

ET Health POST Regis POST Login GET List rec GET Get me POST Cre POST Nutrit GET Get c GET Post + No

My Collection > Post data Save

GET http://127.0.0.1:5001/users/6ac31838be9a0a045813cab0

Docs Params Authorization Headers 8 Body Scripts Settings

Body Cookies Headers 7 Test Results 1/3 200 OK • 3.19 s • 354 B • e.g. S

{ } JSON Preview Visualize

```
1 {
2   "_id": "6ac31838be9a0a045813cab0",
3   "username": "alice",
4   "email": "alice@example.com",
5   "profile": {
6     "role": "admin"
7   },
8   "__v": 0
9 }
```

ET Health POST Regis POST Login GET List rec GET Get me POST Cre POST Nutrit GET Get c GET Post + No Environment

My Collection > Post data Save Share

GET http://127.0.0.1:5001/activities/6ac31838be9a0a045813cab0 Send

Docs Params Authorization Headers 8 Body Scripts Settings Cookies

Body Cookies Headers 7 Test Results 2/3 200 OK • 33 ms • 375 B • Save Response

{ } JSON Preview Visualize

```
1 [
2   {
3     "_id": "6ac3184bbe9a0a045813cab3",
4     "user_id": "6ac31838be9a0a045813cab0",
5     "action": "login",
6     "timestamp": "2026-10-05T03:23:55.491Z",
7     "__v": 0
8   }
9 ]
```

ET Health | POST Regis | POST Login | GET List rec | GET Get me | POST Cre | POST Nutrit | GET Get c | GET Post

My Collection > Post data

GET http://127.0.0.1:5001/activities/6ac31838be9a0a045813cab0

Docs Params Authorization Headers 8 Body Scripts Settings

Body Cookies Headers 7 Test Results 2/3 200 OK • 152 ms • 648

{ } JSON Preview Visualize

```
1  [
2      {
3          "_id": "6ac31965be9a0a045813cabb",
4          "user_id": "6ac31838be9a0a045813cab0",
5          "action": "login",
6          "timestamp": "2026-10-05T03:28:37.104Z",
7          "__v": 0
8      },
9      {
10         "_id": "6ac31957be9a0a045813cab9",
11         "user_id": "6ac31838be9a0a045813cab0",
12         "action": "login",
13         "timestamp": "2026-10-05T03:28:23.274Z",
14         "__v": 0
15     },
16     {
17         "_id": "6ac3184bbe9a0a045813cab3",
18         "user_id": "6ac31838be9a0a045813cab0",
19         "action": "login",
20         "timestamp": "2026-10-05T03:23:55.491Z",
21         "__v": 0
22     }
23 ]
```

```
File Edit Selection View Go Run Terminal Help ← → nodememo


Explorer
node...
  controllers
    routes
      > node_modules
      JS activityRoutes.js
      JS app.js
      JS db.js
      {} package-lock.json
      {} package.json
      JS userRoutes.js
      JS activityController.js
      JS userControllers.js
    > node_modules
    {} package-lock.json
    {} package.json

controllers > routes > JS activityRoutes.js > ...
1  const express = require("express");
2  const router = express.Router();
3  const {
4    createActivity,
5    getActivities
6  } = require("../activityController");
7
8  router.post("/activities", createActivity);
9  router.get("/activities/:user_id", getActivities);
10
11 module.exports = router;
```

```
File Edit Selection View Go Run Terminal Help ← → nodememo


Explorer
node...
  controllers
    routes
      > node_modules
      JS activityRoutes.js
      JS app.js
      JS db.js
      {} package-lock.json
      {} package.json
      JS userRoutes.js
      JS activityController.js
      JS userControllers.js
    > node_modules
    {} package-lock.json
    {} package.json

controllers > routes > JS app.js > ...
1  const express = require("express");
2  const app = express();
3  require("./db");
4
5  app.use(express.json());
6
7  const activityRoutes = require("./activityRoutes");
8  const userRoutes = require("./userRoutes");
9
10 app.use("/", activityRoutes);
11 app.use("/", userRoutes);
12
13 app.listen(5001, () => {
14   console.log("User service running on port 5001");
15 });
```

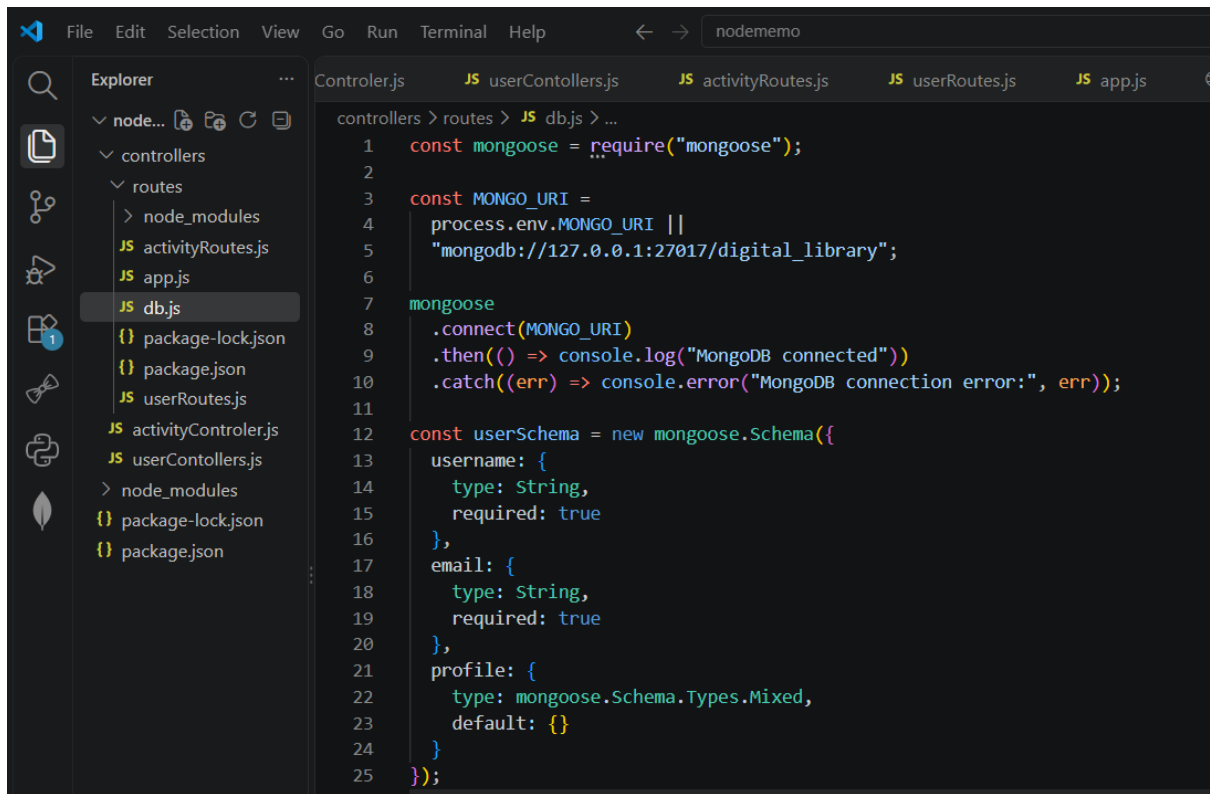

This screenshot shows the VS Code editor with the file `db.js` selected in the Explorer. The file is located within the `controllers > routes` directory. The code in `db.js` initializes a MongoDB connection and defines a user schema.

```
1  const mongoose = require("mongoose");
2
3  const MONGO_URI =
4    process.env.MONGO_URI ||
5    "mongodb://127.0.0.1:27017/digital_library";
6
7  mongoose
8    .connect(MONGO_URI)
9    .then(() => console.log("MongoDB connected"))
10   .catch((err) => console.error("MongoDB connection error:", err));
11
12  const userSchema = new mongoose.Schema({
13    username: {
14      type: String,
15      required: true
16    },
17    email: {
18      type: String,
19      required: true
20    },
21    profile: {
22      type: mongoose.Schema.Types.Mixed,
23      default: {}
24    }
25  });
```

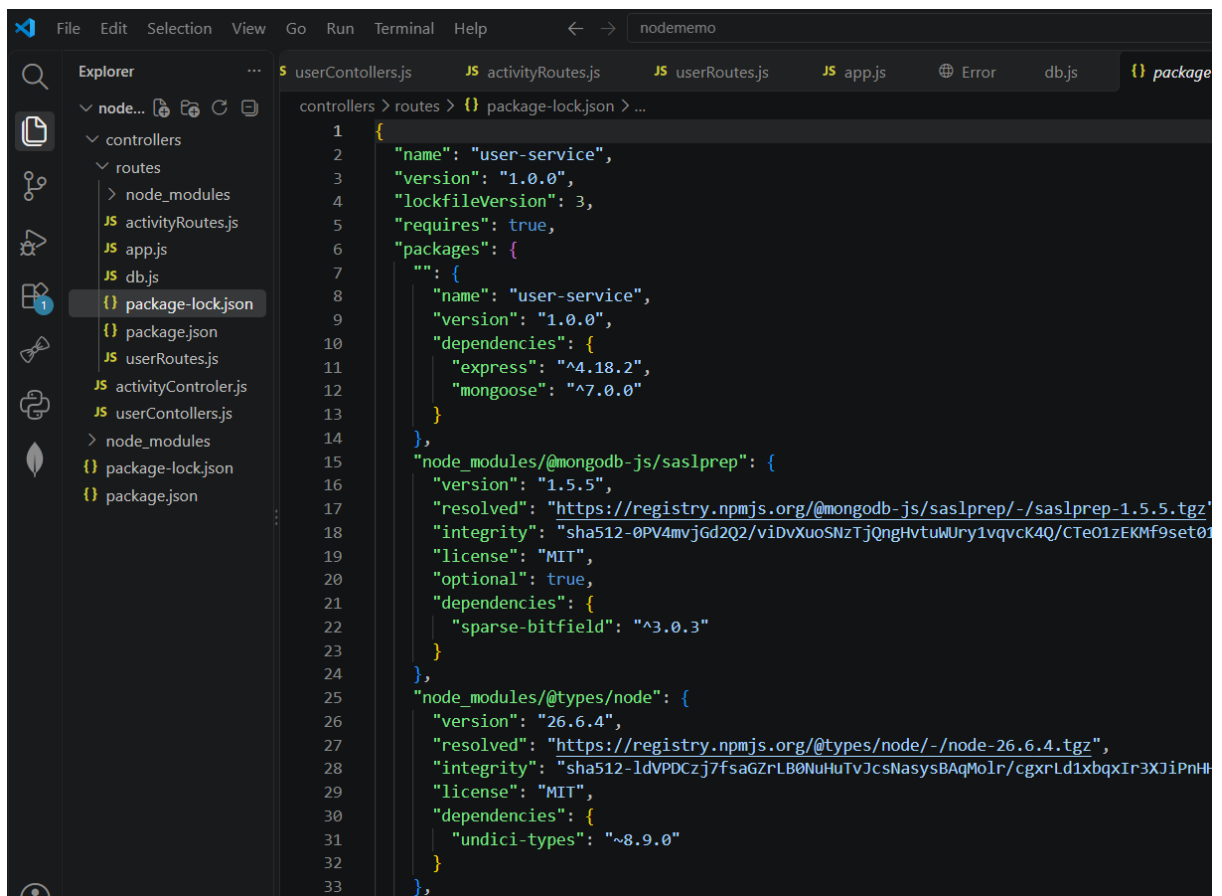

This screenshot shows the VS Code editor with the file `package-lock.json` selected in the Explorer. The file is located within the `controllers > routes` directory. The code in `package-lock.json` defines the project's dependencies and their versions.

```
1  {
2    "name": "user-service",
3    "version": "1.0.0",
4    "lockfileVersion": 3,
5    "requires": true,
6    "packages": {
7      "": {
8        "name": "user-service",
9        "version": "1.0.0",
10       "dependencies": {
11         "express": "^4.18.2",
12         "mongoose": "^7.0.0"
13       },
14     },
15     "node_modules/@mongodb-js/saslprep": {
16       "version": "1.5.5",
17       "resolved": "https://registry.npmjs.org/@mongodb-js/saslprep/-/saslprep-1.5.5.tgz",
18       "integrity": "sha512-0PV4mvjGd2Q2/viDvXuoSNzIjQngHvtuWUry1vqvck4Q/CTe01zEKMf9set01",
19       "license": "MIT",
20       "optional": true,
21       "dependencies": {
22         "sparse-bitfield": "^3.0.3"
23       },
24     },
25     "node_modules/@types/node": {
26       "version": "26.6.4",
27       "resolved": "https://registry.npmjs.org/@types/node/-/node-26.6.4.tgz",
28       "integrity": "sha512-1dVPDCzj7fsaGZrLB0NuHuTvJcsNasysBAqMo1r/cgxrLd1xbqxIr3XJiPnH",
29       "license": "MIT",
30       "dependencies": {
31         "undici-types": "~8.9.0"
32       },
33     },
34   },
35 }
```

This screenshot shows the Visual Studio Code interface with the Explorer sidebar on the left and the main editor on the right. The Explorer sidebar shows a project structure with a 'routes' directory containing 'package.json'. The main editor displays the content of 'package.json' in the 'routes' directory. The file is a JSON object with the following properties: 'name' (user-service), 'version' (1.0.0), 'description' (User Service API), 'main' (app.js), 'scripts' (start: node app.js), and 'dependencies' (express: ^4.18.2, mongoose: ^7.0.0).

```
1 {
2   "name": "user-service",
3   "version": "1.0.0",
4   "description": "User Service API",
5   "main": "app.js",
6   "scripts": {
7     "start": "node app.js"
8   },
9   "dependencies": {
10    "express": "^4.18.2",
11    "mongoose": "^7.0.0"
12  }
13 }
```

This screenshot shows the Visual Studio Code interface with the Explorer sidebar on the left and the main editor on the right. The Explorer sidebar shows a project structure with a 'routes' directory containing 'userRoutes.js'. The main editor displays the content of 'userRoutes.js' in the 'routes' directory. The file is a JavaScript module that imports 'express' and 'express.Router()', and defines a router with two routes: 'post(/users, createUser)' and 'get(/users/:id, getUser)'. The router is exported as 'module.exports'.

```
1 const express = require("express");
2 const router = express.Router();
3 const {
4   createUser,
5   getUser
6 } = require("../userControllers");
7
8 router.post("/users", createUser);
9 router.get("/users/:id", getUser);
10
11 module.exports = router;
```

```
1  const { User } = require("../routes/db");
2
3  const createUser = async (req, res) => {
4    try {
5      const { username, email, profile } = req.body;
6      const user = await User.create({
7        username,
8        email,
9        profile
10      });
11      res.status(201).json({
12        message: "User created successfully",
13        user
14      });
15    } catch (error) {
16      res.status(500).json({
17        message: "Error creating user",
18        error: error.message
19      });
20    }
21  };
22
```