


The screenshot shows a dark-themed code editor interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Run, Terminal, Help.
- Search Bar:** Search field with a magnifying glass icon.
- Toolbar:** RUN AND DEBUG, Get Started, kav.java 2, reg.html, reg.js, reg.css, cb.html.
- Left Sidebar:** RUN section with "Run and Debug" button highlighted in blue, and instructions to "To customize Run and Debug, open a folder and create a launch.json file." It also has Show all automatic debug configurations,田, and A icons.
- Code Editor:** Displays the content of the file cb.html. The code is a repeating pattern of rows and columns of table cells (td) with alternating "light" and "dark" classes.

```
C: > Users > bhava > Documents > Assignment 1 > cb.html > html
51 <th>6</th>
52 <td class="light"></td>
53 <td class="dark"></td>
54 <td class="light"></td>
55 <td class="dark"></td>
56 <td class="light"></td>
57 <td class="dark"></td>
58 <td class="light"></td>
59 <td class="dark"></td>
60 </tr>
61 <tr>
62 <th>5</th>
63 <td class="dark"></td>
64 <td class="light"></td>
65 <td class="dark"></td>
66 <td class="light"></td>
67 <td class="dark"></td>
68 <td class="light"></td>
69 <td class="dark"></td>
70 <td class="light"></td>
71 </tr>
72 <tr>
73 <th>4</th>
74 <td class="light"></td>
75 <td class="dark"></td>
76 <td class="light"></td>
77 <td class="dark"></td>
78 <td class="light"></td>
79 <td class="dark"></td>
80 <td class="light"></td>
81 <td class="dark"></td>
82 </tr>
83 <tr>
84 <th>3</th>
85 <td class="dark"></td>
86 <td class="light"></td>
87 <td class="dark"></td>
88 <td class="light"></td>
89 <td class="dark"></td>
90 <td class="light"></td>
91 <td class="dark"></td>
92 <td class="light"></td>
93 </tr>
94 <tr>
95 <th>2</th>
96 <td class="light"></td>
97 <td class="dark"></td>
98 <td class="light"></td>
99 <td class="dark"></td>
100 <td class="light"></td>
101 <td class="dark"></td>
```
- Bottom Status Bar:** Line 119, Column 8, Spaces: 4, UTF-8, CRLF, HTML, and other icons.

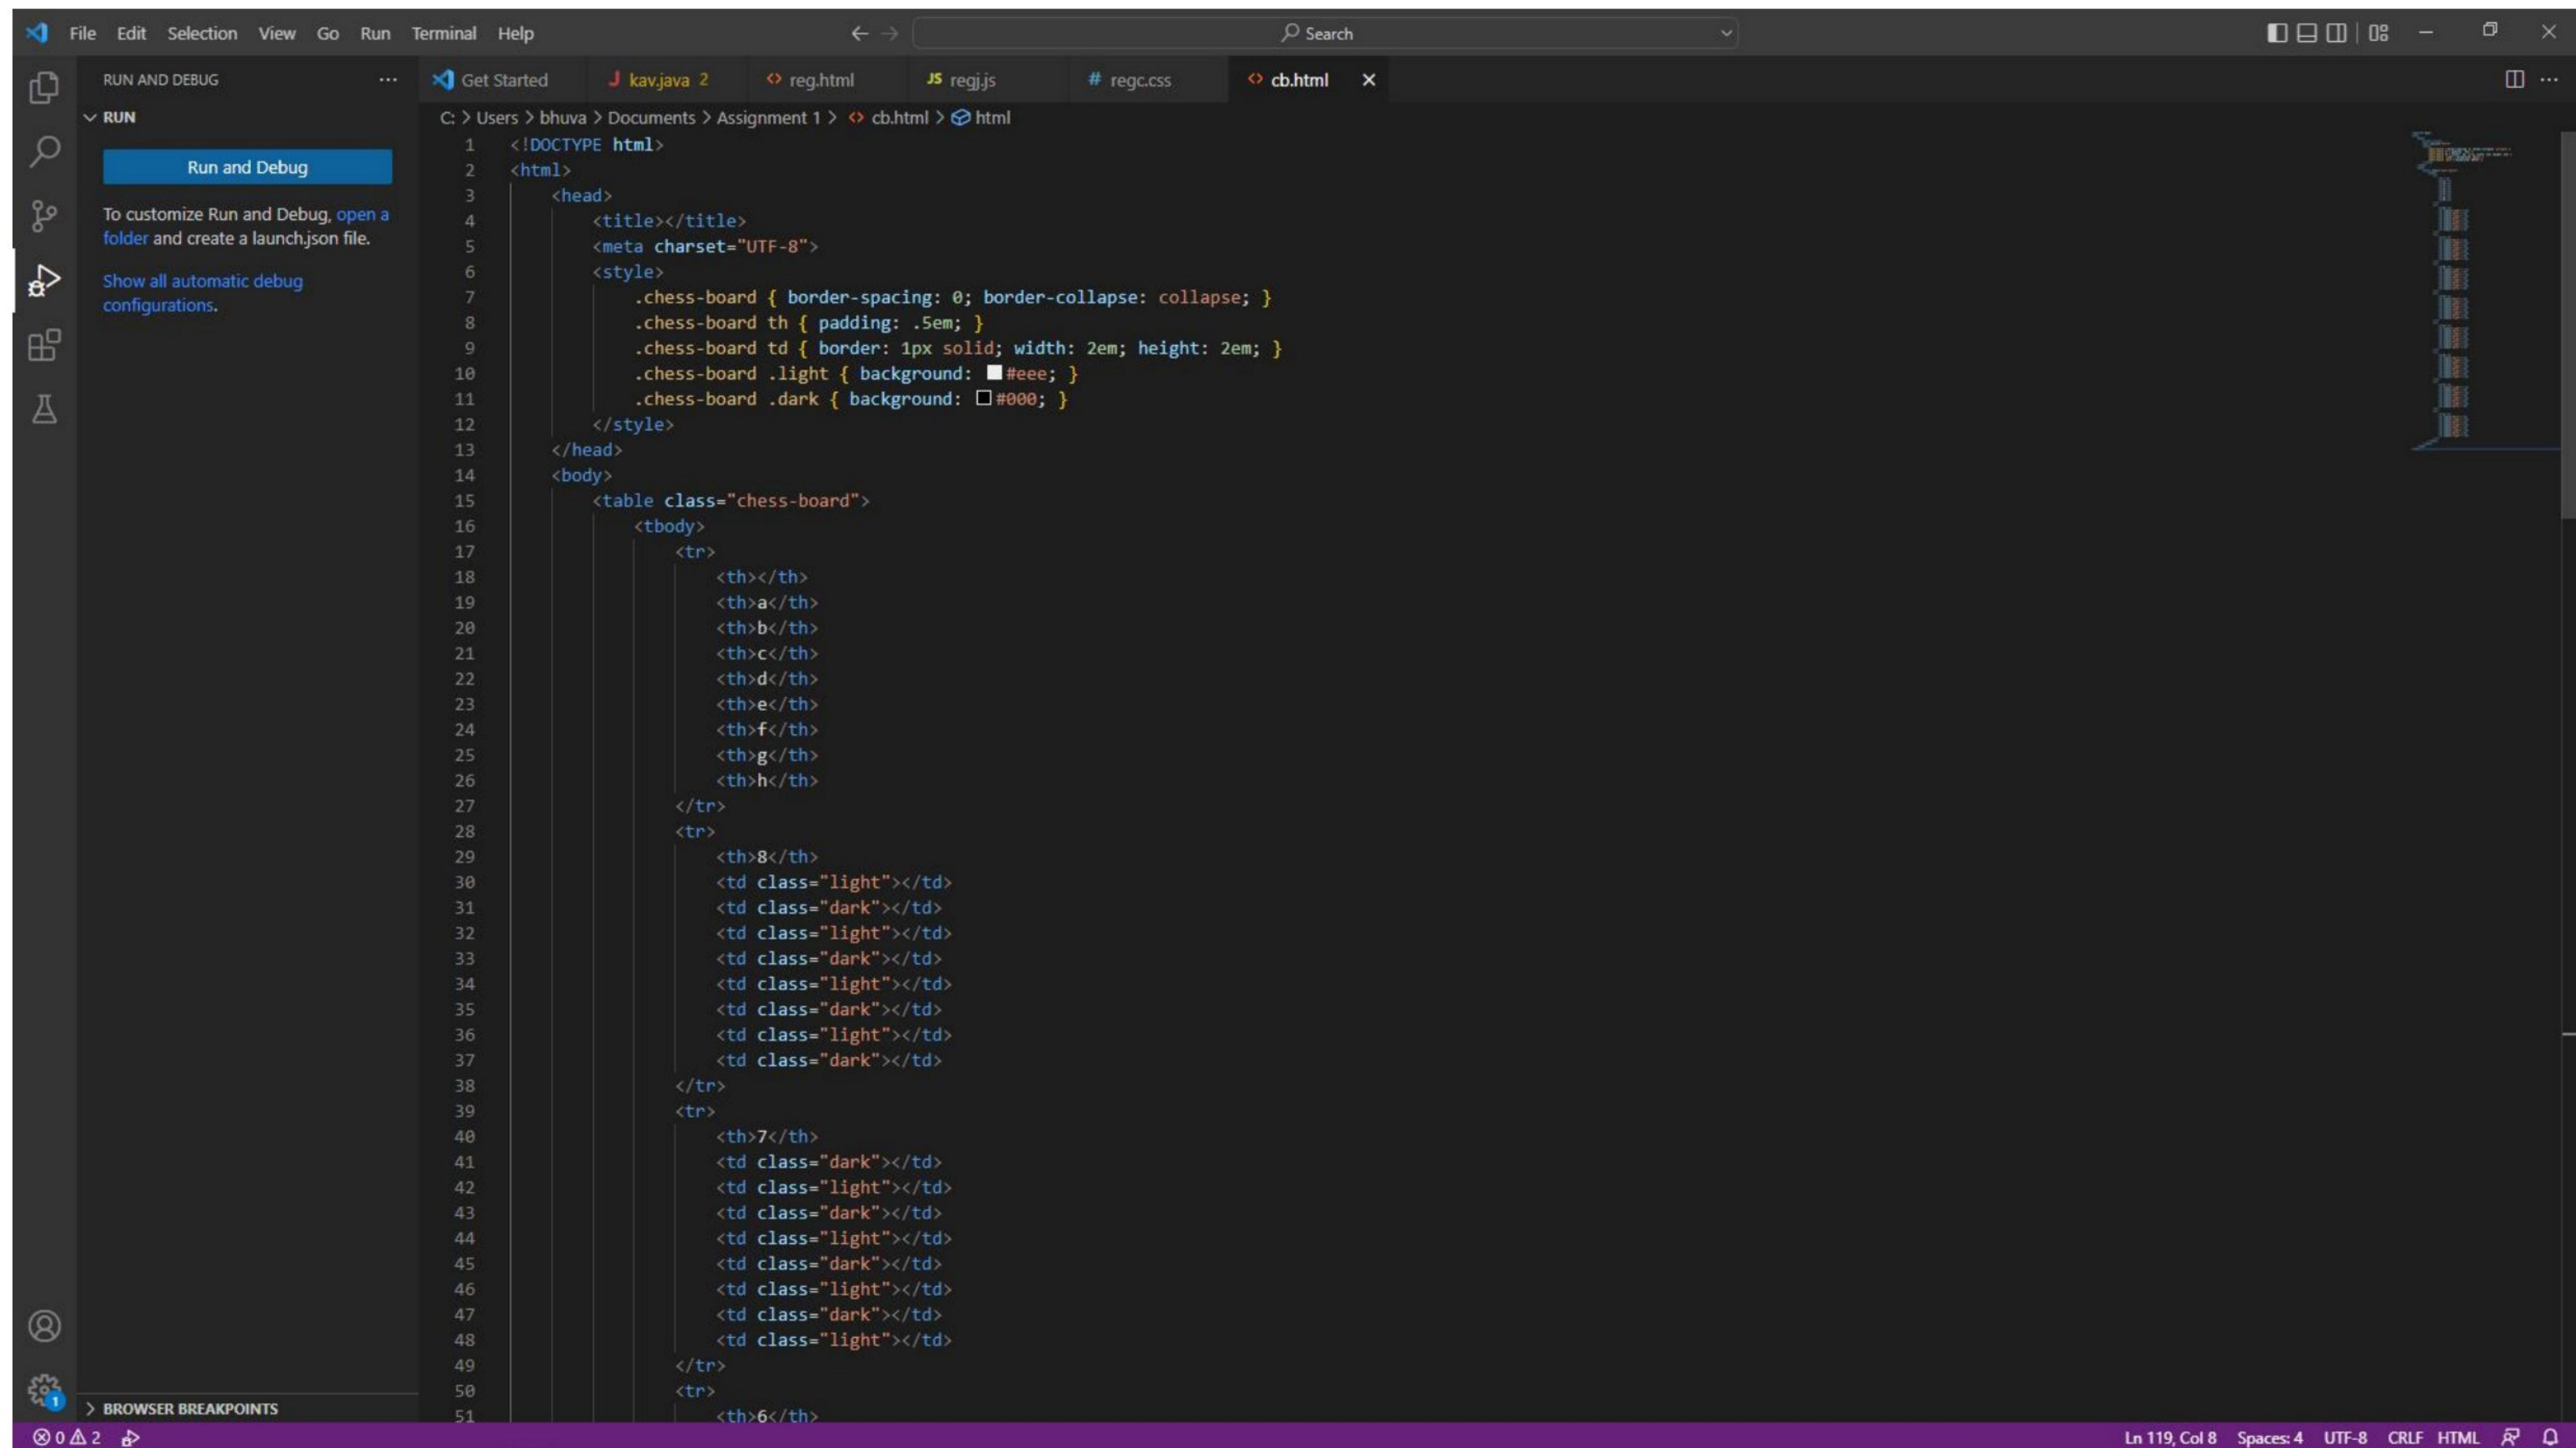

The screenshot shows the Microsoft Edge DevTools interface with the DOM Explorer tab selected. The left sidebar has 'RUN AND DEBUG' and 'RUN' sections, with 'Run and Debug' highlighted. The main pane displays the DOM structure of a chessboard table.

C: > Users > bhuvu > Documents > Assignment 1 > cb.html > html

```
1  <!DOCTYPE html>
2  <html>
3      <head>
4          <title></title>
5          <meta charset="UTF-8">
6          <style>
7              .chess-board { border-spacing: 0; border-collapse: collapse; }
8              .chess-board th { padding: .5em; }
9              .chess-board td { border: 1px solid; width: 2em; height: 2em; }
10             .chess-board .light { background: #eee; }
11             .chess-board .dark { background: #000; }
12         </style>
13     </head>
14     <body>
15         <table class="chess-board">
16             <tbody>
17                 <tr>
18                     <th></th>
19                     <th>a</th>
20                     <th>b</th>
21                     <th>c</th>
22                     <th>d</th>
23                     <th>e</th>
24                     <th>f</th>
25                     <th>g</th>
26                     <th>h</th>
27                 </tr>
28                 <tr>
29                     <th>8</th>
30                     <td class="light"></td>
31                     <td class="dark"></td>
32                     <td class="light"></td>
33                     <td class="dark"></td>
34                     <td class="light"></td>
35                     <td class="dark"></td>
36                     <td class="light"></td>
37                     <td class="dark"></td>
38                 </tr>
39                 <tr>
40                     <th>7</th>
41                     <td class="dark"></td>
42                     <td class="light"></td>
43                     <td class="dark"></td>
44                     <td class="light"></td>
45                     <td class="dark"></td>
46                     <td class="light"></td>
47                     <td class="dark"></td>
48                     <td class="light"></td>
49                 </tr>
50                 <tr>
51                     <th>6</th>
```


BROWSE BREAKPOINTS

Ln 119, Col 8 Spaces: 4 UTF-8 CRLF HTML ⚙️ ⌂

The screenshot shows a dark-themed code editor interface. At the top, there's a navigation bar with File, Edit, Selection, View, Go, Run, Terminal, and Help. To the right of the navigation bar is a search bar labeled "Search". The main area displays a CSS file named "reg.css" with the following content:

```
C: > Users > bhuvan > Documents > Assignment 1 > # reg.css > .container.forms
140     accent-color: #4070f4;
141 }
142
143 .form .text{
144     color: #333;
145     font-size: 14px;
146 }
147
148 .form a.text{
149     color: #4070f4;
150     text-decoration: none;
151 }
152 .form a:hover{
153     text-decoration: underline;
154 }
155
156 .form .button{
157     margin-top: 35px;
158 }
159
160 .form .button input{
161     border: none;
162     color: #fff;
163     font-size: 17px;
164     font-weight: 500;
165     letter-spacing: 1px;
166     border-radius: 6px;
167     background-color: #4070f4;
168     cursor: pointer;
169     transition: all 0.3s ease;
170 }
171
172 .button input:hover{
173     background-color: #265df2;
174 }
175
176 .form .login-signup{
177     margin-top: 30px;
178     text-align: center;
179 }
```

The sidebar on the left contains icons for file operations like Open, Save, Find, and others. Below the sidebar, there's a section titled "RUN AND DEBUG" with a "Run and Debug" button highlighted in blue. A tooltip says, "To customize Run and Debug, open a folder and create a launch.json file." Another link says, "Show all automatic debug configurations." At the bottom of the sidebar, there's a "BROWSER BREAKPOINTS" section with a gear icon and a count of 1. The status bar at the bottom right shows "Ln 32, Col 19" and "Spaces: 4" along with other file information.




The screenshot shows a dark-themed code editor interface. At the top, there is a navigation bar with icons for File, Edit, Selection, View, Go, Run, Terminal, and Help. To the right of the navigation bar is a search bar labeled "Search". On the far right, there are window control buttons (minimize, maximize, close) and a vertical toolbar with icons for file operations.

The main area of the interface is a code editor. The left sidebar contains a "RUN AND DEBUG" section with a "Run and Debug" button highlighted in blue, and a message instructing the user to "To customize Run and Debug, open a folder and create a launch.json file." Below this is a "RUN" section with a "Show all automatic debug configurations" link.

The code editor displays a file named "cb.html" with the following content:

```
C:\> Users > bhava > Documents > Assignment 1 > cb.html > cb.html
98     <td class="light"></td>
99     <td class="dark"></td>
100    <td class="light"></td>
101    <td class="dark"></td>
102    <td class="light"></td>
103    <td class="dark"></td>
104  </tr>
105  <tr>
106    <th>1</th>
107    <td class="dark"></td>
108    <td class="light"></td>
109    <td class="dark"></td>
110    <td class="light"></td>
111    <td class="dark"></td>
112    <td class="light"></td>
113    <td class="dark"></td>
114    <td class="light"></td>
115  </tr>
116  </tbody>
117 </table>
118 </body>
119 </html>
```

The status bar at the bottom of the interface shows the file path "C:\> Users > bhava > Documents > Assignment 1 > cb.html > cb.html", line count "Ln 119, Col 8", character count "Spaces: 4", encoding "UTF-8", and file type "CRLF HTML".



A screenshot of the Visual Studio Code (VS Code) interface. The main area shows an HTML file named 'reg.html' with the following content:

```
C: > Users > bhava > Documents > Assignment 1 > reg.html > html
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta http-equiv="X-UA-Compatible" content="IE=edge">
6      <meta name="viewport" content="width=device-width, initial-scale=1.0">
7
8      <link rel="stylesheet" href="https://unicons.iconscout.com/release/v4.0.0/css/line.css">
9
10     <link rel="stylesheet" href="regc.css">
11
12 </head>
13 <body>
14
15     <div class="container">
16         <div class="forms">
17             <div class="form login">
18                 <span class="title">Login</span>
19
20                 <form action="#">
21                     <div class="input-field">
22                         <input type="text" placeholder="Enter your email" required>
23                         <i class="uil uil-envelope icon"></i>
24                     </div>
25                     <div class="input-field">
26                         <input type="password" class="password" placeholder="Enter your password" required>
27                         <i class="uil uil-lock icon"></i>
28                         <i class="uil uil-eye-slash showHidePw"></i>
29                     </div>
30
31                     <div class="checkbox-text">
32                         <div class="checkbox-content">
33                             <input type="checkbox" id="logCheck">
34                             <label for="logCheck" class="text">Remember me</label>
35                         </div>
36                     </div>
37             </div>
38         </div>
39     </div>
40
41 </body>
42 </html>
```

The left sidebar shows the 'RUN AND DEBUG' section with a 'Run and Debug' button highlighted. Below it, there are instructions to customize the run and debug settings. The bottom status bar shows tabs for PROBLEMS, OUTPUT, DEBUG CONSOLE (which is selected), and TERMINAL. It also includes a filter bar and status information like line 99, column 8, and file encoding.

The screenshot shows a dark-themed code editor interface, likely from Visual Studio Code. The top menu bar includes File, Edit, Selection, View, Go, Run, Terminal, and Help. The title bar shows tabs for Get Started, kav.java 2, reg.html, reg.js, and reg.css. A search bar is at the top right.

The left sidebar has sections for RUN AND DEBUG and RUN, with 'Run and Debug' selected. It includes instructions to customize the run and debug setup by creating a launch.json file and shows options for automatic debug configurations.

The main editor area displays the content of the 'reg.html' file:

```
C:\> Users > bhava > Documents > Assignment 1 > reg.html > html
35     <label for="logCheck" class="text">Remember me</label>
36     </div>
37
38     <a href="#" class="text">Forgot password?</a>
39     </div>
40
41     <div class="input-field button">
42         <input type="button" value="Login">
43     </div>
44
45
46     <div class="login-signup">
47         <span class="text">Not a member?
48             <a href="#" class="text signup-link">Signup Now</a>
49         </span>
50     </div>
51
52
53     <!-- Registration Form -->
54     <div class="form signup">
55         <span class="title">Registration</span>
56
57         <form action="#">
58             <div class="input-field">
59                 <input type="text" placeholder="Enter your name" required>
60                 <i class="uil uil-user"></i>
61             </div>
62             <div class="input-field">
63                 <input type="text" placeholder="Enter your email" required>
64                 <i class="uil uil-envelope icon"></i>
65             </div>
66             <div class="input-field">
67                 <input type="password" class="password" placeholder="Create a password" required>
68                 <i class="uil uil-lock icon"></i>
69             </div>
70             <div class="input-field">
71                 <input type="password" class="password" placeholder="Confirm a password" required>
72                 <i class="uil uil-lock icon"></i>
73             </div>
```

The bottom navigation bar includes PROBLEMS (2), OUTPUT, DEBUG CONSOLE (selected), and TERMINAL. A filter bar with 'Filter (e.g. text, exclude)' is also present. The status bar at the bottom shows line 99, column 8, spaces: 4, UTF-8, CRLF, HTML, and a file icon.

The screenshot shows a dark-themed code editor interface, likely Visual Studio Code, displaying an HTML file named `reg.html`. The file content is as follows:

```
C: > Users > bhuva > Documents > Assignment 1 > reg.html > html
  ...
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
```

The code includes HTML elements like `<div>`, `<input type="password">`, `<i>`, `<checkbox>`, and `<script src="regj.js">`. The editor's sidebar shows "RUN AND DEBUG" and "RUN" sections, and the bottom status bar indicates "Ln 99, Col 8" and "Spaces: 4".

File Edit Selection View Go Run Terminal Help

RUN AND DEBUG

RUN

Run and Debug

To customize Run and Debug, open a folder and create a launch.json file.

Show all automatic debug configurations.

JavaScript Debug Terminal

You can use the JavaScript Debug Terminal to debug Node.js processes run on the command line.

Debug URL

C: > Users > bhava > Documents > Assignment 1 > **JS** reg.js > ...

```
1 const container = document.querySelector(".container"),
2 pwShowHide = document.querySelectorAll(".showHidePw"),
3 pwFields = document.querySelectorAll(".password"),
4 signUp = document.querySelector(".signup-link"),
5 login = document.querySelector(".login-link");
6
7 pwShowHide.forEach(eyeIcon =>{
8     eyeIcon.addEventListener("click", ()=>{
9         pwFields.forEach(pwField =>{
10             if(pwField.type ==="password"){
11                 pwField.type = "text";
12
13                 pwShowHide.forEach(icon =>{
14                     icon.classList.replace("uil-eye-slash", "uil-eye");
15                 })
16             }else{
17                 pwField.type = "password";
18
19                 pwShowHide.forEach(icon =>{
20                     icon.classList.replace("uil-eye", "uil-eye-slash");
21                 })
22             }
23         })
24     })
25 });
26
27 signUp.addEventListener("click", ( )=>{
28     container.classList.add("active");
29 });
30 login.addEventListener("click", ( )=>{
31     container.classList.remove("active");
32 });
```

PROBLEMS 2 OUTPUT DEBUG CONSOLE TERMINAL

Filter (e.g. text, exclude)

BROWSER BREAKPOINTS

Ln 32, Col 8 Spaces: 4 UTF-8 CRLF {} JavaScript

A screenshot of the Visual Studio Code (VS Code) interface. The window title is "RUN AND DEBUG". The left sidebar includes icons for File, Edit, Selection, View, Go, Run, Terminal, Help, and a search bar. The main area shows a CSS file named "reg.css" with the following code:

```
C: > Users > bhava > Documents > Assignment 1 > # reg.css > .container.forms
1 @import url('https://fonts.googleapis.com/css2?family=Poppins:wght@300;400;500;600;700&display=swap');
2
3 *{
4   margin: 0;
5   padding: 0;
6   box-sizing: border-box;
7   font-family: 'Poppins', sans-serif;
8 }
9
10 body{
11   height: 100vh;
12   display: flex;
13   align-items: center;
14   justify-content: center;
15   background-color: #4070f4;
16 }
17
18 .container{
19   position: relative;
20   max-width: 430px;
21   width: 100%;
22   background: #fff;
23   border-radius: 10px;
24   box-shadow: 0 5px 10px rgba(0, 0, 0, 0.1);
25   overflow: hidden;
26   margin: 0 20px;
27 }
28
29 .container .forms{
30   display: flex;
31   align-items: center;
32   height: 440px;
33   width: 200%;
34   transition: height 0.2s ease;
35 }
36
37
38 .container .form{
39   width: 50%;
40   padding: 30px;
41   background-color: #fff;
42   transition: margin-left 0.18s ease;
43 }
44
45 .container.active .login{
46   margin-left: -50%;
47   opacity: 0;
48   transition: margin-left 0.18s ease, opacity 0.15s ease;
49 }
50
51 .container .signup{
```

The status bar at the bottom shows "Ln 32, Col 19" and "Spaces: 4" along with other file-related information.

A screenshot of the Visual Studio Code (VS Code) interface. The window title is "kav.java 2". The top menu bar includes File, Edit, Selection, View, Go, Run, Terminal, and Help. The search bar at the top right contains the placeholder "Search". The left sidebar features icons for RUN AND DEBUG, RUN, SEARCH, OPEN, and OTHERS. The main editor area displays a CSS file named "reg.css" with the path "C:\Users\bhuva\Documents\Assignment 1\# reg.css". The code in the editor is:

```
C: > Users > bhuva > Documents > Assignment 1 > # reg.css > .container.forms
51 .container.signup{
52   opacity: 0;
53   transition: opacity 0.09s ease;
54 }
55 .container.active.signup{
56   opacity: 1;
57   transition: opacity 0.2s ease;
58 }
59 .container.active.forms{
60   height: 600px;
61 }
62 .container.form.title{
63   position: relative;
64   font-size: 27px;
65   font-weight: 600;
66 }
67 .
68 .form.title::before{
69   content: '';
70   position: absolute;
71   left: 0;
72   bottom: 0;
73   height: 3px;
74   width: 30px;
75   background-color: #4070f4;
76   border-radius: 25px;
77 }
78 .
79 .form.input-field{
80   position: relative;
81   height: 50px;
82   width: 100%;
83   margin-top: 30px;
84 }
85 .
86 .input-field input{
87   position: absolute;
88   height: 100%;
89   width: 100%;
90   padding: 0 35px;
91   border: none;
92   outline: none;
93   font-size: 16px;
94   border-bottom: 2px solid #ccc;
95   border-top: 2px solid transparent;
96   transition: all 0.2s ease;
97 }
98 .
99 .input-field input:focus, :valid{
100   border-bottom-color: #4070f4;
```

The status bar at the bottom shows "Ln 32, Col 19" and "Spaces: 4" along with other file-related information.

File Edit Selection View Go Run Terminal Help

RUN AND DEBUG

RUN

Run and Debug

To customize Run and Debug, open a folder and create a launch.json file.


Show all automatic debug configurations.

C:\> Users > bhuvu > Documents > Assignment 1 > # reg.css > .container.forms

```
101     border-bottom-color: #4070f4;
102 }
103
104 .input-field i{
105     position: absolute;
106     top: 50%;
107     transform: translateY(-50%);
108     color: #999;
109     font-size: 23px;
110     transition: all 0.2s ease;
111 }
112
113 .input-field input:focus, :valid ~ i{
114     color: #4070f4;
115 }
116
117 .input-field i.icon{
118     left: 0;
119 }
120 .input-field i.showHidePw{
121     right: 0;
122     cursor: pointer;
123     padding: 10px;
124 }
125
126 .form .checkbox-text{
127     display: flex;
128     align-items: center;
129     justify-content: space-between;
130     margin-top: 20px;
131 }
132
133 .checkbox-text .checkbox-content{
134     display: flex;
135     align-items: center;
136 }
137
138 .checkbox-content input{
139     margin: 0 8px -2px 4px;
140     accent-color: #4070f4;
141 }
142
143 .form .text{
144     color: #333;
145     font-size: 14px;
146 }
147
148 .form a.text{
149     color: #4070f4;
150     text-decoration: none;
151 }
```

BROWSER BREAKPOINTS

Ln 32, Col 19 Spaces:4 UTF-8 CRLF CSS



C: > Users > bhuvan > Documents > Assignment 1 > tt.html

```
1  <!DOCTYPE html>
2  <html>
3
4  <body>
5      <h1>TIME TABLE</h1>
6      <table border="5" cellspacing="0" align="center">
7          <!--<caption>Timetable</caption>-->
8          <tr>
9              <td align="center" height="50"
10                 width="100"><br>
11                 <b>Day/Period</b></br>
12             </td>
13             <td align="center" height="50"
14                 width="100">
15                 <b>I</b><br>9:30-10:20</b>
16             </td>
17             <td align="center" height="50"
18                 width="100">
19                 <b>II</b><br>10:20-11:10</b>
20             </td>
21             <td align="center" height="50"
22                 width="100">
23                 <b>III</b><br>11:10-12:00</b>
24             </td>
25             <td align="center" height="50"
26                 width="100">
27                 <b>12:00-12:40</b>
28             </td>
29             <td align="center" height="50"
30                 width="100">
31                 <b>IV</b><br>12:40-1:30</b>
32             </td>
33             <td align="center" height="50"
34                 width="100">
35                 <b>V</b><br>1:30-2:20</b>
36             </td>
37             <td align="center" height="50"
38                 width="100">
39                 <b>VI</b><br>2:20-3:10</b>
40             </td>
41             <td align="center" height="50"
42                 width="100">
43                 <b>VII</b><br>3:10-4:00</b>
44             </td>
45         </tr>
46         <tr>
47             <td align="center" height="50">
48                 <b>Monday</b></td>
49             <td align="center" height="50">Eng</td>
50             <td align="center" height="50">Mat</td>
51             <td align="center" height="50">Che</td>
```

The screenshot shows a code editor window with the following details:

- File Bar:** File, Edit, Selection, View, Go, Run, Terminal, Help.
- Search Bar:** Search field.
- Toolbar:** RUN AND DEBUG, Get Started, kav.java 2, reg.html, reg.js, reg.jjs, # reg.jjs, html.
- Left Sidebar:** Variables, Watch, Call Stack, Loaded Scripts, Breakpoints, Caught Exceptions, Uncaught Exceptions, Browser Breakpoints.
- Code Area:** C:\> Users\> bhava\> Documents\> Assignment 1\> tt.html. The code is as follows:

```
51 <td align="center" height="50">Che</td>
52 <td rowspan="6" align="center" height="50">
53 <h2>L<br>U<br>N<br>C<br>H</h2>
54 </td>
55 <td colspan="3" align="center"
56 height="50">LAB</td>
57 <td align="center" height="50">Phy</td>
58 </tr>
59 <tr>
60 <td align="center" height="50">
61 <b>Tuesday</b>
62 </td>
63 <td colspan="3" align="center"
64 height="50">LAB
65 </td>
66 <td align="center" height="50">Eng</td>
67 <td align="center" height="50">Che</td>
68 <td align="center" height="50">Mat</td>
69 <td align="center" height="50">SPORTS</td>
70 </tr>
71 <tr>
72 <td align="center" height="50">
73 <b>Wednesday</b>
74 </td>
75 <td align="center" height="50">Mat</td>
76 <td align="center" height="50">phy</td>
77 <td align="center" height="50">Eng</td>
78 <td align="center" height="50">Che</td>
79 <td colspan="3" align="center"
80 height="50">LIBRARY
81 </td>
82 </tr>
83 <tr>
84 <td align="center" height="50">
85 <b>Thursday</b>
86 </td>
87 <td align="center" height="50">Phy</td>
88 <td align="center" height="50">Eng</td>
89 <td align="center" height="50">Che</td>
90 <td colspan="3" align="center"
91 height="50">LAB
92 </td>
93 <td align="center" height="50">Mat</td>
94 </tr>
95 <tr>
96 <td align="center" height="50">
97 <b>Friday</b>
98 </td>
99 <td colspan="3" align="center"
100 height="50">LAB
101 </td>
```

Bottom status bar: Ln 122, Col 8, Spaces: 4, UTF-8, CRLF, HTML.

The screenshot shows a browser developer tools interface with several panels open:

- VARIABLES**: Shows the current state of variables in the application. The code in the main editor is:


```
C: > Users > bhuvan > Documents > Assignment 1 > tt.html > html
90      <tr>
91          <td align="center" height="50">LAB</td>
92      </tr>
93      <tr>
94          <td align="center" height="50">Mat</td>
95      </tr>
96      <tr>
97          <td align="center" height="50">
98              <b>Friday</b>
99          </td>
100         <td colspan="3" align="center"
101             height="50">LAB</td>
102         <td align="center" height="50">Mat</td>
103         <td align="center" height="50">Che</td>
104         <td align="center" height="50">Eng</td>
105         <td align="center" height="50">Phy</td>
106     </tr>
107     <tr>
108         <td align="center" height="50">
109             <b>Saturday</b>
110         </td>
111         <td align="center" height="50">Eng</td>
112         <td align="center" height="50">Che</td>
113         <td align="center" height="50">Mat</td>
114         <td colspan="3" align="center"
115             height="50">SEMINAR</td>
116     </tr>
117     <tr>
118         <td align="center" height="50">SPORTS</td>
119     </tr>
120 </table>
121 </body>
122 </html>
```
- WATCH**: A list of watched variables.
- CALL STACK**: Shows the current call stack with one entry: "Open tt.html: tt.html RUNNING".
- LOADED SCRIPTS**: A list of loaded scripts.
- BREAKPOINTS**: A list of breakpoints, including "Caught Exceptions" and "Uncaught Exceptions".
- BROWSER BREAKPOINTS**: A list of browser breakpoints.

At the bottom, the status bar shows: Ln 122, Col 8 Spaces: 4 UTF-8 CRLF HTML

A screenshot of a dark-themed code editor, likely Visual Studio Code, displaying an HTML file. The file contains an SVG with seven concentric circles of decreasing radius and increasing color intensity from red to violet. The code is as follows:

```
C: > Users > bhuvu > Documents > Assignment 1 > vib.html > html > body > svg
1  <!DOCTYPE html>
2  <html>
3
4  <body>
5
6      <svg width="800" height="400"
7          style="background-color: #aqua;">
8
9
10     <circle cx="400" cy="450" r="400" stroke="none"
11         stroke-width="2" fill="red" />
12
13
14     <circle cx="400" cy="450" r="300" stroke="none"
15         stroke-width="2" fill="yellow" />
16     <circle cx="400" cy="450" r="250" stroke="none"
17         stroke-width="2" fill="green" />
18     <circle cx="400" cy="450" r="200" stroke="none"
19         stroke-width="2" fill="blue" />
20     <circle cx="400" cy="450" r="150" stroke="none"
21         stroke-width="2" fill="indigo" />
22     <circle cx="400" cy="450" r="100" stroke="none"
23         stroke-width="2" fill="violet" />
24
25     </svg>
26
27 </body>
28
29 </html>
```

The editor interface includes a top bar with File, Edit, Selection, View, Go, Run, Terminal, Help, and a search bar. On the left, there's a sidebar with icons for RUN AND DEBUG, RUN, and a section for Run and Debug. A message in this section says "To customize Run and Debug, open a folder and create a launch.json file." Below this, another message says "Show all automatic debug configurations." At the bottom, there are sections for BROWSER BREAKPOINTS and status indicators like Ln 12, Col 1, Spaces: 4, UTF-8, CRLF, HTML, and a refresh icon.

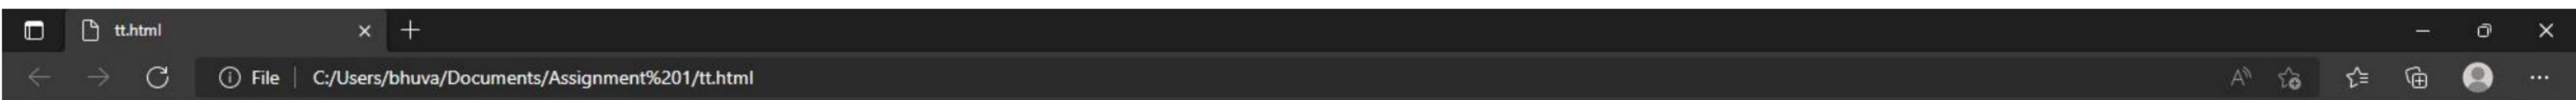

TIME TABLE

Day/Period	I 9:30-10:20	II 10:20-11:10	III 11:10-12:00	12:00-12:40	IV 12:40-1:30	V 1:30-2:20	VI 2:20-3:10	VII 3:10-4:00
Monday	Eng	Mat	Che					Phy
Tuesday		LAB						
Wednesday	Mat	phy	Eng					
Thursday	Phy	Eng	Che					
Friday		LAB						
Saturday	Eng	Che	Mat					

L
U
N
C
H

The screenshot shows a code editor interface with a dark theme. The top menu bar includes File, Edit, Selection, View, Go, Run, Terminal, and Help. The title bar shows the current file is 'tic.html'. The left sidebar has sections for RUN AND DEBUG and RUN, with 'Run and Debug' selected. A message in this section says 'To customize Run and Debug, open a folder and create a launch.json file.' Below this, there's a link to 'Show all automatic debug configurations.' The main workspace displays the HTML code for 'tic.html'. The code includes a head section with meta tags for viewport and CSS, and a body section with a main div containing a h1 tag and game instructions. It also features a 3x3 grid of input fields (b1 to b7) with onclick event handlers calling myfunc_3() through myfunc_8(). The bottom status bar indicates 0 breakpoints, 2 files, and browser breakpoints. The bottom right corner shows file statistics: Ln 5, Col 49, Spaces: 4, UTF-8, CRLF, HTML, and a refresh icon.

```
C: > Users > bhuvu > Documents > Assignment 1 > tic.html > head > meta
1  <!DOCTYPE html>
2
3  <head>
4      <meta name="viewport" content=
5          "width=device-width, initial-scale=1.0">
6
7      <!-- CSS file Included -->
8      <link rel="stylesheet"
9          type="text/css" href="tic.css">
10
11     <!-- JavaScript file included -->
12     <script src="tic.js"></script>
13 </head>
14
15 <body>
16     <div id="main">
17         <h1>TIC TAC TOE</h1>
18
19         <!-- Game Instructions -->
20         <p id="ins">Game starts by just Tap on
21             box<br><br>First Player starts as
22                 <b>Player X</b><br>And<br>Second
23                 Player as <b>Player 0</b>
24         </p>
25
26
27
28
29         <br><br>
30         <!-- 3*3 grid of Boxes -->
31         <input type="text" id="b1" onclick=
32             "myfunc_3(); myfunc();" readonly>
33
34         <input type="text" id="b2" onclick=
35             "myfunc_4(); myfunc();" readonly>
36
37         <input type="text" id="b3" onclick=
38             "myfunc_5(); myfunc();" readonly>
39         <br><br>
40
41         <input type="text" id="b4" onclick=
42             "myfunc_6(); myfunc();" readonly>
43
44         <input type="text" id="b5" onclick=
45             "myfunc_7(); myfunc();" readonly>
46
47         <input type="text" id="b6" onclick=
48             "myfunc_8(); myfunc();" readonly>
49         <br><br>
50
51         <input type="text" id="b7" onclick=
```

File Edit Selection View Go Run Terminal Help

Get Started kav.java 2 reg.html reg.js reg.css cb.html tt.html vib.html tic.html # tic.css tic.js

C: > Users > bhuva > Documents > Assignment 1 > tic.html > head > meta

```
38     "myfunc_5(); myfunc();" readonly>
39     <br><br>
40     <input type="text" id="b4" onclick=
41         "myfunc_6(); myfunc();" readonly>
42
43     <input type="text" id="b5" onclick=
44         "myfunc_7(); myfunc();" readonly>
45
46     <input type="text" id="b6" onclick=
47         "myfunc_8(); myfunc();" readonly>
48
49     <br><br>
50
51     <input type="text" id="b7" onclick=
52         "myfunc_9(); myfunc();" readonly>
53
54     <input type="text" id="b8" onclick=
55         "myfunc_10();myfunc();" readonly>
56
57     <input type="text" id="b9" onclick=
58         "myfunc_11();myfunc();" readonly>
59
60     <!-- Grid end here -->
61     <br><br><br>
62     <!-- Button to reset game -->
63     <button id="but" onclick="myfunc_2()">
64         RESET
65     </button>
66
67     <br><br>
68     <!-- Space to show player turn -->
69     <p id="print"></p>
70
71
72
73
74     </div>
75 </body>
76
77 </html>
78
```

BROWSER BREAKPOINTS

Ln 5, Col 49 Spaces: 4 UTF-8 CRLF HTML ⚙️

The screenshot shows a dark-themed code editor interface with a sidebar on the left containing various icons for file operations like Run, Debug, Find, and Settings. The main area displays a CSS file named 'tic.css' with the following content:

```
C: > Users > bhava > Documents > Assignment 1 > # tic.css > ...
1  <style>
2  /* CSS Code */
3  /* Heading */
4  h1 {
5      color: orange;
6      font-size: 45px;
7  }
8
9  /* 3*3 Grid */
10 #b1, #b2, #b3, #b4, #b5,
11 #b6, #b7, #b8, #b9 {
12     width: 80px;
13     height: 52px;
14     margin: auto;
15     border: 1px solid gray;
16     border-radius: 6px;
17     font-size: 30px;
18     text-align: center;
19 }
20
21 /* Reset Button */
22 #but {
23     box-sizing: border-box;
24     width: 95px;
25     height: 40px;
26     border: 1px solid dodgerblue;
27     margin: auto;
28     border-radius: 4px;
29     font-family: Verdana,
30                 Geneva, Tahoma, sans-serif;
31
32     background-color: dodgerblue;
33     color: white;
34     font-size: 20px;
35     cursor: pointer;
36 }
37
38 /* Player turn space */
39 #print {
40     font-family: Verdana,
41                 Geneva, Tahoma, sans-serif;
42
43     color: dodgerblue;
44     font-size: 20px;
45 }
46
47 /* Main Container */
48 #main {
49     text-align: center;
50 }
```

The status bar at the bottom indicates the file is 61 lines long, 1 column wide, with 4 spaces per line, in UTF-8 encoding, and includes CRLF and CSS file type information.

The screenshot shows a dark-themed code editor interface, likely Visual Studio Code, displaying a CSS file named `tic.css`. The file path is shown as `C: > Users > bhava > Documents > Assignment 1 > # tic.css > ...`. The code includes styles for player turns, a main container, and game instruction text.

```
C: > Users > bhava > Documents > Assignment 1 > # tic.css > ...
27     margin: auto;
28     border-radius: 4px;
29     font-family: Verdana,
30                 Geneva, Tahoma, sans-serif;
31
32     background-color: #dodgerblue;
33     color: white;
34     font-size: 20px;
35     cursor: pointer;
36 }
37
38 /* Player turn space */
39 #print {
40     font-family: Verdana,
41                 Geneva, Tahoma, sans-serif;
42
43     color: #dodgerblue;
44     font-size: 20px;
45 }
46
47 /* Main Container */
48 #main {
49     text-align: center;
50 }
51
52 /* Game Instruction Text */
53 #ins {
54     font-family: Verdana,
55                 Geneva, Tahoma, sans-serif;
56
57     color: #dodgerblue;
58     font-size: 17px;
59 }
60
61 </style>
```

The left sidebar features icons for File, Edit, Selection, View, Go, Run, Terminal, Help, RUN AND DEBUG, and RUN. The RUN AND DEBUG section is expanded, showing "Run and Debug" selected. A note says: "To customize Run and Debug, open a folder and create a launch.json file." Another note says: "Show all automatic debug configurations." The bottom left also shows "BROWSER BREAKPOINTS" with a gear icon and a count of 1.

The bottom status bar displays: Ln 61, Col 1 Spaces:4 UTF-8 CRLF CSS ⚡ ⚡

The screenshot shows a code editor window with a dark theme. At the top, there's a navigation bar with icons for File, Edit, Selection, View, Go, Run, Terminal, and Help. Below the navigation bar is a tab bar with several tabs: 'Get Started', 'kav.java 2', 'reg.html', 'reg.js', 'reg.css', 'cb.html', 'tt.html', 'vib.html', 'tic.html', 'tic.css', and 'tic.js'. The 'tic.js' tab is currently active.

The main area of the editor displays the content of the 'tic.js' file:

```
C: > Users > bhava > Documents > Assignment 1 > JS tic.js > ...
1 // Function called whenever user tab on any box
2 function myfunc() {
3
4     // Setting DOM to all boxes or input field
5     var b1, b2, b3, b4, b5, b6, b7, b8, b9;
6     b1 = document.getElementById("b1").value;
7     b2 = document.getElementById("b2").value;
8     b3 = document.getElementById("b3").value;
9     b4 = document.getElementById("b4").value;
10    b5 = document.getElementById("b5").value;
11    b6 = document.getElementById("b6").value;
12    b7 = document.getElementById("b7").value;
13    b8 = document.getElementById("b8").value;
14    b9 = document.getElementById("b9").value;
15
16    // Checking if Player X won or not and after
17    // that disabled all the other fields
18    if ((b1 == 'x' || b1 == 'X') && (b2 == 'x' ||
19        b2 == 'X') && (b3 == 'x' || b3 == 'X')) {
20        document.getElementById('print')
21            .innerHTML = "Player X won";
22        document.getElementById("b4").disabled = true;
23        document.getElementById("b5").disabled = true;
24        document.getElementById("b6").disabled = true;
25        document.getElementById("b7").disabled = true;
26        document.getElementById("b8").disabled = true;
27        document.getElementById("b9").disabled = true;
28        window.alert('Player X won');
29    }
30    else if ((b1 == 'x' || b1 == 'X') && (b4 == 'x' ||
31        b4 == 'X') && (b7 == 'x' || b7 == 'X')) {
32        document.getElementById('print')
33            .innerHTML = "Player X won";
34        document.getElementById("b2").disabled = true;
35        document.getElementById("b3").disabled = true;
36        document.getElementById("b5").disabled = true;
37        document.getElementById("b6").disabled = true;
38        document.getElementById("b8").disabled = true;
39        document.getElementById("b9").disabled = true;
40
41        window.alert('Player X won');
42    }
43    else if ((b7 == 'x' || b7 == 'X') && (b8 == 'x' ||
44        b8 == 'X') && (b9 == 'x' || b9 == 'X')) {
45        document.getElementById('print')
46            .innerHTML = "Player X won";
47        document.getElementById("b1").disabled = true;
48        document.getElementById("b2").disabled = true;
49        document.getElementById("b3").disabled = true;
50        document.getElementById("b4").disabled = true;
51        document.getElementById("b5").disabled = true;
```

On the left side of the editor, there's a sidebar with various icons and sections: RUN AND DEBUG, RUN, Run and Debug (which is selected), Show all automatic debug configurations, JavaScript Debug Terminal, and Debug URL. At the bottom left, there's a section for BROWSER BREAKPOINTS with a gear icon and a count of 1. The bottom right corner shows status information: Ln 376, Col 1, Spaces: 4, UTF-8, CRLF, () JavaScript, and a refresh icon.

A screenshot of a code editor interface, likely Visual Studio Code, displaying a JavaScript file named `tic.js`. The file contains logic for a Tic-Tac-Toe game, specifically checking for winning conditions. The code uses document.getElementById to reference buttons and sets their disabled attribute to true if they are part of a winning row or column. It also uses window.alert to notify the player that they have won.

```
document.getElementById("b5").disabled = true;
document.getElementById("b6").disabled = true;
window.alert('Player X won');

} else if ((b3 == 'x' || b3 == 'X') && (b6 == 'x' || b6 == 'X') && (b9 == 'x' || b9 == 'X')) {
    document.getElementById('print')
        .innerHTML = "Player X won";
    document.getElementById("b1").disabled = true;
    document.getElementById("b2").disabled = true;
    document.getElementById("b4").disabled = true;
    document.getElementById("b5").disabled = true;
    document.getElementById("b7").disabled = true;
    document.getElementById("b8").disabled = true;
    window.alert('Player X won');

} else if ((b1 == 'x' || b1 == 'X') && (b5 == 'x' || b5 == 'X') && (b9 == 'x' || b9 == 'X')) {
    document.getElementById('print')
        .innerHTML = "Player X won";
    document.getElementById("b2").disabled = true;
    document.getElementById("b3").disabled = true;
    document.getElementById("b4").disabled = true;
    document.getElementById("b6").disabled = true;
    document.getElementById("b7").disabled = true;
    document.getElementById("b8").disabled = true;
    window.alert('Player X won');

} else if ((b3 == 'x' || b3 == 'X') && (b5 == 'x' || b5 == 'X') && (b7 == 'x' || b7 == 'X')) {
    document.getElementById('print')
        .innerHTML = "Player X won";
    document.getElementById("b1").disabled = true;
    document.getElementById("b2").disabled = true;
    document.getElementById("b4").disabled = true;
    document.getElementById("b6").disabled = true;
    document.getElementById("b8").disabled = true;
    document.getElementById("b9").disabled = true;
    window.alert('Player X won');

} else if ((b2 == 'x' || b2 == 'X') && (b5 == 'x' || b5 == 'X') && (b8 == 'x' || b8 == 'X')) {
    document.getElementById('print')
        .innerHTML = "Player X won";
    document.getElementById("b1").disabled = true;
    document.getElementById("b3").disabled = true;
    document.getElementById("b4").disabled = true;
    document.getElementById("b6").disabled = true;
    document.getElementById("b7").disabled = true;
    document.getElementById("b9").disabled = true;
    window.alert('Player X won');
```

The screenshot shows a code editor interface with a dark theme. The top menu bar includes File, Edit, Selection, View, Go, Run, Terminal, and Help. The title bar shows the current file path: C: > Users > bhuva > Documents > Assignment 1 > JS tic.js > ...

The left sidebar contains several icons and sections:

- RUN AND DEBUG**
- RUN**:
 - Run and Debug**: To customize Run and Debug, open a folder and create a launch.json file.
 - Show all automatic debug configurations**
- JavaScript Debug Terminal**: You can use the JavaScript Debug Terminal to debug Node.js processes run on the command line.
- Debug URL**
- BROWSER BREAKPOINTS**: Shows 1 breakpoint.

The main editor area displays the following JavaScript code for a Tic-Tac-Toe game logic:

```
101     window.alert('Player X won');
102 }
103 else if ((b4 == 'x' || b4 == 'X') && (b5 == 'x' ||
104         b5 == 'X') && (b6 == 'x' || b6 == 'X')) {
105     document.getElementById('print')
106     .innerHTML = "Player X won";
107     document.getElementById("b1").disabled = true;
108     document.getElementById("b2").disabled = true;
109     document.getElementById("b3").disabled = true;
110     document.getElementById("b7").disabled = true;
111     document.getElementById("b8").disabled = true;
112     document.getElementById("b9").disabled = true;
113     window.alert('Player X won');
114 }
115
116 // Checking of Player X finish
117 // Checking for Player 0 starts, Is player 0 won or
118 // not and after that disabled all the other fields
119 else if ((b1 == '0' || b1 == '0') && (b2 == '0' ||
120         b2 == '0') && (b3 == '0' || b3 == '0')) {
121     document.getElementById('print')
122     .innerHTML = "Player 0 won";
123     document.getElementById("b4").disabled = true;
124     document.getElementById("b5").disabled = true;
125     document.getElementById("b6").disabled = true;
126     document.getElementById("b7").disabled = true;
127     document.getElementById("b8").disabled = true;
128     document.getElementById("b9").disabled = true;
129     window.alert('Player 0 won');
130 }
131 else if ((b1 == '0' || b1 == '0') && (b4 == '0' ||
132         b4 == '0') && (b7 == '0' || b7 == '0')) {
133     document.getElementById('print')
134     .innerHTML = "Player 0 won";
135     document.getElementById("b2").disabled = true;
136     document.getElementById("b3").disabled = true;
137     document.getElementById("b5").disabled = true;
138     document.getElementById("b6").disabled = true;
139     document.getElementById("b8").disabled = true;
140     document.getElementById("b9").disabled = true;
141     window.alert('Player 0 won');
142 }
143 else if ((b7 == '0' || b7 == '0') && (b8 == '0' ||
144         b8 == '0') && (b9 == '0' || b9 == '0')) {
145     document.getElementById('print')
146     .innerHTML = "Player 0 won";
147     document.getElementById("b1").disabled = true;
148     document.getElementById("b2").disabled = true;
149     document.getElementById("b3").disabled = true;
150     document.getElementById("b4").disabled = true;
151     document.getElementById("b5").disabled = true;
```

The status bar at the bottom indicates: Ln 376, Col 1 Spaces: 4 UTF-8 CRLF {} JavaScript

The screenshot shows a code editor interface with a dark theme. The top menu bar includes File, Edit, Selection, View, Go, Run, Terminal, and Help. The title bar shows the current file path: C:\> Users\> bhava\> Documents\> Assignment 1\> JS\tic.js. A search bar is also present.

The left sidebar contains several icons and sections:

- RUN AND DEBUG**
- RUN**: Contains "Run and Debug" (selected), "To customize Run and Debug, open a folder and create a launch.json file.", "Show all automatic debug configurations.", "JavaScript Debug Terminal", and "Debug URL".
- BROWSE BREAKPOINTS**: Shows 1 breakpoint.

The main editor area displays the contents of the JS\tic.js file. The code is a function that checks for a win condition in a Tic-Tac-Toe board represented by variables b1 through b9. It uses document.getElementById to get elements and .disabled = true to disable them. It also uses window.alert('Player 0 won') to notify the player of a win. The code spans from line 151 to 201.

```
151     document.getElementById("b5").disabled = true;
152     document.getElementById("b6").disabled = true;
153     window.alert('Player 0 won');
154 }
155 else if ((b3 == '0' || b3 == '0') && (b6 == '0' ||
156 b6 == '0') && (b9 == '0' || b9 == '0')) {
157     document.getElementById('print')
158     .innerHTML = "Player 0 won";
159     document.getElementById("b1").disabled = true;
160     document.getElementById("b2").disabled = true;
161     document.getElementById("b4").disabled = true;
162     document.getElementById("b5").disabled = true;
163     document.getElementById("b7").disabled = true;
164     document.getElementById("b8").disabled = true;
165     window.alert('Player 0 won');
166 }
167 else if ((b1 == '0' || b1 == '0') && (b5 == '0' ||
168 b5 == '0') && (b9 == '0' || b9 == '0')) {
169     document.getElementById('print')
170     .innerHTML = "Player 0 won";
171     document.getElementById("b2").disabled = true;
172     document.getElementById("b3").disabled = true;
173     document.getElementById("b4").disabled = true;
174     document.getElementById("b6").disabled = true;
175     document.getElementById("b7").disabled = true;
176     document.getElementById("b8").disabled = true;
177     window.alert('Player 0 won');
178 }
179 else if ((b3 == '0' || b3 == '0') && (b5 == '0' ||
180 b5 == '0') && (b7 == '0' || b7 == '0')) {
181     document.getElementById('print')
182     .innerHTML = "Player 0 won";
183     document.getElementById("b1").disabled = true;
184     document.getElementById("b2").disabled = true;
185     document.getElementById("b4").disabled = true;
186     document.getElementById("b6").disabled = true;
187     document.getElementById("b8").disabled = true;
188     document.getElementById("b9").disabled = true;
189     window.alert('Player 0 won');
190 }
191 else if ((b2 == '0' || b2 == '0') && (b5 == '0' ||
192 b5 == '0') && (b8 == '0' || b8 == '0')) {
193     document.getElementById('print')
194     .innerHTML = "Player 0 won";
195     document.getElementById("b1").disabled = true;
196     document.getElementById("b3").disabled = true;
197     document.getElementById("b4").disabled = true;
198     document.getElementById("b6").disabled = true;
199     document.getElementById("b7").disabled = true;
200     document.getElementById("b9").disabled = true;
201     window.alert('Player 0 won');
```

The status bar at the bottom shows: Ln 376, Col 1 Spaces: 4 UTF-8 CRLF {} JavaScript

File Edit Selection View Go Run Terminal Help

RUN AND DEBUG ... Get Started kav.java 2 reg.html JS reg.js # reg.css cb.html tt.html vib.html tic.html # tic.css JS tic.js X

RUN

Run and Debug To customize Run and Debug, open a folder and create a launch.json file.

Show all automatic debug configurations.

JavaScript Debug Terminal You can use the JavaScript Debug Terminal to debug Node.js processes run on the command line.

Debug URL

```
C: > Users > bhava > Documents > Assignment 1 > JS tic.js > ...
201     window.alert('Player 0 won');
202 }
203 else if ((b4 == '0' || b4 == '0') && (b5 == '0' ||
204     b5 == '0') && (b6 == '0' || b6 == '0')) {
205     document.getElementById('print')
206         .innerHTML = "Player 0 won";
207     document.getElementById("b1").disabled = true;
208     document.getElementById("b2").disabled = true;
209     document.getElementById("b3").disabled = true;
210     document.getElementById("b7").disabled = true;
211     document.getElementById("b8").disabled = true;
212     document.getElementById("b9").disabled = true;
213     window.alert('Player 0 won');
214 }
215
// Checking of Player 0 finish
// Here, Checking about Tie
216 else if ((b1 == 'X' || b1 == '0') && (b2 == 'X'
217     || b2 == '0') && (b3 == 'X' || b3 == '0') &&
218     (b4 == 'X' || b4 == '0') && (b5 == 'X' ||
219     b5 == '0') && (b6 == 'X' || b6 == '0') &&
220     (b7 == 'X' || b7 == '0') && (b8 == 'X' ||
221     b8 == '0') && (b9 == 'X' || b9 == '0')) {
222     document.getElementById('print')
223         .innerHTML = "Match Tie";
224     window.alert('Match Tie');
225 }
226 else {
227
// Here, Printing Result
228     if (flag == 1) {
229         document.getElementById('print')
230             .innerHTML = "Player X Turn";
231     }
232     else {
233         document.getElementById('print')
234             .innerHTML = "Player 0 Turn";
235     }
236 }
237
// Function to reset game
238 function myfunc_2() {
239     location.reload();
240     document.getElementById('b1').value = '';
241     document.getElementById("b2").value = '';
242     document.getElementById("b3").value = '';
243     document.getElementById("b4").value = '';
244     document.getElementById("b5").value = '';
245     document.getElementById("b6").value = '';
246     document.getElementById("b7").value = '';
247 }
```

BROWSER BREAKPOINTS

Ln 376, Col 1 Spaces: 4 UTF-8 CRLF () JavaScript

The screenshot shows a code editor interface with a dark theme. The top menu bar includes File, Edit, Selection, View, Go, Run, Terminal, and Help. The title bar shows the current file is 'tic.js'. The left sidebar has sections for RUN AND DEBUG, RUN, JavaScript Debug Terminal, and Debug URL. The main area displays the following JavaScript code:

```
C: > Users > bhava > Documents > Assignment 1 > JS tic.js > ...
251     document.getElementById("b7").value = '';
252     document.getElementById("b8").value = '';
253     document.getElementById("b9").value = '';
254 }
255 // Here onwards, functions check turn of the player
256 // and put accordingly value X or 0
257 flag = 1;
258 function myfunc_3() {
259     if (flag == 1) {
260         document.getElementById("b1").value = "X";
261         document.getElementById("b1").disabled = true;
262         flag = 0;
263     } else {
264         document.getElementById("b1").value = "0";
265         document.getElementById("b1").disabled = true;
266         flag = 1;
267     }
268 }
269 function myfunc_4() {
270     if (flag == 1) {
271         document.getElementById("b2").value = "X";
272         document.getElementById("b2").disabled = true;
273         flag = 0;
274     } else {
275         document.getElementById("b2").value = "0";
276         document.getElementById("b2").disabled = true;
277         flag = 1;
278     }
279 }
280 function myfunc_5() {
281     if (flag == 1) {
282         document.getElementById("b3").value = "X";
283         document.getElementById("b3").disabled = true;
284         flag = 0;
285     } else {
286         document.getElementById("b3").value = "0";
287         document.getElementById("b3").disabled = true;
288         flag = 1;
289     }
290 }
291 function myfunc_6() {
292     if (flag == 1) {
293         document.getElementById("b4").value = "X";
294         document.getElementById("b4").disabled = true;
295         flag = 0;
296     } else {
297         document.getElementById("b4").value = "0";
298         document.getElementById("b4").disabled = true;
299         flag = 1;
300     }
301 }
```

The status bar at the bottom indicates the code is 376 lines long, 2 columns wide, and uses spaces for indentation. It also shows the file is a JavaScript file.

The screenshot shows the Visual Studio Code interface with the following details:

- File Menu:** File, Edit, Selection, View, Go, Run, Terminal, Help.
- Search Bar:** Search bar with a magnifying glass icon.
- Editor:** The main code editor window displays a JavaScript file named `tic.js`. The code contains several functions (`myfunc_7`, `myfunc_8`, `myfunc_9`, `myfunc_10`) that manipulate elements with IDs `b4`, `b5`, `b6`, and `b7`, setting their values to "X" or "0" and enabling or disabling them based on a `flag` variable.
- Run and Debug View:** A sidebar titled "RUN AND DEBUG" is open, showing the "Run and Debug" tab selected. It includes instructions to customize the run configuration by creating a `launch.json` file and provides links to "JavaScript Debug Terminal" and "Debug URL".
- Terminal:** A terminal window at the bottom left shows the command `C: > Users > bhava > Documents > Assignment 1 > JS tic.js > ...`.
- Bottom Status Bar:** Shows file statistics: Ln 376, Col 1, Spaces: 4, UTF-8, CRLF, and a JavaScript icon.

The screenshot shows the Microsoft Edge DevTools interface with the 'JavaScript Debugger' panel open. The top navigation bar includes File, Edit, Selection, View, Go, Run, Terminal, Help, and a search bar. The left sidebar has sections for RUN AND DEBUG, RUN, JavaScript Debug Terminal, and Debug URL. The main content area displays a stack trace and the source code for 'tic.js'. The code contains three functions: myfunc_9, myfunc_10, and myfunc_11, which manipulate elements with IDs b7, b8, and b9 respectively, setting their values to 'X' or '0' and enabling/disabling them based on a flag variable.

```
C: > Users > bhava > Documents > Assignment 1 > JS tic.js > ...
335     }
336 }
337
338 function myfunc_9() {
339     if (flag == 1) {
340         document.getElementById("b7").value = "X";
341         document.getElementById("b7").disabled = true;
342         flag = 0;
343     }
344     else {
345         document.getElementById("b7").value = "0";
346         document.getElementById("b7").disabled = true;
347         flag = 1;
348     }
349 }
350
351 function myfunc_10() {
352     if (flag == 1) {
353         document.getElementById("b8").value = "X";
354         document.getElementById("b8").disabled = true;
355         flag = 0;
356     }
357     else {
358         document.getElementById("b8").value = "0";
359         document.getElementById("b8").disabled = true;
360         flag = 1;
361     }
362 }
363
364 function myfunc_11() {
365     if (flag == 1) {
366         document.getElementById("b9").value = "X";
367         document.getElementById("b9").disabled = true;
368         flag = 0;
369     }
370     else {
371         document.getElementById("b9").value = "0";
372         document.getElementById("b9").disabled = true;
373         flag = 1;
374     }
375 }
376
```

BROWSE BREAKPOINTS

Ln 376, Col 1 Spaces: 4 UTF-8 CRLF {} JavaScript

The screenshot shows a dark-themed code editor interface. On the left, there's a vertical toolbar with icons for file operations, search, and other development tools. The main area has a header bar with tabs for various files: 'Get Started', 'kav.java 2', 'reg.html', 'reg.js', 'reg.css', 'cb.html', 'tt.html', 'vib.html', 'tic.html', 'tic.css', and 'tic.js'. Below the header, a status bar displays 'RUN AND DEBUG' and 'RUN'.

The central part of the screen is a code editor displaying a CSS file named 'tic.css'. The file path is shown as 'C: > Users > bhava > Documents > Assignment 1 > # tic.css > ...'. The code contains several styles for elements like 'h1', 'but', 'print', and 'main'. The code editor includes line numbers and syntax highlighting.

At the bottom, a footer bar shows 'BROWSER BREAKPOINTS' with a count of 1, and status information: 'Ln 61, Col 1', 'Spaces: 4', 'UTF-8', 'CRLF', 'CSS', and a refresh icon.

```
C: > Users > bhava > Documents > Assignment 1 > # tic.css > ...
1  <style>
2  /* CSS Code */
3  /* Heading */
4  h1 {
5      color: orange;
6      font-size: 45px;
7  }
8
9  /* 3*3 Grid */
10 #b1, #b2, #b3, #b4, #b5,
11 #b6, #b7, #b8, #b9 {
12     width: 80px;
13     height: 52px;
14     margin: auto;
15     border: 1px solid gray;
16     border-radius: 6px;
17     font-size: 30px;
18     text-align: center;
19 }
20
21 /* Reset Button */
22 #but {
23     box-sizing: border-box;
24     width: 95px;
25     height: 40px;
26     border: 1px solid dodgerblue;
27     margin: auto;
28     border-radius: 4px;
29     font-family: Verdana,
30         Geneva, Tahoma, sans-serif;
31
32     background-color: dodgerblue;
33     color: white;
34     font-size: 20px;
35     cursor: pointer;
36 }
37
38 /* Player turn space */
39 #print {
40     font-family: Verdana,
41         Geneva, Tahoma, sans-serif;
42
43     color: dodgerblue;
44     font-size: 20px;
45 }
46
47 /* Main Container */
48 #main {
49     text-align: center;
50 }
```

The screenshot shows the Microsoft Edge DevTools interface with the CSS tab selected. The left sidebar has a 'Run and Debug' section with a 'Run and Debug' button highlighted. The main pane displays the contents of the 'tic.css' file.

```
C: > Users > bhuvan > Documents > Assignment 1 > # tic.css > ...
19
20    /* Reset Button */
21    #but {
22        box-sizing: border-box;
23        width: 95px;
24        height: 40px;
25        border: 1px solid #dodgerblue;
26        margin: auto;
27        border-radius: 4px;
28        font-family: Verdana,
29                    Geneva, Tahoma, sans-serif;
30
31        background-color: #dodgerblue;
32        color: #white;
33        font-size: 20px;
34        cursor: pointer;
35    }
36
37
38    /* Player turn space */
39    #print {
40        font-family: Verdana,
41                    Geneva, Tahoma, sans-serif;
42
43        color: #dodgerblue;
44        font-size: 20px;
45    }
46
47    /* Main Container */
48    #main {
49        text-align: center;
50    }
51
52    /* Game Instruction Text */
53    #ins {
54        font-family: Verdana,
55                    Geneva, Tahoma, sans-serif;
56
57        color: #dodgerblue;
58        font-size: 17px;
59    }
60
61 </style>
```

The status bar at the bottom indicates: Ln 61, Col 1 Spaces:4 UTF-8 CRLF CSS. There are also icons for browser breakpoints, file count (0), and other developer tools.

The screenshot shows a code editor interface with a dark theme. The top menu bar includes File, Edit, Selection, View, Go, Run, Terminal, and Help. The title bar shows the current file is 'tic.html'. The left sidebar has sections for RUN AND DEBUG and RUN, with 'Run and Debug' selected. A message in the RUN section says: 'To customize Run and Debug, open a folder and create a launch.json file.' Below this, there's a link to 'Show all automatic debug configurations.' The main editor area displays the following HTML code:

```
C: > Users > bhuvu > Documents > Assignment 1 > tic.html > head > meta
1  <!DOCTYPE html>
2
3  <head>
4      <meta name="viewport" content=
5          "width=device-width, initial-scale=1.0">
6
7      <!-- CSS file Included -->
8      <link rel="stylesheet"
9          type="text/css" href="tic.css">
10
11     <!-- JavaScript file included -->
12     <script src="tic.js"></script>
13 </head>
14
15 <body>
16     <div id="main">
17         <h1>TIC TAC TOE</h1>
18
19         <!-- Game Instructions -->
20         <p id="ins">Game starts by just Tap on
21             box<br><br>First Player starts as
22             <b>Player X</b><br>And<br>Second
23             Player as <b>Player 0</b>
24         </p>
25
26
27
28
29         <br><br>
30         <!-- 3*3 grid of Boxes -->
31         <input type="text" id="b1" onclick=
32             "myfunc_3(); myfunc();" readonly>
33
34         <input type="text" id="b2" onclick=
35             "myfunc_4(); myfunc();" readonly>
36
37         <input type="text" id="b3" onclick=
38             "myfunc_5(); myfunc();" readonly>
39         <br><br>
40
41         <input type="text" id="b4" onclick=
42             "myfunc_6(); myfunc();" readonly>
43
44         <input type="text" id="b5" onclick=
45             "myfunc_7(); myfunc();" readonly>
46
47         <input type="text" id="b6" onclick=
48             "myfunc_8(); myfunc();" readonly>
49         <br><br>
50
51         <input type="text" id="b7" onclick=
```

The status bar at the bottom shows: Ln 5, Col 49 Spaces: 4 UTF-8 CRLF HTML. There are also icons for browser breakpoints, file count (0), and other settings.

The screenshot shows a dark-themed code editor interface with a sidebar on the left containing various icons for file operations, search, and help. The main area displays an HTML file with line numbers and inline JavaScript code. The status bar at the bottom provides information about the current file.

File Edit Selection View Go Run Terminal Help

RUN AND DEBUG ... Get Started kav.java 2 reg.html reg.js reg.css cb.html tt.html vib.html tic.html # tic.css JS tic.js

Search

C: > Users > bhuva > Documents > Assignment 1 > tic.html > head > meta

```
30     <!-- 3*3 grid of Boxes -->
31     <input type="text" id="b1" onclick=
32         "myfunc_3(); myfunc();" readonly>
33
34     <input type="text" id="b2" onclick=
35         "myfunc_4(); myfunc();" readonly>
36
37     <input type="text" id="b3" onclick=
38         "myfunc_5(); myfunc();" readonly>
39     <br><br>
40
41     <input type="text" id="b4" onclick=
42         "myfunc_6(); myfunc();" readonly>
43
44     <input type="text" id="b5" onclick=
45         "myfunc_7(); myfunc();" readonly>
46
47     <input type="text" id="b6" onclick=
48         "myfunc_8(); myfunc();" readonly>
49     <br><br>
50
51     <input type="text" id="b7" onclick=
52         "myfunc_9(); myfunc();" readonly>
53
54     <input type="text" id="b8" onclick=
55         "myfunc_10(); myfunc();" readonly>
56
57     <input type="text" id="b9" onclick=
58         "myfunc_11(); myfunc();" readonly>
59
60     <!-- Grid end here -->
61     <br><br><br>
62     <!-- Button to reset game -->
63     <button id="but" onclick="myfunc_2()">
64         RESET
65     </button>
66
67     <br><br>
68     <!-- Space to show player turn -->
69     <p id="print"></p>
70
71
72
73
74     </div>
75 </body>
76
77 </html>
78
```

BROWSER BREAKPOINTS

Ln 5, Col 49 Spaces: 4 UTF-8 CRLF HTML ⚡ ⚡

tic.html

File | C:/Users/bhuva/Documents/Assignment%201/tic.html

TIC TAC TOE

Game starts by just Tap on box

First Player starts as **Player X**
And
Second Player as **Player O**

RESET

