

Quality of Service - FFI

IT2901 - Group 7

Bremnes, Jan A. S.
Johanessen, Stig Tore
Kirø, Magnus L.
Nordmoen, Jørgen H.
Støvneng, Ola Martin T.
Tørresen, Håvard

29. februar 2012

Sammendrag

This is the paper's abstract ...

Innhold

1	Project Introduction	4
2	Task Description and Requirements	4
2.1	Description	4
2.2	Requirements	5
3	Project Management	6
3.1	Team Organization	6
3.1.1	Team Structure	7
3.1.2	Team communication	8
3.2	Risk Assesment	9
3.3	Process Evaluation	9
3.4	Progress tracking and Documentation	9
4	Development Methodology	10
4.1	Project Organization	11
4.2	Software project life cycle	11
4.3	System Technology	13
5	Prestudy	14
5.1	Server side Architecture	14
5.2	Client side Architecture	16
5.3	Alternative solutions	18
6	Design	20
6.1	Client Side	20
6.1.1	Data Flow	20
6.2	Server Side	20
6.2.1	Introduction	22
6.2.2	Use Cases	22
6.2.3	Description of ESB concepts	25
6.2.4	Textual Dataflow	26
6.2.5	Extensions to the ESB	28

6.2.6	Sequence Diagrams	29
6.2.7	Configuration of the ESB	29
6.2.8	Modification of the ESB	30
7	Implementation	32
8	Testing	32
9	Results	32
10	Conclusion	32
10.1	Project accomplishments	32
10.2	Future Work	32
11	Project Evaluation	32
A	Technical Glossary	32
B	Work Breakdown Structure	36
C	File Attachments	36

Figurer

1	Team Organization chart	7
2	Example Activity plan	9
3	Status report example	10
4	Part of our Gantt diagram	12
5	Bird view of the thought of architecture.	15
6	The Server side Architecture	16
7	The Client side Architecture	17
8	Client Data Flow	20
9	Client Credentials Flow	21
10	Server Data Flow	26
11	SAML Authentication Flow	27
12	System-level sequence diagram	30
13	SAML mediator sequence diagram	31
14	Response sequence sequence diagram	37

15	Metadata mediator sequence	38
16	MS mediator sequence diagram	39
17	WBS-Client	40
18	WBS-Server	40

Tabeller

1 Project Introduction

This is a preliminary report documenting our progress so far in the course IT2901 - Informatikk Prosjektarbeid II. It will give a description of the problem we were presented with, how we have planned the work for the weeks ahead, how we have organized our group and what development methodology we have chosen etc. We will also give a brief discussion about why we have made the decisions we have.

2 Task Description and Requirements

Our task is to provide a Quality of Service (QoS) layer to web services for use in military tactical networks. As these networks tend to have severely limited bandwidth, and our QoS-layer must therefore prioritise between different messages, of varying importance, that clients and services want to send. Our middleware will have to recognize the role of clients, and, together with the service they are trying to communicate with, decide the priority of the message.

2.1 Description

[Description of the task at hand.]

Our assignment is to create a Java application which will function as a middleware layer between web services, and clients trying to use these services. The middleware needs to process SOAP messages, which is the communication protocol for most web services, in order to be able to do its task. On the client side, the middleware needs to process messages and understand SAML in order to deduce the role of the client. This role, together with information about the service the client is trying to communicate with, decides the overall quality of service the messages should receive.

Our middleware needs to be able to modify the TOS/Diffserv IP packet header in order for the tactical router to prioritize correctly. Currently NATO has just defined one class, BULK, which is to be used with web services, but this may change in the future and our middleware should handle this upcoming change gracefully.

In addition to this, the middleware needs to be able to retrieve the available bandwidth in the network, which in the real system will be retrieved

from the tactical routers. In our testing this information will come from a dummy layer, but how this information is obtained should also be very modular, so that the customer can change how the bandwidth information is obtained later.

With all this information, the role of the client, the relationship between the client and the service, and the available bandwidth, our middleware layer should be able to prioritize messages. Our product should, as much as possible, use existing web standards, the customer outlined some of their choices and options we have for implementation, like SAML, XACML, WS-Security and WSO2 ESB. In addition to this, our middleware needs to work with GlassFish, as that is the application server the customer uses.

2.2 Requirements

As the customer wanted all documentation written in English, we decided to use this for all written communication and documentation, in order to keep things consistent.

The way the course is structured in terms of deliveries of reports and documentation also creates a fairly natural implicit sprint period to work off of, and using an agile methodology will help in easily producing and maintaining said reports and documentation. In addition to the reports and documentation, we will try to deliver two prototypes, an alpha and a beta version, to the customer before the final delivery in May.

The customer does not require any prototypes along the way, just a working prototype by the end of the project, so the deadlines we have set for the alpha and beta, are self-imposed.

The customer has not given us many strict requirements, but instead they have suggested a few things that we could do. Given this freedom, we decided that we should improve on the base requirements by adding most of the things mentioned in this section.

The following is a list of technology requirements.

- Written in java
- High priority messages must arrive, even at the cost of dropping lower priority messages.
- Use standards where they can be used

SAML

Diffserv

XACML

WS-Security

- Test thoroughly
 - Use NS3 for testing
- Extensive documentation
- Use metadata to determine priority
- GlassFish must be supported as the application server
- Must be able to set priority on network layer packets

Currently there is only one priority class defined by NATO, the BULK class, but this will most likely change in the future, as such our middleware layer needs to be expandable enough to handle this change in the future.

- There are no requirements on resource usage, but we should try to keep it lightweight.

The customer has only said that we can expect the product to be used on a standard laptop with full Java support

3 Project Management

In this section, we'll take look at how we organized the team, a brief risk assesment, and an evaluation of the work process.


3.1 Team Organization

[The team structure and roles.]

This section describes in detail how we organize ourselves and how we split roles and tasks among the team members. We have a flat team structure and have shifted our focus accordingly over to team communication.

3.1.1 Team Structure

We already know each other coming into the project so we have chosen a flat organisational structure, since all decisions within the team will more or less be made by all the members together either way. Relying on the entire group for decisions will both involve and invest everyone in the project and will work well with our already existing group dynamic.¹

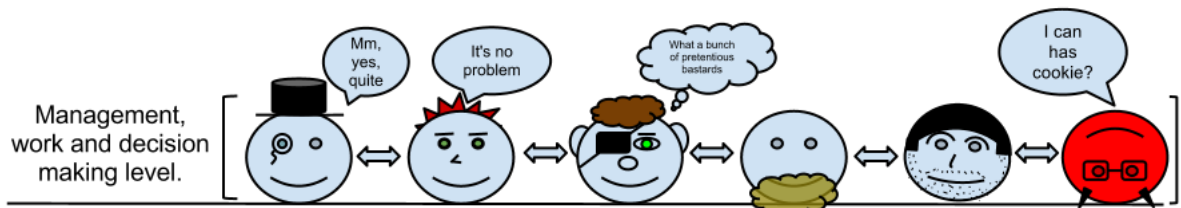

Figur 1: Team Organization chart

It was made during lunch, but the general principle still remains, that the structure is flat.

As the structure shows in the chart, there is no difference in what responsibility level anyone have, or what role one has. The concept of changing roles weekly is good for a learning situation, but very inefficient where knowledge and research are key components in a limited timed project. We anticipate that the time for this project probably won't be sufficient, and therefore we have to keep people focused on the task they have taken. The efficiency of the current task relies on having the current research fresh in mind. If we were to change the roles every week, the newly assigned person would spend much time getting up to date at the beginning of every week, which in turn wouldn't yield any measurable gains.

We chose to drop responsibility areas and roles. Instead we look at tasks. We might have tasks representing a responsibility, but it is still a task with a person assigned to the task. This makes the team more flexible. We don't run the risk of a key member of our team becoming ill and the rest of the group don't have a clue as to whats left to do on that particular responsibility area. Instead we say 'that person is ill, and we have to do this task by Monday then I'll do it'. And the task gets done.

¹ Flat organization structure is a structure with few or no levels of intervening management. The idea is that well-trained workers will be more productive when they are directly involved with decision making. [Wikipedia: Flat Organization Structure](#)

The problem we encounter and discharge is the eventuality of a person becoming ill or incapacitated and at the same time having key knowledge to our project. This seemingly huge problem is not really a problem as we document a lot. So the knowledge of a person is at all times documented, to such a degree that if a person is incapacitated the other team members can pick up right where he left off, thereby expelling the problem altogether.

Further, the team structure and the distribution of responsibility gives us the chance to define how we want to deal with task and their priority. The work flow that we have makes us prioritise tasks continuously and get the most pressing task done at the correct time. It's similar to a max heap. We put tasks in to the heap, heapify(prioritise tasks) and choose(pop) the maximized task, the task that has the highest priority.

When we choose a task we consider the persons interest, experience and existing knowledge. Most times the tasks fall naturally to one person that has worked with similar tasks earlier in the project. Other times there is more of lottery, where the task has no prerequisites. Often we rely on a persons initiative to take a task or we easily delegate them with a question, "Can someone do that?". Task delegation and sharing the work load has not been a problem so far in the project.

3.1.2 Team communication

We decided that we will work together from 10 to 16, Monday through Thursday every week, with allowed exceptions for lectures and such. Group members can also work in their free time to make up for missed collaboration hours or to just put in some extra work. This means more work than the course requires, but we decided that we want to do it this way so we can either take some time off now and then, or have more time for the exams in May.

We will not be able to have frequent face to face meetings with the customer, but we will have weekly online meetings with them instead, as well as e-mail communication as needed. Since we have seen what happens in projects where there is little to no communication, we decided, in agreement with the costumer, that we at least wanted to have weekly meetings in order to keep a good dialog with the customer, and also give them the opportunity to take part in the development of the project. Since we have some challenges in the fact that the customer is in Oslo, we decided that the weekly meetings will be held over Skype.

3.2 Risk Assessment

3.3 Process Evaluation

Project management documented: Possible deviations and how they have been handled.

3.4 Progress tracking and Documentation

In the beginning we had a summary every day where we wrote what we were working on and what had to be done. We stopped doing this after we got good activity plans because the daily summaries became unnecessary.

Activity plan		week - 8							
Resource Rxxx people on activity		Planned work per resource: 24666666666667		Actual work per resource: 21466666666667					
	Plan			Follow-up					
Nr	Work package	Activity	Resource	Planned Work (hs)	Start	Finish	Actual Work (hs)	Status (%)	Comment
1	Client Library	Sequence diagram	R2	24	20.02.12	21.02.12	10.5	100%	Boy did not make the mark on this estimate
2	Client Library	Extend textual use cases	R1	6	22.02.12	22.02.12	2	100%	Was already fairly complete. Remaining work is related to OpenSAML, and how the two should be used together.
3	Client Library	Research Apache Axiom	R1	6	20.02.12		7	80%	One person was missing so that was some time lost, we also had some time issues.
4	Meetings	Meeting preparations	R0	12	20.02.12	21.02.12	6	100%	Had a good meeting with the customer which answered many questions and we presented many documents to the documents.
5	Meetings	Customer meeting	R0	3	21.02.12	21.02.12	3	100%	The meeting was longer than usual and a lot was discussed. Which in turn made the meeting summary longer.
6	Meetings	Meeting summary, and documentation	R1	3	21.02.12	21.02.12	4	100%	therefore taking more time.
7	Project management	Weekly report	R3	6	23.02.12	23.02.12	6		
8	Project management	Activity Plan	R3	6	23.02.12	23.02.12	6		
9	Project management	Unplanned activities	R0	12	20.02.12	24.02.12	24		
10	Report	Team Structure	R1	6	20.02.12	23.02.12	6	100%	
11	Report	Software project life cycle	R1	6	22.02.12	23.02.12	6	100%	
12	SAML	OpenSAML research	R1	16	20.02.12		16	80%	
13	Server	Update Server WBS	R1	4	20.02.12	21.02.12	2	100%	
14	Server	Sequence diagram	R2	24	20.02.12		22	60%	Since two of the mediators has some characteristics which we don't know yet we could not complete them yet. This also meant quite a bit more work than expected because there were two persons working on it.
15	Server	Document server mediators	R1	6	22.02.12	23.02.12	6	100%	Since we only had to update names and some sentences there wasn't much to do and we got it done before the planned time.
16	Server	Update server use cases	R1	4	22.02.12	22.02.12	2	100%	

Figur 2: Example Activity plan

The activity plans(Fig:2) now have the role of our day to day summaries and work progress. We update the activity plan as we go along. This way we have a complete overview of tasks and work hours that are planned this week. As we update the activity plan we have an overview of the work done this week and where we have missed with our time estimation.

As we can see in the weekly report (Fig:3) the status report has a standard setup. We created a template early in the project so that we did not have to redo the work later. In the process of creating the template we put some thought in to it so that we would get a template that would work throughout the project without further changes.

The activity plan has a template which we clone every week to create the plan for next week. We update it

Group 7 - Qos - FFI - 01.01.01

Håvard Tørresen, Jan Alexander Bremnes, Jørgen Nordmoen, Magnus Kire, Ola Martin Støvneng, Stig Tore Johannesen.

Introduction

This week was mostly used for research on various technologies that we might use, and detailing the system architecture (mostly on the client side).

Progress summary

We have made a fair bit of progress on how to use the WSO2 ESB and underlying software libraries. Started detailing the system architecture on both the client- and the server-side. This detailing includes flowcharts and abstract components and their connection with each other. Also found and gotten a good grip on several available libraries to use in both the server and client.

Completed tasks

- Research on how to set TOS in WSO2
- Client library architecture
- Research on WSO2 mediators

New tasks

- Sequence diagrams

Planned work for next period

- See Activity Plan!

Other changes (risks analysis, etc)

We decided to take a more serious approach to Activity plan which now may be more accurate and reflect better the work we have done and are going to do.

Figur 3: Status report example

4 Development Methodology

We did not follow any established development methodology, such as Scrum or XP, as this project required more planning and configuration of existing solutions, than actual coding. We therefore chose a mix of waterfall and agile methods, we discuss these decisions in the sections below. You will also find a list of the tools we chose to work with, and why we decided to use them.

Since this is a research project, the customer will act more as an advisor than a customer, and will have more suggestions and advice than demands and requirements. We have been given a clear understanding of what the final product should be, and we have a list of requirements that should be met. Other than that, we are relatively free regarding how we go about solving the problem. Because of this, a methodology like Scrum won't work for us, as it requires us to be in close and frequent contact with the customer, presenting a prototype every other week and continue development based on the customers feedback and demands.

This is a project that requires quite a lot of planning before any programming can be done. This necessitates that we start the development according to a waterfall model in terms of the architecture planning as well as the requirements specification.

As the project progresses we'll be switching to a more agile development method, so as to allow for iterative development and facilitate for any necessary changes that may turn up as code is produced. Agile also allows for a far flatter organisational structure, which we believe will greatly help cooperation within the team.

4.1 Project Organization

[How we organize the project]

We have divided the project tasks into work packages. These packages are represented in a work breakdown structure (WBS) (B). The timeplan for the project is represented in a Gantt diagram (Fig.4). The figure is part of our full gantt diagram. As the full diagram cannot be included nicely in the report we have attached it as an html document (C).

4.2 Software project life cycle

[The development cycle. Scrum and Agile, why and how.]

For our project life cycle we chose agile. Originally we started out with the intention of using Scrum² and scrum only. That intention was quickly scrapped as we found out that our task was very research heavy. This made us rethink our approach to the development cycle and turn in the direction of agile software development³. Very early in the project we expected that we could begin coding and prototyping very early. This proved to be wrong as there was a lot of research to be done. Scrum was originally a tactic to improve product flexibility and production speed. This works very well in software development as you already know what you are supposed to do and the major part of the task is to make the required functionality. When the functionality has to be designed and researched extensively scrum becomes

²Scrum is a form of agile project management [[Wikipedia: Scrum](#)]

³Agile software development is a group of software development methodologies based on iterative and incremental development, where requirements and solutions evolve through collaboration between self-organizing, cross-functional teams [[Wikipedia: Agile Software Development](#)]

Tasks								
WBS	Name	Start	Finish	Work	Priority	Complete	Cost	Notes
1	Planning	Jan 18	Jan 20	18d		100%		
2	Work on preliminary report	Jan 23	Feb 3	60d	10	100%		
3	Submission of Preliminary Report	Feb 6	Feb 6					Thu 26 Jan 2012, 14:55 This is a note
4	Architecture planning	Feb 6	Mar 5	126d	9	8%		
5	Work on midterm report	Feb 6	Mar 9	150d	7	0%		
6	Work on prototype client	Mar 8	Apr 16	84d 2h				
6.1	Open SAML	Mar 8	Apr 16	27d 4h		0%		
6.2	Client library	Mar 8	Apr 16	56d 6h				
6.2.1	Metadata interpreter	Mar 8	Mar 22	10d 3h		0%		
6.2.2	Prioritizer	Mar 22	Apr 9	17d 3h		0%		
6.2.3	Tactical router communication	Apr 9	Apr 16	5d 7h		0%		
6.2.4	Interface	Mar 8	Apr 16	28d				
6.2.4.1	Client integration manual	Mar 27	Apr 16	14d 6h		0%		
6.2.4.2	API	Mar 8	Mar 27	13d 2h		0%		
7	Work on prototype server	Mar 8	Apr 16	131d 5h				
7.1	ESB	Mar 8	Mar 23	12d		0%		
7.2	Identity server	Mar 20	Apr 3	11d		0%		
7.3	Glassfish	Mar 29	Apr 16	12d 4h		0%		
7.4	SAML mediator	Mar 8	Apr 16	27d 4h				
7.4.1	?	Mar 8	Apr 16	27d 4h		0%		
7.5	OAuth mediator	Mar 8	Apr 16	41d 3h				
7.5.1	Metadata interpreter	Apr 2	Apr 16	10d 3h		0%		
7.5.2	Prioritizer	Mar 8	Apr 6	22d		0%		
7.5.3	Tactical router communication	Mar 28	Apr 9	9d		0%		
7.6	WSO2 network layer	Mar 8	Apr 16	27d 2h				
7.6.1	?	Mar 8	Apr 16	27d 2h		1%		
8	Creation of test suite	Mar 13	Apr 6	36d		0%		
9	Testing of prototype	Apr 9	Apr 16	11d		0%		
10	Work on final report	Mar 12	Apr 16	152d 2h		0%		
11	Submission of Alpha	Mar 9	Mar 9					
12	Submission of midterm report	Mar 9	Mar 9					
13	Submission of Beta	Apr 16	Apr 16					
14	Submission of final report draft	Apr 16	Apr 16					
15	Bug fix, polishing, wrapping things up, buffer	Apr 17	May 25	28d 1h		0%		
16	Deadline	May 25	May 25					

Figur 4: Part of our Gantt diagram
Se full diagram in attachments: (C)

unsuitable. With the agile method there is elements that suits us better then others. "Individuals and Interaction" and "Customer Collaboration" are two important elements that we use. The full description of the agile method can be found in the Agile Manifesto⁴. Individuals and interactions are strongly connected with the organization of our team (3.1). The flat team structure force us to have a good dialog among the group members. This increase the team members interaction and strengthens the team communication. The strengthened communication promotes the individuals of the group and the team members confidence, which in turn increases the total productivity of the group. The frequent interactions with the customer are also a part of our adaption to the agile development method. Customer Collaboration is the aspect of the group contacting the customer and keeping a good dialog with them. This is to make sure that we produce a product that the customer wants. To achieve this part of the agile manifesto we have meetings with the

⁴Agile Manifesto, the key elements of the agile software development method. [Agile-Manifesto.org]

customer every week and we send emails back and forth to iron out the bumps of our product. The frequent communication with the customer helps us to create a more precise and consistent system with better documentation. The main part of the communication with the customer is for the benefit of the project and constant improvement. The constant improvement and iterative work flow is a central part of the agile method.

4.3 System Technology

[The tools and thecnologies that we will use in the project.]

We intend to do a test driven development in order to achieve high quality code. This will give us something to test while we are working, and it will also give us a great way to tell if some new piece of code gets in the way of previously written code. For this purpose we will use JUnit as the testing framework. We will also be doing periodical code reviews approximately every two weeks of development, synchronized with a code/feature freeze where we make sure everything works. As the customer wanted extensive testing of the middleware, we agreed to do testing on the network emulator NS3, as we have someone in the group already familiar with it. The advantage of using NS3 will be extensive testing, but also a great deal of empirical and verifiable data, which the customer also can use to evaluate the product.

We will use Git and GitHub to handle our file repository, although Google Docs will be used for easy sharing and collaboration of schedules, meeting minutes, and reports. Even though the course set us up to use Subversion, we decided against this as Git gives us more options to develop code which will not greatly affect other parts of the code base before we decide to integrate it. To this extent we have decided that as much as possible we should take advantage of Git's built in support for 'branches'. The argument for using Google Docs is that we have the possibility of editing a document together and easy sharing of documents. Delivered reports will be created with [L^AT_EX](#), which we prefer over standard word processors.

Each of us is free to choose his own IDE⁵ for programming. Because we are using Git, there should be no problem in using the IDE of our choice, and this gives us the added advantage that each person can use the tool which he is most comfortable with. We will stick to the standard Java Coding Conventions.

⁵Integrated development environment [[Wikipedia: IDE](#)]

Since we were so free to choose which tools we wanted to use we decided that this list should be quite lightweight. However the list compiled should be an indication of what is needed for the project. Some of the tools were chosen by us as is and other were demanded by needs of other components. All tools used can be upgraded, downgraded or dropped during the course of this project. The final report will contain the official list as such this list is not in any way final. Our final report will also contain a list with supported tools tested with the final product.

- Git version 1.7.x
- Java version 1.6.x
- Free choice of IDE
- JUnit version 4.x
- NS3 unknown at present time
- WSO2 ESB 4.0.3

5 Prestudy

This project is one that requires quite a lot of prestudy before we can begin coding or even designing the architecture. Since the customer wanted us to implement existing technologies, such as Glassfish, WSO2, SAML etc. we need to spend some time researching those technologies to figure out what to use, and how to use it. The following sections will describe the overall architecture of how we, at this point in time, imagine our system will be like.

5.1 Server side Architecture

[The architecture of the server side module we are to create.]

The server side architecture consists of several components, the WSO2 ESB, the WSO2 Identity Server, the Tactical Router and the GlassFish server. All of these components are already available, so what we will have to make is mediators in the ESB.

Before the client can request a web service it has to have an identification. To get an ID-token it has to contact the Identity Server using the ESB as


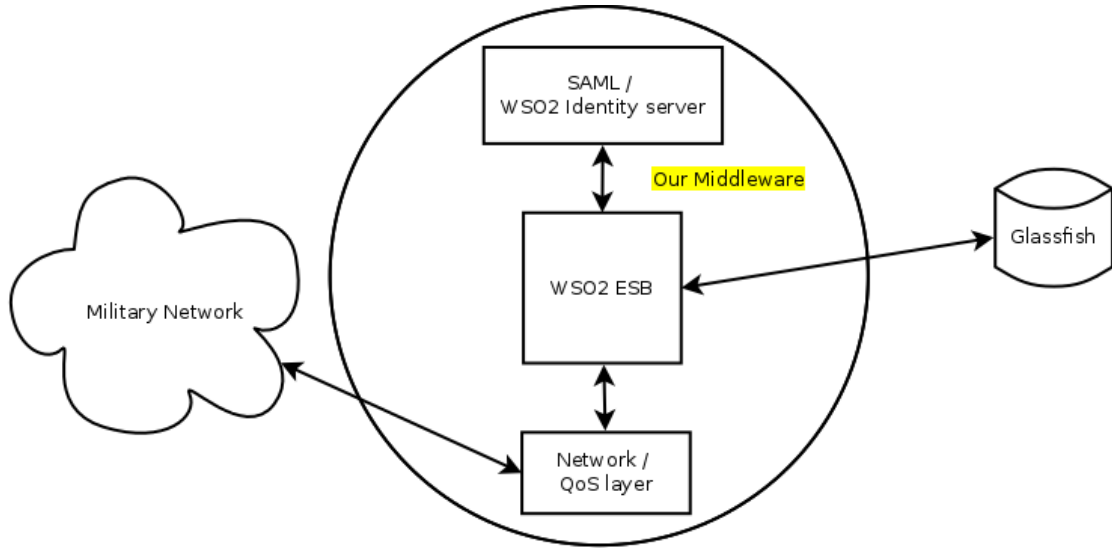


Figure 5: Bird view of the thought of architecture.

a proxy (Fig.6-1). Then the client can request a web service from the ESB. Several things will then happen in the ESB. First the request message is sent to the SAML mediator (Fig.6-2), this mediator contacts the Identity Server to validate the clients ID-token (Fig.6-3). If the token is validated and the client is supposed to have access to the requested service the message is passed on to the GlassFish proxies (Fig.6-4), otherwise it is dropped. The ESB acting as a proxy will then send the request along to the requested service on the GlassFish server (Fig.6-5).

When the request is received at the service, it will probably start sending some data to the client. This is also done through the ESB. First the message is sent to the QoS mediator (Fig.6-6). This mediator will first look at the role, or identity, of the client and the service requested, and use this information to assign a priority to the connection. Then the Tactical Router is contacted for bandwidth information (Fig.6-7), which is used together with the priority to determine whether the message should be sent right away or held back until some higher priority message is finished sending.

Either in the QoS mediator, in the ESB's network layer, or after that, the Diffserv (ToS) field of the IP header will have to be set (Fig.6-8) before the message is sent to the client (Fig.6-9). This field is used by the routers in the network to prioritize packet sending. This step is quite important to

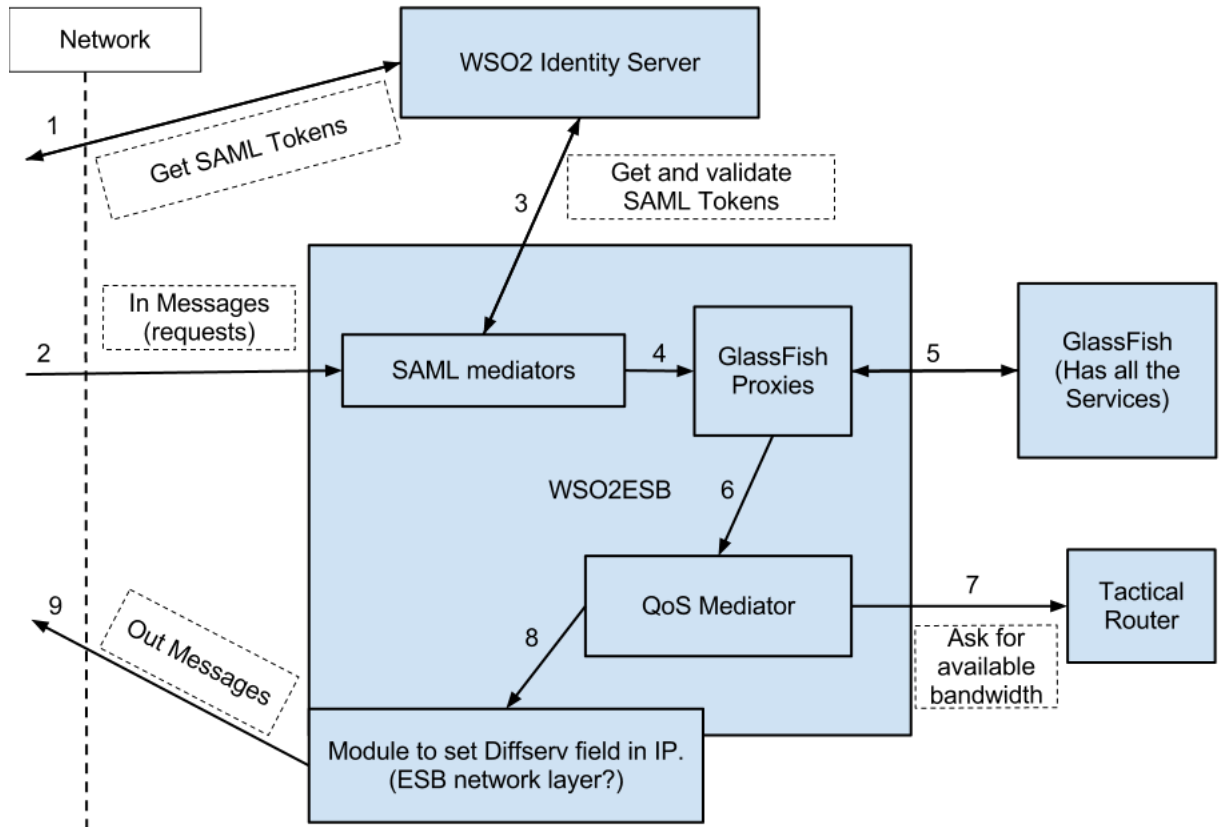

Figur 6: The Server side Architecture


the whole procedure as this is one of the few requirements the customer has given us, as such this step can not be dropped from the final product.

5.2 Client side Architecture

[The architecture of the client side module we are going to create.]

The client-side architecture will be composed of altered (already existing) client software, the OpenSAML library as well as our client library implementation.

Before the client library can ask for the data the client needs to get a SAML authentication token from the identity server (Fig.7-1). The communication here will most likely be handled by our library, but the SAML

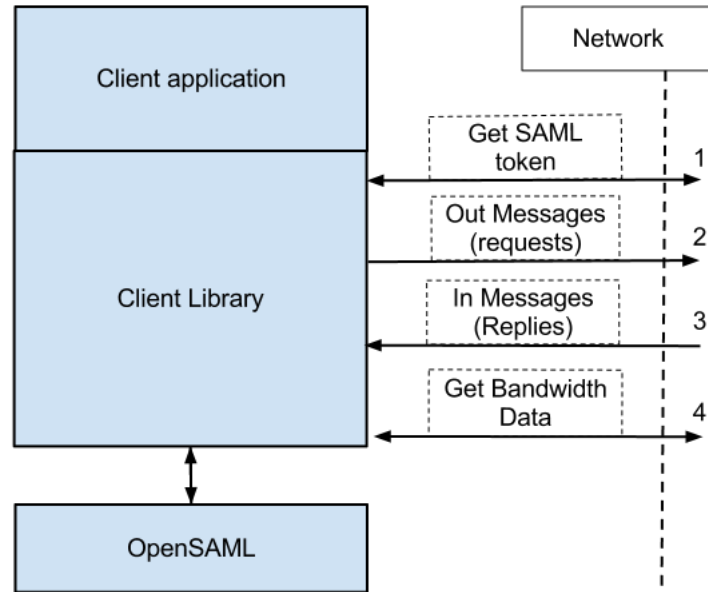

Figur 7: The Client side Architecture

packages will be created and analyzed by the OpenSAML library.

The client library then sends the request from the client to the server (Fig.7-2), appending the SAML token to the package as well as adding some metadata in the SOAP header related to the client role and setting the TOS field of the package to a default value.

The reply from the server is examined by our client library for the metadata the server has embedded in the SOAP header, relevant metadata is stored for future communication and the package is passed to the client application (Fig.7-3).

When new communication is initiated after this first connection is made the client should, if everything went as expected, have the necessary information to prioritize new messages. This means that the client can now take quite an informed decision about how it should prioritize messages, but in order to do this to the best of it's abilities it also has to take into consideration available bandwidth (Fig.7-4).

5.3 Alternative solutions

[Solutions that we have, thought about but discarded.]

Since this is only the preliminary report we have not yet decided on a final solution to the task at hand. But we have taken some decisions which will influence alternative solutions and will lock out some possible avenues of research.

Since you can see an outline to the architecture in (5) we will instead use this section to outline some of the alternative architectures which we looked at, but rejected for the moment.

The customer also gave us a paper[1] which described a previous project they had worked on which tried to solve something quite similar to what we were tasked with. The paper described a system which were used in conjunction with Tactical routers(A) to retrieve bandwidth information and to control sending of messages into this network. As the customer explained this work was not something we could directly copy as the project had not used a lot of web standards and had focused more on the tactical routers as opposed to web services. What we could take out of it however was how they throttled messages. The paper contained five methods which we could easily implement and use their result as an indication of what methods we should use to throttle or hold back messages.

One architecture, which our customer suggested for the project, was to have a proxy in between nodes and creating a custom QoS layer which would sit in front of both the client and the services. This layer would then communicate with a SAML server for authentication, and would have to do all the message prioritization based on the same criteria as our architecture. There are several points about this architecture which would make it a good fit for us. Since the QoS layer would be identical on both client and server side it would mean less work, and more code that could be shared among components, but this freedom comes with some downsides. The first and most glaring problem encountered would be that services on the server would have to be altered to be able to communicate with this front end. Even though we were free to choose architecture ourselves, the client expressed a wish that we would not choose this model because the customer wants to use COTS(A) services which would not be compatible with the new front end.

Even though the above mentioned architecture is not the best fit for us we wanted to take some aspects of the architecture further. Since clients can easily be altered, the above mentioned solution is not applicable for server

side, the solution could however be used for the clients. Having a proxy on the client side could be quite good, but because of the work involved and probable time constraints we chose not to go with this solution. On the server side however a front end is not the best solution for us. What we instead are looking into, is to use an ESB(A) which would be configured together with the services and work as a proxy. Because many ESBs have integrated SAML processing we could easily take advantage of such facilities along with custom message processing, with which we would then extend the ESB to support our needs. The clients would have to point to the ESB, but this should both be trivial to do and the customer has expressed their agreement that this is satisfactory. We could eventually expand the functionality with service discovery, which then would be a good solution to the problem.

So far we have outlined major alternative architectures which could be alternatives to our project, but there are also alternatives within our proposed solution. One such alternative is not to use a premade ESB, but rather build one ourselves. This solution was thoroughly investigated, but was eventually turned down because of the massive amount of work that had to be done, the quality of an already made ESB is much higher than we could ever achieve during this project, and lastly, the open source tools available to implement the functionality needed for SAML was not very well documented, and would take considerable time to get familiar with.

On the client side we also have the choice of having either a HTTP proxy or writing our own custom library. Both have some advantages and disadvantages, a proxy would be better for integration with client programs, but creating this proxy or configuring and customizing an already existing solution is not trivial. On the same note, creating a library for use in client programs is easier, but this would mean that client programs would need to be altered to be usable with our middleware, which isn't that desirable. We chose to go down the road of least resistance, as we see it currently we would have to do quite a lot of research into proxies which could in the worst case scenario result in just wasted time as far as our product goes. A client library would from our perspective be easier as we would have more control, the overall design should be easier and we know that with this sort of library we can integrate OpenSAML which is a huge advantage.


6 Design

6.1 Client Side

[The client side design.]

6.1.1 Data Flow

[how the data moves through the client.]

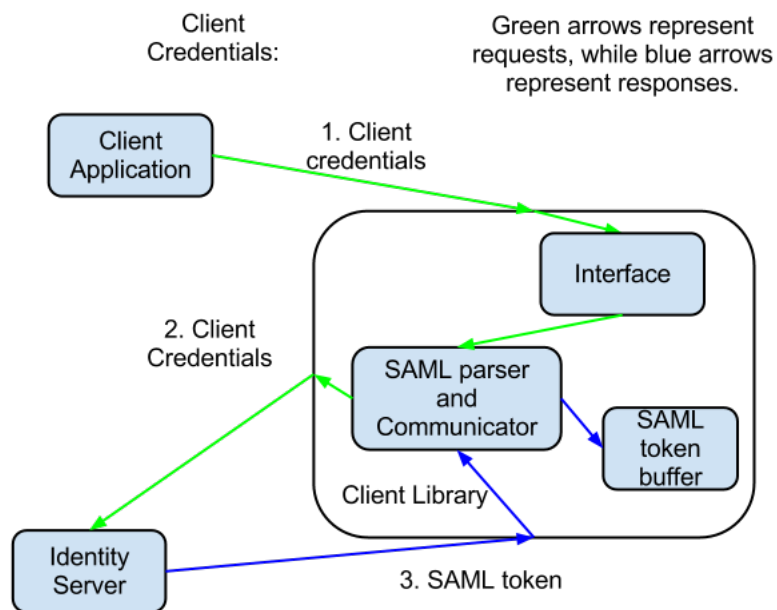

Figur 8: Client Data Flow
How data flows on the client side.

6.2 Server Side

[The server side design specifics.]

In this chapter we are going to introduce the design, configuration and modification that we are going to do to the server side. In section 6.2.1 we

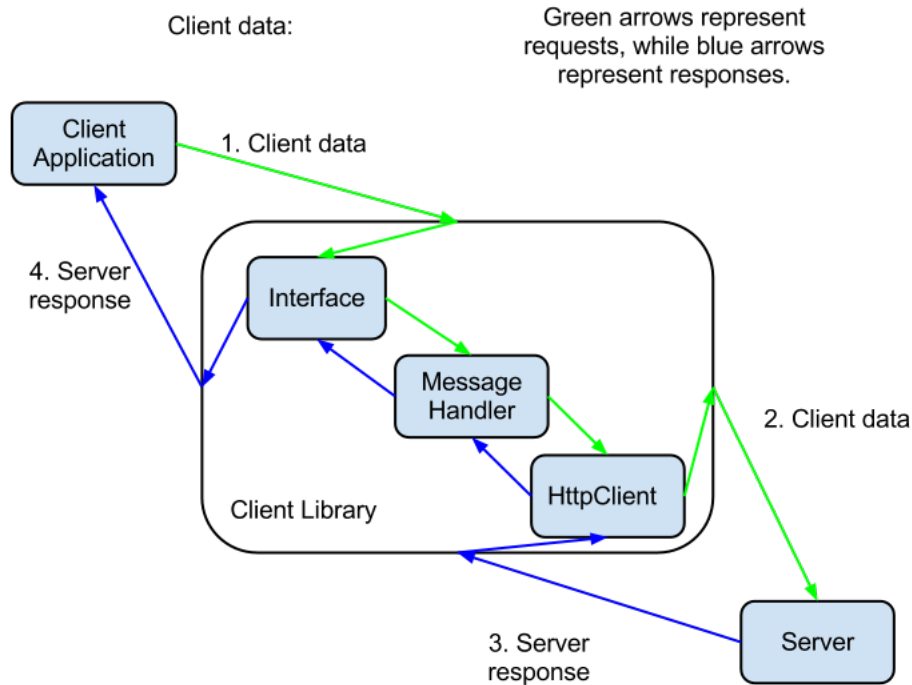


Figure 9: Client Credentials Flow
The flow of the credentials to and in the client side.

are going to introduce the framework that we have built upon and what we are going to do with it. Next follows use cases, 6.2.2. Section 6.2.3 will go into more detail about what the framework consist off. The section will also guide you through the basic processing units which is used in the framework. The next section, 6.2.4, contains the dataflow through the server side which will help you get a good overview of our thoughts about the design. 6.2.5 goes into detail in describing our custom components in the framework and together with the dataflow should give you a good understanding of the whole server side. Together with the section 6.2.6 you should get good overview even down to some of the details. Section 6.2.7 will give you the details about how we have configured the framework, it will not contain description of how we have set variables during testing, but using this description should make it possible to get the framework up and going. The last section, 6.2.8 will depict how

we have modified the framework to be able to meet our requirements, with this section you should be able to tell what modifications were needed and how we have altered those pieces.

6.2.1 Introduction

The server side architecture consists of several components, the WSO2 ESB(A), the WSO2 Identity Server(A), the Monitoring Service (A and the GlassFish server(A. The GlassFish server is not necessary to modify, the Monitoring Service (MS) is something we must assume exist in the network and in the Identity Server (IS) we only have to configure it to work with the ESB. The ESB is what we have to modify, configure and extend to meet the requirements set.

The ESB will be used to implement QoS(A) for the web services(A). To do this it will have to communicate with the IS, and the MS in addition to the clients and the services. The ESB must be configured to work as a proxy for the services on the GlassFish server and the IS. It will also be configured to use certain mediation sequences for incoming requests and outgoing responses. The extensions to the ESB consists mainly of custom mediators (A) used in the mediation sequences. These mediators will have the tasks of determining priority of messages, contacting the MS for bandwidth data, and enforcing the priority. There will also be made modifications to the ESB source code to allow for setting the diffserv field in the IP header.

6.2.2 Use Cases

This section will outline the use cases that we have thought of in relation to the server side. With the help of these you should get a rough idea of what we want the server side to be able to do.

Title: Request for SAML authentication

Actors: Client, Enterprise service bus(ESB) and Identity server(IS)

Main

1. Client sends a SOAP message to ESB containing credentials
2. ESB mediates the message to the IS
3. IS fetches SAML Token
4. IS sends the message to ESB

5. ESB adds metadata to SOAP message
6. ESB sends the message back to the client

Extensions:

- 3a. Invalid credentials
- 4a. IS returns error message
- 6a. ESB sends error message to client

Precondition:

- There exists a connection between the client and the ESB

Title: Request mediation

Actors: Client, ESB, GlassFish

Main

1. Client sends SOAP message with SAML Token to ESB proxy
2. ESB authenticates SAML Token(See Authentication use case)
3. ESB removes SAML metadata from message
4. ESB adds metadata to message context.
5. ESB sends message to GlassFish endpoint

Extensions:

- 2a. SAML Token is invalid
- 2b. ESB sends error message to client

Precondition:

- Client is connected to ESB

Title: Response mediation

Actors: Client, ESB, GlassFish

Main

1. GlassFish sends message to ESB

2. ESB sets priority metadata in message context and SOAP header.
3. ESB retrieves bandwidth information (See Monitoring Service communication use case)
4. ESB prioritizes message (See Prioritize message use case)
5. ESB sends message to Client

Extensions:

Precondition:

- Request mediation

Title: Monitoring Service communication

Actors: Monitoring Service(MS), ESB

Main

1. ESB requests bandwidth information from MS to a specific address
2. MS returns bottleneck bandwidth to the ESB, as well as the address of the last Tactical Router before the endpoint.

Extensions:

- 1a. ESB specifies an invalid address
- 2a. MS returns no information
- 2b. Address is in the same sub net as the ESB

Precondition:

- Response mediation

Title: Prioritize messages

Actors: ESB

Main

1. ESB acquires QoS information (by magick)
2. ESB adds QoS information to the SOAP header of the message
3. ESB sets diffserv field in IP header

Extensions:**Precondition:**

- Response mediation
- Monitoring Service communication

Title: Authenticate SAML token

Actors: ESB, IS

Main

1. ESB sends SAML token to IS
2. IS authenticates the token
3. IS sends verification to ESB

Extensions:

- 2a. SAML token is not valid.
- 3a. IS sends error to ESB

Precondition:

- Request Mediation

6.2.3 Description of ESB concepts

In this section we will shortly describe some important concepts of the ESB and message mediation.

A mediator is the basic processing unit in Apache Synapse. Each message going through the ESB gets mediated through a sequence of mediators which can be configured through either XML or WSO2's graphical user interface. As long as the mediator inherit from a Synapse interface any custom mediator can be used in the same manner as the built in mediators. To control the flow of messages through the ESB there are two paths that can be controlled, the "in sequence" and the "out sequence", which can also be configured to only apply for certain endpoints.


The ESB is built around the notion of a message context, this object contains all the information regarding the message and the context around it. In the message context we can add properties, we can manipulate the

message it self and we can manipulate the sending streams of the message. All the properties added during the receiving of a message is also added to the outgoing message which we can use to our advantage.

Each mediator in the sequence get access to the message context of the incoming or the outgoing message and can thus manipulate the context to its liking. When the mediator is done with the work it is supposed to do it either call the next mediator sending it the possibly altered message context or returning true to indicate that is done.

6.2.4 Textual Dataflow

This section describes the data flow through the ESB with the help of two diagrams. As a bonus, these diagrams show the general architecture of the server side very well.

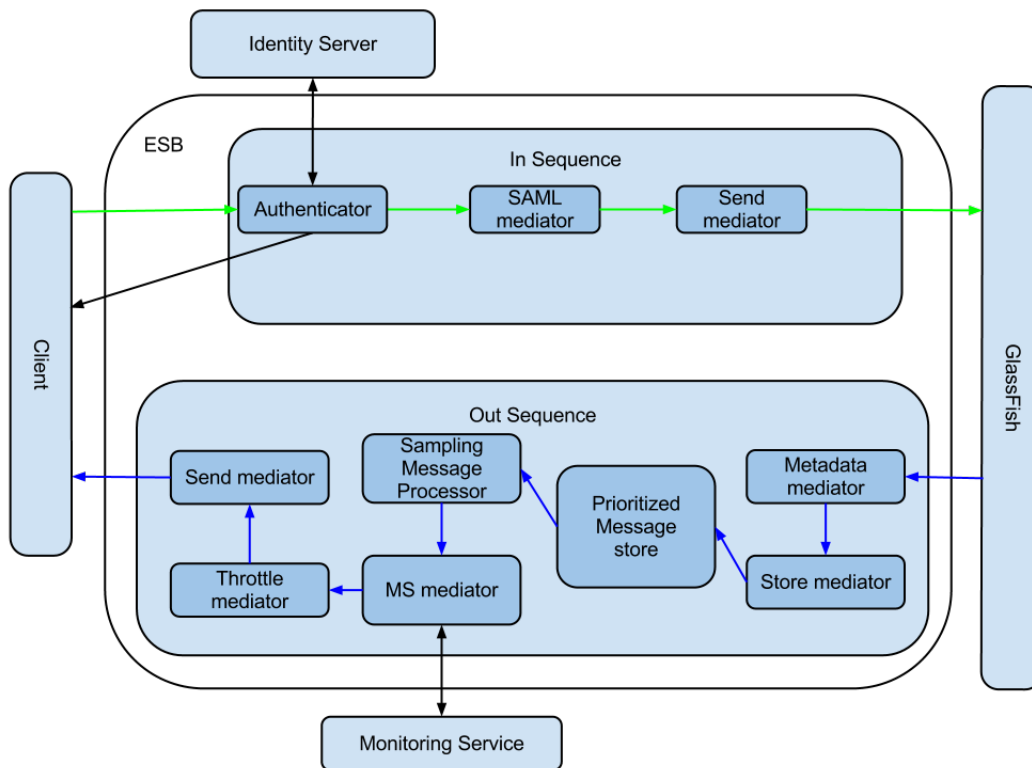


Figur 10: Server Data Flow

Service Request :

To follow this flow follow the green arrows in the figure ???. The ESB receives a request message from a Client, it is then authenticated or if not an error is sent back to the client. If it is not authenticated the flow stops, otherwise the message is sent to the SAML mediator, and then to the send mediator which sends it to the service endpoint on the GlassFish server, and the flow is over.

Service Response:

To follow this flow follow the blue arrows in the figure ???. The ESB receives a response message from the Service, it is then sent through a sequence of mediators, first the Metadata mediator, and then the Store mediator. The Store mediator stores the message in the Prioritized Message Store. The message is stored in the message store until the Sampling Message Processor picks it out before sending it on to another sequence of mediators. First in the sequence is the MS mediator, then the Throttle Mediator and finally the Send mediator. The send mediator sends the message back to the client and the flow is completed.

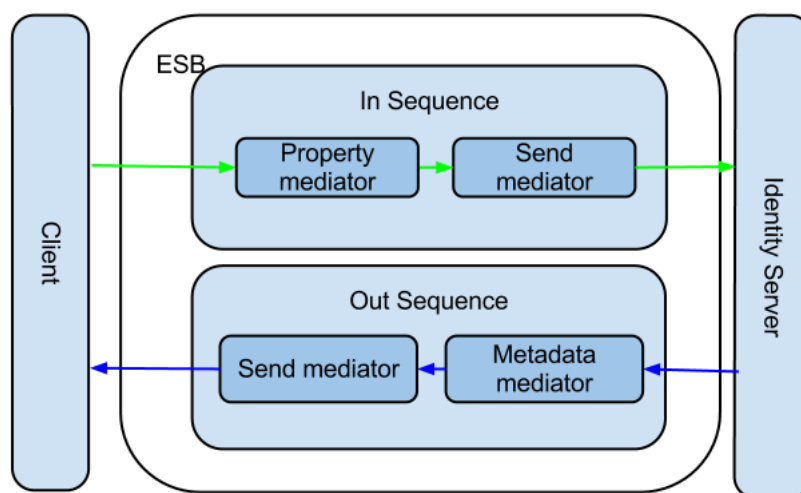

Figur 11: SAML Authentication Flow

SAML Authentication Request:

The ESB receives a request (from a Client) directed at the Identity Server (IS), the ESB relays this message to the IS. The ESB receives the response from the IS, and sends it through a mediator sequence consisting of the Priority mediator and the Send mediator. The send mediator sends the response

to the Client.

6.2.5 Extensions to the ESB

This section will contain a textual description of all the mediators used in the ESB. First we will describe all the custom mediators and extensions we make to the ESB, and then a short description of the built-in mediators we will use.

Custom mediators: SAML mediator:

This mediator retrieves the user role from the SAML authentication and set this as a property in the message context. The service is retrieved from the endpoint reference and set as another property.

SendBack mediator:

This mediator sends a SAML authentication error message back to the client. After the error is sent to the client the message is forwarded to the Drop mediator. We are not quite sure if this mediator is needed or not, it is difficult to determine this before having at least some other parts of the system ready for testing.

Metadata mediator:

This mediator retrieves the client role and service properties from the message context. These properties are then used along with a persistent registry to infer a priority for the message, and what the diffserv field in the IP header should be set as. The priority and diffserv values are then set as new properties in the message context. The diffserv property in the message context will be used in the synapse core to set the diffserv field before sending the message (See “Modifications to Synapse and HTTP Components”).

Prioritized Message store:

This is not a mediator, but it is an important part of the response mediation sequence. This is a message store that stores messages in a priority queue. The queue is ordered by mainly the priority property of the message context, and secondly by the time when added. When retrieving messages from this store the message on the top of the queue is returned. This ensures that high priority messages is processed further before lower priority messages.

MS mediator:

This mediator retrieves the IP address of the receiving client from the endpoint reference in the message context. It sends this IP address to the Monitoring Service and gets the IP address of the last Tactical Router on the path to the client, as well as the limiting bandwidth on the path. The mediator

then set this information as properties in the message context before sending the message to the next mediator.

Throttle mediator:

This mediator is used to ensure that high priority messages are sent first by disrupting already sending messages, and it tries to ensure that the network is not being overflowed by this server by holding back messages. To determine what to disrupt and what to hold back, and for how long several properties are used, the priority of the message, the available bandwidth, the IP address of the client side Tactical Router and the real time demand of the request. In order to do this the mediator must keep a list of sending messages and where those messages are going. This mediator does not have a companion sequence diagram as of the midterm report. The reason behind this is currently a lack of possibility to test the mediator, this will however be remedied when we start to implement the mediators. Once we are more sure of what this mediator will be capable of we will make a sequence diagram for it.

Built in Mediators Drop mediator:

This is a built in mediator that drops the message preventing further processing.

Send mediator;

This is a built in mediator that sends the message to an endpoint (the requested service).

Store mediator:

This is a built in mediator that stores the message context in a message store, here this is the Prioritized Message store.

Sampling Message Processor:

This also, is not a mediator. It is a built in class that takes messages out of the Prioritized Message Store at a defined interval. And then sends them to a mediator sequence, here starting with MS mediator.

6.2.6 Sequence Diagrams

This section contains some sequence diagrams which you can use to get a more in dept look into the code and methods used in the mediators above.

6.2.7 Configuration of the ESB

This section will be about how the ESB is to be configured.

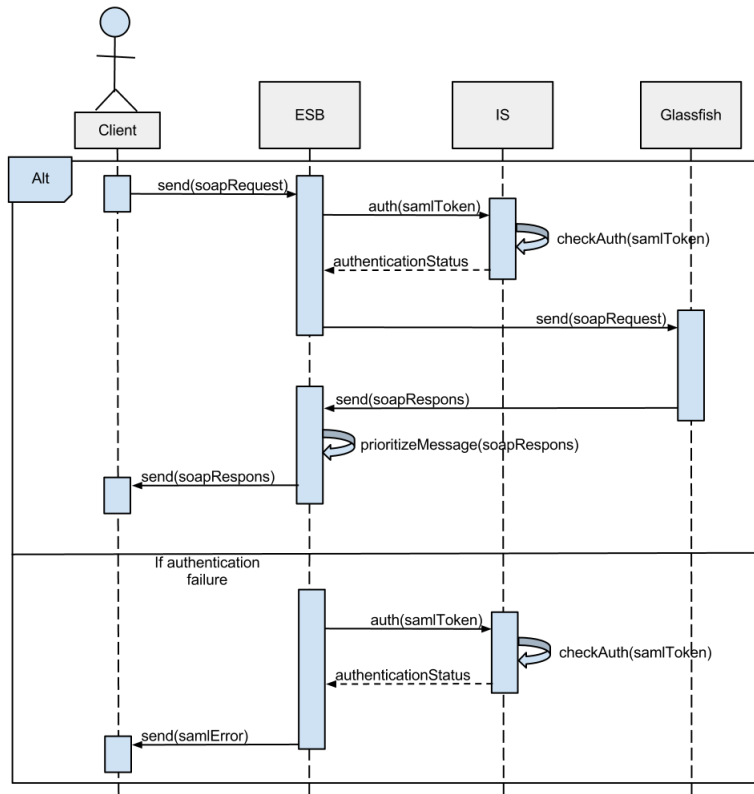



Figure 12: System-level sequence diagram

This high level diagram shows how the client communicates with web services through the ESB.

6.2.8 Modification of the ESB

The WSO2 ESB source code will have to be modified to allow for setting the diffserv field in the IP-header of packets sent. The idea is that we will set a property, DiffServ, in the message context, and let the httpsender get this property and set it on the socket used for sending. These are the modifications that will let us do this:

- in `org.apache.http.nio.reactor.IOSession`
 - add method `setTrafficClass(int diffserv);`
 - * which gets the Socket and calls `setTrafficClass` on it.

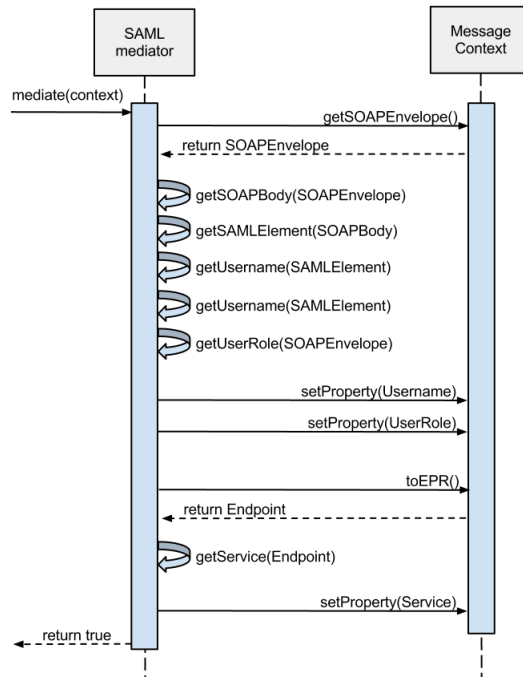

Figur 13: SAML mediator sequence diagram

This diagram describes how the SAML mediator will get data from the message, and set it in the message context so it can be used later in the response sequence

- in `org.apache.http.impl.nio.NHttpClientConnectionBase`
 - add method `setTrafficClass(int diffserv);`
 - * which calls `setTrafficClass(int diffserv)` on the `IOSession`.
- in `org.apache.synapse.transports.nhttp.HttpCoreNIOSender`
 - edit `sendAsyncResponse()`
 - * get `diffserv` property from `MessageContext`.
 - * get `NHttpClientConnectionBase` with `worker.getConn()`.
 - * call `setTrafficClass(diffserv)` on the `HTTPConnection`.

7 Implementation

[The specifics of the implementation of the solution.]

8 Testing

[The testing setup and suit. The testing method and how we did the testing.]

9 Results

[A thorough presentation of the results of the project. The test results and other interesting findings for this project.]

10 Conclusion

[The summarised findings of the project and presentation of the key findings.]

10.1 Project accomplishments

[Did we reach the goal?]

10.2 Future Work

[What we would have to do in the future to complete or continue the this work.]

11 Project Evaluation

[This is the section where we evaluate the project and the process that we have had throughout.]

A Technical Glossary

Bandwidth

Available or consumed data communication resources

[https://secure.wikimedia.org/wikipedia/en/wiki/Bandwidth_\(computing\)](https://secure.wikimedia.org/wikipedia/en/wiki/Bandwidth_(computing))

Broker

Our middleware layer works as a QoS broker for services and clients
Broker as referred to by the report given to us from FFI: a centralized
‘server’ of sorts which gathered Bandwidth data from tactical routers.

COTS

Commercially available Off-The-Shelf often used to talk about services
which the customer wants to use server side

https://secure.wikimedia.org/wikipedia/en/wiki/Commercial_off-the-shelf

Credentials

User-supplied credentials in the form of a username, password, role
tripple.

DiffServ

Differentiated services, a field in the IPv4 header

<http://www.networksorcery.com/enp/rfc/rfc2474.txt>

Git

A free and open source, distributed version control system

<http://www.git-scm.com>

Github

a web-based hosting service for software development projects that use
the Git version control system

<http://www.github.com>

GlassFish

Application server written in Java

<http://glassfish.java.net/>

IDE

Integrated Development Environment

Identity Server

<http://wso2.com/products/identity-server/>

Java Coding Conventions

<http://www.oracle.com/technetwork/java/codeconv-138413.html>

JUnit

A testing framework for the Java programming language

<http://junit.org/>

LaTeX

A document preparation system

<http://www.latex-project.org/>

Mediator

A component in WSO2 ESB which can be used to work on incoming or outgoing messages that passes through the ESB

http://synapse.apache.org/Synapse_QuickStart.html

Message

SOAP message

https://secure.wikimedia.org/wikipedia/en/wiki/SOAP#Message_format

Message Context

Component in the ESB, contains the message, as well as all information about it, including network sockets.

<http://synapse.apache.org/apidocs/org/apache/synapse/MessageContext.html>

Middleware

In most reports middleware will refer to the program we are making. Other distinctions should be made explicitly in the text.

MS

Monitoring Service, a service that provides bandwidth monitoring, running on the same server as the Tactical Router.

NS3

A network simulator

<http://www.nsnam.org/>

OpenSAML

A set of open source C++ Java libraries to support developers working with SAML.

<https://wiki.shibboleth.net/confluence/display/OpenSAML/Home/>

Packet

IP packet

https://secure.wikimedia.org/wikipedia/en/wiki/Transmission_Control_Protocol#TCP_segment_structure

QoS

Quality of Service refers to several related aspects of telephony and computer networks that allow the transport of traffic with special requirements

SAML

Security Assertion Markup Language

<https://secure.wikimedia.org/wikipedia/en/wiki/SAML>

SOAP

A lightweight protocol intended for exchanging structured information in the implementation of web services in computer networks

<http://www.w3.org/TR/soap12-part1/#intro>

Tactical Router

Router used in military networks, Multi-Topology Router(MTR)

Token

A SAML token from some form of identity server, possibly with additional meta data.

TOS

Type of service, a field in the IPv4 header, now obsolete and replaced by diffserv.

Web Service

A software system designed to support interoperable machine-to-machine interaction over a network

<http://www.w3.org/TR/2004/NOTE-ws-gloss-20040211/#soapmessage>

WS-Security

An extension to SOAP to apply security to web services

WSO2 ESB

An Enterprise Service Bus built on top of Apache Synapse

<http://wso2.com/products/enterprise-service-bus/>

XACML

eXtensible Access Control Markup Language

<https://secure.wikimedia.org/wikipedia/en/wiki/Xacml>

B Work Breakdown Structure

WBS to be completely implemented later, it is also attached under (C)

C File Attachments

The files can be unpacked using the pdftk program in Linux with the command: `pdftk filetest.pdf unpack_files`



Risk List



Gantt Diagram

Referanser

- [1] Cross-layer Quality of Service Based Admission
Control for Web Services (*Soa-qos-pdf*)
Frank T. Johnsen, Trude Hafsøe, Mariann Hauge, Norwegian Defence
Research Establishment (FFI)
Øyvind Kolbu, University of Oslo, Norway
- [2] Pervasive Web Services Discovery and Invocation in Military Networks,
(*FFI-rapport 2011/00257*)
Frank T. Johnsen, Norwegian Defence Research Establishment (FFI)
4. January 2011



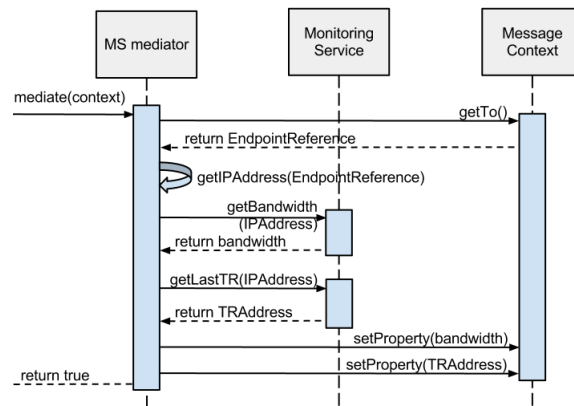


Figure 15: Metadata mediator sequence


This diagram describes how the Metadata mediator retrieves previously stored properties from the message context, determines a priority for the message, and sets priority and diffserv properties in the message context

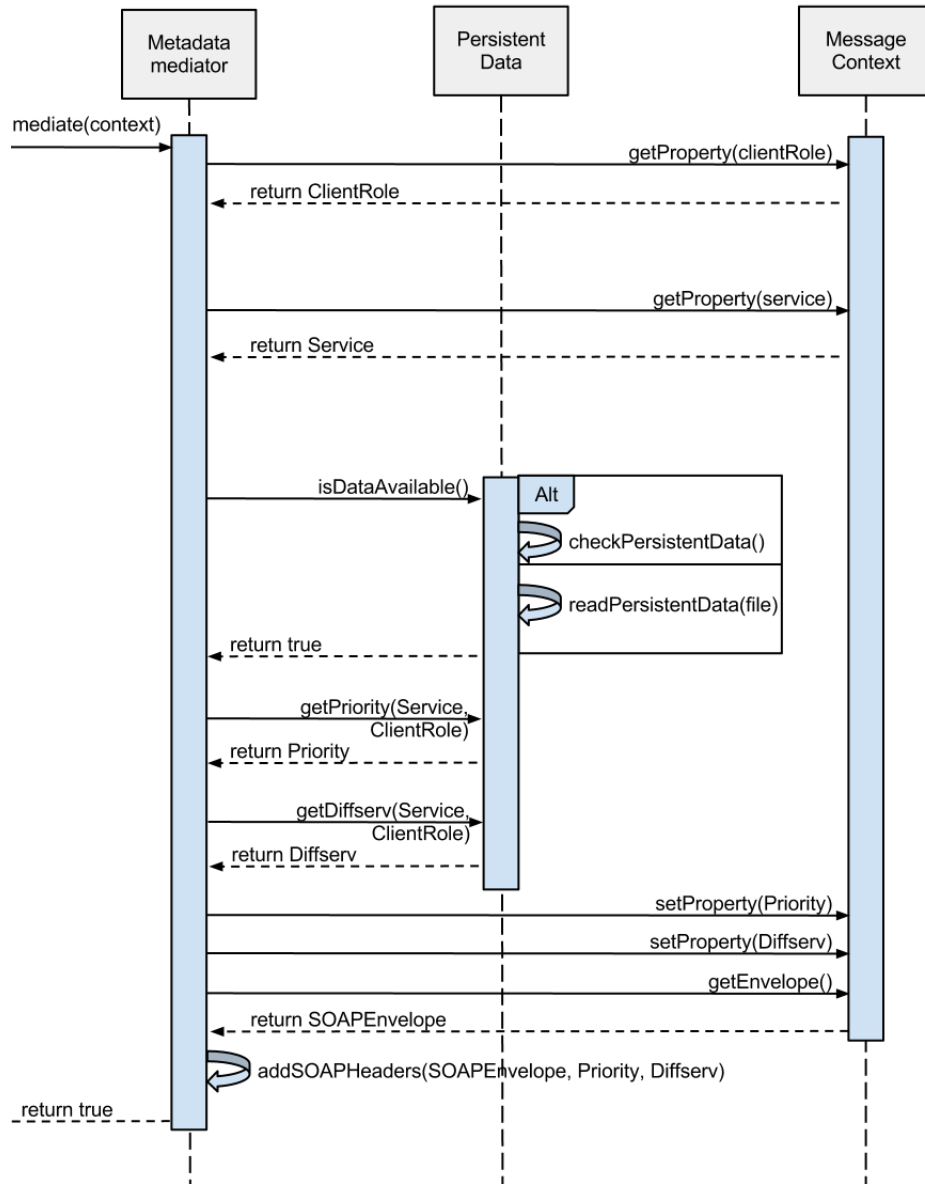

Figur 16: MS mediator sequence diagram
 This diagram describes the MS mediator contacting the Monitoring Service
 for bandwidth information

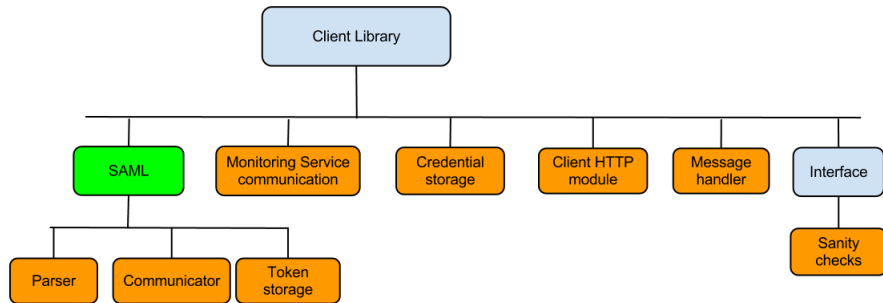

Figur 17: WBS-Client
The work break down structure for the client.

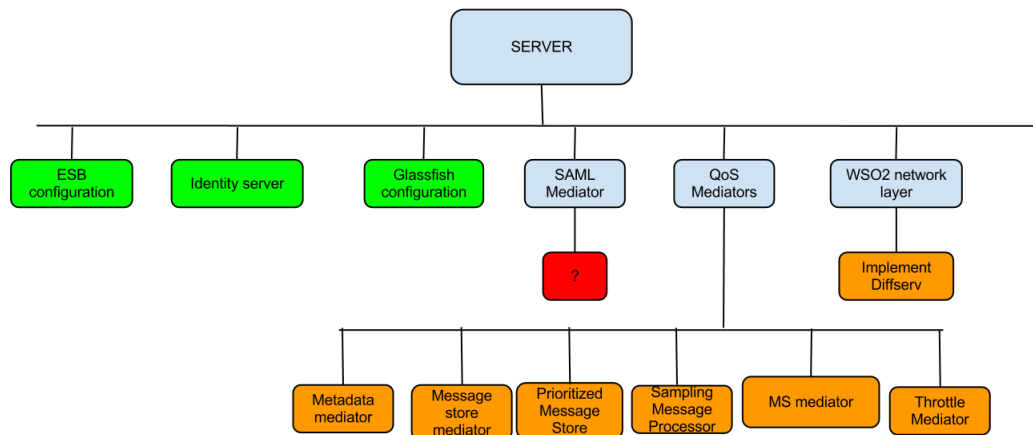

Figur 18: WBS-Server
The work break down structure for the server.