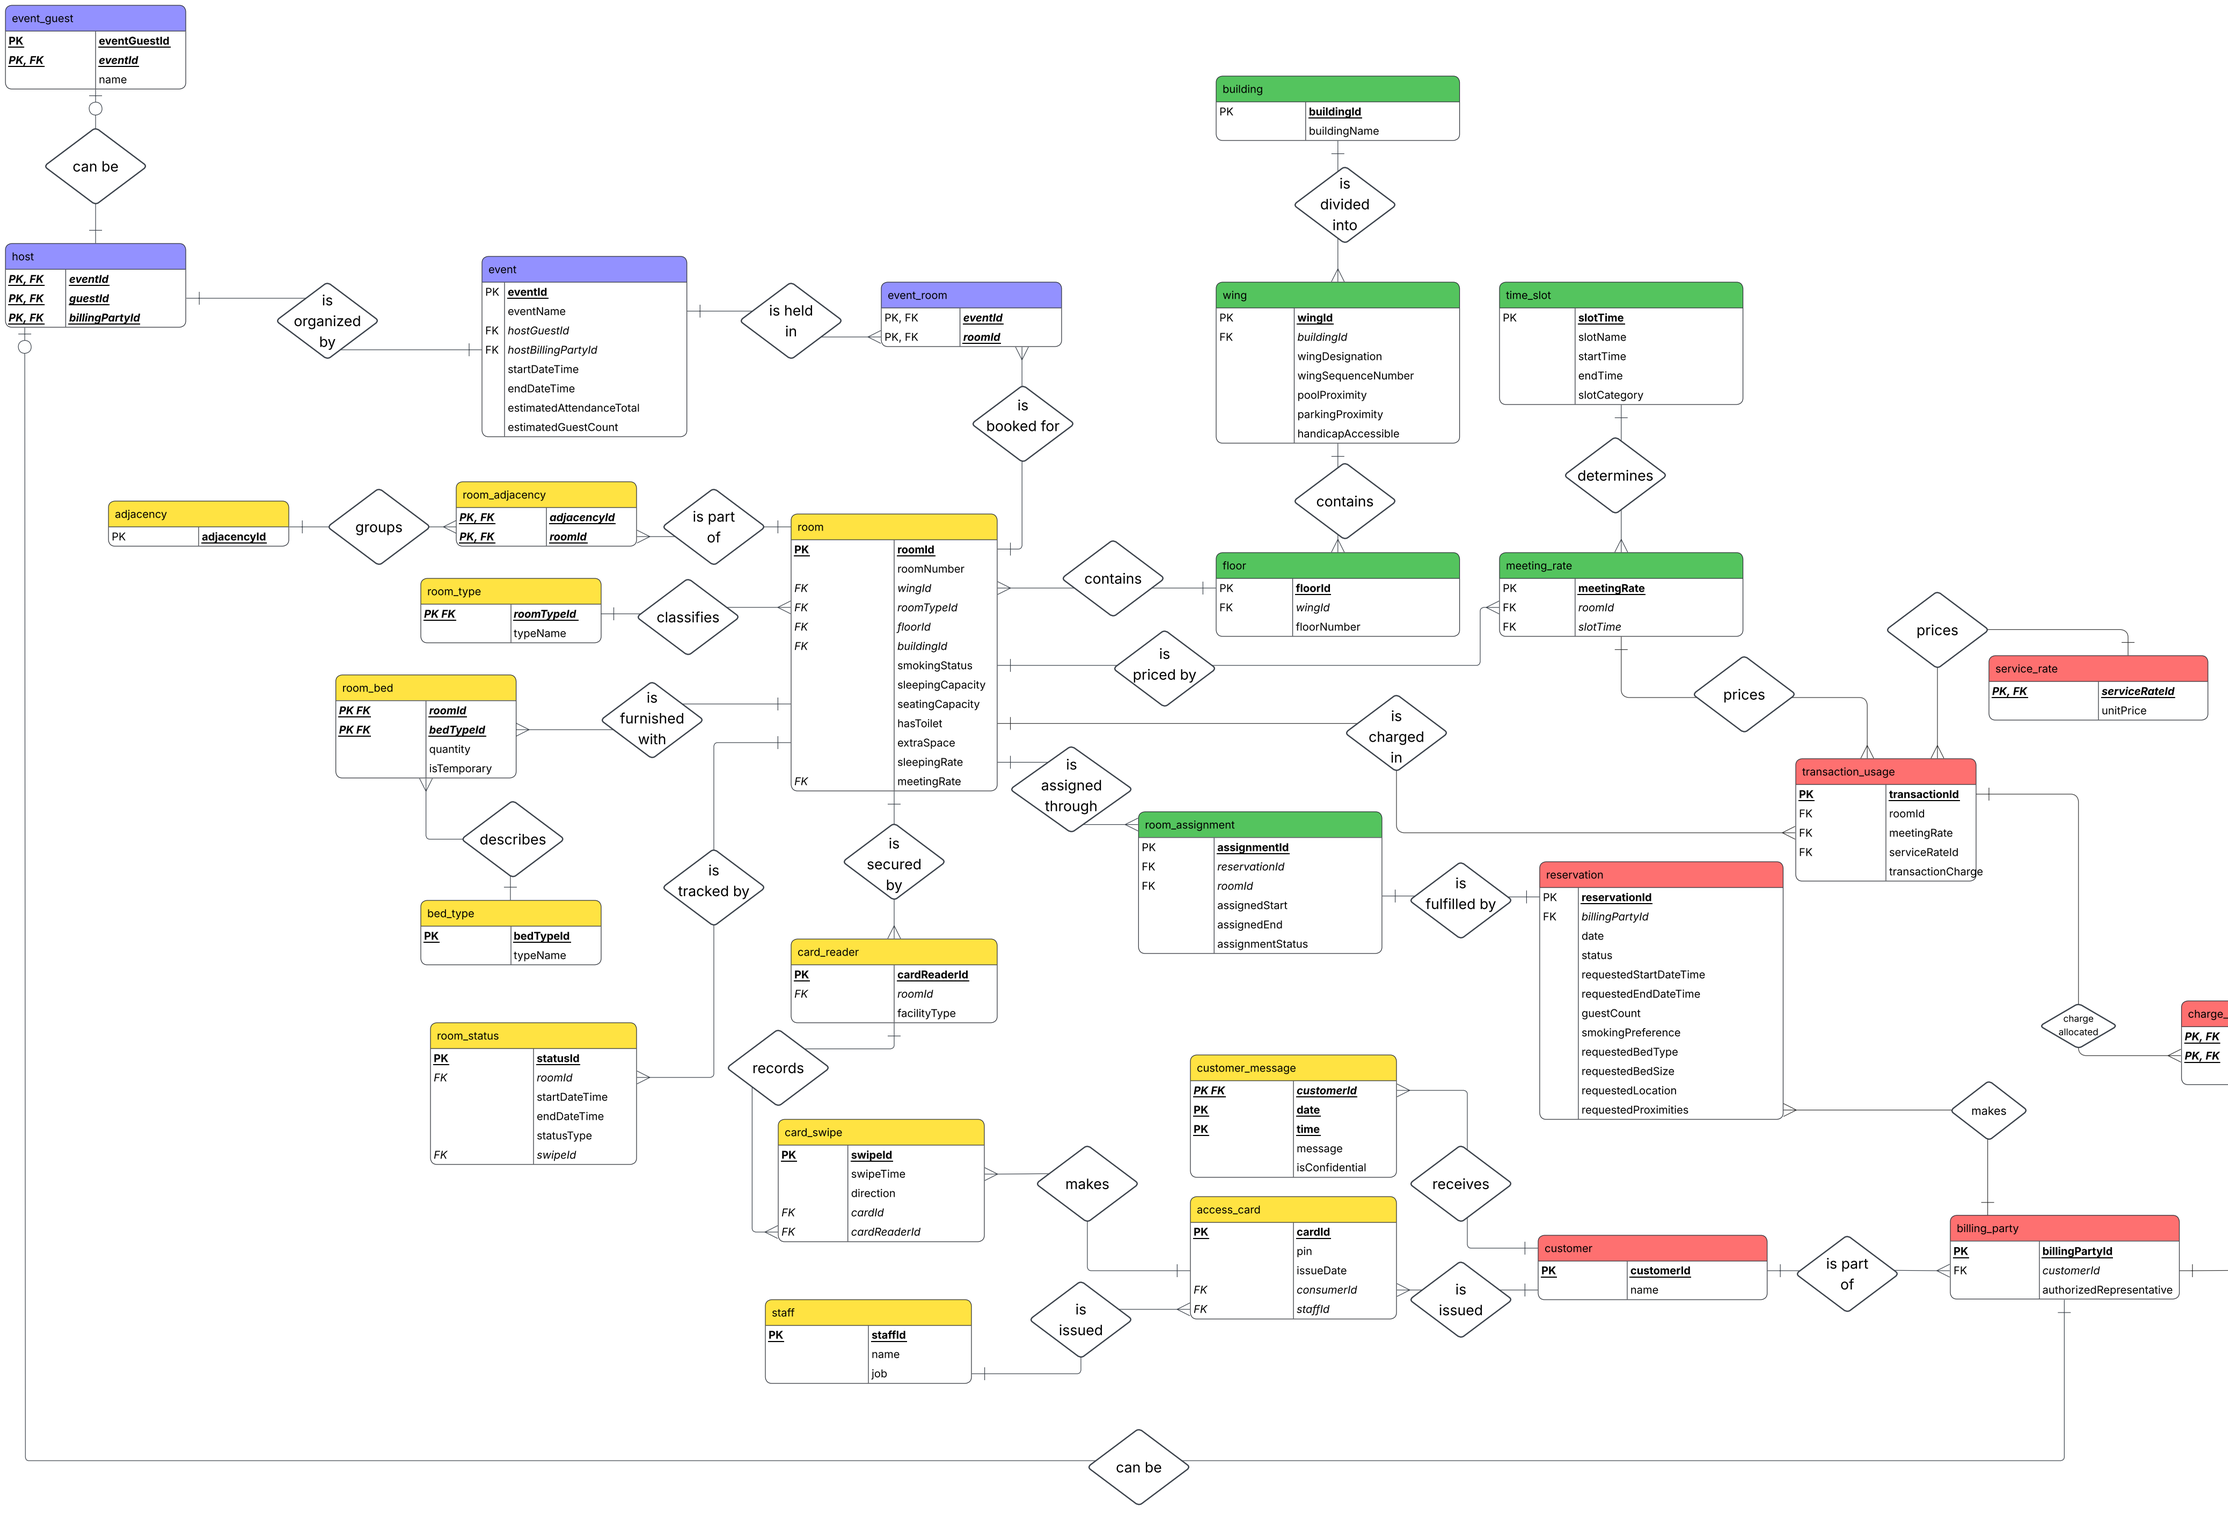

event_guest
PK | eventGuestId
PK, FK | eventId
name
can be
host
PK, FK | eventId
PK, FK | guestId
PK, FK | billingPartyId
is organized by
event
PK | eventId
eventName
FK | hostGuestId
FK | hostBillingPartyId
startDateTime
endDateTime
estimatedAttendanceTotal
estimatedGuestCount
is held in
event_room
PK, FK | eventId
PK, FK | roomId
is booked for
building
PK | buildingId
buildingName
is divided into
wing
PK | wingId
FK | buildingId
wingDesignation
wingSequenceNumber
poolProximity
parkingProximity
handicapAccessible
contains
floor
PK | floorId
FK | wingId
floorNumber
time_slot
PK | slotTime
slotName
startTime
endTime
slotCategory
determines
meeting_rate
PK | meetingRate
FK | roomId
FK | slotTime
prices
service_rate
PK, FK | serviceRateId
unitPrice
adjacency
PK | adjacencyId
groups
room_adjacency
PK, FK | adjacencyId
PK, FK | roomId
is part of
room
PK | roomId
roomNumber
FK | wingId
FK | roomTypeId
FK | floorId
FK | buildingId
smokingStatus
sleepingCapacity
seatingCapacity
hasToilet
extraSpace
sleepingRate
FK | meetingRate
contains
room_type
PK FK | roomTypeId
typeName
classifies
is priced by
room_bed
PK FK | roomId
PK FK | bedTypeId
quantity
isTemporary
is furnished with
is charged in
describes
bed_type
PK | bedTypeId
typeName
is tracked by
is secured by
is assigned through
room_assignment
PK | assignmentId
FK | reservationId
FK | roomId
assignedStart
assignedEnd
assignmentStatus
is fulfilled by
reservation
PK | reservationId
FK | billingPartyId
date
status
requestedStartDateTime
requestedEndDateTime
guestCount
smokingPreference
requestedBedType
requestedBedSize
requestedLocation
requestedProximities
transaction_usage
PK | transactionId
FK | roomId
FK | meetingRate
FK | serviceRateId
transactionCharge
charge allocated
charge_allocation
PK, FK | serviceId
PK, FK | billingPartyId
allocatedCharge
responsible for paying
makes
billing_party
PK | billingPartyId
FK | customerId
authorizedRepresentative
is part of
customer
PK | customerId
name
receives
is issued
customer_message
PK FK | customerId
PK | date
PK | time
message
isConfidential
access_card
PK | cardId
pin
issueDate
FK | consumerId
FK | staffId
makes
is issued
staff
PK | staffId
name
job
room_status
PK | statusId
FK | roomId
startDateTime
endDateTime
statusType
FK | swipeId
records
card_reader
PK | cardReaderId
FK | roomId
facilityType
is secured by
card_swipe
PK | swipeId
swipeTime
direction
FK | cardId
FK | cardReaderId
makes
can be