



100

100

100

SEO

Performance

Accessibility

Best Practices

ι

100


Performance

Values are estimated and may vary. The <u>performance score</u> <u>is calculated</u> directly from these metrics. <u>See calculator.</u>

0-49

50-89

90-100

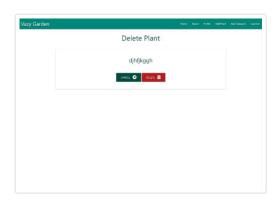

METRICS Expand view

First Contentful Paint

0.6 s

Total Blocking Time

0 ms

Speed Index

0.6 s

Largest Contentful Paint

0.6 s

Cumulative Layout Shift

0

View Treemap

View Original Trace





Show audits relevant to: All FCP LCP TBT CLS

DIAGNOSTICS

▲ Does not use passive listeners to improve scrolling performance

Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. <u>Learn more about adopting passive event listeners</u>.

Source

materialize.min.js:6

materialize.min.js:6

materialize.min.js:6

▲ Page prevented back/forward cache restoration — 4 failure reasons

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. <u>Learn more about the bfcache</u>

Failure reason	Failure type
Back/forward cache is disabled due to extensions using messaging API.	Pending browser support
/delete_plant/6444028 (vazy-garden.herokuapp.com)	
Back/forward cache is disabled by flags. Visit chrome://flags/#back-forward-cache to enable it locally on this device.	Not actionable
/delete_plant/6444028 (vazy-garden.herokuapp.com)	
Pages that JavaScript is injected into by extensions are not currently eligible for back/forward cache.	Not actionable
/delete_plant/6444028 (vazy-garden.herokuapp.com)	
Pages that StyleSheet is injected into by extensions are not currently eligible for back/forward cache.	Not actionable

Failure reason

Failure type

/delete_plant/6444028... (vazy-garden.herokuapp.com)

Avoid chaining critical requests — 6 chains found

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. Learn how to avoid chaining critical requests. FCP LCP

Maximum critical path latency: 378.526 ms

Initial Navigation

/delete_plant/6444028... (vazy-garden.herokuapp.com)

- ...css/all.min.css (cdnjs.cloudflare.com)
 - ...webfonts/fa-solid-900.woff2 (cdnjs.cloudflare.com) 185.73 ms, 79.12 KiB
- ...css/materialize.min.css (cdnjs.cloudflare.com) 72.196 ms, 17.36 KiB
- ...css/style.css (vazy-garden.herokuapp.com) 57.385 ms, 2.00 KiB

/jquery-3.5.1.min.js (code.jquery.com) - 151.775 ms, 30.41 KiB

- ...js/materialize.min.js (cdnjs.cloudflare.com) 67.028 ms, 36.37 KiB
- ...js/script.js (vazy-garden.herokuapp.com) 70.337 ms, 2.24 KiB
- Keep request counts low and transfer sizes small 8 requests 182 KiB


To set budgets for the quantity and size of page resources, add a budget.json file. Learn more about performance budgets.

Resource Type	Requests	Transfer Size
Total	8.0	182.5 KiB
Font	1.0	79.1 KiB
Script	3.0	69.0 KiB
Stylesheet	3.0	29.8 KiB
Document	1.0	4.5 KiB
Image	0.0	0.0 KiB
Media	0.0	0.0 KiB

Resource Type	Requests	Transfer Size
Other	0.0	0.0 KiB
Third-party	8.0	182.5 KiB

O Largest Contentful Paint element — 1 element found

This is the largest contentful element painted within the viewport. <u>Learn more about the Largest Contentful Paint element</u> <u>LCP</u>

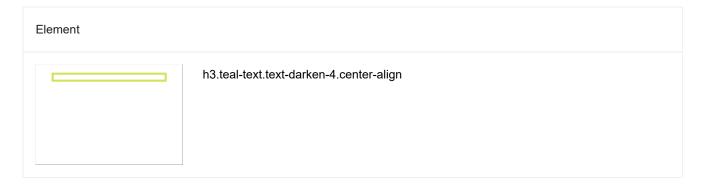

O Avoid large layout shifts — 1 element found

These DOM elements contribute most to the CLS of the page. <u>Learn how to improve CLS</u> <u>CLS</u>



O Avoid long main-thread tasks — 2 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. <u>Learn how to avoid long main-thread tasks</u> (TBT)

URL	Start Time	Duration
/delete_plant/6444028 (vazy-garden.herokuapp.com)	250 ms	69 ms

URL	Start Time	Duration
<pre>chrome-extension://aeblfdkhhhdcdjpifhhbdiojplfjncoa/inline/injected.js</pre>	321 ms	53 ms

More information about the performance of your application. These numbers don't <u>directly affect</u> the Performance score.

PASSED AUDITS (33)		Hide
Eliminate render-blocking resources — Potential savings of 40 ms		^
Resources are blocking the first paint of your page. Consider delivering critical JS/CSS JS/styles. Learn how to eliminate render-blocking resources. FCP LCP	inline and deferring all	non-critical
	Show 3rd-party	resources (1)
URL	Transfer Size	Potential Savings
css/all.min.css (cdnjs.cloudflare.com)	10.5 KiB	210 ms
css/style.css (vazy-garden.herokuapp.com)	2.0 KiB	60 ms
Properly size images		^
Serve images that are appropriately-sized to save cellular data and improve load time. L	_earn how to size imag	<u>es</u> .
Defer offscreen images		^
Consider lazy-loading offscreen and hidden images after all critical resources have finish interactive. <u>Learn how to defer offscreen images</u> .	hed loading to lower tir	me to
Minify CSS		^
Minifying CSS files can reduce network payload sizes. Learn how to minify CSS. FCP	LCP	
Minify JavaScript — Potential savings of 10 KiB		^

Minifying JavaScript files can reduce payload sizes and script parse time. Learn how to minify JavaScript. FCP [LCP]

URL	Transfer Size	Potential Savings
<pre>chrome-extension://nngceckbapebfimnlniiiahkandclblb/content/autofill.js</pre>	14.9 KiB	7.5 KiB
<pre>chrome-extension://nngceckbapebfimnlniiiahkandclblb/content/notificationBar.js</pre>	6.8 KiB	2.6 KiB

Reduce unused CSS — Potential savings of 27 KiB

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. Learn how to reduce unused CSS. FCP (LCP)

URL	Transfer Size	Potential Savings
css/materialize.min.css (cdnjs.cloudflare.com)	17.4 KiB	16.6 KiB
css/all.min.css (cdnjs.cloudflare.com)	10.5 KiB	10.4 KiB

Reduce unused JavaScript — Potential savings of 51 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. <u>Learn how to reduce unused JavaScript</u>. (LCP)

URL	Transfer Size	Potential Savings
js/materialize.min.js (cdnjs.cloudflare.com)	36.4 KiB	29.5 KiB
/jquery-3.5.1.min.js (code.jquery.com)	30.4 KiB	21.8 KiB

Efficiently encode images

Optimized images load faster and consume less cellular data. Learn how to efficiently encode images.

Serve images in next-gen formats

Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. <u>Learn more about modern image formats</u>.

Enable text compression — Potential savings of 3 KiB	^
Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytemore about text compression. FCP LCP	es. <u>Learn</u>
URL Transfer Size	Potential Savings
/delete_plant/6444028 (vazy-garden.herokuapp.com) 4.3 KiB	2.8 KiB
Preconnect to required origins	^
Consider adding preconnect or dns-prefetch resource hints to establish early connections to important thir Learn how to preconnect to required origins. FCP LCP	d-party origins.
Initial server response time was short — Root document took 50 ms	^
Keep the server response time for the main document short because all other requests depend on it. <u>Learn main to First Byte metric</u> . <u>FCP</u> <u>LCP</u>	nore about the
URL	Time Spent
/delete_plant/6444028 (vazy-garden.herokuapp.com)	50 ms
Avoid multiple page redirects	^
Redirects introduce additional delays before the page can be loaded. <u>Learn how to avoid page redirects</u> . <u>FCF</u>	CP
Preload key requests	^
Consider using link rel=preload> to prioritize fetching resources that are currently requested later in page how to preload key requests. FCP LCP	e load. <u>Learn</u>

HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. <u>Learn more about HTTP/2</u>.

Use HTTP/2

Use video formats for animated content

Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. <u>Learn more about efficient video formats</u> [LCP]

Remove duplicate modules in JavaScript bundles

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. [TBT]

Avoid serving legacy JavaScript to modern browsers — Potential savings of 0 KiB

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. Learn how to use modern JavaScript (TBT)

URL		Potential Savings
js/materialize.min.js (cdnjs.cloudflare.com)		0.0 KiB
materialize.min.js:6	@babel/plugin-transform-classes	

Preload Largest Contentful Paint image

If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. <u>Learn more about preloading LCP elements</u>. <u>[LCP]</u>

Avoids enormous network payloads — Total size was 183 KiB

Large network payloads cost users real money and are highly correlated with long load times. Learn how to reduce payload sizes. LCP

Show 3rd-party resources (5)

URL	Transfer Size
webfonts/fa-solid-900.woff2 (cdnjs.cloudflare.com)	79.1 KiB
js/materialize.min.js (cdnjs.cloudflare.com)	36.4 KiB
/jquery-3.5.1.min.js (code.jquery.com)	30.4 KiB
css/materialize.min.css (cdnjs.cloudflare.com)	17.4 KiB

URL			Transfer Size
css/all.min.css (cdnjs.cloudflare.com)			10.5 KiB
/delete_plant/6444028 (vazy-garden.heroku	app.com)		4.5 KiB
js/script.js (vazy-garden.herokuapp.com)			2.2 KiB
css/style.css (vazy-garden.herokuapp.com)			2.0 KiB
img/favicon.ico (vazy-garden.herokuapp.com	1)		0.7 KiB
Uses efficient cache policy on static assets	— 0 resources found		^
A long cache lifetime can speed up repeat visits	s to your page. <u>Learn more at</u>	pout efficient cache policies.	
Avoids an excessive DOM size — 56 eleme	ents		^
A large DOM will increase memory usage, caus avoid an excessive DOM size. TBT	se longer <u>style calculations,</u> a	nd produce costly <u>layout reflows</u> . <u>L</u>	earn how to
Statistic	Element		Value
Total DOM Elements			56
		i.fas.fa-times- circle.right	
Maximum DOM Depth		onoio.ngnt	8

body Maximum Child Elements 8

User Timing marks and measures

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. <u>Learn more about User Timing marks</u>.

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. <u>Learn how to reduce Javascript execution time</u>. (TBT)

URL	Total CPU Time	Script Evaluation	Script Parse
/delete_plant/6444028 (vazy-garden.herokuapp.com)	118 ms	33 ms	36 ms
Unattributable	59 ms	5 ms	0 ms
<pre>chrome- extension://aeblfdkhhhdcdjpifhhbdiojplfjncoa/inline/injected.js</pre>	54 ms	14 ms	26 ms

Minimizes main-thread work — 0.3 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to minimize main-thread work (TBT)

Category	Time Spent
Other	109 ms
Script Evaluation	80 ms
Script Parsing & Compilation	74 ms
Parse HTML & CSS	13 ms
Style & Layout	10 ms
Garbage Collection	5 ms
Rendering	2 ms

All text remains visible during webfont loads

Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. <u>Learn more about font-display</u>. <u>FCP</u> <u>LCP</u>

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. <u>Learn how to minimize third-party impact</u>. (TBT)

Third-Party	Transfer Size	Main-Thread Blocking Time
Cloudflare CDN	143 KiB	0 ms
webfonts/fa-solid-900.woff2 (cdnjs.cloudflare.com)	79 KiB	0 ms
js/materialize.min.js (cdnjs.cloudflare.com)	36 KiB	0 ms
css/materialize.min.css (cdnjs.cloudflare.com)	17 KiB	0 ms
css/all.min.css (cdnjs.cloudflare.com)	10 KiB	0 ms
jQuery CDN	30 KiB	0 ms
/jquery-3.5.1.min.js (code.jquery.com)	30 KiB	0 ms

Lazy load third-party resources with facades

Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. <u>Learn how to defer third-parties with a facade</u>. (TBT)

Largest Contentful Paint image was not lazily loaded

Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. <u>Learn more about optimal lazy loading</u>. [LCP]

Avoids document.write()

For users on slow connections, external scripts dynamically injected via document.write() can delay page load by tens of seconds. <u>Learn how to avoid document.write()</u>.

Avoid non-composited animations

Animations which are not composited can be janky and increase CLS. Learn how to avoid non-composited animations [CLS]

Image elements have explicit width and height

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. <u>Learn how to set image</u> <u>dimensions</u> (CLS)

^

A <meta name="viewport"> not only optimizes your app for mobile screen sizes, but also prevents <u>a 300 millisecond delay</u> to user input. <u>Learn more about using the viewport meta tag</u>. (TBT)



These checks highlight opportunities to improve the accessibility of your web app. Only a subset of accessibility issues can be automatically detected so manual testing is also encouraged.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

The page has a logical tab order	^
Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. Learn more about logical tab ordering.	
Interactive controls are keyboard focusable	^
Custom interactive controls are keyboard focusable and display a focus indicator. <u>Learn how to make custom controls focusable</u> .	
Interactive elements indicate their purpose and state	^
Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. Learn how to decorate interactive elements with affordance hints.	
The user's focus is directed to new content added to the page	^
If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content.	
User focus is not accidentally trapped in a region	^
A user can tab into and out of any control or region without accidentally trapping their focus. Learn how to avoid focus tra	<u>ips</u> .

O Custom controls have associated labels	^
Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels.	
O Custom controls have ARIA roles	^
Custom interactive controls have appropriate ARIA roles. <u>Learn how to add roles to custom controls</u> .	
Visual order on the page follows DOM order	^
DOM order matches the visual order, improving navigation for assistive technology. <u>Learn more about DOM and visual ordering</u> .	
Offscreen content is hidden from assistive technology	^
Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content.	
HTML5 landmark elements are used to improve navigation	^
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technological tearn more about landmark elements.</nav></main>	ogy.
Γhese items address areas which an automated testing tool cannot cover. Learn more in our guide on <u>conducting an accessi</u> review.	<u>bility</u>
PASSED AUDITS (11)	Hide
[aria-hidden="true"] is not present on the document <body></body>	^
Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <bo< td=""><td>dy>.</td></bo<>	dy>.

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more about the viewport meta tag. Background and foreground colors have a sufficient contrast ratio Low-contrast text is difficult or impossible for many users to read. Learn how to provide sufficient color contrast. Document has a <title> element The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles. <html> element has a [lang] attribute If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute. <html> element has a valid value for its [lang] attribute Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the lang attribute. Links have a discernible name Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. Learn how to make links accessible. Lists contain only elements and script supporting elements (<script> and <template>). Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure. List items () are contained within , or <menu> parent elements Screen readers require list items () to be contained within a parent , or <menu> to be announced properly. Learn more about proper list structure. Heading elements appear in a sequentially-descending order Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. Learn more about heading order.

NOT APPLICABLE (33) Hide

O [accesskey] values are unique	\
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys.	<u>}</u>
O [aria-*] attributes match their roles	
Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. Learn how to match ARIA attributes to their roles.	<u>a</u>
O button, link, and menuitem elements have accessible names	
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to make command elements more accessible</u> .	
O [aria-hidden="true"] elements do not contain focusable descendents	
Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how aria-hidden affects focusable elements.	÷
ARIA input fields have accessible names	
O ARIA input fields have accessible names When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels .	
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable	
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels.	
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels. O ARIA meter elements have accessible names When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it	
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels. O ARIA meter elements have accessible names When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name meter elements.	
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels. ARIA meter elements have accessible names When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name meter elements. ARIA progressbar elements have accessible names When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making	_

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. Learn more about roles and required children elements. O [role]s are contained by their required parent element Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. Learn more about ARIA roles and required parent element. O [role] values are valid ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles. O ARIA toggle fields have accessible names ARIA toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields. O ARIA tooltip elements have accessible names ARIA tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements. O ARIA treettee element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about tabeling tree item elements. O ARIA treettee element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about tabeling tree item elements. O [aria-*] attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes. O The page contains a heading, skip link, or landmark region	 Elements with an ARIA [role] that require children to contain a specific [role] have all required children. 	^
Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. Learn more about ARIA roles and required parent element. O [role] values are valid ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles. O ARIA toggle fields have accessible names When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields. O ARIA tooltip elements have accessible names When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements. O ARIA treeitee elements have accessible names When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements. O [aria-*] attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes. O [aria-*] attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.		<u>out</u>
Learn more about ARIA roles and required parent element. O [role] values are valid ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles. O ARIA toggle fields have accessible names ARIA toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields. O ARIA tooltip elements have accessible names ARIA tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements. O ARIA treeites elements have accessible names ARIA treeites element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements. O [aria-*] attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes. O [aria-*] attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.	[role]s are contained by their required parent element	^
ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles. ARIA toggle fields have accessible names ARIA toggle fields have accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields. ARIA tooltip elements have accessible names ARIA tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements. ARIA treeitem elements have accessible names ARIA treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements. (aria-*) attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes. Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.		S.
roles. ARIA toggle fields have accessible names Mhen a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields. ARIA tooltip elements have accessible names Mhen a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements. ARIA treeitem elements have accessible names Mhen a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements. [aria-*] attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.	O [role] values are valid	^
When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields. ARIA tocitip elements have accessible names When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements. ARIA treeitem elements have accessible names When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements. [aria-*] attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.		
for users who rely on screen readers. Learn more about toggle fields. ARIA tooltip elements have accessible names When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements. ARIA treeitem elements have accessible names When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements. [aria-*] attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes. [aria-*] attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.	ARIA toggle fields have accessible names	^
When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements. O ARIA treeitem elements have accessible names A When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements. O [aria-*] attributes have valid values A Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes are valid and not misspelled A Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.		le
unusable for users who rely on screen readers. Learn how to name tooltip elements. ARIA treeitem elements have accessible names When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements. [aria-*] attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes. [aria-*] attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.	 ARIA tooltip elements have accessible names 	^
When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements. O [aria-*] attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes. O [aria-*] attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.		
unusable for users who rely on screen readers. Learn more about labeling treeitem elements. O [aria-*] attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes. O [aria-*] attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.	ARIA treeitem elements have accessible names	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes. O [aria-*] attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.		
for ARIA attributes. O [aria-*] attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.	O [aria-*] attributes have valid values	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.		<u>es</u>
attributes.	O [aria-*] attributes are valid and not misspelled	^
 The page contains a heading, skip link, or landmark region 		<u>A</u>
	The page contains a heading, skip link, or landmark region	^

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more about bypass blocks.
<dl>'s contain only properly-ordered <dt> and <dd> groups, <script>, <template> or <div> elements.</td></tr><tr><td>When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn how to structure definition lists correctly.</td></tr><tr><td>Definition list items are wrapped in <d1> elements</td></tr><tr><td>Definition list items (<dt> and <dd>) must be wrapped in a parent <dl> element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly.</td></tr><tr><td>[id] attributes on active, focusable elements are unique</td></tr><tr><td>All focusable elements must have a unique id to ensure that they're visible to assistive technologies. Learn how to fix duplicate ids.</td></tr><tr><td>O ARIA IDs are unique</td></tr><tr><td>The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. <u>Learn how to fix duplicate ARIA IDs.</u></td></tr><tr><td> No form fields have multiple labels </td></tr><tr><td>Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn how to use form labels.</td></tr><tr><td><frame> Or <iframe> elements have a title</td></tr><tr><td>Screen reader users rely on frame titles to describe the contents of frames. Learn more about frame titles.</td></tr><tr><td>Image elements have [alt] attributes</td></tr><tr><td>Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute.</td></tr><tr><td><pre></td></tr><tr><td>When an image is being used as an <input> button, providing alternative text can help screen reader users understand the purpose of the button. Learn about input image alt text.</td></tr></tbody></table></script></dd></dt></dl>

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. <u>Learn more about form element labels</u> .
The document does not use <meta http-equiv="refresh"/>
Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. <u>Learn more about the refresh meta tag</u> .
O <object> elements have alternate text</object>
Screen readers cannot translate non-text content. Adding alternate text to <object> elements helps screen readers convey meaning to users. Learn more about alt text for object elements.</object>
No element has a [tabindex] value greater than 0
A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. Learn more about the tabindex attribute.
Cells in a element that use the [headers] attribute refer to table cells within the same table.
Screen readers have features to make navigating tables easier. Ensuring cells using the [headers] attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more about the headers attribute.
elements and elements with [role="columnheader"/"rowheader"] have data cells they describe.
Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. Learn more about table headers.
O [lang] attributes have a valid value
Specifying a valid <u>BCP 47 language</u> on elements helps ensure that text is pronounced correctly by a screen reader. <u>Learn how to use the lang attribute</u> .
When a video provides a caption it is easier for deaf and hearing impaired users to access its information. <u>Learn more about video captions</u> .

Г

TRUST AND SAFETY

Ensure CSP is effective against XSS attacks		^
A strong Content Security Policy (CSP) significantly a CSP to prevent XSS	reduces the risk of cross-site scripting	(XSS) attacks. <u>Learn how to use</u>
Description	Directive	Severity
No CSP found in enforcement mode		High

GENERAL

O Detected JavaScript libraries

All front-end JavaScript libraries detected on the page. Learn more about this JavaScript library detection diagnostic audit.

Name

Version

jQuery

3.5.1

PASSED AUDITS (13)

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding mixed content, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. Learn more about HTTPS.

Avoids requesting the geolocation permission on page load

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. Learn more about the geolocation permission.
Avoids requesting the notification permission on page load
Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. <u>Learn more about responsibly getting permission for notifications</u> .
Allows users to paste into input fields
Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. Learn more about user-friendly input fields.
Displays images with correct aspect ratio
Image display dimensions should match natural aspect ratio. <u>Learn more about image aspect ratio</u> .
Serves images with appropriate resolution
Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. <u>Learn how to provide responsive images</u> .
Page has the HTML doctype
Specifying a doctype prevents the browser from switching to quirks-mode. <u>Learn more about the doctype declaration</u> .
Properly defines charset
A character encoding declaration is required. It can be done with a <meta/> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. Learn more about declaring the character encoding.
Avoids unload event listeners
The unload event does not fire reliably and listening for it can prevent browser optimizations like the Back-Forward Cache. Use pagehide or visibilitychange events instead. Learn more about unload event listeners
Avoids deprecated APIs
Deprecated APIs will eventually be removed from the browser. <u>Learn more about deprecated APIs</u> .
No browser errors logged to the console

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. Learn more about this errors in console diagnostic audit

No issues in the Issues panel in Chrome Devtools

Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Page has valid source maps

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. <u>Learn more about source maps</u>.

NOT APPLICABLE (1) Hide

Fonts with font-display: optional are preloaded

Preload optional fonts so first-time visitors may use them. <u>Learn more about preloading fonts</u>



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on Core Web Vitals. Learn more about Google Search Essentials.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

Structured data is valid

Run the <u>Structured Data Testing Tool</u> and the <u>Structured Data Linter</u> to validate structured data. <u>Learn more about Structured Data</u>.

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (9) Hide Has a <meta name="viewport"> tag with width or initial-scale A <meta name="viewport"> not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecond delay to user input. Learn more about using the viewport meta tag. TBT Document has a <title> element The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles. Document has a meta description Meta descriptions may be included in search results to concisely summarize page content. Learn more about the meta description. Page has successful HTTP status code Pages with unsuccessful HTTP status codes may not be indexed properly. Learn more about HTTP status codes. Links have descriptive text Descriptive link text helps search engines understand your content. Learn how to make links more accessible. Links are crawlable Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. Learn how to make links crawlable Page isn't blocked from indexing Search engines are unable to include your pages in search results if they don't have permission to crawl them. Learn more about crawler directives. Document has a valid hreflang hreflang links tell search engines what version of a page they should list in search results for a given language or region. Learn more about hreflang. Document avoids plugins

Search engines can't index plugin content, and many devices restrict plugins or don't support them. <u>Learn more about avoiding plugins</u>.

NOT APPLICABLE (5)	Hide
o robots.txt is valid	^
If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled indexed. Learn more about robots.txt.	or
Image elements have [alt] attributes	^
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empattribute. Learn more about the alt attribute.	oty alt
O Document has a valid rel=canonical	^
Canonical links suggest which URL to show in search results. <u>Learn more about canonical links</u> .	
O Document uses legible font sizes	^
Font sizes less than 12px are too small to be legible and require mobile visitors to "pinch to zoom" in order to read. So have >60% of page text ≥12px. Learn more about legible font sizes.	trive to
Tap targets are sized appropriately	^
Interactive elements like buttons and links should be large enough (48x48px), and have enough space around them, easy enough to tap without overlapping onto other elements. <u>Learn more about tap targets</u> .	to be
Captured at Apr 27, 2023, 5:37 Emulated Desktop with Single page load	

Generated by **Lighthouse** 10.0.1 | File an issue

Using Chromium 112.0.0.0 with

devtools

Lighthouse 10.0.1

Custom throttling

PM GMT+1

Initial page load