



Performance



Accessibility



Best Practices



SEO



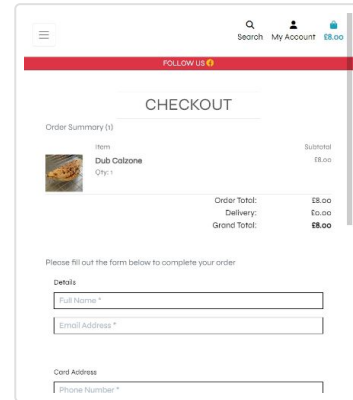
Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

▲ 0–49

50–89

90–100



METRICS

Expand view

First Contentful Paint

1.0 s

Largest Contentful Paint

1.2 s

Total Blocking Time

20 ms

Cumulative Layout Shift

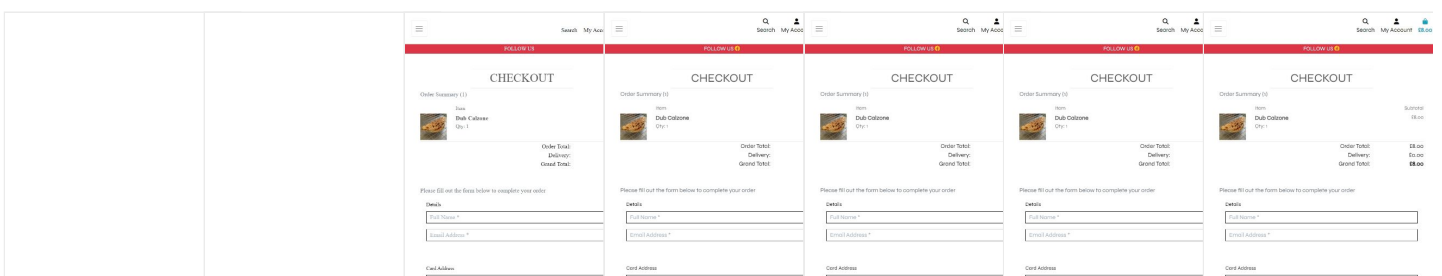
0.005


Speed Index

1.1 s

[View Treemap](#)

[View Original Trace](#)





Show audits relevant to: All FCP LCP TBT CLS

OPPORTUNITIES

Opportunity Estimated Savings

Eliminate render-blocking resources 0.53s ^

Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. [Learn how to eliminate render-blocking resources.](#) FCP LCP

URL	Transfer Size	Potential Savings
JSDelivr CDN Cdn	58.3 KiB	430 ms
...css/bootstrap.min.css (cdn.jsdelivr.net)	25.9 KiB	340 ms
...dist/jquery.min.js (cdn.jsdelivr.net)	32.4 KiB	100 ms
Google Fonts Cdn	0.8 KiB	260 ms
/css?family=Syne&display=swap (fonts.googleapis.com)	0.8 KiB	260 ms
FontAwesome CDN Cdn	4.5 KiB	320 ms
/7c6e646adf.js (kit.fontawesome.com)	4.5 KiB	320 ms
Stripe Utility	142.3 KiB	500 ms
/v3/ (js.stripe.com)	142.3 KiB	500 ms

Reduce unused JavaScript 0.19s ^

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript.](#) LCP

URL	Transfer Size	Potential Savings
Stripe Utility	142.3 KiB	94.4 KiB
/v3/ (js.stripe.com)	142.3 KiB	94.4 KiB
JSDelivr CDN Cdn	32.4 KiB	22.1 KiB
...dist/jquery.min.js (cdn.jsdelivr.net)	32.4 KiB	22.1 KiB

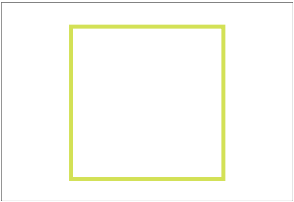
These suggestions can help your page load faster. They don't [directly affect](#) the Performance score.

DIAGNOSTICS

▲ Image elements do not have explicit [width](#) and [height](#)



Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions](#) CLS

URL
<div>gitpod.io 1st Party</div> <div>  <div>img.w-100</div> </div> <div>/media/pizza-calzone.jpg (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)</div>

▲ Page prevented back/forward cache restoration — 16 failure reasons



Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. [Learn more about the bfcache](#)

Failure reason	Failure type
Back/forward cache is disabled due to extensions using messaging API.	Pending browser support
/checkout/ (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	

Failure reason	Failure type
<div> <div>/v3/controller-1009173....html (js.stripe.com)</div> <div>/v3/elements-inner-card-fe07271....html (js.stripe.com)</div> <div>/v3/m-outer-93afeeb....html (js.stripe.com)</div> <div>/inner.html (m.stripe.network)</div> </div> <p>Back/forward cache is disabled by flags. Visit chrome://flags/#back-forward-cache to enable it locally on this device.</p> <div>/checkout/ (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)</div>	Not actionable
<p>Pages that JavaScript is injected into by extensions are not currently eligible for back/forward cache.</p> <div> <div>/checkout/ (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)</div> <div>/v3/controller-1009173....html (js.stripe.com)</div> <div>/v3/elements-inner-card-fe07271....html (js.stripe.com)</div> <div>/v3/m-outer-93afeeb....html (js.stripe.com)</div> <div>/inner.html (m.stripe.network)</div> </div>	Not actionable
<p>Pages that StyleSheet is injected into by extensions are not currently eligible for back/forward cache.</p> <div> <div>/checkout/ (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)</div> <div>/v3/controller-1009173....html (js.stripe.com)</div> <div>/v3/elements-inner-card-fe07271....html (js.stripe.com)</div> <div>/v3/m-outer-93afeeb....html (js.stripe.com)</div> <div>/inner.html (m.stripe.network)</div> </div>	Not actionable

▲ Serve static assets with an efficient cache policy — 7 resources found



A long cache lifetime can speed up repeat visits to your page. [Learn more about efficient cache policies.](#)

☒ Show 3rd-party resources (2)

URL	Cache TTL	Transfer Size
gitpod.io 1st Party		378 KiB
/media/pizza-calzone.jpg (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	None	249 KiB

URL	Cache TTL	Transfer Size
/media/homepage_background_cropped.jpg (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	None	117 KiB
...css/base.css (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	None	6 KiB
...js/stripe_elements.js (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	None	4 KiB
...css/checkout.css (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	None	1 KiB
Stripe Utility		157 KiB
/v3/ (js.stripe.com)	1m	142 KiB
/out-4.5.43.js (m.stripe.network)	5m	14 KiB

○ Avoid chaining critical requests — 12 chains found

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load.

[Learn how to avoid chaining critical requests.](#) FCP LCP

Maximum critical path latency: **1,149.676 ms**

Initial Navigation

/checkout/ (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)

...css/bootstrap.min.css (cdn.jsdelivr.net) - **106.329 ms, 25.90 KiB**

/css?family=Syne&display=swap (fonts.googleapis.com)

...v16/8vIS7w4qz....woff2 (fonts.gstatic.com) - **30.883 ms, 13.52 KiB**

...css/base.css (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io) - **59.593 ms, 6.37 KiB**

...css/checkout.css (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io) - **59.564 ms, 1.18 KiB**

...js/stripe_elements.js (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io) - **26.621 ms, 4.17 KiB**

...webfonts/free-fa-solid-900.woff2 (ka-f.fontawesome.com) - **64.118 ms, 147.43 KiB**

...webfonts/free-fa-brands-400.woff2 (ka-f.fontawesome.com) - **51.392 ms, 106.05 KiB**

/7c6e646adf.js (kit.fontawesome.com) - **140.635 ms, 4.52 KiB**

...dist/jquery.min.js (cdn.jsdelivr.net) - **117.069 ms, 32.41 KiB**

...umd/popper.min.js (cdn.jsdelivr.net) - **121.725 ms, 7.77 KiB**

...js/bootstrap.min.js (cdn.jsdelivr.net) - **121.076 ms, 16.32 KiB**

Keep request counts low and transfer sizes small — 55 requests • 1,379 KiB


To set budgets for the quantity and size of page resources, add a budget.json file. [Learn more about performance budgets.](#)

Resource Type	Requests	Transfer Size
Total	55.0	1,378.7 KiB
Script	13.0	591.5 KiB
Image	2.0	366.0 KiB
Font	3.0	267.0 KiB
Other	26.0	77.1 KiB
Stylesheet	6.0	39.8 KiB
Document	5.0	37.3 KiB
Media	0.0	0.0 KiB
Third-party	49.0	968.3 KiB

Largest Contentful Paint element — 1 element found






This is the largest contentful element painted within the viewport. [Learn more about the Largest Contentful Paint element](#)

LCP

Element	
	h2.logo-font

Avoid large layout shifts — 5 elements found

These DOM elements contribute most to the CLS of the page. [Learn how to improve CLS](#) CLS

Element	CLS Contribution
 div.col.bg-danger.text-white	0.002
 h2.logo-font	0.001
 ul	0.001
 ul	0.000
 p.my-0	0.000

☐ Avoid long main-thread tasks — 2 long tasks found



Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn how to avoid long main-thread tasks](#) TBT


☒ Show 3rd-party resources (1)

URL	Start Time	Duration
FontAwesome CDN Cdn		83 ms

URL	Start Time	Duration
/7c6e646adf.js (kit.fontawesome.com)	1,098 ms	83 ms
gitpod.io 1st Party		57 ms
/checkout/ (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	395 ms	57 ms

○ Avoid non-composited animations — 1 animated element found

Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) CLS

Element	Name
	div#card-element.mb-3.StripeElement.StripeElement--empty
Unsupported CSS Property: box-shadow	box-shadow

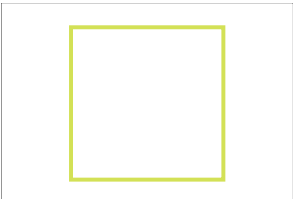
More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (29)

Hide

Properly size images — Potential savings of 247 KiB

Serve images that are appropriately-sized to save cellular data and improve load time. [Learn how to size images](#).

URL	Resource Size	Potential Savings
gitpod.io 1st Party	248.5 KiB	246.8 KiB
	/media/pizza-calzone.jpg (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	248.5 KiB
img.w-100		246.8 KiB

Defer offscreen images



Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. [Learn how to defer offscreen images.](#)

Minify CSS — Potential savings of 2 KiB



Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS.](#) FCP LCP

URL	Transfer Size	Potential Savings
gitpod.io 1st Party	6.4 KiB	2.1 KiB
...css/base.css (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	6.4 KiB	2.1 KiB

Minify JavaScript — Potential savings of 16 KiB



Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript.](#) FCP LCP

URL	Transfer Size	Potential Savings
chrome-extension://nngceckbapebfimlniiahkandclblb/content/notificationBar.js	13.7 KiB	8.9 KiB
chrome-extension://nngceckbapebfimlniiahkandclblb/content/autofill.js	14.9 KiB	7.6 KiB

Reduce unused CSS — Potential savings of 45 KiB



Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS.](#) FCP LCP

☒ Show 3rd-party resources (1)

URL	Transfer Size	Potential Savings
JSDelivr CDN Cdn	25.9 KiB	24.6 KiB
...css/bootstrap.min.css (cdn.jsdelivr.net)	25.9 KiB	24.6 KiB

URL	Transfer Size	Potential Savings
Unattributable	20.2 KiB	20.0 KiB
<pre> /*! * Font Awesome Free 6.4.0 by @fontawesome - https://fontawesome.com * License - https://fonta... </pre>	20.2 KiB	20.0 KiB

Efficiently encode images

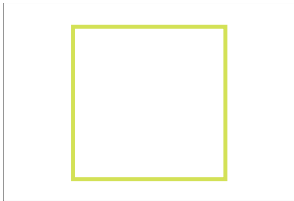



Optimized images load faster and consume less cellular data. [Learn how to efficiently encode images.](#)

Serve images in next-gen formats — Potential savings of 157 KiB



Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. [Learn more about modern image formats.](#)

URL	Resource Size	Potential Savings
gitpod.io 1st Party	365.5 KiB	157.3 KiB
 img.w-100	/media/pizza-calzone.jpg (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io) 248.5 KiB	95.1 KiB
 body	/media/homepage_background_cropped.jpg (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io) 117.0 KiB	62.2 KiB

Enable text compression — Potential savings of 33 KiB



Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. [Learn more about text compression.](#) FCP LCP

URL	Transfer Size	Potential Savings
gitpod.io 1st Party	42.8 KiB	32.6 KiB
/checkout/ (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	32.4 KiB	25.6 KiB
...css/base.css (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	6.3 KiB	4.3 KiB
...js/stripe_elements.js (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	4.1 KiB	2.8 KiB

Preconnect to required origins — Potential savings of 100 ms

Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-party origins. [Learn how to preconnect to required origins.](#) FCP LCP

URL	Potential Savings
FontAwesome CDN Cdn	100 ms
https://ka-f.fontawesome.com	100 ms

Initial server response time was short — Root document took 540 ms

Keep the server response time for the main document short because all other requests depend on it. [Learn more about the Time to First Byte metric.](#) FCP LCP

URL	Time Spent
gitpod.io 1st Party	540 ms
/checkout/ (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	540 ms

Avoid multiple page redirects

Redirects introduce additional delays before the page can be loaded. [Learn how to avoid page redirects.](#) FCP LCP

☐ Preload key requests

Consider using `<link rel=preload>` to prioritize fetching resources that are currently requested later in page load. [Learn how to preload key requests.](#) FCP LCP

Use HTTP/2

HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. [Learn more about HTTP/2.](#)

Use video formats for animated content

Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. [Learn more about efficient video formats](#) LCP

Remove duplicate modules in JavaScript bundles

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity.

TBT

Avoid serving legacy JavaScript to modern browsers — Potential savings of 0 KiB

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. [Learn how to use modern JavaScript](#) TBT

URL	Potential Savings
JSDelivr CDN Cdn	0.1 KiB
...umd/popper.min.js (cdn.jsdelivr.net)	0.1 KiB
popper.min.js:4	@babel/plugin-transform-classes
Stripe Utility	0.0 KiB
/v3/ (js.stripe.com)	0.0 KiB
js.stripe.com/:1	@babel/plugin-transform-classes

○ Preload Largest Contentful Paint image

If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. [Learn more about preloading LCP elements.](#) LCP




Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes.](#) LCP

☒ Show 3rd-party resources (7)

URL	Transfer Size
Stripe Utility	537.2 KiB
/v3/ (js.stripe.com)	142.3 KiB
...js/controller-ddb4b97....js (js.stripe.com)	133.9 KiB
...js/shared-789a078....js (js.stripe.com)	128.4 KiB
...js/ui-shared-1231192....js (js.stripe.com)	93.6 KiB
...data/countryRanges-1e8b3d3....json (js.stripe.com)	39.0 KiB
gitpod.io 1st Party	398.7 KiB
/media/pizza-calzone.jpg (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	248.8 KiB
/media/homepage_background_cropped.jpg (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	117.2 KiB
/checkout/ (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	32.7 KiB
FontAwesome CDN Cdn	253.5 KiB
...webfonts/free-fa-solid-900.woff2 (ka-f.fontawesome.com)	147.4 KiB
...webfonts/free-fa-brands-400.woff2 (ka-f.fontawesome.com)	106.1 KiB



A large DOM will increase memory usage, cause longer [style calculations](#), and produce costly [layout reflows](#). [Learn how to avoid an excessive DOM size.](#) TBT

Statistic	Element	Value
Total DOM Elements		459
Maximum DOM Depth	i.fas.fa-search	13
Maximum Child Elements	 select#id_country.stripe-style-input.lazysselect.form-control	250

User Timing marks and measures

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#)

JavaScript execution time — 0.1 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#) TBT

☒ Show 3rd-party resources (1)

URL	Total CPU Time	Script Evaluation	Script Parse
Unattributable	295 ms	11 ms	0 ms
Unattributable	295 ms	11 ms	0 ms
gitpod.io 1st Party	286 ms	21 ms	39 ms
/checkout/ (8000-janetdev-cimilestonepro-y1mawb4qtt0.ws-eu101.gitpod.io)	286 ms	21 ms	39 ms
Stripe Utility	73 ms	54 ms	16 ms
/v3/ (js.stripe.com)	73 ms	54 ms	16 ms

Minimizes main-thread work — 0.9 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) TBT

Category	Time Spent
Other	439 ms
Script Evaluation	255 ms
Style & Layout	83 ms
Script Parsing & Compilation	66 ms
Rendering	30 ms
Parse HTML & CSS	18 ms
Garbage Collection	13 ms

All text remains visible during webfont loads



Leverage the `font-display` CSS feature to ensure text is user-visible while webfonts are loading. [Learn more about font-display](#). FCP LCP

Minimize third-party usage — Third-party code blocked the main thread for 0 ms



Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. [Learn how to minimize third-party impact](#). TBT

Third-Party	Transfer Size	Main-Thread Blocking Time
Stripe Utility	584 KiB	0 ms
/v3/ (js.stripe.com)	142 KiB	0 ms
...js/controller-ddb4b97....js (js.stripe.com)	134 KiB	0 ms
...js/shared-789a078....js (js.stripe.com)	128 KiB	0 ms
...js/ui-shared-1231192....js (js.stripe.com)	94 KiB	0 ms
...data/countryRanges-1e8b3d3....json (js.stripe.com)	39 KiB	0 ms
Other resources	47 KiB	0 ms
FontAwesome CDN Cdn	288 KiB	0 ms

Third-Party	Transfer Size	Main-Thread Blocking Time
...webfonts/free-fa-solid-900.woff2 (ka-f.fontawesome.com)	147 KiB	0 ms
...webfonts/free-fa-brands-400.woff2 (ka-f.fontawesome.com)	106 KiB	0 ms
...css/free.min.css?token=7c6e646adf (ka-f.fontawesome.com)	23 KiB	0 ms
JSDelivr CDN Cdn	82 KiB	0 ms
...dist/jquery.min.js (cdn.jsdelivr.net)	32 KiB	0 ms
...css/bootstrap.min.css (cdn.jsdelivr.net)	26 KiB	0 ms
...js/bootstrap.min.js (cdn.jsdelivr.net)	16 KiB	0 ms
...umd/popper.min.js (cdn.jsdelivr.net)	8 KiB	0 ms
Google Fonts Cdn	14 KiB	0 ms
...v16/8vIS7w4qz....woff2 (fonts.gstatic.com)	14 KiB	0 ms

○ Lazy load third-party resources with facades ^

Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. [Learn how to defer third-parties with a facade.](#) TBT

○ Largest Contentful Paint image was not lazily loaded ^

Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. [Learn more about optimal lazy loading.](#) LCP

Uses passive listeners to improve scrolling performance ^

Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. [Learn more about adopting passive event listeners.](#)

Avoids `document.write()` ^

For users on slow connections, external scripts dynamically injected via `document.write()` can delay page load by tens of seconds. [Learn how to avoid document.write\(\).](#)

Has a `<meta name="viewport">` tag with `width` or `initial-scale` ^

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag.](#) TBT



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Only a subset of accessibility issues can be automatically detected so manual testing is also encouraged.

ARIA


▲ ARIA IDs are not unique



The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. [Learn how to fix duplicate ARIA IDs](#).

Failing Elements

`a#user-options.text-black.nav-link`



`a#user-options.text-black.nav-link.d-block.d-lg-none`

These are opportunities to improve the usage of ARIA in your application which may enhance the experience for users of assistive technology, like a screen reader.

CONTRAST

▲ Background and foreground colors do not have a sufficient contrast ratio.



Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast](#).

Failing Elements



select#id_country.stripe-style-input.lazyselect.form-control

These are opportunities to improve the legibility of your content.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

- ☐ The page has a logical tab order



Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical tab ordering.](#)

- ☐ Interactive controls are keyboard focusable



Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable.](#)

- ☐ Interactive elements indicate their purpose and state



Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints.](#)

- ☐ The user's focus is directed to new content added to the page



If new content, such as a dialog, is added to the page, the user's focus is directed to it. [Learn how to direct focus to new content.](#)

- ☐ User focus is not accidentally trapped in a region



A user can tab into and out of any control or region without accidentally trapping their focus. [Learn how to avoid focus traps.](#)

- ☐ Custom controls have associated labels



Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. [Learn more about custom controls and labels.](#)

- ☐ Custom controls have ARIA roles



Custom interactive controls have appropriate ARIA roles. [Learn how to add roles to custom controls.](#)

○ Visual order on the page follows DOM order ^

DOM order matches the visual order, improving navigation for assistive technology. [Learn more about DOM and visual ordering.](#)

○ Offscreen content is hidden from assistive technology ^

Offscreen content is hidden with display: none or aria-hidden=true. [Learn how to properly hide offscreen content.](#)

○ HTML5 landmark elements are used to improve navigation ^

Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. [Learn more about landmark elements.](#)

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review.](#)

PASSED AUDITS (20)

Hide

[aria-*] attributes match their roles ^

Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. [Learn how to match ARIA attributes to their roles.](#)

[aria-hidden="true"] is not present on the document <body> ^

Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. [Learn how aria-hidden affects the document body.](#)

[role]s have all required [aria-*] attributes ^

Some ARIA roles have required attributes that describe the state of the element to screen readers. [Learn more about roles and required attributes.](#)

[role] values are valid ^

ARIA roles must have valid values in order to perform their intended accessibility functions. [Learn more about valid ARIA roles.](#)

`[aria-*]` attributes have valid values



Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. [Learn more about valid values for ARIA attributes.](#)

`[aria-*]` attributes are valid and not misspelled



Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more about valid ARIA attributes.](#)

Buttons have an accessible name



When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn how to make buttons more accessible.](#)

Image elements have `[alt]` attributes



Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

Form elements have associated labels



Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more about form element labels.](#)

`[user-scalable="no"]` is not used in the `<meta name="viewport">` element and the `[maximum-scale]` attribute is not less than 5.



Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more about the viewport meta tag.](#)

`[aria-hidden="true"]` elements do not contain focusable descendents



Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available to users of assistive technologies like screen readers. [Learn how aria-hidden affects focusable elements.](#)

Document has a `<title>` element



The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

`[id]` attributes on active, focusable elements are unique



All focusable elements must have a unique `id` to ensure that they're visible to assistive technologies. [Learn how to fix duplicate ids.](#)

`<frame>` or `<iframe>` elements have a title



Screen reader users rely on frame titles to describe the contents of frames. [Learn more about frame titles.](#)

`<html>` element has a `[lang]` attribute



If a page doesn't specify a `lang` attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. [Learn more about the `lang` attribute.](#)

`<html>` element has a valid value for its `[lang]` attribute



Specifying a valid [BCP 47 language](#) helps screen readers announce text properly. [Learn how to use the `lang` attribute.](#)

Links have a discernible name



Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn how to make links accessible.](#)

Lists contain only `` elements and script supporting elements (`<script>` and `<template>`).



Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. [Learn more about proper list structure.](#)

List items (``) are contained within ``, `` or `<menu>` parent elements



Screen readers require list items (``) to be contained within a parent ``, `` or `<menu>` to be announced properly. [Learn more about proper list structure.](#)

Heading elements appear in a sequentially-descending order



Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. [Learn more about heading order.](#)

NOT APPLICABLE (22)

Hide

☐ `[accesskey]` values are unique



Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. [Learn more about access keys.](#)

○ **button, link, and menuitem** elements have accessible names ^

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to make command elements more accessible.](#)

○ **ARIA input fields** have accessible names ^

When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about input field labels.](#)

○ **ARIA meter** elements have accessible names ^

When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name meter elements.](#)

○ **ARIA progressbar** elements have accessible names ^

When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to label progressbar elements.](#)

○ **Elements with an ARIA [role] that require children to contain a specific [role]** have all required children. ^

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more about roles and required children elements.](#)

○ **[role]s** are contained by their required parent element ^

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element.](#)

○ **ARIA toggle fields** have accessible names ^

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about toggle fields.](#)

○ **ARIA tooltip** elements have accessible names ^

When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name tooltip elements.](#)

☐ ARIA `treeitem` elements have accessible names ^

When a `treeitem` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about labeling `treeitem` elements](#).

☐ The page contains a heading, skip link, or landmark region ^

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. [Learn more about bypass blocks](#).

☐ `<dl>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements. ^

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn how to structure definition lists correctly](#).

☐ Definition list items are wrapped in `<dl>` elements ^

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<dl>` element to ensure that screen readers can properly announce them. [Learn how to structure definition lists correctly](#).

☐ No form fields have multiple labels ^

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. [Learn how to use form labels](#).

☐ `<input type="image">` elements have `[alt]` text ^

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn about input image alt text](#).

☐ The document does not use `<meta http-equiv="refresh">` ^

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag](#).

☐ `<object>` elements have alternate text ^

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more about alt text for `object` elements](#).

☐ No element has a `[tabindex]` value greater than 0 ^

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the tabindex attribute.](#)

- Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table. ^

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute.](#)

- `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe. ^

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers.](#)

- `[lang]` attributes have a valid value ^

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute.](#)

- `<video>` elements contain a `<track>` element with `[kind="captions"]` ^

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#)



Best Practices

GENERAL

- ▲ Browser errors were logged to the console ^

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more about this errors in console diagnostic audit](#)

Source	Description
gitpod.io	1st Party

Source	Description
8000-janetdev-cimile...-eu101.gitpod.io/:1	Error: A listener indicated an asynchronous response by returning true, but the message channel closed before a response was received

○ Detected JavaScript libraries ^

All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)

Name	Version
Bootstrap	4.6.2
jQuery	3.5.1

TRUST AND SAFETY

○ Ensure CSP is effective against XSS attacks ^

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#)

Description	Directive	Severity
No CSP found in enforcement mode		High

PASSED AUDITS (12)

Hide

Uses HTTPS ^

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS.](#)

Avoids requesting the geolocation permission on page load ^

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. [Learn more about the geolocation permission.](#)

Avoids requesting the notification permission on page load



Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more about responsibly getting permission for notifications.](#)

Allows users to paste into input fields



Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. [Learn more about user-friendly input fields.](#)

Displays images with correct aspect ratio



Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio.](#)

Serves images with appropriate resolution



Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn how to provide responsive images.](#)

Page has the HTML doctype



Specifying a doctype prevents the browser from switching to quirks-mode. [Learn more about the doctype declaration.](#)

Properly defines charset



A character encoding declaration is required. It can be done with a `<meta>` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. [Learn more about declaring the character encoding.](#)

Avoids `unload` event listeners



The unload event does not fire reliably and listening for it can prevent browser optimizations like the Back-Forward Cache. Use `pagehide` or `visibilitychange` events instead. [Learn more about unload event listeners](#)

Avoids deprecated APIs



Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

No issues in the `Issues` panel in Chrome Devtools



Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps.](#)

URL	Map URL
Stripe Utility	
/v3/ (js.stripe.com)	...sourcemaps/stripe-0e5f943...js.map (js.stripe.com)
JSDelivr CDN Cdn	
...umd/popper.min.js (cdn.jsdelivr.net)	...umd/popper.min.js.map (cdn.jsdelivr.net)
...js/bootstrap.min.js (cdn.jsdelivr.net)	...js/bootstrap.min.js.map (cdn.jsdelivr.net)

NOT APPLICABLE (1)

Hide

- ☐ Fonts with `font-display: optional` are preloaded

^

Preload `optional` fonts so first-time visitors may use them. [Learn more about preloading fonts](#)



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials.](#)

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

- ☐ Structured data is valid

^

Run the [Structured Data Testing Tool](#) and the [Structured Data Linter](#) to validate structured data. [Learn more about Structured Data.](#)

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (10)

Hide

Has a `<meta name="viewport">` tag with `width` or `initial-scale`



A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag.](#) TBT

Document has a `<title>` element



The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

Document has a meta description



Meta descriptions may be included in search results to concisely summarize page content. [Learn more about the meta description.](#)

Page has successful HTTP status code



Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more about HTTP status codes.](#)

Links have descriptive text



Descriptive link text helps search engines understand your content. [Learn how to make links more accessible.](#)

Links are crawlable



Search engines may use `href` attributes on links to crawl websites. Ensure that the `href` attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn how to make links crawlable](#)

Page isn't blocked from indexing



Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more about crawler directives.](#)

Image elements have `[alt]` attributes



Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

Document has a valid `hreflang`



hreflang links tell search engines what version of a page they should list in search results for a given language or region. [Learn more about hreflang.](#)

Document avoids plugins



Search engines can't index plugin content, and many devices restrict plugins or don't support them. [Learn more about avoiding plugins.](#)

NOT APPLICABLE (4)

Hide

☐ robots.txt is valid



If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. [Learn more about robots.txt.](#)

☐ Document has a valid `rel=canonical`



Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#)

☐ Document uses legible font sizes



Font sizes less than 12px are too small to be legible and require mobile visitors to “pinch to zoom” in order to read. Strive to have >60% of page text ≥ 12 px. [Learn more about legible font sizes.](#)

☐ Tap targets are sized appropriately



Interactive elements like buttons and links should be large enough (48x48px), or have enough space around them, to be easy enough to tap without overlapping onto other elements. [Learn more about tap targets.](#)

Captured at Jul 20, 2023, 11:47
AM GMT+1
Initial page load

Emulated Desktop with
Lighthouse 10.1.1
Custom throttling

Single page load

Using Chromium 114.0.0.0 with
devtools