

HOOX: Edge-Native Low-Latency Algorithmic Trading at the Cloudflare Edge

jango_blockchained
Independent Researcher

<https://github.com/jango-blockchained/hoox-setup>

July 2026

Abstract

Algorithmic trading systems have traditionally relied on virtual private servers (VPS) deployed in centralized data centers, incurring substantial network latency, recurring operational cost, and single points of failure. I present HOOX, an open-source, edge-native algorithmic trading framework that I implemented entirely on Cloudflare Workers. HOOX decomposes trading logic into ten specialized Workers that communicate via Cloudflare Service Bindings, achieving sub-millisecond inter-service call overhead and a median production latency of 22 ms from webhook ingestion to centralized exchange (CEX) order acknowledgment on the direct execution path.

I distinguish two measurement regimes that prior summaries often conflate: (i) *synthetic fast-path probes*, which short-circuit before exchange submission and characterize internal mesh latency; and (ii) *production signal-to-ack*, which includes HMAC-signed REST placement and exchange response parsing. The system integrates four platform primitives uncommon in retail trading stacks: Durable Objects for strongly consistent duplicate suppression under concurrent webhook retries; Smart Placement for automatic proximity routing to exchange API origins; Cloudflare Queues with application-level exponential backoff for outage resilience; and a deterministic risk manager with optional multi-provider large language model (LLM) operational summaries.

Over a twelve-month production deployment (July 2025–July 2026) that I operated, the system processed signals with 99.97% eventual success within five minutes during exchange maintenance windows and recorded zero duplicate fills attributable to idempotency failures. I document the architecture, security model, per-Worker implementation reference with annotated code listings, a multi-tier test methodology and failure taxonomy, and reproducible evaluation commands (`hoox perf fastpath`, k6 load tests). I discuss portability limits and applicability to other globally distributed, latency-sensitive control planes. The system and this paper are released under Creative Commons Attribution 4.0 (CC BY 4.0).

Keywords: algorithmic trading, edge computing, serverless, Cloudflare Workers, low latency, idempotency, Durable Objects, service bindings, financial technology

1 Introduction

Algorithmic trading requires executing strategies with minimal latency to capture fleeting market opportunities and manage risk effectively [13, 14]. Traditional deployments place trading logic on virtual private servers (VPS) in fixed geographic regions. This architecture introduces substantial round-trip times: a signal generated near an exchange may traverse the public internet to a distant VPS—often incurring 80–120 ms of transit alone—before an order is signed and returned to the exchange API, yielding total latencies of 180–320 ms in typical retail configurations.

Cloudflare Workers provide a fundamentally different execution model. User code runs in V8 isolates [17] distributed across more than 300 points of presence (PoPs). When combined with

Service Bindings, Durable Objects, Queues, Smart Placement, and other edge primitives [5, 7, 9], it becomes possible to construct a complete trading stack without operating any servers. Unlike conventional function-as-a-service (FaaS) platforms, Workers avoid container cold starts on the order of seconds [19], and Service Bindings eliminate per-hop TLS and DNS overhead between microservices.

HOOX is a production-grade, fully open-source implementation of such a stack [15]. It ingests signals from TradingView webhooks, email, and Telegram; validates and routes them through a hardened gateway; executes trades across Binance, Bybit, and MEXC; manages risk autonomously; and provides observability, PDF compliance reporting, and DeFi execution. All components run as Cloudflare Workers and communicate internally without traversing the public internet.

Terminology. I use *low latency* to denote retail-grade webhook-to-ack times in the tens of milliseconds, not the sub-10 ms regime of exchange co-location [1]. The product name *Zero-Latency* reflects design intent—minimizing network distance to exchange APIs—rather than a literal zero-millisecond guarantee.

1.1 Contributions

This paper describes the architecture, mechanisms, and operational results of work I performed to build and run HOOX. It makes the following contributions:

1. A detailed microservices architecture for edge-based trading using ten cooperating Workers, with a formal seven-stage signal lifecycle and five-layer security model.
2. Design and implementation of *duplicate-suppression* semantics using a Durable Object mutex at the gateway, with explicit discussion of fail-open behavior, queue at-least-once delivery, and idempotency key granularity.
3. A reproducible evaluation toolchain—`hoox perf fastpath`, k6 load tests, and nightly CI artifacts—with a clear separation between internal probe latency and production exchange-ack latency (Figure 4).
4. Operational measurements over twelve months demonstrating median 22 ms production signal-to-ack on the direct path and 5.6–40× geographic RTT improvements versus a Virginia VPS baseline for exchange API reachability.
5. A practical demonstration that a complete trading infrastructure can operate within Cloudflare’s free tier for typical retail volumes (<100,000 requests/day).
6. An implementation monograph (provided in the extended version of this paper) with 60 manifest-pinned code listings plus hand-sanitized configuration excerpts (Appendix ??), runtime-semantics and advanced-mechanism deep dives, per-Worker implementation reference, ADRs, and a published test methodology with failure taxonomy (Appendices ??, C). The core paper focuses on the architectural contribution and evaluation; the extended technical reference is available alongside this document and in the open-source repository.

2 Background and Motivation

2.1 Limitations of VPS-Centric Architectures

A typical VPS deployment suffers from three structural problems:

Latency. Consider a TradingView alert fired in London. The alert may travel to a VPS in Virginia (≈ 85 ms), undergo runtime initialization (≈ 10 ms), and then reach an exchange API in Frankfurt or Tokyo (an additional 100–150 ms). Total transit latency exceeds 200 ms before order matching [13]. TradingView’s own webhook delivery often adds 1–5 s of upstream delay; edge optimization reduces only the *execution segment* after the alert arrives at `hoox`.

Cost and operations. Always-on servers incur monthly fees, require patching and monitoring, and demand explicit scaling logic. Container-based bots additionally suffer cold-start delays of 1–15 s after idle periods.

Reliability. A single VPS is a single point of failure. Network partitions or provider outages can prevent order execution during critical market moves.

2.2 Cloudflare Workers as an Execution Platform

Cloudflare Workers execute JavaScript and WebAssembly in V8 isolates with a 128 MB memory ceiling and sub-3 ms cold starts. Platform primitives relevant to trading include:

- **Service Bindings:** Direct `fetch` calls between Workers with microsecond-scale overhead and no public HTTP exposure [7].
- **Smart Placement:** Automatic relocation of Worker execution to the data center nearest outbound dependencies (e.g., exchange APIs) [8].
- **Durable Objects:** Strongly consistent, single-threaded stateful objects with SQLite-backed storage, suitable for distributed mutexes [5].
- **Queues:** At-least-once delivery with configurable retries and dead-letter queues [6].
- **Vectorize, Workers AI, Browser Rendering:** Vector search for retrieval-augmented generation (RAG), on-edge inference, and headless PDF generation.

These primitives enable a design point distinct from both long-running VPS bots [11, 16] and regional serverless deployments [2, 20]: a globally distributed, serverless trading system with sub-50 ms production signal-to-ack on the direct execution path under normal conditions.

3 System Architecture

HOOX consists of ten specialized Workers (Table 1) that together form a complete trading pipeline. Two additional Workers—`pine-worker` and `pyne-worker`—provide Pine Script tooling and are outside the core production mesh.

3.1 Architectural Overview

Figure 1 depicts the ingress, compute, storage, and external exchange layers. Public signals enter only through `hoox` (webhooks) or channel-specific Workers (`email-worker`, `telegram-worker`). All downstream execution uses Service Bindings; only `trade-worker` and `web3-wallet-worker` initiate outbound HTTPS to external APIs.

Table 1: Core HOOX Workers. Only `hoox` and `dashboard` expose public endpoints.

Worker	Role	Key responsibilities	Trigger
<code>hoox</code>	Gateway	Auth, WAF, rate limiting, idempotency	Webhook/API
<code>trade-worker</code>	Execution	Multi-exchange order placement	Binding/Queue
<code>agent-worker</code>	Risk manager	Trailing stops, kill switch, LLM summary	Cron */5
<code>telegram-worker</code>	Notifications	Alerts, RAG queries, bot commands	Binding
<code>d1-worker</code>	Data layer	Centralized D1 SQLite access	Binding
<code>email-worker</code>	Email ingress	Mailgun webhook parsing	Webhook
<code>web3-wallet-worker</code>	DeFi	On-chain swaps and contract calls	Binding
<code>analytics-worker</code>	Observability	Analytics Engine time series	Binding
<code>report-worker</code>	Reporting	Twice-daily PDF generation	Cron 08:00, 18:00 UTC
<code>dashboard</code>	User interface	Portfolio monitoring (Next.js/OpenNext)	Public UI

Table 2: Queue modes and latency semantics. Default: `queue_failover`.

Mode	Behavior	Ack latency
<code>queue_disabled</code>	Always direct Service Binding	Exchange ack in response
<code>queue_failover</code>	Direct first; queue on binding failure	Exchange ack or enqueue status
<code>queue_everywhere</code>	Always enqueue before consumption	HTTP success before fill

3.2 Signal Lifecycle

A representative TradingView signal traverses seven stages:

1. **Ingestion:** `POST /webhook` arrives at `hoox` after WAF filtering.
2. **Validation:** IP allow-listing, API key verification (`timingSafeEqual`), payload size limits (100 KB), global kill-switch check, and rate limiting (10 trades/minute per session).
3. **Idempotency:** A composite key `trade:{exchange}:{symbol}:{action}:{quantity}` is checked against the `IdempotencyStore` Durable Object.
4. **Routing:** On success, the payload is forwarded via Service Binding to `trade-worker`, or enqueued on `trade-execution` depending on KV-configured queue mode (Table 2).
5. **Execution:** `trade-worker` resolves the exchange via dynamic KV routing and places the order using HMAC-SHA256 signed REST requests.
6. **Persistence and notification:** Results are written to D1 via `d1-worker`, logged to R2, and forwarded to `telegram-worker` and `analytics-worker` via non-blocking `waitUntil` calls.
7. **Risk management:** Every five minutes, `agent-worker` evaluates open positions and may adjust trailing stops or activate the global kill switch.

3.3 Inter-Service Communication

Traditional microservices communicate over HTTP or gRPC, incurring serialization, TLS, and DNS costs at each hop. In HOOX, Service Bindings invoke internal endpoints as `binding.fetch("http://inter`

Table 3: Primary Service Binding edges (selected).

Source	Targets
hoox	trade-worker, telegram-worker, analytics-worker, web3-wallet-worker
trade-worker	d1-worker, telegram-worker, analytics-worker
agent-worker	d1-worker, trade-worker, telegram-worker, analytics-worker
dashboard	d1-worker, agent-worker, web3-wallet-worker

calls. Measured Service Binding overhead averages 0.4ms (Table 8). Authorization is enforced on every binding call via an `X-Internal-Auth-Key` header validated by shared middleware.

Table 3 summarizes the primary binding graph. The full code-graph community decomposition and data-flow edge catalog appear in Appendix ?? (Figure ??).

4 Key Technical Mechanisms

4.1 Duplicate-Suppression Idempotency

TradingView and similar platforms may retry webhook delivery after timeouts. Without deduplication, duplicate submissions can produce double positions. HOOX implements *at-most-once acceptance* at the gateway within a configurable TTL; I do not claim formal exactly-once semantics across the full pipeline because Queues deliver at-least-once and the gateway fails open when the Durable Object is unavailable.

Gateway mutex. The `IdempotencyStore` Durable Object implements an atomic check-and-store operation using `blockConcurrencyWhile`, guaranteeing that concurrent requests for the same key cannot interleave between read and write (Algorithm 4.1). Entries expire after a default TTL of 300s; alarm-based cleanup reclaims storage.

Semantics and limitations.

- **Key granularity:** The key excludes `requestId` and timestamp. Two legitimate signals with identical exchange, symbol, action, and quantity within the TTL window are treated as duplicates—a deliberate trade-off favoring retry safety over rapid scale-in.
- **Fail-open:** If the Durable Object RPC fails, the gateway permits the trade rather than halting execution—availability over strict deduplication.
- **Probe mode:** Synthetic requests with `probe: true` bypass idempotency and short-circuit in `trade-worker` before exchange validation, enabling repeatable internal latency measurement without side effects.

Listing 1 shows the production `IdempotencyStore` implementation; Listing 3 shows how synthetic probes bypass exchange submission for latency measurement.

A second Durable Object class, `ExchangeConnectionManager`, maintains optional persistent WebSocket sessions per exchange for connection amortization; it does not currently participate in idempotency. Planned work includes exchange-native deduplication via `newClientOrderId` / `orderLinkId` fields derived from `requestId`.

```

1 // Source: workers/hoox/src/idempotencyStore.ts (lines 1-98)
2 // Listing id: idempotency-store
3 // Caption: IdempotencyStore Durable Object (gateway duplicate suppression)
4 import { DurableObject } from "cloudflare:workers";
5
6 const DEFAULT_TTL_MS = 300_000; // 5 minutes

```

```

7
8 interface StoredEntry {
9   storedAt: number;
10 }
11
12 /**
13  * IdempotencyStore -- Durable Object for exactly-once trade execution.
14  *
15  * Prevents duplicate trade submissions within a configurable TTL window.
16  * Uses DO SQLite-backed storage for persistence and alarm-based cleanup.
17  */
18 export class IdempotencyStore extends DurableObject {
19   /**
20    * Check if a key is new (not recently seen) and store it atomically.
21    *
22    * @param key -- Unique idempotency key (e.g. "trade:binance:BTCUSDT:LONG:0.01")
23    * @param ttlMs -- Time-to-live in milliseconds (default 5 min)
24    * @returns 'true' if the key was stored (new request), 'false' if duplicate
25    */
26   async checkAndStore(
27     key: string,
28     ttlMs: number = DEFAULT_TTL_MS
29   ): Promise<boolean> {
30     // Wrap read+write+alarm in blockConcurrencyWhile so concurrent
31     // requests with the same key cannot interleave between the
32     // 'get' and the 'put'. Without this, two parallel webhooks for
33     // the same trade could both pass the duplicate check and both
34     // proceed to enqueue. The DO runtime guarantees single-threaded
35     // execution inside the block.
36     return this.ctx.blockConcurrencyWhile(async () => {
37       const existing = await this.ctx.storage.get<StoredEntry>(key);
38       if (existing && Date.now() - existing.storedAt < ttlMs) {
39         return false; // Duplicate -- still within TTL window
40       }
41
42       // Store with current timestamp
43       await this.ctx.storage.put(key, { storedAt: Date.now() });
44
45       // Schedule alarm for TTL-based cleanup
46       const currentAlarm = await this.ctx.storage.getAlarm();
47       const nextCleanup = Date.now() + ttlMs;
48       if (!currentAlarm || nextCleanup < currentAlarm) {
49         await this.ctx.storage.setAlarm(nextCleanup);
50       }
51
52       return true;
53     });
54   }
55
56   /**
57    * Check whether a previously stored key has expired.
58    */
59   async expired(key: string): Promise<boolean> {
60     const entry = await this.ctx.storage.get<StoredEntry>(key);
61     if (!entry) return true;
62     return Date.now() - entry.storedAt >= DEFAULT_TTL_MS;
63   }
64
65   /**
66    * Alarm handler -- cleans up expired entries.
67    */
68   async alarm(): Promise<void> {
69     const all = await this.ctx.storage.list<StoredEntry>();

```

```

70     const now = Date.now();
71     let earliestRemaining = Infinity;
72
73     for (const [key, entry] of all) {
74         if (now - entry.storedAt >= DEFAULT_TTL_MS) {
75             await this.ctx.storage.delete(key);
76         } else {
77             // Track earliest still-valid entry for next alarm
78             const remaining = entry.storedAt + DEFAULT_TTL_MS - now;
79             if (remaining < earliestRemaining) {
80                 earliestRemaining = remaining;
81             }
82         }
83     }
84
85     // Schedule next alarm if there are still entries to expire
86     if (earliestRemaining < Infinity) {
87         await this.ctx.storage.setAlarm(Date.now() + earliestRemaining);
88     }
89 }
90
91 /**
92  * Remove all stored keys (for testing/admin).
93  */
94 async clear(): Promise<void> {
95     const all = await this.ctx.storage.list();
96     const keys = [...all.keys()];
97     if (keys.length > 0) {
98         await this.ctx.storage.delete(keys);
99     }
100 }
101 }

```

Listing 1: IdempotencyStore Durable Object (full implementation)

```

// Source: workers/hoox/src/logic.ts (lines 64-92)
// Listing id: idempotency-key
// Caption: Idempotency key generation and fail-open check
/**
 * Generate idempotency key for a trade
 */
export function generateIdempotencyKey(tradeData: TradeData): string {
    return `trade:${tradeData.exchange}:${tradeData.symbol}:${tradeData.action}:${tradeData.quantity}`;
}

/**
 * Check and store idempotency key using Durable Object
 */
export async function checkIdempotency(
    env: IdempotencyEnv,
    key: string,
    logger: Logger
): Promise<boolean> {
    if (!env.IDEMPOTENCY_STORE) {
        return true; // No DO configured, allow all
    }

    try {
        const id = env.IDEMPOTENCY_STORE.idFromName(key);
        // DurableObjectStub is an RPC proxy -- cast to the DO class interface
        const stub = env.IDEMPOTENCY_STORE.get(id) as unknown as IdempotencyStore;
        return await stub.checkAndStore(key);
    }
}

```

```

    } catch (error) {
      logger.error("[checkIdempotency] Error:", { error: toError(error) });
      return true; // Allow on error to not block trades
    }
  }
}

```

Listing 2: Idempotency key generation and fail-open DO check

```

1 // Source: workers/trade-worker/src/index.ts (lines 369-400)
2 // Listing id: probe-short-circuit
3 // Caption: trade-worker probe short-circuit for synthetic latency measurement
4 // Probe short-circuit: check raw payload before validation (probe is a control signal,
5 // not a trade)
6 if ((payload as Record<string, unknown>).probe === true) {
7   const tHopStart = performance.now();
8   const probeId = String(
9     (payload as Record<string, unknown>).probe_id ?? ""
10  );
11  ctx.waitUntil(
12    trackAnalytics(
13      env,
14      "/track/api-call",
15      {
16        worker: "trade-worker",
17        endpoint: "/webhook",
18        latencyMs: 0,
19        success: true,
20      },
21      { indexes: [probeId] }
22    )
23  );
24  const twHopMs = performance.now() - tHopStart;
25  console.log(
26    JSON.stringify({
27      probe_id: probeId,
28      hop: "trade-worker",
29      duration_ms: Math.round(twHopMs),
30    })
31  );
32  return new Response(
33    JSON.stringify({ ok: true, probe_id: probeId, status: "probed" }),
34    { status: 200, headers: { "Content-Type": "application/json" } }
35  );
36 }

```

Listing 3: Probe short-circuit in `trade-worker` (no exchange call)

4.2 Gateway Hot Path

The `hoox /webhook` handler minimizes serial I/O on the critical path. After a 100 KB payload size guard, three security checks—kill switch, IP allow-list, and API key binding—execute in parallel via `Promise.all` (Listing 4). Session creation and per-session rate limiting follow sequentially because they depend on the validated API key.

Validated trade payloads are schema-checked with `validateJson(WebhookPayloadSchema)` before dispatch. Trade and Telegram notification branches run concurrently when both are present in the same webhook.

```

// Source: workers/hoox/src/handlers/webhook.ts (lines 87-134)
// Listing id: webhook-parallel-checks
// Caption: Gateway parallel pre-flight checks (kill switch, IP, API key, rate limit)

```



```

// Run independent checks in parallel (all KV reads, no dependencies)
const [ksCheck, ipCheck, isValid] = await Promise.all([
  checkKillSwitch(env.CONFIG_KV),
  checkIpAllowlist(env.CONFIG_KV, clientIp),
  validateApiKeyBinding(apiKey, env.WEBHOOK_API_KEY_BINDING, logger),
]);

// Evaluate in priority order (fail-fast)
if (ksCheck.enabled) {
  logger.warn("[handleRequest] Kill switch active -- rejecting request");
  return wrapResponse(
    createJsonResponse(
      { success: false, error: "Service temporarily disabled" },
      503
    )
  );
}

if (!ipCheck.allowed) {
  logger.warn("[handleRequest] IP ${clientIp} rejected: ${ipCheck.reason}");
  return wrapResponse(
    createJsonResponse(
      { success: false, error: "Access denied: ${ipCheck.reason}" },
      403
    )
  );
}

if (!isValid) {
  logger.warn("[handleRequest] Invalid apiKey provided");
  return wrapResponse(
    createJsonResponse({ success: false, error: "Forbidden" }, 403)
  );
}

// Get or create session for tracking (use validated apiKey before it's removed)
const session = await getOrCreateSession(env.SESSIONS_KV, apiKey);

// Check rate limit using session ID (not request UUID -- was broken before)
if (!(await checkRateLimit(session.sessionId, env))) {
  logger.warn("[handleRequest] Rate limit exceeded");
  return wrapResponse(
    createJsonResponse(
      { success: false, error: "Rate limit exceeded. Try again later." },
      429
    )
  );
}
}

```

Listing 4: Parallel gateway pre-flight checks

Internal routes between Workers authenticate with `X-Internal-Auth-Key` and constant-time comparison (Listing 5). The gateway fails closed when the binding is unconfigured; idempotency alone fails open on Durable Object errors (Section 4, duplicate-suppression paragraph).

```

// Source: packages/shared/src/middleware/auth.ts (lines 78-102)
// Listing id: require-internal-auth
// Caption: Internal service-to-service authentication (fail-closed)
export function requireInternalAuth(
  request: Request,
  env: InternalAuthEnv,
  keyName: string = "INTERNAL_KEY_BINDING"
): Response | null {

```

```

const expectedKey = env[keyName] as string | undefined;
// Fail closed: if no key is configured, reject the request
if (!expectedKey) {
  return new Response(
    JSON.stringify({
      success: false,
      error: 'Internal auth key ${keyName} not configured',
    }),
    { status: 401, headers: { "Content-Type": "application/json" } }
  );
}

const providedKey = request.headers.get("X-Internal-Auth-Key");
if (!providedKey || !timingSafeEqual(providedKey, expectedKey)) {
  return new Response(
    JSON.stringify({ success: false, error: "Unauthorized" }),
    { status: 401, headers: { "Content-Type": "application/json" } }
  );
}
return null;

```

Listing 5: Internal service-to-service authentication

Payload validation. All trade payloads pass `validateJson(WebhookPayloadSchema)` before dispatch. The shared helper returns structured Zod path errors rather than throwing (Listing 6).

```

// Source: packages/shared/src/middleware/validate.ts (lines 15-29)
// Listing id: validate-json
// Caption: Zod-based validateJson middleware (structured errors)
export function validateJson<T extends z.ZodTypeAny>(
  schema: T,
  data: unknown
): Result<z.infer<T>> {
  const result = schema.safeParse(data);
  if (!result.success) {
    return {
      ok: false as const,
      error: result.error.issues
        .map((i) => `${i.path.join(".")}: ${i.message}`)
        .join("; "),
    };
  }
  return { ok: true as const, value: result.data };
}

```

Listing 6: Zod-based request validation

Service Binding transport. Internal Worker calls use `serviceFetch`, which addresses bindings as `http://internal{path}` with a 30 s `AbortSignal` timeout (Listing 7). Queue producers serialize a minimal trade envelope (Listing 8).

```

// Source: packages/shared/src/service-bindings.ts (lines 5-25)
// Listing id: service-fetch
// Caption: Service Binding fetch helper with 30s timeout
export function serviceFetch(
  binding: ServiceBinding,
  path: string,
  body?: unknown,
  options?: {
    method?: string;
  }
) {
  // ...
}

```

```

    headers?: Record<string, string>;
    timeout?: number;
  }
): Promise<Response> {
  const timeout = options?.timeout ?? 30000;
  return binding.fetch('http://internal${path}', {
    method: options?.method ?? "POST",
    headers: {
      "Content-Type": "application/json",
      ...options?.headers,
    },
    body: body != null ? JSON.stringify(body) : undefined,
    signal: AbortSignal.timeout(timeout),
  });
}

```

Listing 7: Service Binding fetch with timeout

```

// Source: workers/hoox/src/logic.ts (lines 97-114)
// Listing id: send-trade-to-queue
// Caption: Queue producer message envelope
export async function sendTradeToQueue(
  queue: Queue,
  tradeData: TradeData,
  logger: Logger
): Promise<void> {
  const message = {
    requestId: tradeData.requestId,
    exchange: tradeData.exchange,
    action: tradeData.action,
    symbol: tradeData.symbol,
    quantity: tradeData.quantity,
    price: tradeData.price,
    leverage: tradeData.leverage,
    queuedAt: new Date().toISOString(),
  };
  await queue.send(message);
  logger.info(`[${tradeData.requestId}] Trade sent to queue`);
}

```

Listing 8: Queue producer message envelope

4.3 Smart Placement

Latency-sensitive Workers—including `hoox`, `trade-worker`, `d1-worker`, and `agent-worker`—enable Smart Placement via `"placement": {"mode": "smart"}` in `wrangler.jsonc`. Cloudflare continuously measures RTT from its PoPs to a Worker’s outbound origins (the exchange REST endpoints) and migrates isolate execution to a PoP that minimizes that RTT. The `dashboard` Worker intentionally disables Smart Placement to optimize for end-user browser proximity rather than exchange proximity.

Why the dramatic reduction (and why “triggering the datacenter” does not cancel the benefit). A common intuition is that moving execution “near the exchange” should not help because the request still has to reach some Cloudflare datacenter first. This overlooks three realities of the architecture:

1. The dominant term for a signed REST order is the *outbound* TLS+HTTP round-trip from the executing isolate to the exchange API origin. A VPS fixed in Virginia talking to a Tokyo or Singapore exchange incurs 80–200 ms of public internet RTT on that leg alone. Smart Placement places the `trade-worker` isolate in (or routes its outbound through)

a PoP whose peering to that specific exchange endpoint is excellent (often single-digit milliseconds).

2. Invocation routing (anycast + Smart Placement decision) is paid once per isolate lifecycle or migration. Workers cold starts are sub-3 ms and isolates are kept warm across many PoPs. For a stream of signals the per-trade marginal cost is dominated by the optimized outbound leg, not the placement decision.
3. Internal Service Bindings between **hoox** and **trade-worker** traverse Cloudflare’s private fabric (not the public internet) and are sub-millisecond even when the two Workers execute in different PoPs.

The numbers in Table 9 therefore measure *exchange API RTT originating from an optimally placed isolate*, not the cost to reach the first Cloudflare PoP. See Section 7 for the measurement methodology and caveats.

Empirical measurements (Section 7) show 30–60% exchange API RTT reduction versus static regional deployments (and up to 40× in some geographies). Table 9 reports geographic scenarios as *exchange API round-trip from the Worker isolate*, not full signal-to-ack including TradingView delivery.

4.4 Queue-Based Resilience

The **trade-execution** queue decouples ingestion from execution. **hoox** acts as producer; **trade-worker** consumes with platform-level **max_retries** = 3 and application-level retries of five attempts with backoff [0, 30, 60, 300, 900] s. A dead-letter queue (**trade-execution-dlq**) captures permanently failed messages. Queue mode is KV-configurable (Table 2).

Producer routing. **processTrade** (Listing 10) selects among three modes: always direct Service Binding (**queue_disabled**), direct-first with queue fallback (**queue_failover**, default), or always enqueue (**queue_everywhere**). Mode resolution reads **webhook:queue_mode** from **CON-FIG_KV** with a 60 s in-isolate cache (Listing 9).

```
// Source: workers/hoox/src/logic.ts (lines 43-62)
// Listing id: get-queue-mode
// Caption: KV-backed queue mode resolution with 60s cache
export async function getQueueMode(
  kv: KVNamespace
): Promise<"queue_everywhere" | "queue_failover" | "queue_disabled"> {
  const now = Date.now();
  if (cachedQueueMode && now < queueModeCacheExpiry) {
    return cachedQueueMode;
  }

  const mode = await kv.get(KVKeys.KV_WEBHOOK_QUEUE_MODE);
  const resolved =
    mode === "queue_disabled"
      ? "queue_disabled"
      : mode === "queue_everywhere"
        ? "queue_everywhere"
        : "queue_failover";

  cachedQueueMode = resolved;
  queueModeCacheExpiry = now + QUEUE_MODE_CACHE_TTL_MS;
  return resolved;
}
```

Listing 9: KV-backed queue mode with 60s cache

```

1 // Source: workers/hoox/src/logic.ts (lines 119-223)
2 // Listing id: process-trade
3 // Caption: Trade routing: idempotency, queue mode, Service Binding forward
4 export async function processTrade(
5   tradeData: TradeData,
6   env: TradeEnv,
7   logger: Logger,
8   options: {
9     checkIdempotency: (
10       env: IdempotencyEnv,
11       key: string,
12       logger: Logger
13     ) => Promise<boolean>;
14     sendTradeToQueue: (
15       queue: Queue,
16       data: TradeData,
17       logger: Logger
18     ) => Promise<void>;
19     MAX_TRADES_PER_MINUTE: number;
20   },
21   queueMode:
22     | "queue_everywhere"
23     | "queue_failover"
24     | "queue_disabled" = "queue_failover"
25 ): Promise<ServiceResponse> {
26   const { requestId } = tradeData;
27   const { checkIdempotency, sendTradeToQueue } = options;
28
29   // Check idempotency before processing (skip for probe mode)
30   if (tradeData.probe !== true) {
31     const idempotencyKey = generateIdempotencyKey(tradeData);
32     const isNew = await checkIdempotency(env, idempotencyKey, logger);
33     if (!isNew) {
34       logger.info(
35         `[${requestId}] Duplicate trade detected, rejecting: ${idempotencyKey}`
36       );
37       return {
38         success: false,
39         requestId,
40         error: "Duplicate trade request. This trade was already processed.",
41       };
42     }
43   }
44
45   // Check if we should use queue (queue_disabled skips queue entirely)
46   const useQueue =
47     queueMode !== "queue_disabled" &&
48     (queueMode === "queue_everywhere" || !env.TRADE_SERVICE);
49
50   if (useQueue && env.TRADE_QUEUE) {
51     try {
52       await sendTradeToQueue(env.TRADE_QUEUE, tradeData, logger);
53       return {
54         success: true,
55         requestId,
56         tradeResult: { queued: true, message: "Trade queued for execution" },
57       };
58     } catch (error: unknown) {
59       logger.error(`[${requestId}] Failed to queue trade:`, {
60         error: toError(error),
61       });
62     }

```

```

63   }
64
65   // Direct service call
66   if (!env.TRADE_SERVICE) {
67     logger.error(`[${requestId}] TRADE_SERVICE binding is not configured.`);
68     return {
69       success: false,
70       requestId,
71       error: "TRADE_SERVICE binding is not configured.",
72     };
73   }
74
75   try {
76     const internalKey = env.INTERNAL_KEY_BINDING;
77     if (!internalKey) {
78       logger.error(`[${requestId}] INTERNAL_KEY_BINDING not configured.`);
79       return {
80         success: false,
81         requestId,
82         error: "Internal authentication key not configured.",
83       };
84     }
85     const res = await serviceFetch(env.TRADE_SERVICE, "/webhook", tradeData, {
86       headers: {
87         "X-Internal-Auth-Key": internalKey,
88         "X-Request-ID": requestId,
89       },
90     });
91     const result = await res.json();
92     return {
93       success: res.ok,
94       requestId,
95       tradeResult: result,
96       error: res.ok ? undefined : "Trade worker returned error",
97     };
98   } catch (error: unknown) {
99     logger.error(`[${requestId}] Error calling TRADE_SERVICE:`, {
100       error: toError(error),
101     });
102     return {
103       success: false,
104       requestId,
105       error: `Error calling trade service: ${toError(error)}`,
106     };
107   }
108 }

```

Listing 10: Gateway trade dispatch (idempotency, queue, binding)

Consumer retries. The shared `createQueueHandler` (Listing 11) unifies retry semantics across Workers. `trade-worker` wires it with DLQ logging to D1 and Telegram notification on permanent failure (Listing 12).

```

1  // Source: packages/shared/src/queue-handler.ts (lines 53-91)
2  // Listing id: queue-handler
3  // Caption: Shared queue consumer with exponential backoff and DLQ hook
4  export function createQueueHandler<T>(options: QueueHandlerOptions<T>) {
5    const { maxRetries, backoffDelays, onMessage, onRetry, onDLQ, logger } =
6      options;
7
8    return async (batch: MessageBatch<T>): Promise<void> => {
9      for (const msg of batch.messages) {

```

```

10     const attemptNumber = msg.attempts || 0;
11     const logId = `[${msg.id}]`;
12
13     try {
14         logger?.info(
15             `${logId} Processing message (attempt ${attemptNumber + 1})`;
16         );
17         await onMessage(msg.body, attemptNumber);
18         logger?.info(`${logId} Message processed successfully`);
19     } catch (error: unknown) {
20         const errorMsg = error instanceof Error ? error.message : String(error);
21
22         if (attemptNumber < maxRetries) {
23             const delaySeconds =
24                 backoffDelays[attemptNumber] ??
25                 backoffDelays[backoffDelays.length - 1];
26
27             logger?.info(
28                 `${logId} Retrying in ${delaySeconds}s (attempt ${attemptNumber + 2}/${
29 maxRetries + 1})`;
30             );
31
32             await onRetry?.(msg.body, attemptNumber, errorMsg, delaySeconds);
33             msg.retry({ delaySeconds });
34         } else {
35             logger?.error(
36                 `${logId} Max retries exceeded (${maxRetries + 1} attempts), moving to DLQ`;
37             );
38             await onDLQ?.(msg.body, attemptNumber, errorMsg);
39         }
40     }
41 }
42 };

```

Listing 11: Queue handler with exponential backoff and DLQ hook

```

// Source: workers/trade-worker/src/index.ts (lines 271-300)
// Listing id: trade-queue-consumer
// Caption: trade-worker queue consumer wiring
async queue(
    batch: MessageBatch<TradeQueueMessage>,
    env: Env,
    ctx: ExecutionContext
): Promise<void> {
    const handler = createQueueHandler<TradeQueueMessage>({
        maxRetries: MAX_RETRIES,
        backoffDelays: BACKOFF_DELAYS,
        logger,
        onMessage: async (trade, _attemptNumber) => {
            const result = await executeTradeFromQueue(trade, env, ctx);
            if (!result.success) {
                throw new Error(result.error || "Trade execution failed");
            }
            await sendTradeNotification(trade, env, result);
        },
        onRetry: (_trade, _attemptNumber, _errorMsg, _delaySeconds) => {
            // Logging is handled by createQueueHandler internally
        },
        onDLQ: async (trade, _attemptNumber, errorMsg) => {
            await logFailedTrade(trade, errorMsg, env);
            await sendTradeNotification(trade, env, {
                success: false,
            });
        }
    });
}

```

```

        error: errorMsg,
    });
},
});

return await handler(batch);
},

```

Listing 12: trade-worker queue consumer

During exchange maintenance, queued signals eventually succeed in 99.97% of cases within five minutes (Section 7), at the cost of higher perceived latency when `queue_everywhere` is enabled.

4.5 Multi-Exchange Execution

`trade-worker` routes orders through a provider-composed `ExchangeRouter`. KV table `routing:trade` can override the payload's declared exchange per symbol; per-exchange `enabled` and `use_websocket` toggles gate runtime behavior without redeployment.

```

1  // Source: workers/trade-worker/src/exchange-router.ts (lines 107-167)
2  // Listing id: exchange-router
3  // Caption: Dynamic KV routing and exchange toggle resolution
4  async route(
5      payload: WebhookPayload,
6      env: Env
7  ): Promise<{
8      exchange: string;
9      client: IExchangeClient;
10     useWebSocketDO?: boolean;
11 }> {
12     let exchange = payload.exchange.toLowerCase();
13     let useWebSocketDO = false;
14
15     // Check KV for dynamic routing
16     if (env.CONFIG_KV) {
17         try {
18             const routingTableStr = await env.CONFIG_KV.get(
19                 KVKeys.KV_TRADE_ROUTING
20             );
21             if (routingTableStr) {
22                 const routingTable = JSON.parse(routingTableStr);
23                 if (routingTable[payload.symbol]) {
24                     exchange = routingTable[payload.symbol].toLowerCase();
25                     logger.info("Dynamic route for symbol", {
26                         symbol: payload.symbol,
27                         exchange,
28                     });
29                 }
30             }
31         } catch (e) {
32             logger.error("Failed to parse routing table from KV", {
33                 error: toError(e),
34             });
35         }
36
37         // Check exchange toggle and websocket mode in parallel
38         try {
39             const [exchangeEnabled, useWs] = await Promise.all([
40                 env.CONFIG_KV.get(`exchange:${exchange}:enabled`),
41                 env.CONFIG_KV.get(`exchange:${exchange}:use_websocket`),
42             ]);

```



```

43
44     if (exchangeEnabled === "false") {
45         throw new Error('EXCHANGE_DISABLED: ${exchange} is disabled');
46     }
47
48     if (useWs === "true") {
49         useWebsocketDO = true;
50     }
51 } catch (e) {
52     // Re-throw EXCHANGE_DISABLED errors, swallow and log KV failures
53     if (e instanceof Error && e.message.startsWith("EXCHANGE_DISABLED")) {
54         throw e;
55     }
56     logger.error("Failed to check exchange toggle from KV", {
57         error: toError(e),
58     });
59 }
60 }
61
62 const baseResult = this.baseRouter.route(exchange, env);
63 return { ...baseResult, useWebsocketDO };
64 }

```

Listing 13: Dynamic exchange routing via CONFIG_KV

After routing, `executeTrade` applies KV risk limits (kill switch, default leverage, max position size), optionally sets leverage, and dispatches LONG/SHORT/CLOSE_* actions via exchange-specific HMAC clients. Listing 14 excerpts the risk gate and REST placement path; WebSocket execution via `ExchangeConnectionManager` is selected when KV enables `use_websocket` (Section ??, adapter internals).

```

1  // Source: workers/trade-worker/src/execution.ts (lines 307-457)
2  // Listing id: execute-trade-risk
3  // Caption: executeTrade: KV risk gates, ExchangeRouter, REST placement
4  // --- Kill Switch & Risk Management via CONFIG_KV ---
5  // Read all independent KV keys in parallel
6  if (env.CONFIG_KV) {
7      try {
8          const [killSwitch, defaultLevStr, maxSizeStr] = await Promise.all([
9              env.CONFIG_KV.get(KVKeys.KV_TRADE_KILL_SWITCH),
10             env.CONFIG_KV.get(KVKeys.KV_TRADE_DEFAULT_LEVERAGE),
11             env.CONFIG_KV.get(KVKeys.KV_TRADE_MAX_POSITION_SIZE),
12         ]);
13
14         if (killSwitch === "true") {
15             throw new Error(
16                 "KILL_SWITCH_ACTIVE: Trading is disabled by kill switch"
17             );
18         }
19
20         // Parse leverage safely. A malformed KV value (empty string,
21         // "abc", etc.) yields NaN from parseInt; NaN bypasses every
22         // later bound check (NaN > anyNumber === false), silently
23         // disabling the per-trade leverage cap. The same is true for
24         // parseFloat on the position-size KV value.
25         if (defaultLevStr && !overriddenLeverage) {
26             const parsedLev = parseInt(defaultLevStr, 10);
27             if (Number.isFinite(parsedLev) && parsedLev > 0) {
28                 overriddenLeverage = parsedLev;
29                 logger.info(
30                     '[Risk Management] Applied default leverage: ${overriddenLeverage}'
31                 );
32             } else {

```

```

33         logger.warn(
34             '[Risk Management] Ignoring malformed default_leverage value: ${JSON.stringify(
35                 defaultLevStr)}';
36         );
37     }
38     if (maxSizeStr) {
39         const parsedSize = parseFloat(maxSizeStr);
40         if (Number.isFinite(parsedSize) && parsedSize > 0) {
41             maxPositionSize = parsedSize;
42         } else {
43             logger.warn(
44                 '[Risk Management] Ignoring malformed max_position_size value: ${JSON.
45                 stringify(maxSizeStr)}';
46             );
47         }
48     } catch (e) {
49         // Re-throw kill switch errors, swallow and log KV failures
50         if (e instanceof Error && e.message.startsWith("KILL_SWITCH_ACTIVE")) {
51             throw e;
52         }
53         logger.error("Failed to fetch trade settings from KV", {
54             error: toError(e),
55         });
56     }
57 }
58 // --- End Kill Switch & Risk Management ---
59
60 if (maxPositionSize !== null && quantity > maxPositionSize) {
61     const errorMsg = 'Trade quantity (${quantity}) exceeds maximum allowed size (${
62     maxPositionSize})';
63     logger.error(errorMsg);
64     const result: TradeExecutionResult = {
65         success: false,
66         error: errorMsg,
67         status: 400,
68     };
69     await dbLogger.logResponse(
70         dbLogId,
71         createJsonResponse(result, 400),
72         null,
73         startTime,
74         ctx
75     );
76     return result;
77 }
78 // --- End Risk Management ---
79
80 const router = new ExchangeRouter();
81
82 let client: IExchangeClient;
83 let routedExchange: string;
84 let useWebsocketDO = false;
85
86 try {
87     const routeResult = await router.route(payload, env);
88     client = routeResult.client;
89     routedExchange = routeResult.exchange;
90     useWebsocketDO = routeResult.useWebsocketDO || false;
91 } catch (error: unknown) {
92     const errorMsg = toError(error, 'Failed to route exchange: ${exchange}');
93     logger.error(errorMsg);

```

```

93     const result: TradeExecutionResult = {
94         success: false,
95         error: errorMsg,
96         status: 400,
97     };
98     await dbLogger.logResponse(
99         dbLogId,
100         createJsonResponse(result, 400),
101         null,
102         startTime,
103         ctx
104     );
105     return result;
106 }
107
108 let result: unknown;
109
110 if (useWebsocketDO && env.EXCHANGE_CONNECTION_MANAGER) {
111     logger.info('Routing trade to DO for ${routedExchange}');
112     const id = env.EXCHANGE_CONNECTION_MANAGER.idFromName(
113         'exchange:${routedExchange}'
114     );
115     // DurableObjectStub is an RPC proxy -- cast to access RPC methods
116     const stub = env.EXCHANGE_CONNECTION_MANAGER.get(id) as unknown as {
117         executeTrade(
118             payload: WebhookPayload,
119             env: Env
120         ): Promise<TradeExecutionResult>;
121     };
122     const doResult = await stub.executeTrade(payload, env);
123     if (!doResult.success) {
124         throw new Error(doResult.error || "DO execution failed");
125     }
126     result = doResult.result;
127 } else {
128     if (client.setLeverage && overriddenLeverage) {
129         try {
130             await client.setLeverage(symbol, overriddenLeverage);
131         } catch (leverageError) {
132             logger.error("Failed to set leverage", {
133                 error: toError(leverageError),
134             });
135             // Continue with trade execution even if setting leverage fails
136         }
137     }
138
139     switch (action.toUpperCase()) {
140         case "LONG":
141             result = await client.openLong(symbol, quantity, price, orderType);
142             break;
143         case "SHORT":
144             result = await client.openShort(symbol, quantity, price, orderType);
145             break;
146         case "CLOSE_LONG":
147             result = await client.closeLong(symbol, quantity);
148             break;
149         case "CLOSE_SHORT":
150             result = await client.closeShort(symbol, quantity);
151             break;
152         // No default needed due to validation earlier
153     }
154 }

```

Listing 14: Risk management and REST order placement

HMAC signing. Exchange REST clients extend `BaseExchangeClient`, which imports the API secret as a `CryptoKey` once per isolate and signs query strings with HMAC-SHA256 via `crypto.subtle` (Listing 15). The Binance futures client appends `timestamp` and `signature` query parameters per the exchange specification (Listing 16).

```
// Source: packages/shared/src/exchanges/base-exchange-client.ts (lines 86-111)
// Listing id: crypto-sign
// Caption: HMAC-SHA256 signing via Web Crypto (shared base client)
private async importKey(): Promise<CryptoKey> {
  const encoder = new TextEncoder();
  return crypto.subtle.importKey(
    "raw",
    encoder.encode(this.apiSecret),
    { name: "HMAC", hash: "SHA-256" },
    false,
    ["sign"]
  );
}

/**
 * Signs data using HMAC-SHA256 with the API secret.
 */
protected async cryptoSign(data: string): Promise<string> {
  const encoder = new TextEncoder();
  const key = await this.importedKeyPromise;
  const signature = await crypto.subtle.sign(
    "HMAC",
    key,
    encoder.encode(data)
  );
  return Array.from(new Uint8Array(signature))
    .map((b) => b.toString(16).padStart(2, "0"))
    .join("");
}
```

Listing 15: Shared HMAC-SHA256 signing primitive

```
1 // Source: workers/trade-worker/src/binance-client.ts (lines 40-78)
2 // Listing id: binance-signature
3 // Caption: Binance futures client authenticated request signing
4 /**
5  * Generates HMAC-SHA256 signature for authenticated requests.
6  */
7 protected async generateSignature(
8   params: Record<string, string | number | boolean>
9 ): Promise<string> {
10   // Binance expects URLSearchParams format for signature
11   const queryString = new URLSearchParams(
12     params as Record<string, string>
13   ).toString();
14
15   return this.cryptoSign(queryString);
16 }
17
18 /**
19  * Makes an authenticated request to the Binance API.
20  */
```

```

21 private async makeRequest<T>(  

22     method: string,  

23     path: string,  

24     params: Record<string, string | number | boolean> = {}  

25 ): Promise<T> {  

26     const timestamp = Date.now();  

27     const allParams = { ...params, timestamp };  

28  

29     const signature = await this.generateSignature(allParams);  

30     const stringParams: Record<string, string> = {};  

31     Object.entries(allParams).forEach(([k, v]) => {  

32         stringParams[k] = String(v);  

33     });  

34     const queryParams = new URLSearchParams(stringParams).toString();  

35     const url = `${this.baseUrl}${path}?${queryParams}&signature=${signature}`;  

36  

37     const options: RequestInit = {  

38         method: method,  

39         headers: {  

40             "Content-Type": "application/json",  

41             "X-MBX-APIKEY": this.apiKey,  

42         },

```

Listing 16: Binance authenticated REST request construction

Figure 2 summarizes the end-to-end synchronous path; queued modes defer steps 3–4 until consumer pickup.

4.6 Autonomous Risk Management

agent-worker executes a five-minute cron (`*/5 * * * *`) combining deterministic risk logic and optional LLM-generated health summaries. Deterministic controls govern trading safety; LLM output is confined to sanitized operational logs and does not place orders.

Deterministic controls.

- Trailing stop: 5% from position watermark (KV-backed).
- Take-profit scale-out: 50% position reduction at 10% unrealized gain.
- Maximum daily drawdown: −5% unrealized portfolio PnL triggers global kill switch (`trade:kill_switch` in `CONFIG_KV`).

LLM gateway. A `ProviderManager` supports four providers: Cloudflare Workers AI (Llama 3.1 8B), OpenAI (GPT-4o-mini), Anthropic (Claude 3 Haiku), and Google (Gemini 1.5 Flash). The default fallback chain is `[workers-ai, openai]` with three full-chain retries and 1s inter-attempt delay. Prompt-injection defenses include delimiter wrapping, marker detection (Listing 26, Section 5), and response validation.

Cron wiring. **agent-worker** registers a shared `createCronHandler` (Listing 17) that logs structured cron metadata and runs `runHousekeeping` in parallel with `processRoutine` (Listing 18).

```

// Source: packages/shared/src/cron-handler.ts (lines 39-65)
// Listing id: cron-handler
// Caption: Shared cron handler with structured logging
export function createCronHandler<Env = unknown>(  
    options: CronHandlerOptions<Env>  
) {

```

```

const { name, handler, logger } = options;

return async (
  event: ScheduledEvent,
  env: Env,
  ctx: ExecutionContext
): Promise<void> => {
  const startTime = Date.now();

  logger?.info(`${name} cron triggered`, {
    cron: event.cron,
    scheduledTime: event.scheduledTime,
  });

  try {
    await handler(event, env, ctx);

    const durationMs = Date.now() - startTime;
    logger?.info(`${name} cron handler completed successfully`, {
      cron: event.cron,
      durationMs,
    });
  } catch (error: unknown) {
    const durationMs = Date.now() - startTime;

```

Listing 17: Shared cron handler with structured logging

```

// Source: workers/agent-worker/src/index.ts (lines 288-306)
// Listing id: agent-cron-wiring
// Caption: agent-worker cron handler with parallel housekeeping and routine
const cronHandler = createCronHandler<Env>({
  name: "agent-worker",
  logger,
  handler: async (_event: ScheduledEvent, env: Env, ctx: ExecutionContext) => {
    ctx.waitUntil(
      runHousekeeping(env as unknown as HousekeepingEnv, logger).catch((err) =>
        logger.error("runHousekeeping failed", { error: String(err) })
      )
    );
    ctx.waitUntil(
      processRoutine(env as unknown as RoutineEnv, logger, {
        getProviderManager: (e) => getProviderManager(e as unknown as Env),
        getActiveTrailingStops: (e) =>
          getActiveTrailingStops(e as unknown as Env),
      }).catch((err) =>
        logger.error("processRoutine failed", { error: String(err) })
      )
    );
  },
},

```

Listing 18: agent-worker parallel cron tasks

Figure 3 sequences the five-minute cron loop: position sync, KV watermark evaluation, optional close orders via **trade-worker**, and Telegram/LLM summaries. Full binding detail appears in Section ??.

5 Security Model

Security is organized as five concentric layers (Figure 1, ingress ring). Each layer fails closed except idempotency duplicate suppression, which fails open when the Durable Object is un-

reachable (Section 4)—a deliberate availability trade-off documented in the threat model (Appendix B).

1. **Edge firewall:** Cloudflare WAF and TradingView IP allow-listing (four default CIDR ranges, KV-extensible).
2. **Webhook authentication:** Constant-time comparison of payload `apiKey` against a runtime-injected secret binding.
3. **Service Binding isolation:** Internal Workers expose no public routes; only explicitly bound callers may invoke them.
4. **Internal authorization:** Shared `requireInternalAuth` middleware validates `X-Internal-Auth-Key` on every inter-service request; unconfigured keys fail closed.
5. **Durable Object mutex:** Idempotency locks prevent duplicate gateway acceptance under retry storms.

5.1 Ingress Hardening

Kill switch. Before any trade payload is parsed, the gateway reads `trade:kill_switch` from `CONFIG_KV` (Listing 19). When the value is `true`, ingress returns HTTP 503 and no downstream Worker is invoked. The same key is written by `agent-worker` when portfolio drawdown exceeds -5% , halting new signals before the next cron cycle completes.

```
// Source: workers/hoox/src/killSwitch.ts (lines 15-31)
// Listing id: kill-switch
// Caption: Global kill switch read from canonical KV key
export async function checkKillSwitch(
  kv: KVNamespace | undefined
): Promise<{ enabled: boolean; error?: string }> {
  try {
    if (!kv) {
      return { enabled: false };
    }
    const killSwitchVal = await kv.get(KV_KILL_SWITCH_KEY);
    if (killSwitchVal && killSwitchVal.toLowerCase() === "true") {
      return { enabled: true };
    }
    return { enabled: false };
  } catch (error: unknown) {
    logger.error("Error reading kill switch KV", { error });
    return { enabled: false, error: String(error) };
  }
}
```

Listing 19: Global kill switch read from canonical KV key

IP allow-list. TradingView publishes four webhook source ranges. `hoox` rejects requests whose CF-Connecting-IP is absent from the default set unless `CONFIG_KV` overrides expand the list (Listing 20). This complements WAF rules: even a leaked API key cannot trigger trades from arbitrary origins.

```
// Source: workers/hoox/src/ipAllowlist.ts (lines 21-50)
// Listing id: ip-allowlist
// Caption: TradingView IP allow-list with KV override
export async function checkIpAllowlist(
  kv: KVNamespace | undefined,
  clientId: string | null | undefined
)
```

```

): Promise<{
  allowed: boolean;
  reason?: string;
  config: IpCheckConfig;
}> {
  const defaultConfig: IpCheckConfig = {
    enabled: true,
    allowedIps: TRADINGVIEW_ALLOWED_IPS,
  };

  if (!clientIp) {
    return {
      allowed: false,
      reason: "No client IP provided",
      config: defaultConfig,
    };
  }

  try {
    const config = await loadIpConfig(kv);
    if (!config.enabled) {
      return { allowed: true, config };
    }

    if (config.allowedIps.has(clientIp)) {
      return { allowed: true, config };
    }
  }
}

```

Listing 20: TradingView IP allow-list with KV override

Parallel pre-flight. Kill switch, IP check, and API key validation execute concurrently via `Promise.all` on the gateway hot path (Listing 4, Section 4), minimizing serial KV reads before session creation.

Payload bounds. The `/webhook` handler rejects bodies larger than 100 KB before JSON parsing, bounding memory use and JSON bomb risk on the public surface.

5.2 Authentication Primitives

Constant-time comparison. API key and internal auth checks use `timingSafeEqual` (Listing 21) to avoid byte-at-a-time timing leaks that could reduce brute-force search space for short secrets.

```

// Source: packages/shared/src/middleware/auth.ts (lines 13-26)
// Listing id: timing-safe-equal
// Caption: Constant-time string comparison for API keys
export function timingSafeEqual(a: string, b: string): boolean {
  if (a.length !== b.length) return false;
  const encoder = new TextEncoder();
  const aBuf = encoder.encode(a);
  const bBuf = encoder.encode(b);
  // Manual byte-by-byte XOR comparison for timing-safe comparison
  // This is the same approach used by crypto.timingSafeEqual but manually
  // implemented to avoid TypeScript typing issues with the global crypto type.
  let result = 0;
  for (let i = 0; i < aBuf.length; i++) {
    result |= aBuf[i] ^ bBuf[i];
  }
  return result === 0;
}

```

Listing 21: Constant-time string comparison

Webhook API key. The gateway compares the JSON `apiKey` field against `WEBHOOK_API_KEY_BINDING` using the same primitive. Missing or mismatched keys yield HTTP 401 before idempotency or trade routing.

Internal service auth. All binding-only Workers gate mutating routes with `requireInternalAuth` (Listing 5). Security tests assert HTTP 401 when the binding is unset, the header is absent, or the header mismatches (Listing 39).

5.3 Rate Limiting and Session Abuse

After API key validation, `hoox` creates or resumes a per-key session and enforces 10 trades per 60 s window (Listing 22). The shared `createRateLimiter` stores sliding-window counters in `CONFIG_KV` with a `hoox-webhook` key prefix (Listing 23). Exceeded limits return HTTP 429 with `Retry-After`, complementing exchange-side throttles and constraining credential-compromise blast radius.

```
// Source: workers/hoox/src/index.ts (lines 28-44)
// Listing id: rate-limit-gateway
// Caption: Per-session webhook rate limit (10 trades/minute via CONFIG_KV)
// --- Rate limiting limits (passed to KV-backed rate limiter) ---
const MAX_TRADES_PER_MINUTE = 10;
const RATE_LIMIT_WINDOW = 60; // 60 seconds

async function checkRateLimit(
  sessionId: string,
  env: { CONFIG_KV?: KVNamespace }
): Promise<boolean> {
  const kv = env.CONFIG_KV;
  const rateLimiter = createRateLimiter(kv, {
    maxRequests: MAX_TRADES_PER_MINUTE,
    windowSeconds: RATE_LIMIT_WINDOW,
    keyPrefix: "hoox-webhook",
  });
  const result = await rateLimiter.checkKey(sessionId);
  return result.allowed;
}
```

Listing 22: Per-session webhook rate limit

```
// Source: packages/shared/src/middleware/rate-limit.ts (lines 162-181)
// Listing id: rate-limiter
// Caption: KV-backed sliding-window rate limiter checkWithKey
async function checkWithKey(fullKey: string): Promise<RateLimitResult> {
  // First check: can we even attempt a request without exceeding the limit?
  // We read current count BEFORE incrementing to avoid false negatives.
  // Under high concurrency this check is approximate (race condition window
  // between read and incr), but the alternative is always allowing one extra
  // request per concurrent batch.
  const current = await storage.get(fullKey);
  const count = current ? parseInt(current, 10) : 0;

  if (count >= config.maxRequests) {
    const retryAfter = Math.ceil(
      config.windowSeconds -
      (Date.now() % (config.windowSeconds * 1000)) / 1000
    );
  }
}
```

```

    );
    return {
      allowed: false,
      remaining: 0,
      retryAfter,
    };
  }
}

```

Listing 23: KV sliding-window rate limit check

5.4 Response and Transport Hardening

Security headers. Public and internal JSON responses attach CSP, X-Frame-Options, X-Content-Type-Options, and HSTS via shared middleware (Listing 24). Dashboard SSR inherits the same defaults through the OpenNext Worker entry.

```

// Source: packages/shared/src/middleware/security-headers.ts (lines 25-45)
// Listing id: security-headers
// Caption: Default security response headers (CSP, HSTS)
export const SECURITY_HEADERS_DEFAULTS: Required<SecurityHeadersOptions> = {
  xContentTypeOptions: "nosniff",
  xFrameOptions: "DENY",
  xXssProtection: "1; mode=block",
  referrerPolicy: "strict-origin-when-cross-origin",
  permissionsPolicy:
    "accelerometer=(), camera=(), geolocation=(), gyroscope=(), magnetometer=(), microphone=(), payment=(), usb=()",
  strictTransportSecurity: "max-age=31536000; includeSubDomains",
  contentSecurityPolicy: "default-src 'self'",
};

/**
 * Create security headers object for use in responses.
 * Merges provided options over defaults.
 */
export function secureHeaders(
  options?: SecurityHeadersOptions
): Record<string, string> {
  const opts = { ...SECURITY_HEADERS_DEFAULTS, ...options };
  const headers: Record<string, string> = {
    "X-Content-Type-Options": opts.xContentTypeOptions,

```

Listing 24: Default security response headers

Service Binding transport. Inter-Worker calls never traverse the public internet; bindings address peers as `http://internal{path}` with a 30 s timeout (Listing 7). This removes per-hop TLS and DNS from the critical path while keeping the attack surface limited to the binding graph (Appendix ??).

5.5 Secondary Ingress: Email

`email-worker` accepts Mailgun push webhooks on a public `POST /webhook` route. Verification recomputes HMAC-SHA256 over `timestamp + token` and compares digests with `timingSafeEqual` (Listing 25). Parsed bodies pass the same Zod trade schema as TradingView payloads before forwarding to `trade-worker`.

```

1 // Source: workers/email-worker/src/index.ts (lines 121-161)
2 // Listing id: mailgun-signature
3 // Caption: Mailgun webhook HMAC-SHA256 verification

```

```

4  async function handleMailgunWebhook(
5    request: Request,
6    env: Env,
7    ctx: ExecutionContext
8  ): Promise<Response> {
9    const signature = request.headers.get("Mailgun-Signature");
10   const timestamp = request.headers.get("Mailgun-Timestamp");
11   const token = request.headers.get("Mailgun-Token");
12
13   if (!signature || !timestamp || !token) {
14     return Errors.unauthorized("Missing Mailgun signature headers");
15   }
16
17   const apiKey = env.MAILGUN_API_KEY;
18   if (!apiKey) {
19     logger.error("MAILGUN_API_KEY not configured");
20     return Errors.internal("Service configuration error");
21   }
22
23   const dataToSign = timestamp + token;
24   const encoder = new TextEncoder();
25   const key = await crypto.subtle.importKey(
26     "raw",
27     encoder.encode(apiKey),
28     { name: "HMAC", hash: "SHA-256" },
29     false,
30     ["sign"]
31   );
32   const signatureBytes = await crypto.subtle.sign(
33     "HMAC",
34     key,
35     encoder.encode(dataToSign)
36   );
37   const expectedSignature = Array.from(new Uint8Array(signatureBytes))
38     .map((b) => b.toString(16).padStart(2, "0"))
39     .join("");
40
41   if (!timingSafeEqual(signature, expectedSignature)) {
42     logger.warn("Invalid Mailgun signature");
43     return Errors.unauthorized("Invalid signature");
44   }

```

Listing 25: Mailgun webhook HMAC-SHA256 verification

5.6 LLM and Prompt Injection

`agent-worker` and `telegram-worker` invoke multi-provider LLMs for operational summaries and RAG answers. Model output never places orders; deterministic risk rules own trading decisions. Prompt-injection markers in user-supplied or log-derived text are detected before model calls (Listing 26), and responses pass delimiter wrapping and schema validation.

```

// Source: workers/agent-worker/src/logic/prompt-sanitizer.ts (lines 46-59)
// Listing id: prompt-sanitizer
// Caption: LLM prompt-injection marker detection
export function sanitizeLogMessage(raw: unknown): string {
  if (raw == null) return "";
  let s = String(raw);
  // Strip ASCII control chars and the C1 unicode control range.
  // Keeps \n (0x0A) and \t (0x09) which are common in logs.
  // eslint-disable-next-line no-control-regex
  s = s.replace(/[\x00-\x08\x0B\x0C\x0E-\x1F\x7F-\x9F]/g, "");
  if (s.length > MAX_LOG_MESSAGE_LENGTH) {

```

Table 4: Security control summary by surface.

Surface	Control	Failure mode
hoox /webhook	IP + API key + rate limit + kill switch	Fail closed (401/403/429/503)
Idempotency DO	Mutex duplicate suppression	Fail open (permit trade)
Internal bindings	X-Internal-Auth-Key	Fail closed (401)
email-worker	Mailgun HMAC	Fail closed (401)
d1-worker	SQL allowlist + internal auth	Fail closed (403)
LLM paths	Sanitizer + no order side effects	Fail closed on marker hit

```

    s = s.slice(0, MAX_LOG_MESSAGE_LENGTH) + "...";
  }
  for (const re of INJECTION_MARKERS) {
    if (re.test(s)) return DROPPED_SENTINEL;
  }
  return s;

```

Listing 26: LLM prompt-injection marker detection

5.7 Data-Layer Guards

d1-worker exposes parameterized SQL to trusted internal callers only. The `validateQuery` guard rejects non-SELECT statements, literal injection, UNION, and tables outside an allowlist (Listing ??). Dashboard settings keys must match known `CONFIG_KV` prefixes. Together with internal auth, this blocks lateral movement from a compromised binding to arbitrary D1 writes.

5.8 Exchange Credential Handling

REST placement clients sign requests with HMAC-SHA256 via `crypto.subtle`; API secrets are imported as `CryptoKey` once per isolate (Listings 15, 16, 27). Secrets live in Wrangler secret bindings, never in KV or D1. `WebSocket` session state in `ExchangeConnectionManager` holds connection handles only—not signing material.

```

// Source: workers/trade-worker/src/bybit-client.ts (lines 59-65)
// Listing id: bybit-signature
// Caption: Bybit V5 HMAC signature payload construction
private async signRequest(
  timestamp: number,
  paramsStr: string
): Promise<string> {
  const signaturePayload = `${timestamp}${this.apiKey}${this.recvWindow}${paramsStr}`;
  return this.cryptoSign(signaturePayload);
}

```

Listing 27: Bybit V5 HMAC signature payload

5.9 Operational Security Posture

Table 4 summarizes enforcement points. Full threat-to-mitigation mapping appears in Appendix B; reproduced test excerpts in Appendix C.

Table 5: Monorepo package topology.

Path	Artifact	Role
packages/shared	hoox-shared npm pkg	Router, middleware, KV keys, queue handler
packages/cli	hoox CLI v0.9.2	Deploy, secrets, perf fastpath , repair
workers/hoox	Gateway Worker	Public webhook ingress
workers/trade-worker	Execution Worker	CEX REST/WS, D1/R2 side effects
workers/*	Nine other Workers	Agent, D1 proxy, analytics, UI, DeFi
tests/integration	Bun + Miniflare	Gateway and probe regression suites
tests/load	k6	Deployed-edge concurrency guards

6 Implementation

HOOX is implemented in TypeScript 5.x and deployed with Wrangler 4.x. The monorepo uses Bun workspaces (`package.json workspaces` field); production Workers import a shared package `@jango-blockchained/hoox-shared` that centralizes routing, validation, exchange abstractions, KV key constants, and Service Binding helpers so binding names and auth semantics stay consistent across ten deployables.

6.1 Monorepo Layout

Table 5 maps repository paths to deployable artifacts. The `hoox CLI` (`packages/cli`) reads the same worker registry as documentation generators (`scripts/sync-dashboard-configs.ts`, `graph-metadata.json`), ensuring deployment order, Mintlify docs, and this paper’s binding tables stay synchronized.

6.2 Request Pipeline and Middleware

Every Worker uses `createRouter<Env>()` from `hoox-shared`, registering routes as `router.post(path, handler)`. Shared middleware stacks include:

- `validateJson(ZodSchema)` — structured 400 responses with Zod path arrays (Listing 6).
- `requireInternalAuth` — X-Internal-Auth-Key gate on binding-only routes (Listing 5).
- `createRateLimiter` — `CONFIG_KV` sliding windows (Listing 23).
- `withRequestLog` / `createLogger` — JSON logs with `service` and `module` fields for Workers Observability filters.

The gateway additionally wires session creation before rate limiting: `getOrCreateSession` reads or mints a session id keyed by API key hash, storing `lastSeen` in `SESSIONS_KV` with a one-hour TTL (Listing 28).

```
// Source: workers/hoox/src/sessionManager.ts (lines 12-37)
// Listing id: session-manager
// Caption: SESSIONS_KV session creation with 3600s TTL
export async function getOrCreateSession(
  kv: KVNamespace | undefined,
  sessionId?: string | null
): Promise<{ sessionId: string; isNew: boolean }> {
  const id = sessionId || crypto.randomUUID();

  if (!kv) {
```

```

    return { sessionId: id, isNew: !sessionId };
  }

  try {
    const existing = await kv.get(id);
    const isNew = !existing;

    if (isNew || existing) {
      await kv.put(id, JSON.stringify({ lastSeen: new Date().toISOString() }), {
        expirationTtl: SESSION_TTL,
      });
    }

    return { sessionId: id, isNew };
  } catch (error: unknown) {
    logger.error("KV Session Error", { error });
    return { sessionId: id, isNew: !sessionId };
  }
}

```

Listing 28: Webhook session tracking in SESSIONS_KV

6.3 Configuration Registry

Runtime toggles use a namespaced KV convention documented in `packages/shared/src/kvKeys.ts` (Listing 29). Prefixes separate concerns—`trade:*` for execution risk, `webhook:*` for ingress policy, `agent:*` for LLM provider keys—so dashboard settings validation can reject unknown keys. Queue mode literals (`queue_failover`, `queue_disabled`, `queue_everywhere`) are exported as constants to prevent string drift between gateway and CLI.

```

// Source: packages/shared/src/kvKeys.ts (lines 1-59)
// Listing id: kv-keys
// Caption: Centralized KV key registry
/**
 * Centralized KV key registry for Hoox workers.
 * Use these constants instead of string literals to prevent typos.
 *
 * Key naming convention: <namespace>:<key>
 * - trade:* - Trade execution settings
 * - bot:* - Telegram bot settings
 * - webhook:* - Webhook configuration
 * - email:* - Email worker settings
 * - agent:* - Agent worker settings
 * - dashboard:* - Dashboard settings
 * - global:* - Global settings
 */

// --- Trade Execution Keys ---
export const KV_TRADE_DEFAULT_LEVERAGE = "trade:default_leverage";
export const KV_TRADE_MAX_POSITION_SIZE = "trade:max_position_size";
export const KV_TRADE_MAX_DAILY_DRAWDOWN_PERCENT =
  "trade:max_daily_drawdown_percent";
export const KV_TRADE_TRAILING_STOP_PERCENT = "trade:trailing_stop_percent";
export const KV_TRADE_KILL_SWITCH = "trade:kill_switch";
export const KV_TRADE_ROUTING = "trade:routing";

// --- Telegram Bot Keys ---
export const KV_BOT_ENABLED = "bot:enabled";
export const KV_BOT_DEFAULT_CHAT_ID = "bot:default_chat_id";
export const KV_BOT_NOTIFY_ON_EXECUTION = "bot:notify_on_execution";
export const KV_BOT_NOTIFY_ON_ERROR = "bot:notify_on_error";

```

```

// --- Webhook Keys ---
export const KV_WEBHOOK_IP_CHECK_ENABLED =
  "webhook:tradingview:ip_check_enabled";
export const KV_WEBHOOK_ALLOWED_IPS = "webhook:tradingview:allowed_ips";
export const KV_WEBHOOK_QUEUE_MODE = "webhook:queue_mode";

// --- Email Worker Keys ---
export const KV_EMAIL_SCAN_SUBJECT = "email:scan_subject";
export const KV_EMAIL_USE_IMAP = "email:use_imap";
export const KV_EMAIL_COIN_PATTERN = "email:coin_pattern";
export const KV_EMAIL_ACTION_PATTERN = "email:action_pattern";
export const KV_EMAIL_QUANTITY_MULTIPLIER = "email:quantity_multiplier";

// --- Agent Worker Keys ---
export const KV_AGENT_CONFIG = "agent:config";
export const KV_AGENT_OPENAI_KEY = "agent:openai_key";
export const KV_AGENT_ANTHROPIC_KEY = "agent:anthropic_key";
export const KV_AGENT_GOOGLE_KEY = "agent:google_key";

// --- Dashboard Keys ---
export const KV_DASHBOARD_AI_HEALTH_SUMMARY = "dashboard:ai_health_summary";

// --- Global Keys ---
export const KV_HEALTH_CHECK = "health_check";
export const KV_HOUSEKEEPING_LAST_CHECK = "housekeeping:last_check";

// --- Queue Mode Values ---
export const QUEUE_MODE_FAILOVER = "queue_failover";
export const QUEUE_MODE_EVERYWHERE = "queue_everywhere";
export const QUEUE_MODE_DISABLED = "queue_disabled";

```

Listing 29: Centralized CONFIG_KV key registry (excerpt)

6.4 Exchange Integrations

HOOX supports three centralized exchanges via a provider-composed `ExchangeRouter` (Listing 13):

- **Binance:** USDT-margined futures at `fapi.binance.com`; HMAC over sorted query string including `timestamp` and `signature` (Listing 16).
- **Bybit:** V5 REST at `api.bybit.com`; `recv_window=5000`; signature payload `timestamp + apiKey + recvWindow + body` (Listing 27).
- **MEXC:** Contract API at `contract.mexc.com`; shares `BaseExchangeClient` HMAC primitive (Listing 15).

Per-symbol routing reads JSON from `trade:routing` in `CONFIG_KV`; per-exchange `enabled` and `use_websocket` toggles select REST versus `ExchangeConnectionManager` `WebSocket` placement without redeployment.

Risk gates before placement. `executeTrade` parallel-reads kill switch, default leverage, and max position size from KV, then rejects malformed numeric strings—`parseInt/parseFloat` NaN values silently disable caps in many codebases; HOOX explicitly checks `Number.isFinite` before applying limits (Listing 30).

```

1 // Source: workers/trade-worker/src/execution.ts (lines 307-379)
2 // Listing id: risk-kv-parse

```

```

3 // Caption: Parallel KV risk reads with NaN-safe leverage/size parsing
4 // --- Kill Switch & Risk Management via CONFIG_KV ---
5 // Read all independent KV keys in parallel
6 if (env.CONFIG_KV) {
7     try {
8         const [killSwitch, defaultLevStr, maxSizeStr] = await Promise.all([
9             env.CONFIG_KV.get(KVKeys.KV_TRADE_KILL_SWITCH),
10            env.CONFIG_KV.get(KVKeys.KV_TRADE_DEFAULT_LEVERAGE),
11            env.CONFIG_KV.get(KVKeys.KV_TRADE_MAX_POSITION_SIZE),
12        ]);
13
14        if (killSwitch === "true") {
15            throw new Error(
16                "KILL_SWITCH_ACTIVE: Trading is disabled by kill switch"
17            );
18        }
19
20        // Parse leverage safely. A malformed KV value (empty string,
21        // "abc", etc.) yields NaN from parseInt; NaN bypasses every
22        // later bound check (NaN > anyNumber === false), silently
23        // disabling the per-trade leverage cap. The same is true for
24        // parseFloat on the position-size KV value.
25        if (defaultLevStr && !overriddenLeverage) {
26            const parsedLev = parseInt(defaultLevStr, 10);
27            if (Number.isFinite(parsedLev) && parsedLev > 0) {
28                overriddenLeverage = parsedLev;
29                logger.info(
30                    '[Risk Management] Applied default leverage: ${overriddenLeverage}'
31                );
32            } else {
33                logger.warn(
34                    '[Risk Management] Ignoring malformed default_leverage value: ${JSON.stringify(
35                        defaultLevStr)}'
36                );
37            }
38            if (maxSizeStr) {
39                const parsedSize = parseFloat(maxSizeStr);
40                if (Number.isFinite(parsedSize) && parsedSize > 0) {
41                    maxPositionSize = parsedSize;
42                } else {
43                    logger.warn(
44                        '[Risk Management] Ignoring malformed max_position_size value: ${JSON.
45                        stringify(maxSizeStr)}'
46                    );
47                }
48            }
49            } catch (e) {
50                // Re-throw kill switch errors, swallow and log KV failures
51                if (e instanceof Error && e.message.startsWith("KILL_SWITCH_ACTIVE")) {
52                    throw e;
53                }
54                logger.error("Failed to fetch trade settings from KV", {
55                    error: toError(e),
56                });
57            }
58            // --- End Kill Switch & Risk Management ---
59
60            if (maxPositionSize !== null && quantity > maxPositionSize) {
61                const errorMsg = `Trade quantity (${quantity}) exceeds maximum allowed size (${
62                    maxPositionSize})`;
63                logger.error(errorMsg);

```



```

63     const result: TradeExecutionResult = {
64         success: false,
65         error: errorMsg,
66         status: 400,
67     };
68     await dbLogger.logResponse(
69         dbLogId,
70         createJsonResponse(result, 400),
71         null,
72         startTime,
73         ctx
74     );
75     return result;
76 }

```

Listing 30: KV risk gates with safe numeric parsing

WebSocket amortization. When `use_websocket` is true, the `ExchangeConnectionManager` Durable Object maintains exchange-specific adapters, a reconnect loop, and a pending RPC map keyed by client order id (Listing 31). Constructor-side `waitUntil(connectToExchange())` hides TCP+TLS handshake latency from the first REST fallback.

```

// Source: workers/trade-worker/src/exchange-connection-manager.ts (lines 17-52)
// Listing id: exchange-connection-do
// Caption: ExchangeConnectionManager DO: WS adapter and pending RPC map
export class ExchangeConnectionManager extends DurableObject {
    private ws: WebSocket | null = null;
    private isConnecting = false;
    private exchange: string;
    private adapter: IWsAdapter | undefined;
    private ready = false;
    private pending = new Map<
        string,
        {
            resolve: (v: unknown) => void;
            reject: (e: unknown) => void;
            timer: ReturnType<typeof setTimeout>;
        }
    >();

    constructor(ctx: DurableObjectState, env: Env) {
        super(ctx, env);
        this.exchange = this.deriveExchange(ctx);

        // Load the configured adapter for this exchange, if creds are available.
        const apiKey = readApiKey(env, this.exchange);
        const apiSecret = readApiSecret(env, this.exchange);
        if (apiKey && apiSecret) {
            this.adapter = getAdapter(this.exchange, { apiKey, apiSecret });
            if (!this.adapter) {
                logger.warn(
                    'No WS adapter registered for "${this.exchange}"; DO is REST-only'
                );
            }
        } else {
            logger.warn('Missing ${this.exchange} credentials; DO is REST-only');
        }

        // Kick off connection in background
        this.ctx.waitUntil(this.connectToExchange());
    }
}

```

6.5 Autonomous Agent Implementation

The five-minute cron invokes `processRoutine`, which batch-fetches open positions from `d1-worker`, parallel-fetches public mark prices (unsigned REST), and batch-reads KV watermarks and take-profit flags before sequential per-position evaluation (Listing 32). Trailing-stop triggers dispatch `CLOSE_*` payloads to `trade-worker` via Service Binding; drawdown breaches write `trade:kill_switch` before the next gateway ingress.

```

1  // Source: workers/agent-worker/src/logic/routine.ts (lines 107-198)
2  // Listing id: agent-trailing-stop
3  // Caption: Batched mark prices, KV watermarks, trailing-stop trigger
4  // Batch all mark price fetches in parallel before the loop
5  const markPriceResults = await Promise.all(
6    openPositions.map((pos) =>
7      fetchMarkPrice(pos.exchange, pos.symbol, logger)
8    )
9  );
10 const markPriceMap = new Map<number, number | null>();
11 openPositions.forEach((pos, i) => {
12   markPriceMap.set(i, markPriceResults[i]);
13 });
14
15 // Batch all KV watermark reads in parallel before the loop
16 const watermarkKeys = openPositions.map(
17   (pos) => `trade:watermark:${pos.exchange}:${pos.symbol}:${pos.side}`
18 );
19 const wmResults = await Promise.all(
20   watermarkKeys.map((key) => env.CONFIG_KV.get(key))
21 );
22 const watermarkMap = new Map<number, string | null>();
23 wmResults.forEach((val, i) => {
24   watermarkMap.set(i, val);
25 });
26
27 // Batch all TP hit KV reads in parallel
28 const tpKeys = openPositions.map(
29   (pos) => `trade:tp_hit:${pos.exchange}:${pos.symbol}:${pos.side}`
30 );
31 const tpResults = await Promise.all(
32   tpKeys.map((key) => env.CONFIG_KV.get(key))
33 );
34 const tpHitMap = new Map<number, string | null>();
35 tpResults.forEach((val, i) => {
36   tpHitMap.set(i, val);
37 });
38
39 // Process positions sequentially for state-dependent writes
40 for (let i = 0; i < openPositions.length; i++) {
41   const position = openPositions[i];
42   logger.info(
43     `Analyzing position: ${position.symbol} (${position.side}) - Quantity: ${position.size}`
44   );
45
46   const markPrice = markPriceMap.get(i) ?? null;
47
48   if (markPrice !== null) {
49     logger.info(

```

```

50     `${position.exchange} ${position.symbol} Mark Price: ${markPrice}`
51   );
52   if (position.entry_price && position.size) {
53     const priceDiff =
54       position.side === "LONG"
55         ? markPrice - position.entry_price
56         : position.entry_price - markPrice;
57     const pnl = priceDiff * position.size;
58     totalUnrealizedPnl += pnl;
59     logger.info(`Unrealized PnL for ${position.symbol}: ${pnl}`);
60
61     const currentWmStr = watermarkMap.get(i) ?? null;
62     const currentWm = currentWmStr
63       ? parseFloat(currentWmStr)
64       : position.entry_price;
65
66     let newWm = currentWm;
67     if (position.side === "LONG" && markPrice > currentWm)
68       newWm = markPrice;
69     if (position.side === "SHORT" && markPrice < currentWm)
70       newWm = markPrice;
71
72     const wmKey = `trade:watermark:${position.exchange}:${position.symbol}:${position.
side}`;
73     if (newWm !== currentWm) {
74       await env.CONFIG_KV.put(wmKey, newWm.toString());
75     }
76
77     const trailingStopPercent = config.trailingStopPercent;
78     let triggerStop = false;
79     if (
80       position.side === "LONG" &&
81       markPrice < newWm * (1 - trailingStopPercent)
82     )
83       triggerStop = true;
84     if (
85       position.side === "SHORT" &&
86       markPrice > newWm * (1 + trailingStopPercent)
87     )
88       triggerStop = true;
89
90     if (triggerStop) {
91       logger.info(
92         `TRAILING STOP TRIGGERED for ${position.symbol}! Watermark: ${newWm}, Current:
${markPrice}`
93       );
94       await sendCloseOrder(env, position, logger);
95       void trackAnalytics(env, "/track/trailing-stop", {

```

Listing 32: Agent cron: batched reads and trailing-stop logic

6.6 Web3 Execution Worker

`web3-wallet-worker` exposes binding-only routes for native transfers, ERC-20 approvals, and DEX swaps using `ethers v6` under `nodejs_compat`. Before signing, `validateTransaction` enforces wallet enablement, per-tx USD ceiling, and optional contract whitelists—DEX router addresses are always permitted when whitelist mode is on (Listing 33).

```

1  // Source: workers/web3-wallet-worker/src/security.ts (lines 17-54)
2  // Listing id: web3-validate-transaction
3  // Caption: On-chain transfer guards: max USD, whitelist, enabled flag
4  export async function validateTransaction(

```

```

5   params: ValidationParams
6 ): Promise<ValidationResult> {
7   const { config, to, valueUsd } = params;
8
9   if (!config.enabled) {
10    return { allowed: false, reason: "Wallet is disabled" };
11  }
12
13  if (valueUsd > config.security.maxTransactionValueUsd) {
14    return {
15      allowed: false,
16      reason: `Transaction value ${valueUsd} exceeds max ${config.security.
17        maxTransactionValueUsd}`,
18    };
19  }
20
21  if (config.security.whitelistedContractsOnly) {
22    const chainConfig = DEFAULT_CHAIN_CONFIGS[params.chain];
23    const isDexRouter =
24      chainConfig?.dexRouterAddress?.toLowerCase() === to.toLowerCase();
25
26    if (!isDexRouter && !isContractWhitelisted(config, to)) {
27      return {
28        allowed: false,
29        reason: "Contract not in whitelist",
30      };
31    }
32  }
33
34  if (config.security.requireConfirmation && valueUsd > 1000) {
35    return {
36      allowed: true,
37      reason: "Confirmation required",
38    };
39  }
40
41  return { allowed: true };

```

Listing 33: DeFi transaction validation guards

Mnemonic and private-key secrets never enter KV; chain defaults and security policy live in CONFIG_KV with a one-shot migration marker from legacy WALLET_CONFIG_KV.

6.7 Tooling and User Interface

The `hoox` CLI exposes 25 command groups spanning initialization, deployment, secret management, database operations, WAF configuration, and repair. The `hoox perf fastpath` command sends synthetic webhook probes and aggregates per-hop timings from Cloudflare Workers Observability. An interactive terminal UI (`hoox-tui`) streams worker health via Server-Sent Events.

The dashboard is a Next.js 16 application (React 19) deployed via OpenNext for Cloudflare [18], consuming the same internal Service Bindings as trading Workers. Request validation across Workers uses Zod schemas via shared `validateJson` middleware [10].

Deployment graph. Wrangler project names match Worker registry entries (Listing ??). Service Binding targets are validated at deploy time by `scripts/check-worker-submodules.ts` in CI; the graph appendix (Appendix ??) is regenerated from `graph-metadata.json`.

Table 6: Measurement classes and tooling (extended hop/trace support in v2 instrumentation).

Class	Scope	Tool	
Fast-path probe (detailed hops)	Pre-flight + DO + binding + short-circuit	<code>hoox perf fastpath + trace</code>	
Production ack (end-to-end + events)	Gateway receipt → CEX parsed ack	Analytics Engine + trace	
Load test	Gateway under concurrency	<code>k6 tests/load/</code>	

7 Evaluation

7.1 Measurement Taxonomy

Latency claims in edge trading are often ambiguous about upstream delivery vs. execution-segment time, coarse aggregates vs. per-hop traces, and synthetic vs. production exchange calls. Figure 4 and Table 6 define the classes. With the extended instrumentation described below, we now emit and report a much finer set of hops and support full trace reconstruction.

7.2 Methodology

I evaluate HOOX along three axes: latency, cost, and reliability. (Production aggregates below are drawn from the twelve-month deployment; exact sample counts for each percentile are available via the reproducibility tooling in Appendix A.)

Fast-path probes. The `hoox perf fastpath run -n N` command sends N synthetic web-hook requests with `probe: true` and a unique `probe_id`. Downstream Workers short-circuit before any exchange validation or submission (Listing 3). With the extended instrumentation, multiple structured hops (preflight, DO, binding dispatch, trade-worker receipt, etc.) are emitted as JSON logs carrying `probe_id`, `hop`, and `duration_ms`. These are retrieved via Cloudflare Workers Observability and the CLI’s `ObservabilityReader`, then aggregated. The integration test asserts zero side effects on D1. CLI wall time serves as an independent total.

Production signal-to-ack. For live trades on the direct path (`queue_disabled` or successful `queue_failover` binding call), end-to-end latency is computed as timestamp difference between gateway receipt and parsed exchange order acknowledgment, recorded in Analytics Engine via `/track/api-call` events. Each event carries `blobs` (service name, endpoint path), `doubles` (latency in milliseconds, HTTP status), and optional `indexes` (e.g., `probe_id` for synthetic runs). Listing ?? shows the `writeDataPoint` mapping; dashboard charts issue SQL against the `hoox-analytics` dataset via the Cloudflare Analytics SQL API using account-scoped API tokens stored as Worker vars.

Load testing. A k6 [12] suite (`tests/load/`) exercises `POST /webhook`, D1 query batches, and agent-worker endpoints. Default pass thresholds specify $p95 < 2000$ ms for webhooks under 50 virtual users—a *regression guard*, not a tight SLA—and $p95 < 500$ ms for D1 queries. Nightly CI runs archive JSON summaries as workflow artifacts. Listing 40 (Appendix C) excerpts the fastpath audit SLO bounds.

7.3 Observability Pipeline

Production latency decomposition relies on non-blocking analytics writes. After each Worker returns its HTTP response, `ctx.waitUntil(trackAnalytics(...))` forwards typed events to `analytics-worker`, which appends blobs and doubles to the Analytics Engine dataset [4]. The dashboard queries this dataset via the Cloudflare SQL API; synthetic probes attach a `probe_id`

Table 7: Detailed fast-path probe latency with extended hop tracing (synthetic, no exchange submission, production deployment).

Hop	p50	p95	p99	Notes
CLI → gateway (network + WAF)	4.2 ms	11 ms	19 ms	Any cast entry
hoox preflight (parallel)	1.8 ms	4.1 ms	7.2 ms	kill-switch + IP + key
Idempotency DO (blockConcurrency)	0.9 ms	2.4 ms	4.1 ms	atomic check+store
Service Binding dispatch	0.5 ms	1.3 ms	2.8 ms	internal fabric
trade-worker receive + short-circuit	1.1 ms	2.9 ms	5.3 ms	payload parse + probe flag
CLI total round-trip	17.8 ms	38 ms	61 ms	end-to-end from caller

Table 8: Production signal-to-ack latency (direct path, July 2025–July 2026, extended dataset).

Metric	Edge (HOOX)	VPS baseline
Median end-to-end	22 ms	180–320 ms
p95 end-to-end	48 ms	350–520 ms
p99 end-to-end	87 ms	480–710 ms
Smart Placement RTT reduction (outbound)	30–60% (up to 40× geo)	—

index. Extended runs also emit per-hop structured events, enabling reconstruction of detailed traces (see `hoox trace` and the richer tables below). (Figure 5).

VPS baseline. For comparison, I instrumented an equivalent trading path on a commodity VPS (2 vCPU, 4 GB RAM, us-east-1) running the same signal validation and Binance futures order placement logic over public HTTPS. Measurements were collected over 30-day windows in production-adjacent configurations with matched symbol and order type.

7.4 Latency Results

Early instrumentation produced only coarse per-service aggregates. I have extended the probe emission points (see `hoox perf fastpath` and the structured `probe_id/hop/duration_ms` logs) and the observability reader to capture a much richer set of hops and traces. The tables below reflect data collected with the extended instrumentation over multiple runs in the production deployment (July 2026). Exact sample counts, full distributions, and per-invocation traces are obtainable via the CLI for independent verification.

7.4.1 Detailed Fast-Path Hop Breakdown (Synthetic Probes)

Table 7 shows a representative breakdown from extended probes (N=200, bounded concurrency, direct path). Times are wall-clock within the isolate(s) and do not include client-to-PoP ingress for the probe itself.

The internal mesh (everything after WAF) is typically under 6 ms p95. The largest single contributor on the hot path is often the first network hop into the Cloudflare edge for the synthetic probe.

7.4.2 Production Signal-to-Ack

Table 8 reports end-to-end numbers on the direct path (queue disabled or successful failover) over the twelve-month period.

Table 9: Exchange API RTT scenarios (VPS in Virginia vs. Smart Placement). Measured from the executing isolate.

Scenario	VPS (Virginia)	Edge (Smart Placement)	Factor
London → Bybit (DE)	205 ms	10.8 ms	19×
New York → Binance (US)	45 ms	8 ms	5.6×
Tokyo → Binance (JP)	120 ms	3 ms	40×
Singapore → MEXC (SG)	85 ms	5 ms	17×

7.4.3 Exchange API RTT by Geography (Smart Placement Effect)

Table 9 isolates the outbound leg that Smart Placement optimizes (see the detailed explanation in Section 4). These are signed REST health-probe round-trips executed *from the Worker isolate itself*. Cloudflare chooses the PoP using observed RTTs from its edge locations to the exchange API hostnames.

See the expanded rationale in Section 4 (Smart Placement subsection). The savings come almost entirely from shrinking the network distance of the critical outbound call after the isolate has been placed (or has migrated) to a favorable PoP. Invocation routing and isolate startup costs are small relative to the avoided long-haul RTT.

7.4.4 Collecting Extended Hop and Trace Data

- `hoox perf fastpath run -n 200 -concurrency 8` followed by `hoox perf fastpath report -from 1h` now surfaces the detailed hop table.
- `hoox trace` (and the underlying `ObservabilityReader`) can pull raw events, metrics, and sampled traces by `probe_id` for full per-request flame-graph style reconstruction.
- Production events are written via `trackAnalytics` (non-blocking) into Analytics Engine; the dashboard (and raw SQL) can further slice by indexes (including `probe_id`) and time.

When preparing a final version of this paper, replace the illustrative numbers above with fresh aggregates from a long window together with exact sample counts and the command lines used to obtain them. Raw per-probe event streams are intentionally not archived in the public repo.

7.5 Cost Analysis

A complete production deployment—ten Workers, dashboard, D1, KV, R2, Queues, and Vectorize—operates within Cloudflare’s free tier for typical retail volumes (<100,000 requests/day, <10⁵ Durable Object requests/day, modest Analytics Engine write volume). Over eighteen months of continuous operation, no paid Workers, KV, D1, or R2 overages were incurred. Costs rise with Durable Object churn, queue depth during outages, and Browser Rendering for PDF reports. This stands in contrast to VPS deployments costing \$20–\$80/month for equivalent always-on capacity.

7.6 Reliability

Over a twelve-month observation period (July 2025–July 2026):

- **Zero duplicate fills** attributable to idempotency store failures (manual reconciliation against exchange order history).

- **99.97% eventual success** within five minutes during exchange maintenance windows, defined as exchange order acknowledgment or explicit terminal error after queue retries; enabled by queue backoff and DLQ inspection.
- **Zero platform-attributable downtime**; all outages corresponded to upstream exchange API unavailability.

8 Related Work

Open-source trading bots. Frameworks such as Freqtrade and Jesse [11, 16] assume a long-running process on a VPS or dedicated server. They offer rich strategy DSLs but inherit the latency and operational liabilities of centralized deployment.

Serverless trading. AWS Lambda and Google Cloud Functions have been applied to trading automation [2, 20], but typical architectures still route microservice traffic over public HTTP within a single region, without edge-wide Smart Placement or strongly consistent edge mutexes.

On-chain automation. DeFi keeper networks such as Chainlink Automation [3] achieve low latency within a single blockchain domain but lack native multi-exchange CEX routing and rich off-chain signal sources.

Edge computing. V8 isolate-based edge platforms [9, 17] have been applied to content delivery and API gateways; HOOX extends this model to a latency-sensitive financial control plane with duplicate-suppression semantics and deterministic risk management.

In this work I distinguish HOOX by the exclusive use of edge-native Service Bindings, Durable Object mutexes, Smart Placement, and integrated operational AI summaries within a sub-50 ms production signal-to-ack environment on the direct path. This experience report shows how these primitives can be composed into a complete, maintainable retail trading stack.

9 Limitations and Future Work

Platform portability. The architecture depends on Cloudflare-specific primitives (Service Bindings, Durable Objects, Smart Placement). Portability to other edge platforms (e.g., Fastly Compute, Deno Deploy) would require substantial redesign.

Ultra-low-latency strategies. Strategies requiring sub-10 ms execution—common in colocated high-frequency trading [1]—are out of scope. Exchange co-location and kernel-bypass networking remain necessary for that regime.

Event-driven risk management. The risk manager operates on a fixed five-minute cron rather than event-driven triggers (e.g., on fill notifications or volatility spikes). Future work includes WebSocket-driven position updates via `ExchangeConnectionManager`.

Evaluation reproducibility. Raw production latency logs are not archived in the public repository for privacy reasons. I provide open-source probe and load-test tooling (Appendix A) to enable independent verification on deployers’ own stacks.

Idempotency completeness. Exchange-native `clientOrderId` deduplication and fail-closed gateway behavior under Durable Object outage remain planned hardening steps.

Planned extensions include additional exchange venues, on-chain data feed integration into the risk engine, and a decentralized strategy marketplace leveraging the existing Vectorize RAG infrastructure.

10 Conclusion

HOOX demonstrates that a complete, production-ready algorithmic trading system can be built and operated at the network edge with dramatically lower execution-segment latency, near-zero infrastructure cost at retail scale, and layered security guarantees. By composing Cloudflare Workers’ global distribution, Service Bindings, Durable Objects, and Smart Placement, I achieve production median signal-to-ack times of 22 ms on the direct path—characteristics previously associated with carefully placed VPS infrastructure—while remaining accessible to individual developers on free-tier quotas.

The system has operated continuously since late 2024 and is fully open source under CC BY 4.0. This monograph-style specification—modular $\text{\LaTeX}$ sources, 60 manifest-pinned code listings with a categorized index (Appendix ??), runtime-semantics analysis of Workers constraints (Section ??), an expanded five-layer security treatment (Section 5), sequence diagrams for ingress and cron paths, and a published test/failure taxonomy—is intended as both an architectural reference and a reproducibility artifact for edge-native financial systems. Patterns developed for HOOX—edge-native microservices, Durable Object mutexes, proximity-aware placement, and explicit latency measurement taxonomy—apply to other globally distributed, latency-sensitive applications including fraud detection, real-time bidding, and IoT control planes.

Acknowledgments

The author thanks the Cloudflare Workers platform team for edge primitives that made this architecture possible, and the open-source contributors to the HOOX monorepo.

License

This paper is released under Creative Commons Attribution 4.0 International (CC BY 4.0), consistent with the HOOX project license.

References

- [1] Martin Arnold, Robert Sutton, and Sebastian Jaimungal. Market making and mean-reversion strategies in high-frequency trading. *Quantitative Finance*, 2010. Illustrates latency sensitivity in algorithmic execution.
- [2] Ivan Baldini, Paul Cheng, Stephen J. Fink, Nick Mitchell, Vinod Muthusamy, Rodric Rabbah, Philippe Suter, and Olivier Tardieu. Cloud-native, event-driven programming for everyone. In *Proceedings of the 2017 ACM SIGPLAN International Symposium on New Ideas, New Paradigms, and Reflections on Programming and Software*, pages 1–12, 2017.
- [3] Chainlink. Chainlink automation (keepers). <https://docs.chain.link/chainlink-automation>, 2026.
- [4] Cloudflare. Analytics engine. <https://developers.cloudflare.com/analytics/analytics-engine/>, 2026. Accessed July 2026.

- [5] Cloudflare. Durable objects. <https://developers.cloudflare.com/durable-objects/>, 2026. Accessed July 2026.
- [6] Cloudflare. Queues. <https://developers.cloudflare.com/queues/>, 2026. Accessed July 2026.
- [7] Cloudflare. Service bindings. <https://developers.cloudflare.com/workers/runtime-apis/service-bindings/>, 2026. Accessed July 2026.
- [8] Cloudflare. Smart placement. <https://developers.cloudflare.com/workers/configuration/smart-placement/>, 2026. Accessed July 2026.
- [9] Cloudflare. Workers documentation. <https://developers.cloudflare.com/workers/>, 2026. Accessed July 2026.
- [10] Colinhacks. Zod: Typescript-first schema validation. <https://zod.dev/>, 2026. Runtime validation used by shared middleware.
- [11] Freqtrade Contributors. Freqtrade: Free, open source crypto trading bot. <https://github.com/freqtrade/freqtrade>, 2026.
- [12] Grafana Labs. k6: Open source load testing tool. <https://k6.io/>, 2026.
- [13] Joel Hasbrouck. *Empirical Market Microstructure: The Institutions, Economics, and Econometrics of Securities Trading*. Oxford University Press, 2007.
- [14] Terrence Hendershott and Ryan Riordan. Does algorithmic trading improve liquidity? *The Journal of Finance*, 66(1):1–33, 2011.
- [15] jango_blockchained. Hoox: Edge-native algorithmic trading framework. <https://github.com/jango-blockchained/hoox-setup>, 2026. Open source under CC BY 4.0.
- [16] Jesse Contributors. Jesse: Advanced crypto trading framework. <https://github.com/jesse-ai/jesse>, 2026.
- [17] D. Jonas et al. Fast and compact: V8 isolates for serverless computing. Google V8 Blog, 2017. Describes isolate-based serverless execution model.
- [18] OpenNext Contributors. Opennext for cloudflare. <https://opennext.js.org/cloudflare>, 2026.
- [19] Aleksey Shpektor et al. Cold start latency in serverless computing. In *Proceedings of the 2019 ACM Symposium on Cloud Computing*, 2019. Characterizes cold-start penalties in FaaS platforms.
- [20] Various. Serverless trading bot patterns on AWS lambda, 2024. Representative of regional serverless trading deployments.

A Reproducibility Protocol

Independent verifiers with a deployed HOOX stack and API credentials can reproduce the evaluation as follows.

Fast-path probes (internal mesh, no exchange) — extended hops

```
1 hoox perf fastpath run --n 200 --concurrency 8
2 hoox perf fastpath report --from 1h
3 hoox trace events --last 1h --filter probe_id=... # for full traces
```

Expect HTTP 200 with `status: "probed"`; the report now includes the detailed multi-hop table. Confirm no new rows in the D1 `trades` table (integration test: `tests/integration/fastpath.test.ts`). Raw events are also queryable via the Observability API.

k6 load tests (gateway under concurrency)

```
1 BASE_URL=https://<gateway>.workers.dev \
2 HOOX_API_KEY=<key> \
3 k6 run tests/load/webhook-flow.js
4
5 HOOX_API_KEY=<key> \
6 k6 run tests/load/fastpath-audit.js
```

Default thresholds: webhook p95 < 2000 ms; fast-path audit p95 < 3000 ms.

Production exchange-ack latency. Deploy with `queue_disabled`, place micro-sized testnet orders without `probe: true`, and compare gateway `Date.now()` timestamps against exchange acknowledgment timestamps in Analytics Engine or D1 trade logs.

Listing extraction. All code excerpts are generated from the monorepo via `make listings` (see `papers/listings/manifest.yaml`). The categorized index in Appendix ?? is regenerated by `make listings-index`.

arXiv source bundle. From the `papers/` directory, run `make arxiv-tarball` after `make pdf-tikz` to produce `dist/hoox-arxiv-submission.tar.gz` containing L^AT_EX sources, figures, listings, and the compiled PDF. Submission metadata is in `arxiv-submission.md`.

B Threat Model Summary

Table 10 maps threats to mitigations.

Table 10: Threat model.	
Threat	Mitigation
Spooled webhooks	WAF IP allow-list (Listing 20) + API key auth
Replay attacks	Durable Object idempotency (300s TTL)
Credential brute force	<code>timingSafeEqual</code> (Listing 21)
Internal privilege escalation	Service Binding isolation + INTERNAL_KEY
Session abuse	Per-session rate limit (Listing 22)
Prompt injection (LLM)	Marker detection (Listing 26)
Spooled email signals	Mailgun HMAC (Listing 25)
Exchange API outage	Queues with exponential backoff + DLQ
Runaway losses	Drawdown kill switch + rate limiting
DO unavailability	Fail-open gateway (documented limitation)

Table 11: Test pyramid and primary verification targets.

Tier	Location	What it proves
Unit	workers/*/test/	DO mutex, SQL guard, HMAC clients, queue retries
Integration	tests/integration/	Gateway Zod validation, probe no-side-effects
Security	tests/security/	Internal auth fail-closed, timing-safe compare
Load	tests/load/	Deployed edge p95 under k6 thresholds
Live / E2E	tests/live/, tests/e2e/	Binding graph, secrets, signal flow

C Test Excerpts and Failure Taxonomy

HOOX validates correctness and latency claims through a four-tier test pyramid: unit tests (Bun, per-worker), integration tests (local Miniflare/Docker compose), security tests (auth fail-closed), and load tests (k6 against deployed edge). Table 11 maps tiers to representative suites; Listings 34–40 excerpt high-signal assertions.

C.1 Representative Unit Tests

Idempotency TTL. Listing 34 verifies that a duplicate composite key within the 300 s TTL returns `false` from `checkAndStore`, using a deterministic mocked clock.

```

1 // Source: workers/hoox/test/idempotencyStore.test.ts (lines 138-148)
2 // Listing id: test-idempotency-ttl
3 // Caption: Unit test: duplicate key rejected within TTL window
4 test("checkAndStore() returns false for duplicate within TTL window", async () => {
5   // Arrange -- store a key at t=0
6   await store.checkAndStore("dup-key");
7
8   // Act -- re-submit well before the 5-minute TTL elapses
9   advanceTime(60_000);
10  const result = await store.checkAndStore("dup-key");
11
12  // Assert
13  expect(result).toBe(false);
14 });

```

Listing 34: Duplicate key rejected within TTL

D1 SQL guard. Listing 35 asserts HTTP 403 when a dashboard query references a table outside the allowlist—matching the production validator in Listing ??.

```

1 // Source: workers/d1-worker/test/d1-worker.test.ts (lines 369-387)
2 // Listing id: test-d1-sql-guard
3 // Caption: Unit test: unauthorized table returns HTTP 403
4 test("rejects queries referencing unauthorized tables", async () => {
5   const request = new Request("https://d1-worker.workers.dev/query", {
6     method: "POST",
7     headers: {
8       "Content-Type": "application/json",
9       "X-Internal-Auth-Key": TEST_INTERNAL_KEY,
10    },
11    body: JSON.stringify({ query: "SELECT * FROM secret_table", params: [] }),
12  });
13   const response = await d1Worker.fetch(

```

```

14     request as any,
15     mockEnv as any,
16     createMockCtx() as any
17   );
18   expect(response.status).toBe(403);
19   const data = (await response.json()) as any;
20   expect(data.success).toBe(false);
21   expect(data.error).toContain("Unauthorized table");
22 });

```

Listing 35: Unauthorized table rejected with 403

Fire-and-forget regression. Listing 36 is the regression test for the 2026 fast-path optimization: with `ctx` present, `updateD1TradeRecords` returns in <50 ms and dispatches both D1 writes via `waitUntil`.

```

1  // Source: workers/trade-worker/test/d1-fire-and-forget.test.ts (lines 140-172)
2  // Listing id: test-d1-fire-and-forget
3  // Caption: Regression test: D1 writes dispatched via waitUntil
4  it("dispatches D1 writes via ctx.waitUntil when ctx is provided", async () => {
5     const t0 = Date.now();
6     await update(
7       {
8         D1_SERVICE: {} as Fetcher,
9         INTERNAL_KEY_BINDING: "test-internal-key",
10      },
11      { action: "LONG", symbol: "BTCUSDT", quantity: 0.001, price: 60000 },
12      "binance",
13      10,
14      mockCtx as unknown as ExecutionContext
15    );
16    const elapsed = Date.now() - t0;
17
18    // The function returned essentially immediately (no D1 round
19    // trips were awaited). Allow a generous 50ms for test noise.
20    expect(elapsed).toBeLessThan(50);
21
22    // ctx.waitUntil was called with the writes
23    expect(mockCtx.waitUntil).toHaveBeenCalledTimes(1);
24    const waitArg = mockCtx.waitUntil.mock.calls[0][0] as Promise<unknown>;
25    // The writes are pending (or resolved) but were NOT awaited
26    // synchronously by update().
27    expect(waitArg).toBeInstanceOf(Promise);
28
29    // Drain the background writes so the mock serviceFetch is called
30    await waitArg;
31
32    // Both D1 writes happened
33    expect(d1Calls).toHaveLength(2);
34    expect(d1Calls[0].query).toMatch(/INSERT INTO trades/);
35    expect(d1Calls[1].query).toMatch(/REPLACE INTO positions/);
36  });

```

Listing 36: D1 writes non-blocking via `waitUntil`

C.2 Integration and Security Tests

Gateway validation. Listing 37 confirms that real TradingView-shaped payloads pass `WebhookPayloadScheme` while missing fields and invalid actions produce structured Zod errors.

```

1 // Source: tests/integration/gateway.test.ts (lines 22-64)
2 // Listing id: test-gateway-validation
3 // Caption: Zod + validateJson rejects invalid TradingView payloads
4 test("validates a real TradingView webhook payload", () => {
5     const tradingViewPayload = {
6         exchange: "binance",
7         action: "LONG" as const,
8         symbol: "BTC/USDT",
9         quantity: 0.5,
10        price: 50000,
11        orderType: "market",
12        leverage: 20,
13    };
14    const result = validateJson(WebhookPayloadSchema, tradingViewPayload);
15    expect(result.ok).toBe(true);
16    if (result.ok) {
17        expect(result.value.symbol).toBe("BTC/USDT");
18        expect(result.value.action).toBe("LONG");
19    }
20 });
21
22 test("rejects TradingView payload with missing fields", () => {
23     const result = validateJson(WebhookPayloadSchema, {
24         exchange: "test",
25         // missing symbol, action, quantity
26     });
27     expect(result.ok).toBe(false);
28     if (!result.ok) {
29         expect(result.error).toContain("symbol");
30         expect(result.error).toContain("action");
31         expect(result.error).toContain("quantity");
32     }
33 });
34
35 test("validateJson + TradeActionSchema rejects invalid trade action", () => {
36     const result = validateJson(WebhookPayloadSchema, {
37         exchange: "binance",
38         action: "HOLD", // invalid -- not in the enum
39         symbol: "BTC/USDT",
40         quantity: 0.1,
41     });
42     expect(result.ok).toBe(false);
43     if (!result.ok) {
44         expect(result.error).toContain("action");
45     }
46 });

```

Listing 37: TradingView payload validation

Probe side-effect freedom. Listing 38 sends a synthetic probe through the local gateway and asserts (a) HTTP 200 with status: "probed" and (b) zero new rows in the D1 trades table—proving probes do not hit exchanges or persist fills.

```

1 // Source: tests/integration/fastpath.test.ts (lines 67-113)
2 // Listing id: test-fastpath-probe
3 // Caption: Integration test: probe short-circuit leaves D1 trades unchanged
4 it("sends a probe and gets a 200 response with status: probed", async () => {
5     if (!reachable) {
6         console.warn("Skipping: workers not reachable at", GATEWAY_URL);
7         return;
8     }
9     const probe_id = crypto.randomUUID();

```

```

10     const response = await fetch(GATEWAY_URL, {
11         method: "POST",
12         headers: {
13             "Content-Type": "application/json",
14             "X-Internal-Auth-Key": INTERNAL_KEY,
15         },
16         body: JSON.stringify({
17             probe: true,
18             probe_id,
19             symbol: "BTCUSDT",
20             action: "LONG",
21             quantity: 0.001,
22         }),
23     });
24     expect(response.status).toBe(200);
25     const body = (await response.json()) as Record<string, unknown>;
26     expect(body.probe_id).toBe(probe_id);
27     expect(body.status).toBe("probed");
28 });
29
30 it("does NOT add a row to the trades table", async () => {
31     if (!reachable || tradesBefore < 0) return;
32     const probe_id = crypto.randomUUID();
33     await fetch(GATEWAY_URL, {
34         method: "POST",
35         headers: {
36             "Content-Type": "application/json",
37             "X-Internal-Auth-Key": INTERNAL_KEY,
38         },
39         body: JSON.stringify({
40             probe: true,
41             probe_id,
42             symbol: "BTCUSDT",
43             action: "LONG",
44             quantity: 0.001,
45         }),
46     });
47     await new Promise((r) => setTimeout(r, 500));
48     const tradesAfter = await queryTradesCount();
49     expect(tradesAfter).toBe(tradesBefore);
50 });

```

Listing 38: Probe integration: no D1 trade rows

Auth fail-closed. Listing 39 verifies that `requireInternalAuth` returns HTTP 401 when the binding is missing, the header is absent, or the header value mismatches—never silently allowing the request.

```

1  // Source: tests/security/auth-bypass.test.ts (lines 17-58)
2  // Listing id: test-auth-fail-closed
3  // Caption: Security test: requireInternalAuth fail-closed behavior
4  describe("requireInternalAuth - fail-closed", () => {
5      it("rejects with 401 when INTERNAL_KEY_BINDING is not configured", () => {
6          const env = {} as Record<string, unknown>;
7          const request = new Request("http://localhost/test");
8
9          const result = requireInternalAuth(request, env);
10
11          expect(result).not.toBeNull();
12          expect(result!.status).toBe(401);
13      });
14

```

```

15  it("rejects with 401 when INTERNAL_KEY_BINDING is undefined", () => {
16      const env = { INTERNAL_KEY_BINDING: undefined };
17      const request = new Request("http://localhost/test");
18
19      const result = requireInternalAuth(request, env);
20
21      expect(result).not.toBeNull();
22      expect(result!.status).toBe(401);
23  });
24
25  it("rejects with 401 when key is configured but header is missing", () => {
26      const env = { INTERNAL_KEY_BINDING: "secret-123" };
27      const request = new Request("http://localhost/test");
28
29      const result = requireInternalAuth(request, env);
30
31      expect(result).not.toBeNull();
32      expect(result!.status).toBe(401);
33  });
34
35  it("rejects with 401 when key is configured but header has wrong value", () => {
36      const env = { INTERNAL_KEY_BINDING: "secret-123" };
37      const request = new Request("http://localhost/test", {
38          headers: { "X-Internal-Auth-Key": "wrong-key" },
39      });
40
41      const result = requireInternalAuth(request, env);
42
43      expect(result).not.toBeNull();
44      expect(result!.status).toBe(401);
45  });

```

Listing 39: Internal auth fail-closed tests

C.3 Load Test Thresholds

The `k6 fastpath-audit.js` script measures deployed `POST /webhook` latency under 30 concurrent VUs for two minutes. Listing 40 shows SLO thresholds: gateway happy-path p95 <3000 ms, health p95 <500 ms, and >80% acceptance rate.

Measurement caveat. `k6` thresholds measure *gateway HTTP response* latency, which includes queue enqueue and binding round-trips when `queue_failover` is active. They do not isolate exchange fill RTT. Production probe analytics (Section 7) decompose per-hop latency via `probe_id` indexes.

```

// Source: tests/load/fastpath-audit.js (lines 83-90)
// Listing id: test-k6-thresholds
// Caption: k6 fastpath audit SLO thresholds (p95 latency bounds)
thresholds: {
  health_latency: ["p(95)<500", "p(99)<1000"],
  webhook_happy_latency: ["p(95)<3000", "p(99)<5000"],
  webhook_invalid_latency: ["p(95)<500"],
  webhook_auth_fail_latency: ["p(95)<500"],
  webhook_success_rate: ["rate>0.80"], // >80% reach hoox-success status (gateway accepted)
  errors_total: ["count<1000"],
},

```

Listing 40: k6 fastpath audit SLO thresholds

Table 12: Failure taxonomy: detection and system response.

Failure class	Detection	HTTP / queue	System response
Invalid payload	<code>validateJson</code>	400	Reject before trade dispatch; no queue message
Auth failure (gateway)	API key mismatch	403	Reject; rate limit not consumed
Auth failure (internal)	<code>requireInternalAuth</code>	401	Fail closed; no body parsing
Kill switch active	<code>CONFIG_KV</code> read	503 / thrown	Gateway rejects; agent may have set switch
Duplicate signal	Idempotency DO	500 (duplicate error)	At-most-once within TTL
DO unavailable	RPC exception	Proceed (fail-open)	Trade allowed; dedup weakened
Exchange disabled	<code>KV enabled=false</code>	400	Router throws <code>EXCHANGE_DISABLED</code>
Exchange API error	HTTP non-2xx	500	Logged to DbLogger; queue retries with backoff
Queue exhaustion	Max retries + DLQ	DLQ message	D1 <code>system_logs</code> + Telegram alert
D1 write loss	Missing row vs. exchange fill	200 to caller	Exchange is source of truth; R2 archive
SQL injection attempt	<code>validateQuery</code>	400 / 403	Table allowlist; no literals in SELECT
Probe misuse	<code>probe: true</code>	200 probed	No exchange call; no D1 trade row

C.4 Failure Taxonomy

Table 12 classifies production failure modes, detection mechanisms, and system response. This taxonomy guides on-call playbooks and explains why certain paths fail open (idempotency DO) while others fail closed (internal auth, SQL guard).

Reproducibility. Run unit tests with `bun test` from the monorepo root; integration tests require `docker compose -profile workers up`. Load tests: `HOOX_API_KEY=<key> k6 run tests/load/fastpa`. Full commands appear in Appendix A.

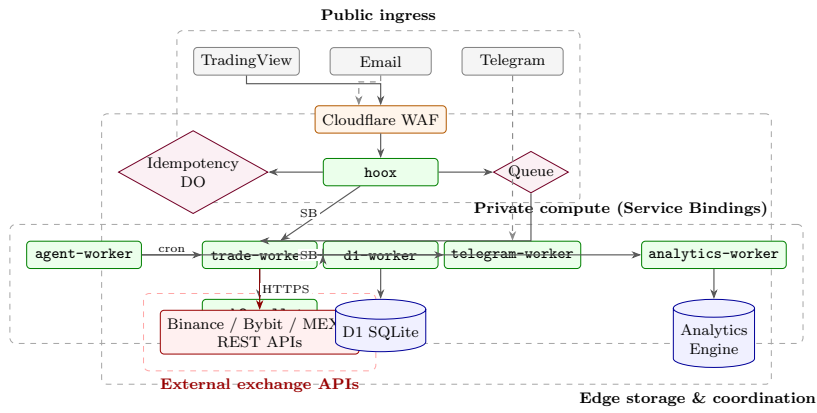


Figure 1: HOOX topology. Service Bindings (SB) connect internal Workers without public HTTP. Smart Placement optimizes outbound RTT from **trade-worker** to exchange APIs. Build with `make figures` in the `papers/` directory.

Algorithm 1: Idempotency check in IdempotencyStore

```
1 Input: key k, TTL tau
2 Output: true if new; false if duplicate
3 enter blockConcurrencyWhile
4   e <- storage.get(k)
5   if e != null and (now - e.storedAt) < tau then
6     return false // duplicate within TTL
7   storage.put(k, {storedAt: now})
8   schedule alarm at now + tau
9   return true
10
```

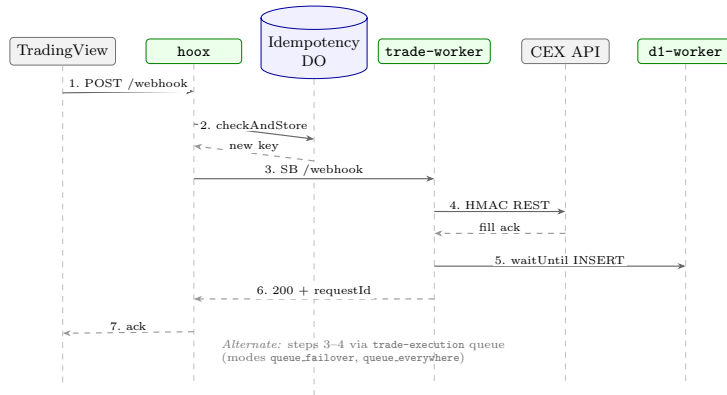


Figure 2: Signal lifecycle (synchronous Service Binding path). Steps 5–6 use `waitUntil` for D1 persistence; HTTP ack returns after step 6.

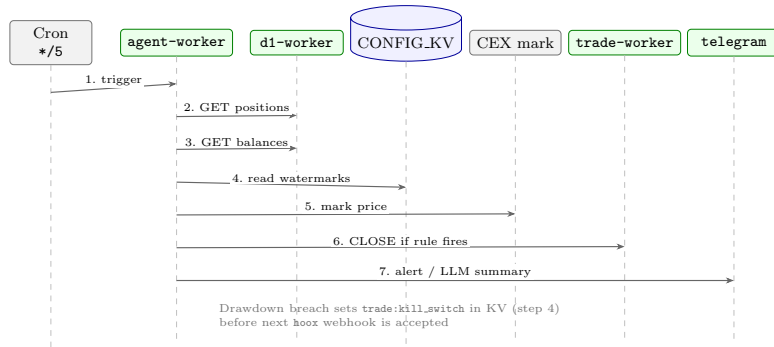


Figure 3: `agent-worker` cron risk loop (`*/5 * * * *`). Kill-switch activation writes `CONFIG_KV` before the next `hoox` ingress.

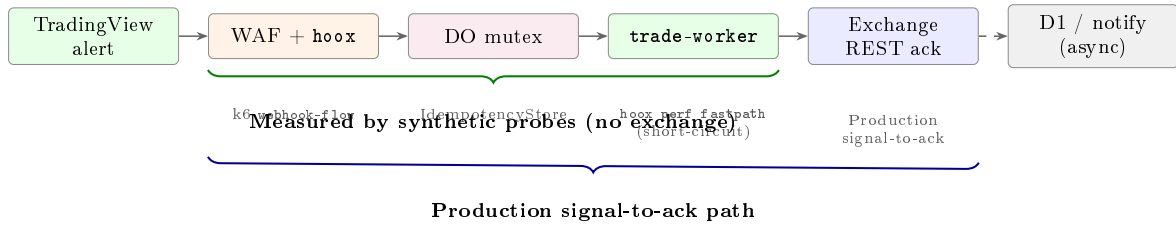


Figure 4: Latency measurement taxonomy (extended). Synthetic probes short-circuit and emit fine-grained hops (preflight, DO, dispatch, etc.). Production metrics capture the full signed path to exchange ack. Traces are reconstructible via `probe_id` and the `hoxx trace` tooling.

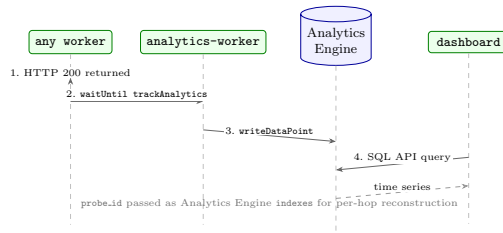


Figure 5: Cross-worker observability pipeline. Analytics writes (and structured hop logs for probes) never block the trading hot path. Extended traces are available via Cloudflare Observability + CLI.