

HOOX: Edge-Native Low-Latency Algorithmic Trading at the Cloudflare Edge

jango_blockchained
Independent Researcher

<https://github.com/jango-blockchained/hoox-setup>

July 2026

Abstract

Algorithmic trading systems have traditionally relied on virtual private servers (VPS) deployed in centralized data centers, incurring substantial network latency, recurring operational cost, and single points of failure. We present HOOX, an open-source, edge-native algorithmic trading framework implemented entirely on Cloudflare Workers. HOOX decomposes trading logic into ten specialized Workers that communicate via Cloudflare Service Bindings, achieving sub-millisecond inter-service call overhead and a median production latency of 22 ms from webhook ingestion to centralized exchange (CEX) order acknowledgment on the direct execution path.

We distinguish two measurement regimes that prior summaries often conflate: (i) *synthetic fast-path probes*, which short-circuit before exchange submission and characterize internal mesh latency; and (ii) *production signal-to-ack*, which includes HMAC-signed REST placement and exchange response parsing. The system integrates four platform primitives uncommon in retail trading stacks: Durable Objects for strongly consistent duplicate suppression under concurrent webhook retries; Smart Placement for automatic proximity routing to exchange API origins; Cloudflare Queues with application-level exponential backoff for outage resilience; and a deterministic risk manager with optional multi-provider large language model (LLM) operational summaries.

A production deployment spanning twelve months (July 2025–July 2026) processed signals with 99.97% eventual success within five minutes during exchange maintenance windows and recorded zero duplicate fills attributable to idempotency failures. We document the architecture, security model, per-Worker implementation reference with annotated code listings, a multi-tier test methodology and failure taxonomy, and reproducible evaluation commands (`hoox perf fastpath`, k6 load tests). We discuss portability limits and applicability to other globally distributed, latency-sensitive control planes. The system and this paper are released under Creative Commons Attribution 4.0 (CC BY 4.0).

Keywords: algorithmic trading, edge computing, serverless, Cloudflare Workers, low latency, idempotency, Durable Objects, service bindings, financial technology

1 Introduction

Algorithmic trading requires executing strategies with minimal latency to capture fleeting market opportunities and manage risk effectively [14, 15]. Traditional deployments place trading logic on virtual private servers (VPS) in fixed geographic regions. This architecture introduces substantial round-trip times: a signal generated near an exchange may traverse the public internet to a distant VPS—often incurring 80–120 ms of transit alone—before an order is signed and returned to the exchange API, yielding total latencies of 180–320 ms in typical retail configurations.

Cloudflare Workers provide a fundamentally different execution model. User code runs in V8 isolates [18] distributed across more than 300 points of presence (PoPs). When combined with

Service Bindings, Durable Objects, Queues, Smart Placement, and other edge primitives [6, 8, 10], it becomes possible to construct a complete trading stack without operating any servers. Unlike conventional function-as-a-service (FaaS) platforms, Workers avoid container cold starts on the order of seconds [20], and Service Bindings eliminate per-hop TLS and DNS overhead between microservices.

HOOX is a production-grade, fully open-source implementation of such a stack [16]. It ingests signals from TradingView webhooks, email, and Telegram; validates and routes them through a hardened gateway; executes trades across Binance, Bybit, and MEXC; manages risk autonomously; and provides observability, PDF compliance reporting, and DeFi execution. All components run as Cloudflare Workers and communicate internally without traversing the public internet.

Terminology. We use *low latency* to denote retail-grade webhook-to-ack times in the tens of milliseconds, not the sub-10 ms regime of exchange co-location [1]. The product name *Zero-Latency* reflects design intent—minimizing network distance to exchange APIs—rather than a literal zero-millisecond guarantee.

1.1 Contributions

This paper makes the following contributions:

1. A detailed microservices architecture for edge-based trading using ten cooperating Workers, with a formal seven-stage signal lifecycle and five-layer security model.
2. Design and implementation of *duplicate-suppression* semantics using a Durable Object mutex at the gateway, with explicit discussion of fail-open behavior, queue at-least-once delivery, and idempotency key granularity.
3. A reproducible evaluation toolchain—`hoox perf fastpath`, k6 load tests, and nightly CI artifacts—with a clear separation between internal probe latency and production exchange-ack latency (Figure 4).
4. Operational measurements over twelve months demonstrating median 22 ms production signal-to-ack on the direct path and 5.6–40× geographic RTT improvements versus a Virginia VPS baseline for exchange API reachability.
5. A practical demonstration that a complete trading infrastructure can operate within Cloudflare’s free tier for typical retail volumes (<100,000 requests/day).
6. An implementation monograph with 60 manifest-pinned code listings plus hand-sanitized configuration excerpts (Appendix G), runtime-semantics and advanced-mechanism deep dives (WebSocket adapters, D1 batch semantics, LLM fallback state machine; Sections 14, 15), cron/observability sequence diagrams, a graph-derived architecture appendix, and a published test methodology with failure taxonomy (Appendices E, F).

2 Background and Motivation

2.1 Limitations of VPS-Centric Architectures

A typical VPS deployment suffers from three structural problems:

Latency. Consider a TradingView alert fired in London. The alert may travel to a VPS in Virginia (≈ 85 ms), undergo runtime initialization (≈ 10 ms), and then reach an exchange API in Frankfurt or Tokyo (an additional 100–150 ms). Total transit latency exceeds 200 ms before order matching [14]. TradingView’s own webhook delivery often adds 1–5 s of upstream delay; edge optimization reduces only the *execution segment* after the alert arrives at `hoox`.

Cost and operations. Always-on servers incur monthly fees, require patching and monitoring, and demand explicit scaling logic. Container-based bots additionally suffer cold-start delays of 1–15 s after idle periods.

Reliability. A single VPS is a single point of failure. Network partitions or provider outages can prevent order execution during critical market moves.

2.2 Cloudflare Workers as an Execution Platform

Cloudflare Workers execute JavaScript and WebAssembly in V8 isolates with a 128 MB memory ceiling and sub-3 ms cold starts. Platform primitives relevant to trading include:

- **Service Bindings:** Direct `fetch` calls between Workers with microsecond-scale overhead and no public HTTP exposure [8].
- **Smart Placement:** Automatic relocation of Worker execution to the data center nearest outbound dependencies (e.g., exchange APIs) [9].
- **Durable Objects:** Strongly consistent, single-threaded stateful objects with SQLite-backed storage, suitable for distributed mutexes [6].
- **Queues:** At-least-once delivery with configurable retries and dead-letter queues [7].
- **Vectorize, Workers AI, Browser Rendering:** Vector search for retrieval-augmented generation (RAG), on-edge inference, and headless PDF generation.

These primitives enable a design point distinct from both long-running VPS bots [12, 17] and regional serverless deployments [2, 21]: a globally distributed, serverless trading system with sub-50 ms production signal-to-ack on the direct execution path under normal conditions.

3 System Architecture

HOOX consists of ten specialized Workers (Table 1) that together form a complete trading pipeline. Two additional Workers—`pine-worker` and `pyne-worker`—provide Pine Script tooling and are outside the core production mesh.

3.1 Architectural Overview

Figure 1 depicts the ingress, compute, storage, and external exchange layers. Public signals enter only through `hoox` (webhooks) or channel-specific Workers (`email-worker`, `telegram-worker`). All downstream execution uses Service Bindings; only `trade-worker` and `web3-wallet-worker` initiate outbound HTTPS to external APIs.

Table 1: Core HOOX Workers. Only `hoox` and `dashboard` expose public endpoints.

Worker	Role	Key responsibilities	Trigger
<code>hoox</code>	Gateway	Auth, WAF, rate limiting, idempotency	Webhook/API
<code>trade-worker</code>	Execution	Multi-exchange order placement	Binding/Queue
<code>agent-worker</code>	Risk manager	Trailing stops, kill switch, LLM summary	Cron */5
<code>telegram-worker</code>	Notifications	Alerts, RAG queries, bot commands	Binding
<code>d1-worker</code>	Data layer	Centralized D1 SQLite access	Binding
<code>email-worker</code>	Email ingress	Mailgun webhook parsing	Webhook
<code>web3-wallet-worker</code>	DeFi	On-chain swaps and contract calls	Binding
<code>analytics-worker</code>	Observability	Analytics Engine time series	Binding
<code>report-worker</code>	Reporting	Twice-daily PDF generation	Cron 08:00, 18:00 UTC
<code>dashboard</code>	User interface	Portfolio monitoring (Next.js/OpenNext)	Public UI

Table 2: Queue modes and latency semantics. Default: `queue_failover`.

Mode	Behavior	Ack latency
<code>queue_disabled</code>	Always direct Service Binding	Exchange ack in response
<code>queue_failover</code>	Direct first; queue on binding failure	Exchange ack or enqueue status
<code>queue_everywhere</code>	Always enqueue before consumption	HTTP success before fill

3.2 Signal Lifecycle

A representative TradingView signal traverses seven stages:

1. **Ingestion:** `POST /webhook` arrives at `hoox` after WAF filtering.
2. **Validation:** IP allow-listing, API key verification (`timingSafeEqual`), payload size limits (100 KB), global kill-switch check, and rate limiting (10 trades/minute per session).
3. **Idempotency:** A composite key `trade:{exchange}:{symbol}:{action}:{quantity}` is checked against the `IdempotencyStore` Durable Object.
4. **Routing:** On success, the payload is forwarded via Service Binding to `trade-worker`, or enqueued on `trade-execution` depending on KV-configured queue mode (Table 2).
5. **Execution:** `trade-worker` resolves the exchange via dynamic KV routing and places the order using HMAC-SHA256 signed REST requests.
6. **Persistence and notification:** Results are written to D1 via `d1-worker`, logged to R2, and forwarded to `telegram-worker` and `analytics-worker` via non-blocking `waitUntil` calls.
7. **Risk management:** Every five minutes, `agent-worker` evaluates open positions and may adjust trailing stops or activate the global kill switch.

3.3 Inter-Service Communication

Traditional microservices communicate over HTTP or gRPC, incurring serialization, TLS, and DNS costs at each hop. In HOOX, Service Bindings invoke internal endpoints as `binding.fetch("http://inter`

Table 3: Primary Service Binding edges (selected).

Source	Targets
hoox	trade-worker, telegram-worker, analytics-worker, web3-wallet-worker
trade-worker	d1-worker, telegram-worker, analytics-worker
agent-worker	d1-worker, trade-worker, telegram-worker, analytics-worker
dashboard	d1-worker, agent-worker, web3-wallet-worker

calls. Measured Service Binding overhead averages 0.4ms (Table 8). Authorization is enforced on every binding call via an `X-Internal-Auth-Key` header validated by shared middleware.

Table 3 summarizes the primary binding graph. The full code-graph community decomposition and data-flow edge catalog appear in Appendix E (Figure 8).

4 Key Technical Mechanisms

4.1 Duplicate-Suppression Idempotency

TradingView and similar platforms may retry webhook delivery after timeouts. Without deduplication, duplicate submissions can produce double positions. HOOX implements *at-most-once acceptance* at the gateway within a configurable TTL; we do not claim formal exactly-once semantics across the full pipeline because Queues deliver at-least-once and the gateway fails open when the Durable Object is unavailable.

Gateway mutex. The `IdempotencyStore` Durable Object implements an atomic check-and-store operation using `blockConcurrencyWhile`, guaranteeing that concurrent requests for the same key cannot interleave between read and write (Algorithm 4.1). Entries expire after a default TTL of 300s; alarm-based cleanup reclaims storage.

Semantics and limitations.

- **Key granularity:** The key excludes `requestId` and timestamp. Two legitimate signals with identical exchange, symbol, action, and quantity within the TTL window are treated as duplicates—a deliberate trade-off favoring retry safety over rapid scale-in.
- **Fail-open:** If the Durable Object RPC fails, the gateway permits the trade rather than halting execution—availability over strict deduplication.
- **Probe mode:** Synthetic requests with `probe: true` bypass idempotency and short-circuit in `trade-worker` before exchange validation, enabling repeatable internal latency measurement without side effects.

Listing 1 shows the production `IdempotencyStore` implementation; Listing 3 shows how synthetic probes bypass exchange submission for latency measurement.

A second Durable Object class, `ExchangeConnectionManager`, maintains optional persistent WebSocket sessions per exchange for connection amortization; it does not currently participate in idempotency. Planned work includes exchange-native deduplication via `newClientOrderId` / `orderLinkId` fields derived from `requestId`.

```

1 // Source: workers/hoox/src/idempotencyStore.ts (lines 1-98)
2 // Listing id: idempotency-store
3 // Caption: IdempotencyStore Durable Object (gateway duplicate suppression)
4 import { DurableObject } from "cloudflare:workers";
5
6 const DEFAULT_TTL_MS = 300_000; // 5 minutes

```

```

7
8 interface StoredEntry {
9   storedAt: number;
10 }
11
12 /**
13  * IdempotencyStore -- Durable Object for exactly-once trade execution.
14  *
15  * Prevents duplicate trade submissions within a configurable TTL window.
16  * Uses DO SQLite-backed storage for persistence and alarm-based cleanup.
17  */
18 export class IdempotencyStore extends DurableObject {
19   /**
20    * Check if a key is new (not recently seen) and store it atomically.
21    *
22    * @param key -- Unique idempotency key (e.g. "trade:binance:BTCUSDT:LONG:0.01")
23    * @param ttlMs -- Time-to-live in milliseconds (default 5 min)
24    * @returns 'true' if the key was stored (new request), 'false' if duplicate
25    */
26   async checkAndStore(
27     key: string,
28     ttlMs: number = DEFAULT_TTL_MS
29   ): Promise<boolean> {
30     // Wrap read+write+alarm in blockConcurrencyWhile so concurrent
31     // requests with the same key cannot interleave between the
32     // 'get' and the 'put'. Without this, two parallel webhooks for
33     // the same trade could both pass the duplicate check and both
34     // proceed to enqueue. The DO runtime guarantees single-threaded
35     // execution inside the block.
36     return this.ctx.blockConcurrencyWhile(async () => {
37       const existing = await this.ctx.storage.get<StoredEntry>(key);
38       if (existing && Date.now() - existing.storedAt < ttlMs) {
39         return false; // Duplicate -- still within TTL window
40       }
41
42       // Store with current timestamp
43       await this.ctx.storage.put(key, { storedAt: Date.now() });
44
45       // Schedule alarm for TTL-based cleanup
46       const currentAlarm = await this.ctx.storage.getAlarm();
47       const nextCleanup = Date.now() + ttlMs;
48       if (!currentAlarm || nextCleanup < currentAlarm) {
49         await this.ctx.storage.setAlarm(nextCleanup);
50       }
51
52       return true;
53     });
54   }
55
56   /**
57    * Check whether a previously stored key has expired.
58    */
59   async expired(key: string): Promise<boolean> {
60     const entry = await this.ctx.storage.get<StoredEntry>(key);
61     if (!entry) return true;
62     return Date.now() - entry.storedAt >= DEFAULT_TTL_MS;
63   }
64
65   /**
66    * Alarm handler -- cleans up expired entries.
67    */
68   async alarm(): Promise<void> {
69     const all = await this.ctx.storage.list<StoredEntry>();

```

```

70     const now = Date.now();
71     let earliestRemaining = Infinity;
72
73     for (const [key, entry] of all) {
74         if (now - entry.storedAt >= DEFAULT_TTL_MS) {
75             await this.ctx.storage.delete(key);
76         } else {
77             // Track earliest still-valid entry for next alarm
78             const remaining = entry.storedAt + DEFAULT_TTL_MS - now;
79             if (remaining < earliestRemaining) {
80                 earliestRemaining = remaining;
81             }
82         }
83     }
84
85     // Schedule next alarm if there are still entries to expire
86     if (earliestRemaining < Infinity) {
87         await this.ctx.storage.setAlarm(Date.now() + earliestRemaining);
88     }
89 }
90
91 /**
92  * Remove all stored keys (for testing/admin).
93  */
94 async clear(): Promise<void> {
95     const all = await this.ctx.storage.list();
96     const keys = [...all.keys()];
97     if (keys.length > 0) {
98         await this.ctx.storage.delete(keys);
99     }
100 }
101 }

```

Listing 1: IdempotencyStore Durable Object (full implementation)

```

// Source: workers/hoox/src/logic.ts (lines 64-92)
// Listing id: idempotency-key
// Caption: Idempotency key generation and fail-open check
/**
 * Generate idempotency key for a trade
 */
export function generateIdempotencyKey(tradeData: TradeData): string {
    return `trade:${tradeData.exchange}:${tradeData.symbol}:${tradeData.action}:${tradeData.quantity}`;
}

/**
 * Check and store idempotency key using Durable Object
 */
export async function checkIdempotency(
    env: IdempotencyEnv,
    key: string,
    logger: Logger
): Promise<boolean> {
    if (!env.IDEMPOTENCY_STORE) {
        return true; // No DO configured, allow all
    }

    try {
        const id = env.IDEMPOTENCY_STORE.idFromName(key);
        // DurableObjectStub is an RPC proxy -- cast to the DO class interface
        const stub = env.IDEMPOTENCY_STORE.get(id) as unknown as IdempotencyStore;
        return await stub.checkAndStore(key);
    }
}

```

```

    } catch (error) {
      logger.error("[checkIdempotency] Error:", { error: toError(error) });
      return true; // Allow on error to not block trades
    }
  }
}

```

Listing 2: Idempotency key generation and fail-open DO check

```

1 // Source: workers/trade-worker/src/index.ts (lines 369-400)
2 // Listing id: probe-short-circuit
3 // Caption: trade-worker probe short-circuit for synthetic latency measurement
4 // Probe short-circuit: check raw payload before validation (probe is a control signal,
5 // not a trade)
6 if ((payload as Record<string, unknown>).probe === true) {
7   const tHopStart = performance.now();
8   const probeId = String(
9     (payload as Record<string, unknown>).probe_id ?? ""
10  );
11  ctx.waitUntil(
12    trackAnalytics(
13      env,
14      "/track/api-call",
15      {
16        worker: "trade-worker",
17        endpoint: "/webhook",
18        latencyMs: 0,
19        success: true,
20      },
21      { indexes: [probeId] }
22    )
23  );
24  const twHopMs = performance.now() - tHopStart;
25  console.log(
26    JSON.stringify({
27      probe_id: probeId,
28      hop: "trade-worker",
29      duration_ms: Math.round(twHopMs),
30    })
31  );
32  return new Response(
33    JSON.stringify({ ok: true, probe_id: probeId, status: "probed" }),
34    { status: 200, headers: { "Content-Type": "application/json" } }
35  );
36 }

```

Listing 3: Probe short-circuit in `trade-worker` (no exchange call)

4.2 Gateway Hot Path

The `hoox /webhook` handler minimizes serial I/O on the critical path. After a 100 KB payload size guard, three security checks—kill switch, IP allow-list, and API key binding—execute in parallel via `Promise.all` (Listing 4). Session creation and per-session rate limiting follow sequentially because they depend on the validated API key.

Validated trade payloads are schema-checked with `validateJson(WebhookPayloadSchema)` before dispatch. Trade and Telegram notification branches run concurrently when both are present in the same webhook.

```

// Source: workers/hoox/src/handlers/webhook.ts (lines 87-134)
// Listing id: webhook-parallel-checks
// Caption: Gateway parallel pre-flight checks (kill switch, IP, API key, rate limit)

```

```

// Run independent checks in parallel (all KV reads, no dependencies)
const [ksCheck, ipCheck, isValid] = await Promise.all([
  checkKillSwitch(env.CONFIG_KV),
  checkIpAllowlist(env.CONFIG_KV, clientIp),
  validateApiKeyBinding(apiKey, env.WEBHOOK_API_KEY_BINDING, logger),
]);

// Evaluate in priority order (fail-fast)
if (ksCheck.enabled) {
  logger.warn("[handleRequest] Kill switch active -- rejecting request");
  return wrapResponse(
    createJsonResponse(
      { success: false, error: "Service temporarily disabled" },
      503
    )
  );
}

if (!ipCheck.allowed) {
  logger.warn("[handleRequest] IP ${clientIp} rejected: ${ipCheck.reason}");
  return wrapResponse(
    createJsonResponse(
      { success: false, error: "Access denied: ${ipCheck.reason}" },
      403
    )
  );
}

if (!isValid) {
  logger.warn("[handleRequest] Invalid apiKey provided");
  return wrapResponse(
    createJsonResponse({ success: false, error: "Forbidden" }, 403)
  );
}

// Get or create session for tracking (use validated apiKey before it's removed)
const session = await getOrCreateSession(env.SESSIONS_KV, apiKey);

// Check rate limit using session ID (not request UUID -- was broken before)
if (!(await checkRateLimit(session.sessionId, env))) {
  logger.warn("[handleRequest] Rate limit exceeded");
  return wrapResponse(
    createJsonResponse(
      { success: false, error: "Rate limit exceeded. Try again later." },
      429
    )
  );
}
}

```

Listing 4: Parallel gateway pre-flight checks

Internal routes between Workers authenticate with `X-Internal-Auth-Key` and constant-time comparison (Listing 5). The gateway fails closed when the binding is unconfigured; idempotency alone fails open on Durable Object errors (Section 4, duplicate-suppression paragraph).

```

// Source: packages/shared/src/middleware/auth.ts (lines 78-102)
// Listing id: require-internal-auth
// Caption: Internal service-to-service authentication (fail-closed)
export function requireInternalAuth(
  request: Request,
  env: InternalAuthEnv,
  keyName: string = "INTERNAL_KEY_BINDING"
): Response | null {

```

```

const expectedKey = env[keyName] as string | undefined;
// Fail closed: if no key is configured, reject the request
if (!expectedKey) {
  return new Response(
    JSON.stringify({
      success: false,
      error: 'Internal auth key ${keyName} not configured',
    }),
    { status: 401, headers: { "Content-Type": "application/json" } }
  );
}

const providedKey = request.headers.get("X-Internal-Auth-Key");
if (!providedKey || !timingSafeEqual(providedKey, expectedKey)) {
  return new Response(
    JSON.stringify({ success: false, error: "Unauthorized" }),
    { status: 401, headers: { "Content-Type": "application/json" } }
  );
}
return null;

```

Listing 5: Internal service-to-service authentication

Payload validation. All trade payloads pass `validateJson(WebhookPayloadSchema)` before dispatch. The shared helper returns structured Zod path errors rather than throwing (Listing 6).

```

// Source: packages/shared/src/middleware/validate.ts (lines 15-29)
// Listing id: validate-json
// Caption: Zod-based validateJson middleware (structured errors)
export function validateJson<T extends z.ZodTypeAny>(
  schema: T,
  data: unknown
): Result<z.infer<T>> {
  const result = schema.safeParse(data);
  if (!result.success) {
    return {
      ok: false as const,
      error: result.error.issues
        .map((i) => `${i.path.join(".")}: ${i.message}`)
        .join("; "),
    };
  }
  return { ok: true as const, value: result.data };
}

```

Listing 6: Zod-based request validation

Service Binding transport. Internal Worker calls use `serviceFetch`, which addresses bindings as `http://internal{path}` with a 30 s `AbortSignal` timeout (Listing 7). Queue producers serialize a minimal trade envelope (Listing 8).

```

// Source: packages/shared/src/service-bindings.ts (lines 5-25)
// Listing id: service-fetch
// Caption: Service Binding fetch helper with 30s timeout
export function serviceFetch(
  binding: ServiceBinding,
  path: string,
  body?: unknown,
  options?: {
    method?: string;
  }
) {
  // ...
}

```

```

    headers?: Record<string, string>;
    timeout?: number;
  }
): Promise<Response> {
  const timeout = options?.timeout ?? 30000;
  return binding.fetch('http://internal${path}', {
    method: options?.method ?? "POST",
    headers: {
      "Content-Type": "application/json",
      ...options?.headers,
    },
    body: body != null ? JSON.stringify(body) : undefined,
    signal: AbortSignal.timeout(timeout),
  });
}

```

Listing 7: Service Binding fetch with timeout

```

// Source: workers/hoox/src/logic.ts (lines 97-114)
// Listing id: send-trade-to-queue
// Caption: Queue producer message envelope
export async function sendTradeToQueue(
  queue: Queue,
  tradeData: TradeData,
  logger: Logger
): Promise<void> {
  const message = {
    requestId: tradeData.requestId,
    exchange: tradeData.exchange,
    action: tradeData.action,
    symbol: tradeData.symbol,
    quantity: tradeData.quantity,
    price: tradeData.price,
    leverage: tradeData.leverage,
    queuedAt: new Date().toISOString(),
  };
  await queue.send(message);
  logger.info(`[${tradeData.requestId}] Trade sent to queue`);
}

```

Listing 8: Queue producer message envelope

4.3 Smart Placement

Latency-sensitive Workers—including `hoox`, `trade-worker`, `d1-worker`, and `agent-worker`—enable Smart Placement via `"placement": {"mode": "smart"}` in `wrangler.jsonc`. Cloudflare monitors outbound dependency RTTs and migrates isolate execution toward the PoP nearest exchange API origins. The `dashboard` Worker intentionally disables Smart Placement to optimize for end-user browser proximity rather than exchange proximity.

Empirical measurements (Section 7) show 30–60% exchange API RTT reduction versus static regional deployments. Table 9 reports geographic scenarios as *exchange API round-trip from the Worker isolate*, not full signal-to-ack including TradingView delivery.

4.4 Queue-Based Resilience

The `trade-execution` queue decouples ingestion from execution. `hoox` acts as producer; `trade-worker` consumes with platform-level `max_retries = 3` and application-level retries of five attempts with backoff [0, 30, 60, 300, 900] s. A dead-letter queue (`trade-execution-dlq`) captures permanently failed messages. Queue mode is KV-configurable (Table 2).

Producer routing. `processTrade` (Listing 10) selects among three modes: always direct Service Binding (`queue_disabled`), direct-first with queue fallback (`queue_failover`, default), or always enqueue (`queue_everywhere`). Mode resolution reads `webhook:queue_mode` from `CONFIG_KV` with a 60 s in-isolate cache (Listing 9).

```
// Source: workers/hoox/src/logic.ts (lines 43-62)
// Listing id: get-queue-mode
// Caption: KV-backed queue mode resolution with 60s cache
export async function getQueueMode(
  kv: KVNamespace
): Promise<"queue_everywhere" | "queue_failover" | "queue_disabled"> {
  const now = Date.now();
  if (cachedQueueMode && now < queueModeCacheExpiry) {
    return cachedQueueMode;
  }

  const mode = await kv.get(KVKeys.KV_WEBHOOK_QUEUE_MODE);
  const resolved =
    mode === "queue_disabled"
      ? "queue_disabled"
      : mode === "queue_everywhere"
        ? "queue_everywhere"
        : "queue_failover";

  cachedQueueMode = resolved;
  queueModeCacheExpiry = now + QUEUE_MODE_CACHE_TTL_MS;
  return resolved;
}
```

Listing 9: KV-backed queue mode with 60s cache

```
1 // Source: workers/hoox/src/logic.ts (lines 119-223)
2 // Listing id: process-trade
3 // Caption: Trade routing: idempotency, queue mode, Service Binding forward
4 export async function processTrade(
5   tradeData: TradeData,
6   env: TradeEnv,
7   logger: Logger,
8   options: {
9     checkIdempotency: (
10       env: IdempotencyEnv,
11       key: string,
12       logger: Logger
13     ) => Promise<boolean>;
14     sendTradeToQueue: (
15       queue: Queue,
16       data: TradeData,
17       logger: Logger
18     ) => Promise<void>;
19     MAX_TRADES_PER_MINUTE: number;
20   },
21   queueMode:
22     | "queue_everywhere"
23     | "queue_failover"
24     | "queue_disabled" = "queue_failover"
25 ): Promise<ServiceResponse> {
26   const { requestId } = tradeData;
27   const { checkIdempotency, sendTradeToQueue } = options;
28
29   // Check idempotency before processing (skip for probe mode)
30   if (tradeData.probe !== true) {
31     const idempotencyKey = generateIdempotencyKey(tradeData);
```

```

32     const isNew = await checkIdempotency(env, idempotencyKey, logger);
33     if (!isNew) {
34         logger.info(
35             `[${requestId}] Duplicate trade detected, rejecting: ${idempotencyKey}`
36         );
37         return {
38             success: false,
39             requestId,
40             error: "Duplicate trade request. This trade was already processed.",
41         };
42     }
43 }
44
45 // Check if we should use queue (queue_disabled skips queue entirely)
46 const useQueue =
47     queueMode !== "queue_disabled" &&
48     (queueMode === "queue_everywhere" || !env.TRADE_SERVICE);
49
50 if (useQueue && env.TRADE_QUEUE) {
51     try {
52         await sendTradeToQueue(env.TRADE_QUEUE, tradeData, logger);
53         return {
54             success: true,
55             requestId,
56             tradeResult: { queued: true, message: "Trade queued for execution" },
57         };
58     } catch (error: unknown) {
59         logger.error(`[${requestId}] Failed to queue trade:`, {
60             error: toError(error),
61         });
62     }
63 }
64
65 // Direct service call
66 if (!env.TRADE_SERVICE) {
67     logger.error(`[${requestId}] TRADE_SERVICE binding is not configured.`);
68     return {
69         success: false,
70         requestId,
71         error: "TRADE_SERVICE binding is not configured.",
72     };
73 }
74
75 try {
76     const internalKey = env.INTERNAL_KEY_BINDING;
77     if (!internalKey) {
78         logger.error(`[${requestId}] INTERNAL_KEY_BINDING not configured.`);
79         return {
80             success: false,
81             requestId,
82             error: "Internal authentication key not configured.",
83         };
84     }
85     const res = await serviceFetch(env.TRADE_SERVICE, "/webhook", tradeData, {
86         headers: {
87             "X-Internal-Auth-Key": internalKey,
88             "X-Request-ID": requestId,
89         },
90     });
91     const result = await res.json();
92     return {
93         success: res.ok,
94         requestId,

```

```

95     tradeResult: result,
96     error: res.ok ? undefined : "Trade worker returned error",
97   };
98 } catch (error: unknown) {
99   logger.error(`${requestId}] Error calling TRADE_SERVICE:`, {
100     error: toError(error),
101   });
102   return {
103     success: false,
104     requestId,
105     error: `Error calling trade service: ${toError(error)}`,
106   };
107 }
108 }

```

Listing 10: Gateway trade dispatch (idempotency, queue, binding)

Consumer retries. The shared `createQueueHandler` (Listing 11) unifies retry semantics across Workers. `trade-worker` wires it with DLQ logging to D1 and Telegram notification on permanent failure (Listing 12).

```

1  // Source: packages/shared/src/queue-handler.ts (lines 53-91)
2  // Listing id: queue-handler
3  // Caption: Shared queue consumer with exponential backoff and DLQ hook
4  export function createQueueHandler<T>(options: QueueHandlerOptions<T>) {
5    const { maxRetries, backoffDelays, onMessage, onRetry, onDLQ, logger } =
6      options;
7
8    return async (batch: MessageBatch<T>): Promise<void> => {
9      for (const msg of batch.messages) {
10        const attemptNumber = msg.attempts || 0;
11        const logId = `[${msg.id}]`;
12
13        try {
14          logger?.info(
15            `${logId} Processing message (attempt ${attemptNumber + 1})`
16          );
17          await onMessage(msg.body, attemptNumber);
18          logger?.info(`${logId} Message processed successfully`);
19        } catch (error: unknown) {
20          const errorMsg = error instanceof Error ? error.message : String(error);
21
22          if (attemptNumber < maxRetries) {
23            const delaySeconds =
24              backoffDelays[attemptNumber] ??
25              backoffDelays[backoffDelays.length - 1];
26
27            logger?.info(
28              `${logId} Retrying in ${delaySeconds}s (attempt ${attemptNumber + 2}/${maxRetries + 1})`
29            );
30
31            await onRetry?.(msg.body, attemptNumber, errorMsg, delaySeconds);
32            msg.retry({ delaySeconds });
33          } else {
34            logger?.error(
35              `${logId} Max retries exceeded (${maxRetries + 1} attempts), moving to DLQ`
36            );
37
38            await onDLQ?.(msg.body, attemptNumber, errorMsg);
39          }
40        }

```

```

41     }
42 };

```

Listing 11: Queue handler with exponential backoff and DLQ hook

```

// Source: workers/trade-worker/src/index.ts (lines 271-300)
// Listing id: trade-queue-consumer
// Caption: trade-worker queue consumer wiring
async queue(
  batch: MessageBatch<TradeQueueMessage>,
  env: Env,
  ctx: ExecutionContext
): Promise<void> {
  const handler = createQueueHandler<TradeQueueMessage>({
    maxRetries: MAX_RETRIES,
    backoffDelays: BACKOFF_DELAYS,
    logger,
    onMessage: async (trade, _attemptNumber) => {
      const result = await executeTradeFromQueue(trade, env, ctx);
      if (!result.success) {
        throw new Error(result.error || "Trade execution failed");
      }
      await sendTradeNotification(trade, env, result);
    },
    onRetry: (_trade, _attemptNumber, _errorMsg, _delaySeconds) => {
      // Logging is handled by createQueueHandler internally
    },
    onDLQ: async (trade, _attemptNumber, errorMsg) => {
      await logFailedTrade(trade, errorMsg, env);
      await sendTradeNotification(trade, env, {
        success: false,
        error: errorMsg,
      });
    },
  });

  return await handler(batch);
}

```

Listing 12: trade-worker queue consumer

During exchange maintenance, queued signals eventually succeed in 99.97% of cases within five minutes (Section 7), at the cost of higher perceived latency when `queue_everywhere` is enabled.

4.5 Multi-Exchange Execution

`trade-worker` routes orders through a provider-composed `ExchangeRouter`. KV table `routing:trade` can override the payload's declared exchange per symbol; per-exchange `enabled` and `use_websocket` toggles gate runtime behavior without redeployment.

```

1 // Source: workers/trade-worker/src/exchange-router.ts (lines 107-167)
2 // Listing id: exchange-router
3 // Caption: Dynamic KV routing and exchange toggle resolution
4 async route(
5   payload: WebhookPayload,
6   env: Env
7 ): Promise<{
8   exchange: string;
9   client: IExchangeClient;
10  useWebsocketDO?: boolean;
11 }> {

```

```

12     let exchange = payload.exchange.toLowerCase();
13     let useWebsocketDO = false;
14
15     // Check KV for dynamic routing
16     if (env.CONFIG_KV) {
17         try {
18             const routingTableStr = await env.CONFIG_KV.get(
19                 KVKeys.KV_TRADE_ROUTING
20             );
21             if (routingTableStr) {
22                 const routingTable = JSON.parse(routingTableStr);
23                 if (routingTable[payload.symbol]) {
24                     exchange = routingTable[payload.symbol].toLowerCase();
25                     logger.info("Dynamic route for symbol", {
26                         symbol: payload.symbol,
27                         exchange,
28                     });
29                 }
30             }
31         } catch (e) {
32             logger.error("Failed to parse routing table from KV", {
33                 error: toError(e),
34             });
35         }
36
37         // Check exchange toggle and websocket mode in parallel
38         try {
39             const [exchangeEnabled, useWs] = await Promise.all([
40                 env.CONFIG_KV.get(`exchange:${exchange}:enabled`),
41                 env.CONFIG_KV.get(`exchange:${exchange}:use_websocket`),
42             ]);
43
44             if (exchangeEnabled === "false") {
45                 throw new Error(`EXCHANGE_DISABLED: ${exchange} is disabled`);
46             }
47
48             if (useWs === "true") {
49                 useWebsocketDO = true;
50             }
51         } catch (e) {
52             // Re-throw EXCHANGE_DISABLED errors, swallow and log KV failures
53             if (e instanceof Error && e.message.startsWith("EXCHANGE_DISABLED")) {
54                 throw e;
55             }
56             logger.error("Failed to check exchange toggle from KV", {
57                 error: toError(e),
58             });
59         }
60     }
61
62     const baseResult = this.baseRouter.route(exchange, env);
63     return { ...baseResult, useWebsocketDO };
64 }

```

Listing 13: Dynamic exchange routing via CONFIG_KV

After routing, `executeTrade` applies KV risk limits (kill switch, default leverage, max position size), optionally sets leverage, and dispatches `LONG/SHORT/CLOSE_*` actions via exchange-specific HMAC clients. Listing 14 excerpts the risk gate and REST placement path; WebSocket execution via `ExchangeConnectionManager` is selected when KV enables `use_websocket` (Section 15, adapter internals).

1 // Source: workers/trade-worker/src/execution.ts (lines 307-457)

```

2 // Listing id: execute-trade-risk
3 // Caption: executeTrade: KV risk gates, ExchangeRouter, REST placement
4 // --- Kill Switch & Risk Management via CONFIG_KV ---
5 // Read all independent KV keys in parallel
6 if (env.CONFIG_KV) {
7     try {
8         const [killSwitch, defaultLevStr, maxSizeStr] = await Promise.all([
9             env.CONFIG_KV.get(KVKeys.KV_TRADE_KILL_SWITCH),
10            env.CONFIG_KV.get(KVKeys.KV_TRADE_DEFAULT_LEVERAGE),
11            env.CONFIG_KV.get(KVKeys.KV_TRADE_MAX_POSITION_SIZE),
12        ]);
13
14        if (killSwitch === "true") {
15            throw new Error(
16                "KILL_SWITCH_ACTIVE: Trading is disabled by kill switch"
17            );
18        }
19
20        // Parse leverage safely. A malformed KV value (empty string,
21        // "abc", etc.) yields NaN from parseInt; NaN bypasses every
22        // later bound check (NaN > anyNumber === false), silently
23        // disabling the per-trade leverage cap. The same is true for
24        // parseFloat on the position-size KV value.
25        if (defaultLevStr && !overriddenLeverage) {
26            const parsedLev = parseInt(defaultLevStr, 10);
27            if (Number.isFinite(parsedLev) && parsedLev > 0) {
28                overriddenLeverage = parsedLev;
29                logger.info(
30                    '[Risk Management] Applied default leverage: ${overriddenLeverage}'
31                );
32            } else {
33                logger.warn(
34                    '[Risk Management] Ignoring malformed default_leverage value: ${JSON.stringify(
35                        defaultLevStr)}'
36                );
37            }
38            if (maxSizeStr) {
39                const parsedSize = parseFloat(maxSizeStr);
40                if (Number.isFinite(parsedSize) && parsedSize > 0) {
41                    maxPositionSize = parsedSize;
42                } else {
43                    logger.warn(
44                        '[Risk Management] Ignoring malformed max_position_size value: ${JSON.
45                        stringify(maxSizeStr)}'
46                    );
47                }
48            }
49        } catch (e) {
50            // Re-throw kill switch errors, swallow and log KV failures
51            if (e instanceof Error && e.message.startsWith("KILL_SWITCH_ACTIVE")) {
52                throw e;
53            }
54            logger.error("Failed to fetch trade settings from KV", {
55                error: toError(e),
56            });
57        }
58        // --- End Kill Switch & Risk Management ---
59
60        if (maxPositionSize !== null && quantity > maxPositionSize) {
61            const errorMsg = `Trade quantity (${quantity}) exceeds maximum allowed size (${
62                maxPositionSize})`;

```

```

62     logger.error(errorMsg);
63     const result: TradeExecutionResult = {
64         success: false,
65         error: errorMsg,
66         status: 400,
67     };
68     await dbLogger.logResponse(
69         dbLogId,
70         createJsonResponse(result, 400),
71         null,
72         startTime,
73         ctx
74     );
75     return result;
76 }
77 // --- End Risk Management ---
78
79 const router = new ExchangeRouter();
80
81 let client: IExchangeClient;
82 let routedExchange: string;
83 let useWebsocketDO = false;
84
85 try {
86     const routeResult = await router.route(payload, env);
87     client = routeResult.client;
88     routedExchange = routeResult.exchange;
89     useWebsocketDO = routeResult.useWebsocketDO || false;
90 } catch (error: unknown) {
91     const errorMsg = toError(error, 'Failed to route exchange: ${exchange}');
92     logger.error(errorMsg);
93     const result: TradeExecutionResult = {
94         success: false,
95         error: errorMsg,
96         status: 400,
97     };
98     await dbLogger.logResponse(
99         dbLogId,
100         createJsonResponse(result, 400),
101         null,
102         startTime,
103         ctx
104     );
105     return result;
106 }
107
108 let result: unknown;
109
110 if (useWebsocketDO && env.EXCHANGE_CONNECTION_MANAGER) {
111     logger.info('Routing trade to DO for ${routedExchange}');
112     const id = env.EXCHANGE_CONNECTION_MANAGER.idFromName(
113         'exchange:${routedExchange}'
114     );
115     // DurableObjectStub is an RPC proxy -- cast to access RPC methods
116     const stub = env.EXCHANGE_CONNECTION_MANAGER.get(id) as unknown as {
117         executeTrade(
118             payload: WebhookPayload,
119             env: Env
120         ): Promise<TradeExecutionResult>;
121     };
122     const doResult = await stub.executeTrade(payload, env);
123     if (!doResult.success) {
124         throw new Error(doResult.error || "DO execution failed");

```

```

125     }
126     result = doResult.result;
127 } else {
128     if (client.setLeverage && overriddenLeverage) {
129         try {
130             await client.setLeverage(symbol, overriddenLeverage);
131         } catch (leverageError) {
132             logger.error("Failed to set leverage", {
133                 error: toError(leverageError),
134             });
135             // Continue with trade execution even if setting leverage fails
136         }
137     }
138
139     switch (action.toUpperCase()) {
140         case "LONG":
141             result = await client.openLong(symbol, quantity, price, orderType);
142             break;
143         case "SHORT":
144             result = await client.openShort(symbol, quantity, price, orderType);
145             break;
146         case "CLOSE_LONG":
147             result = await client.closeLong(symbol, quantity);
148             break;
149         case "CLOSE_SHORT":
150             result = await client.closeShort(symbol, quantity);
151             break;
152         // No default needed due to validation earlier
153     }
154 }

```

Listing 14: Risk management and REST order placement

HMAC signing. Exchange REST clients extend `BaseExchangeClient`, which imports the API secret as a `CryptoKey` once per isolate and signs query strings with HMAC-SHA256 via `crypto.subtle` (Listing 15). The Binance futures client appends `timestamp` and `signature` query parameters per the exchange specification (Listing 16).

```

// Source: packages/shared/src/exchanges/base-exchange-client.ts (lines 86-111)
// Listing id: crypto-sign
// Caption: HMAC-SHA256 signing via Web Crypto (shared base client)
private async importKey(): Promise<CryptoKey> {
    const encoder = new TextEncoder();
    return crypto.subtle.importKey(
        "raw",
        encoder.encode(this.apiSecret),
        { name: "HMAC", hash: "SHA-256" },
        false,
        ["sign"]
    );
}

/**
 * Signs data using HMAC-SHA256 with the API secret.
 */
protected async cryptoSign(data: string): Promise<string> {
    const encoder = new TextEncoder();
    const key = await this.importedKeyPromise;
    const signature = await crypto.subtle.sign(
        "HMAC",
        key,
        encoder.encode(data)
    );
}

```

```

    );
    return Array.from(new Uint8Array(signature))
      .map((b) => b.toString(16).padStart(2, "0"))
      .join("");
  }

```

Listing 15: Shared HMAC-SHA256 signing primitive

```

1  // Source: workers/trade-worker/src/binance-client.ts (lines 40-78)
2  // Listing id: binance-signature
3  // Caption: Binance futures client authenticated request signing
4  /**
5   * Generates HMAC-SHA256 signature for authenticated requests.
6   */
7  protected async generateSignature(
8    params: Record<string, string | number | boolean>
9  ): Promise<string> {
10   // Binance expects URLSearchParams format for signature
11   const queryString = new URLSearchParams(
12     params as Record<string, string>
13   ).toString();
14
15   return this.cryptoSign(queryString);
16 }
17
18 /**
19  * Makes an authenticated request to the Binance API.
20  */
21 private async makeRequest<T>(<
22   method: string,
23   path: string,
24   params: Record<string, string | number | boolean> = {}
25 ): Promise<T> {
26   const timestamp = Date.now();
27   const allParams = { ...params, timestamp };
28
29   const signature = await this.generateSignature(allParams);
30   const stringParams: Record<string, string> = {};
31   Object.entries(allParams).forEach(([k, v]) => {
32     stringParams[k] = String(v);
33   });
34   const queryParams = new URLSearchParams(stringParams).toString();
35   const url = `${this.baseUrl}${path}?${queryParams}&signature=${signature}`;
36
37   const options: RequestInit = {
38     method: method,
39     headers: {
40       "Content-Type": "application/json",
41       "X-MBX-APIKEY": this.apiKey,
42     },

```

Listing 16: Binance authenticated REST request construction

Figure 2 summarizes the end-to-end synchronous path; queued modes defer steps 3–4 until consumer pickup.

4.6 Autonomous Risk Management

`agent-worker` executes a five-minute cron (`*/5 * * * *`) combining deterministic risk logic and optional LLM-generated health summaries. Deterministic controls govern trading safety; LLM output is confined to sanitized operational logs and does not place orders.

Deterministic controls.

- Trailing stop: 5% from position watermark (KV-backed).
- Take-profit scale-out: 50% position reduction at 10% unrealized gain.
- Maximum daily drawdown: -5% unrealized portfolio PnL triggers global kill switch (`trade:kill_switch` in `CONFIG_KV`).

LLM gateway. A `ProviderManager` supports four providers: Cloudflare Workers AI (Llama 3.1 8B), OpenAI (GPT-4o-mini), Anthropic (Claude 3 Haiku), and Google (Gemini 1.5 Flash). The default fallback chain is `[workers-ai, openai]` with three full-chain retries and 1s inter-attempt delay. Prompt-injection defenses include delimiter wrapping, marker detection (Listing 26, Section 5), and response validation.

Cron wiring. `agent-worker` registers a shared `createCronHandler` (Listing 17) that logs structured cron metadata and runs `runHousekeeping` in parallel with `processRoutine` (Listing 18).

```
// Source: packages/shared/src/cron-handler.ts (lines 39-65)
// Listing id: cron-handler
// Caption: Shared cron handler with structured logging
export function createCronHandler<Env = unknown>({
  options: CronHandlerOptions<Env>
}) {
  const { name, handler, logger } = options;

  return async (
    event: ScheduledEvent,
    env: Env,
    ctx: ExecutionContext
  ): Promise<void> => {
    const startTime = Date.now();

    logger?.info(`${name} cron triggered`, {
      cron: event.cron,
      scheduledTime: event.scheduledTime,
    });

    try {
      await handler(event, env, ctx);

      const durationMs = Date.now() - startTime;
      logger?.info(`${name} cron handler completed successfully`, {
        cron: event.cron,
        durationMs,
      });
    } catch (error: unknown) {
      const durationMs = Date.now() - startTime;
```

Listing 17: Shared cron handler with structured logging

```
// Source: workers/agent-worker/src/index.ts (lines 288-306)
// Listing id: agent-cron-wiring
// Caption: agent-worker cron handler with parallel housekeeping and routine
const cronHandler = createCronHandler<Env>({
  name: "agent-worker",
  logger,
  handler: async (_event: ScheduledEvent, env: Env, ctx: ExecutionContext) => {
    ctx.waitUntil(
```

```

    runHousekeeping(env as unknown as HousekeepingEnv, logger).catch((err) =>
      logger.error("runHousekeeping failed", { error: String(err) })
    )
  );
  ctx.waitUntil(
    processRoutine(env as unknown as RoutineEnv, logger, {
      getProviderManager: (e) => getProviderManager(e as unknown as Env),
      getActiveTrailingStops: (e) =>
        getActiveTrailingStops(e as unknown as Env),
    }).catch((err) =>
      logger.error("processRoutine failed", { error: String(err) })
    )
  );
},

```

Listing 18: agent-worker parallel cron tasks

Figure 3 sequences the five-minute cron loop: position sync, KV watermark evaluation, optional close orders via **trade-worker**, and Telegram/LLM summaries. Full binding detail appears in Section 12.

5 Security Model

Security is organized as five concentric layers (Figure 1, ingress ring). Each layer fails closed except idempotency duplicate suppression, which fails open when the Durable Object is unreachable (Section 4)—a deliberate availability trade-off documented in the threat model (Appendix C).

1. **Edge firewall:** Cloudflare WAF and TradingView IP allow-listing (four default CIDR ranges, KV-extensible).
2. **Webhook authentication:** Constant-time comparison of payload `apiKey` against a runtime-injected secret binding.
3. **Service Binding isolation:** Internal Workers expose no public routes; only explicitly bound callers may invoke them.
4. **Internal authorization:** Shared `requireInternalAuth` middleware validates `X-Internal-Auth-Key` on every inter-service request; unconfigured keys fail closed.
5. **Durable Object mutex:** Idempotency locks prevent duplicate gateway acceptance under retry storms.

5.1 Ingress Hardening

Kill switch. Before any trade payload is parsed, the gateway reads `trade:kill_switch` from `CONFIG_KV` (Listing 19). When the value is `true`, ingress returns HTTP 503 and no downstream Worker is invoked. The same key is written by **agent-worker** when portfolio drawdown exceeds -5% , halting new signals before the next cron cycle completes.

```

// Source: workers/hoor/src/killSwitch.ts (lines 15-31)
// Listing id: kill-switch
// Caption: Global kill switch read from canonical KV key
export async function checkKillSwitch(
  kv: KVNamespace | undefined
): Promise<{ enabled: boolean; error?: string }> {
  try {
    if (!kv) {

```

```

    return { enabled: false };
  }
  const killSwitchVal = await kv.get(KV_KILL_SWITCH_KEY);
  if (killSwitchVal && killSwitchVal.toLowerCase() === "true") {
    return { enabled: true };
  }
  return { enabled: false };
} catch (error: unknown) {
  logger.error("Error reading kill switch KV", { error });
  return { enabled: false, error: String(error) };
}
}

```

Listing 19: Global kill switch read from canonical KV key

IP allow-list. TradingView publishes four webhook source ranges. `hoox` rejects requests whose CF-Connecting-IP is absent from the default set unless `CONFIG_KV` overrides expand the list (Listing 20). This complements WAF rules: even a leaked API key cannot trigger trades from arbitrary origins.

```

// Source: workers/hoox/src/ipAllowlist.ts (lines 21-50)
// Listing id: ip-allowlist
// Caption: TradingView IP allow-list with KV override
export async function checkIpAllowlist(
  kv: KVNamespace | undefined,
  clientIp: string | null | undefined
): Promise<{
  allowed: boolean;
  reason?: string;
  config: IpCheckConfig;
}> {
  const defaultConfig: IpCheckConfig = {
    enabled: true,
    allowedIps: TRADINGVIEW_ALLOWED_IPS,
  };

  if (!clientIp) {
    return {
      allowed: false,
      reason: "No client IP provided",
      config: defaultConfig,
    };
  }

  try {
    const config = await loadIpConfig(kv);
    if (!config.enabled) {
      return { allowed: true, config };
    }

    if (config.allowedIps.has(clientIp)) {
      return { allowed: true, config };
    }
  }
}

```

Listing 20: TradingView IP allow-list with KV override

Parallel pre-flight. Kill switch, IP check, and API key validation execute concurrently via `Promise.all` on the gateway hot path (Listing 4, Section 4), minimizing serial KV reads before session creation.

Payload bounds. The `/webhook` handler rejects bodies larger than 100 KB before JSON parsing, bounding memory use and JSON bomb risk on the public surface.

5.2 Authentication Primitives

Constant-time comparison. API key and internal auth checks use `timingSafeEqual` (Listing 21) to avoid byte-at-a-time timing leaks that could reduce brute-force search space for short secrets.

```
// Source: packages/shared/src/middleware/auth.ts (lines 13-26)  
// Listing id: timing-safe-equal  
// Caption: Constant-time string comparison for API keys  
export function timingSafeEqual(a: string, b: string): boolean {  
  if (a.length !== b.length) return false;  
  const encoder = new TextEncoder();  
  const aBuf = encoder.encode(a);  
  const bBuf = encoder.encode(b);  
  // Manual byte-by-byte XOR comparison for timing-safe comparison  
  // This is the same approach used by crypto.timingSafeEqual but manually  
  // implemented to avoid TypeScript typing issues with the global crypto type.  
  let result = 0;  
  for (let i = 0; i < aBuf.length; i++) {  
    result |= aBuf[i] ^ bBuf[i];  
  }  
  return result === 0;  
}
```

Listing 21: Constant-time string comparison

Webhook API key. The gateway compares the JSON `apiKey` field against `WEBHOOK_API_KEY_BINDING` using the same primitive. Missing or mismatched keys yield HTTP 401 before idempotency or trade routing.

Internal service auth. All binding-only Workers gate mutating routes with `requireInternalAuth` (Listing 5). Security tests assert HTTP 401 when the binding is unset, the header is absent, or the header mismatches (Listing 62).

5.3 Rate Limiting and Session Abuse

After API key validation, `hoox` creates or resumes a per-key session and enforces 10 trades per 60 s window (Listing 22). The shared `createRateLimiter` stores sliding-window counters in `CONFIG_KV` with a `hoox-webhook` key prefix (Listing 23). Exceeded limits return HTTP 429 with `Retry-After`, complementing exchange-side throttles and constraining credential-compromise blast radius.

```
// Source: workers/hoox/src/index.ts (lines 28-44)  
// Listing id: rate-limit-gateway  
// Caption: Per-session webhook rate limit (10 trades/minute via CONFIG_KV)  
// --- Rate limiting limits (passed to KV-backed rate limiter) ---  
const MAX_TRADES_PER_MINUTE = 10;  
const RATE_LIMIT_WINDOW = 60; // 60 seconds  
  
async function checkRateLimit(  
  sessionId: string,  
  env: { CONFIG_KV?: KVNamespace }  
)  
: Promise<boolean> {  
  const kv = env.CONFIG_KV;  
  const rateLimiter = createRateLimiter(kv, {
```

```

    maxRequests: MAX_TRADES_PER_MINUTE,
    windowSeconds: RATE_LIMIT_WINDOW,
    keyPrefix: "hoox-webhook",
  });
  const result = await rateLimiter.checkKey(sessionId);
  return result.allowed;
}

```

Listing 22: Per-session webhook rate limit

```

// Source: packages/shared/src/middleware/rate-limit.ts (lines 162-181)
// Listing id: rate-limiter
// Caption: KV-backed sliding-window rate limiter checkWithKey
async function checkWithKey(fullKey: string): Promise<RateLimitResult> {
  // First check: can we even attempt a request without exceeding the limit?
  // We read current count BEFORE incrementing to avoid false negatives.
  // Under high concurrency this check is approximate (race condition window
  // between read and incr), but the alternative is always allowing one extra
  // request per concurrent batch.
  const current = await storage.get(fullKey);
  const count = current ? parseInt(current, 10) : 0;

  if (count >= config.maxRequests) {
    const retryAfter = Math.ceil(
      config.windowSeconds -
      (Date.now() % (config.windowSeconds * 1000)) / 1000
    );
    return {
      allowed: false,
      remaining: 0,
      retryAfter,
    };
  }
}

```

Listing 23: KV sliding-window rate limit check

5.4 Response and Transport Hardening

Security headers. Public and internal JSON responses attach CSP, X-Frame-Options, X-Content-Type-Options, and HSTS via shared middleware (Listing 24). Dashboard SSR inherits the same defaults through the OpenNext Worker entry.

```

// Source: packages/shared/src/middleware/security-headers.ts (lines 25-45)
// Listing id: security-headers
// Caption: Default security response headers (CSP, HSTS)
export const SECURITY_HEADERS_DEFAULTS: Required<SecurityHeadersOptions> = {
  xContentTypeOptions: "nosniff",
  xFrameOptions: "DENY",
  xXssProtection: "1; mode=block",
  referrerPolicy: "strict-origin-when-cross-origin",
  permissionsPolicy:
    "accelerometer=(), camera=(), geolocation=(), gyroscope=(), magnetometer=(), microphone=(), payment=(), usb=()",
  strictTransportSecurity: "max-age=31536000; includeSubDomains",
  contentSecurityPolicy: "default-src 'self'",
};

/**
 * Create security headers object for use in responses.
 * Merges provided options over defaults.
 */

```

```

export function secureHeaders(
  options?: SecurityHeadersOptions
): Record<string, string> {
  const opts = { ...SECURITY_HEADERS_DEFAULTS, ...options };
  const headers: Record<string, string> = {
    "X-Content-Type-Options": opts.xContentTypeOptions,

```

Listing 24: Default security response headers

Service Binding transport. Inter-Worker calls never traverse the public internet; bindings address peers as `http://internal{path}` with a 30 s timeout (Listing 7). This removes per-hop TLS and DNS from the critical path while keeping the attack surface limited to the binding graph (Appendix D).

5.5 Secondary Ingress: Email

`email-worker` accepts Mailgun push webhooks on a public `POST /webhook` route. Verification recomputes HMAC-SHA256 over `timestamp + token` and compares digests with `timingSafeEqual` (Listing 25). Parsed bodies pass the same Zod trade schema as `TradingView` payloads before forwarding to `trade-worker`.

```

1 // Source: workers/email-worker/src/index.ts (lines 121-161)
2 // Listing id: mailgun-signature
3 // Caption: Mailgun webhook HMAC-SHA256 verification
4 async function handleMailgunWebhook(
5   request: Request,
6   env: Env,
7   ctx: ExecutionContext
8 ): Promise<Response> {
9   const signature = request.headers.get("Mailgun-Signature");
10  const timestamp = request.headers.get("Mailgun-Timestamp");
11  const token = request.headers.get("Mailgun-Token");
12
13  if (!signature || !timestamp || !token) {
14    return Errors.unauthorized("Missing Mailgun signature headers");
15  }
16
17  const apiKey = env.MAILGUN_API_KEY;
18  if (!apiKey) {
19    logger.error("MAILGUN_API_KEY not configured");
20    return Errors.internal("Service configuration error");
21  }
22
23  const dataToSign = timestamp + token;
24  const encoder = new TextEncoder();
25  const key = await crypto.subtle.importKey(
26    "raw",
27    encoder.encode(apiKey),
28    { name: "HMAC", hash: "SHA-256" },
29    false,
30    ["sign"]
31  );
32  const signatureBytes = await crypto.subtle.sign(
33    "HMAC",
34    key,
35    encoder.encode(dataToSign)
36  );
37  const expectedSignature = Array.from(new Uint8Array(signatureBytes))
38    .map((b) => b.toString(16).padStart(2, "0"))
39    .join("");

```

```

40
41   if (!timingSafeEqual(signature, expectedSignature)) {
42     logger.warn("Invalid Mailgun signature");
43     return Errors.unauthorized("Invalid signature");
44   }

```

Listing 25: Mailgun webhook HMAC-SHA256 verification

5.6 LLM and Prompt Injection

`agent-worker` and `telegram-worker` invoke multi-provider LLMs for operational summaries and RAG answers. Model output never places orders; deterministic risk rules own trading decisions. Prompt-injection markers in user-supplied or log-derived text are detected before model calls (Listing 26), and responses pass delimiter wrapping and schema validation.

```

// Source: workers/agent-worker/src/logic/prompt-sanitizer.ts (lines 46-59)
// Listing id: prompt-sanitizer
// Caption: LLM prompt-injection marker detection
export function sanitizeLogMessage(raw: unknown): string {
  if (raw == null) return "";
  let s = String(raw);
  // Strip ASCII control chars and the C1 unicode control range.
  // Keeps \n (0x0A) and \t (0x09) which are common in logs.
  // eslint-disable-next-line no-control-regex
  s = s.replace(/[\x00-\x08\x0B\x0C\x0E-\x1F\x7F-\x9F]/g, "");
  if (s.length > MAX_LOG_MESSAGE_LENGTH) {
    s = s.slice(0, MAX_LOG_MESSAGE_LENGTH) + "...";
  }
  for (const re of INJECTION_MARKERS) {
    if (re.test(s)) return DROPPED_SENTINEL;
  }
  return s;
}

```

Listing 26: LLM prompt-injection marker detection

5.7 Data-Layer Guards

`d1-worker` exposes parameterized SQL to trusted internal callers only. The `validateQuery` guard rejects non-SELECT statements, literal injection, UNION, and tables outside an allowlist (Listing 45). Dashboard settings keys must match known `CONFIG_KV` prefixes. Together with internal auth, this blocks lateral movement from a compromised binding to arbitrary D1 writes.

5.8 Exchange Credential Handling

REST placement clients sign requests with HMAC-SHA256 via `crypto.subtle`; API secrets are imported as `CryptoKey` once per isolate (Listings 15, 16, 27). Secrets live in Wrangler secret bindings, never in KV or D1. `WebSocket` session state in `ExchangeConnectionManager` holds connection handles only—not signing material.

```

// Source: workers/trade-worker/src/bybit-client.ts (lines 59-65)
// Listing id: bybit-signature
// Caption: Bybit V5 HMAC signature payload construction
private async signRequest(
  timestamp: number,
  paramsStr: string
): Promise<string> {
  const signaturePayload = `${timestamp}${this.apiKey}${this.recvWindow}${paramsStr}`;
}

```

Table 4: Security control summary by surface.

Surface	Control	Failure mode
hoox /webhook	IP + API key + rate limit + kill switch	Fail closed (401/403/429/503)
Idempotency DO	Mutex duplicate suppression	Fail open (permit trade)
Internal bindings	X-Internal-Auth-Key	Fail closed (401)
email-worker	Mailgun HMAC	Fail closed (401)
d1-worker	SQL allowlist + internal auth	Fail closed (403)
LLM paths	Sanitizer + no order side effects	Fail closed on marker hit

Table 5: Monorepo package topology.

Path	Artifact	Role
packages/shared	hoox-shared npm pkg	Router, middleware, KV keys, queue handler
packages/cli	hoox CLI v0.9.2	Deploy, secrets, perf fastpath, repair
workers/hoox	Gateway Worker	Public webhook ingress
workers/trade-worker	Execution Worker	CEX REST/WS, D1/R2 side effects
workers/*	Nine other Workers	Agent, D1 proxy, analytics, UI, DeFi
tests/integration	Bun + Miniflare	Gateway and probe regression suites
tests/load	k6	Deployed-edge concurrency guards

```

    return this.cryptoSign(signaturePayload);
  }

```

Listing 27: Bybit V5 HMAC signature payload

5.9 Operational Security Posture

Table 4 summarizes enforcement points. Full threat-to-mitigation mapping appears in Appendix C; reproduced test excerpts in Appendix F.

6 Implementation

HOOX is implemented in TypeScript 5.x and deployed with Wrangler 4.x. The monorepo uses Bun workspaces (`package.json workspaces` field); production Workers import a shared package `@jango-blockchained/hoox-shared` that centralizes routing, validation, exchange abstractions, KV key constants, and Service Binding helpers so binding names and auth semantics stay consistent across ten deployables.

6.1 Monorepo Layout

Table 5 maps repository paths to deployable artifacts. The hoox CLI (`packages/cli`) reads the same worker registry as documentation generators (`scripts/sync-dashboard-configs.ts`, `graph-metadata.json`), ensuring deployment order, Mintlify docs, and this paper’s binding tables stay synchronized.

6.2 Request Pipeline and Middleware

Every Worker uses `createRouter<Env>()` from `hoox-shared`, registering routes as `router.post(path, handler)`. Shared middleware stacks include:

- `validateJson(ZodSchema)` — structured 400 responses with Zod path arrays (Listing 6).
- `requireInternalAuth` — X-Internal-Auth-Key gate on binding-only routes (Listing 5).
- `createRateLimiter` — `CONFIG_KV` sliding windows (Listing 23).
- `withRequestLog` / `createLogger` — JSON logs with `service` and `module` fields for Workers Observability filters.

The gateway additionally wires session creation before rate limiting: `getOrCreateSession` reads or mints a session id keyed by API key hash, storing `lastSeen` in `SESSIONS_KV` with a one-hour TTL (Listing 28).

```
// Source: workers/hoox/src/sessionManager.ts (lines 12-37)
// Listing id: session-manager
// Caption: SESSIONS_KV session creation with 3600s TTL
export async function getOrCreateSession(
  kv: KVNamespace | undefined,
  sessionId?: string | null
): Promise<{ sessionId: string; isNew: boolean }> {
  const id = sessionId || crypto.randomUUID();

  if (!kv) {
    return { sessionId: id, isNew: !sessionId };
  }

  try {
    const existing = await kv.get(id);
    const isNew = !existing;

    if (isNew || existing) {
      await kv.put(id, JSON.stringify({ lastSeen: new Date().toISOString() }), {
        expirationTtl: SESSION_TTL,
      });
    }

    return { sessionId: id, isNew };
  } catch (error: unknown) {
    logger.error("KV Session Error", { error });
    return { sessionId: id, isNew: !sessionId };
  }
}
```

Listing 28: Webhook session tracking in `SESSIONS_KV`

6.3 Configuration Registry

Runtime toggles use a namespaced KV convention documented in `packages/shared/src/kvKeys.ts` (Listing 29). Prefixes separate concerns—`trade:*` for execution risk, `webhook:*` for ingress policy, `agent:*` for LLM provider keys—so dashboard settings validation can reject unknown keys. Queue mode literals (`queue_failover`, `queue_disabled`, `queue_everywhere`) are exported as constants to prevent string drift between gateway and CLI.

```
// Source: packages/shared/src/kvKeys.ts (lines 1-59)
// Listing id: kv-keys
// Caption: Centralized KV key registry
/**
 * Centralized KV key registry for Hoox workers.
 * Use these constants instead of string literals to prevent typos.
 */
```

```

* Key naming convention: <namespace>:<key>
* - trade:* - Trade execution settings
* - bot:* - Telegram bot settings
* - webhook:* - Webhook configuration
* - email:* - Email worker settings
* - agent:* - Agent worker settings
* - dashboard:* - Dashboard settings
* - global:* - Global settings
*/

// --- Trade Execution Keys ---
export const KV_TRADE_DEFAULT_LEVERAGE = "trade:default_leverage";
export const KV_TRADE_MAX_POSITION_SIZE = "trade:max_position_size";
export const KV_TRADE_MAX_DAILY_DRAWDOWN_PERCENT =
    "trade:max_daily_drawdown_percent";
export const KV_TRADE_TRAILING_STOP_PERCENT = "trade:trailing_stop_percent";
export const KV_TRADE_KILL_SWITCH = "trade:kill_switch";
export const KV_TRADE_ROUTING = "trade:routing";

// --- Telegram Bot Keys ---
export const KV_BOT_ENABLED = "bot:enabled";
export const KV_BOT_DEFAULT_CHAT_ID = "bot:default_chat_id";
export const KV_BOT_NOTIFY_ON_EXECUTION = "bot:notify_on_execution";
export const KV_BOT_NOTIFY_ON_ERROR = "bot:notify_on_error";

// --- Webhook Keys ---
export const KV_WEBHOOK_IP_CHECK_ENABLED =
    "webhook:tradingview:ip_check_enabled";
export const KV_WEBHOOK_ALLOWED_IPS = "webhook:tradingview:allowed_ips";
export const KV_WEBHOOK_QUEUE_MODE = "webhook:queue_mode";

// --- Email Worker Keys ---
export const KV_EMAIL_SCAN_SUBJECT = "email:scan_subject";
export const KV_EMAIL_USE_IMAP = "email:use_imap";
export const KV_EMAIL_COIN_PATTERN = "email:coin_pattern";
export const KV_EMAIL_ACTION_PATTERN = "email:action_pattern";
export const KV_EMAIL_QUANTITY_MULTIPLIER = "email:quantity_multiplier";

// --- Agent Worker Keys ---
export const KV_AGENT_CONFIG = "agent:config";
export const KV_AGENT_OPENAI_KEY = "agent:openai_key";
export const KV_AGENT_ANTHROPIC_KEY = "agent:anthropic_key";
export const KV_AGENT_GOOGLE_KEY = "agent:google_key";

// --- Dashboard Keys ---
export const KV_DASHBOARD_AI_HEALTH_SUMMARY = "dashboard:ai_health_summary";

// --- Global Keys ---
export const KV_HEALTH_CHECK = "health_check";
export const KV_HOUSEKEEPING_LAST_CHECK = "housekeeping:last_check";

// --- Queue Mode Values ---
export const QUEUE_MODE_FAILOVER = "queue_failover";
export const QUEUE_MODE_EVERYWHERE = "queue_everywhere";
export const QUEUE_MODE_DISABLED = "queue_disabled";

```

Listing 29: Centralized CONFIG_KV key registry (excerpt)

6.4 Exchange Integrations

HOOX supports three centralized exchanges via a provider-composed `ExchangeRouter` (Listing 13):

- **Binance:** USDT-margined futures at `fapi.binance.com`; HMAC over sorted query string including timestamp and signature (Listing 16).
- **Bybit:** V5 REST at `api.bybit.com`; `recv_window=5000`; signature payload timestamp + `apiKey` + `recvWindow` + `body` (Listing 27).
- **MEXC:** Contract API at `contract.mexc.com`; shares `BaseExchangeClient` HMAC primitive (Listing 15).

Per-symbol routing reads JSON from `trade:routing` in `CONFIG_KV`; per-exchange `enabled` and `use_websocket` toggles select REST versus `ExchangeConnectionManager` `WebSocket` placement without redeployment.

Risk gates before placement. `executeTrade` parallel-reads kill switch, default leverage, and max position size from KV, then rejects malformed numeric strings—`parseInt/parseFloat` NaN values silently disable caps in many codebases; HOOX explicitly checks `Number.isFinite` before applying limits (Listing 30).

```

1  // Source: workers/trade-worker/src/execution.ts (lines 307-379)
2  // Listing id: risk-kv-parse
3  // Caption: Parallel KV risk reads with NaN-safe leverage/size parsing
4  // --- Kill Switch & Risk Management via CONFIG_KV ---
5  // Read all independent KV keys in parallel
6  if (env.CONFIG_KV) {
7    try {
8      const [killSwitch, defaultLevStr, maxSizeStr] = await Promise.all([
9        env.CONFIG_KV.get(KVKeys.KV_TRADE_KILL_SWITCH),
10       env.CONFIG_KV.get(KVKeys.KV_TRADE_DEFAULT_LEVERAGE),
11       env.CONFIG_KV.get(KVKeys.KV_TRADE_MAX_POSITION_SIZE),
12     ]);
13
14     if (killSwitch === "true") {
15       throw new Error(
16         "KILL_SWITCH_ACTIVE: Trading is disabled by kill switch"
17       );
18     }
19
20     // Parse leverage safely. A malformed KV value (empty string,
21     // "abc", etc.) yields NaN from parseInt; NaN bypasses every
22     // later bound check (NaN > anyNumber === false), silently
23     // disabling the per-trade leverage cap. The same is true for
24     // parseFloat on the position-size KV value.
25     if (defaultLevStr && !overriddenLeverage) {
26       const parsedLev = parseInt(defaultLevStr, 10);
27       if (Number.isFinite(parsedLev) && parsedLev > 0) {
28         overriddenLeverage = parsedLev;
29         logger.info(
30           '[Risk Management] Applied default leverage: ${overriddenLeverage}'
31         );
32       } else {
33         logger.warn(
34           '[Risk Management] Ignoring malformed default_leverage value: ${JSON.stringify(
35             defaultLevStr)}'
36         );
37       }
38     }
39     if (maxSizeStr) {
40       const parsedSize = parseFloat(maxSizeStr);
41       if (Number.isFinite(parsedSize) && parsedSize > 0) {
42         maxPositionSize = parsedSize;
43       } else {

```

```

43         logger.warn(
44             '[Risk Management] Ignoring malformed max_position_size value: ${JSON.
stringify(maxSizeStr)}';
45         );
46     }
47 }
48 } catch (e) {
49     // Re-throw kill switch errors, swallow and log KV failures
50     if (e instanceof Error && e.message.startsWith("KILL_SWITCH_ACTIVE")) {
51         throw e;
52     }
53     logger.error("Failed to fetch trade settings from KV", {
54         error: toError(e),
55     });
56 }
57 }
58 // --- End Kill Switch & Risk Management ---
59
60 if (maxPositionSize !== null && quantity > maxPositionSize) {
61     const errorMsg = `Trade quantity (${quantity}) exceeds maximum allowed size (${
maxPositionSize}`;
62     logger.error(errorMsg);
63     const result: TradeExecutionResult = {
64         success: false,
65         error: errorMsg,
66         status: 400,
67     };
68     await dbLogger.logResponse(
69         dbLogId,
70         createJsonResponse(result, 400),
71         null,
72         startTime,
73         ctx
74     );
75     return result;
76 }

```

Listing 30: KV risk gates with safe numeric parsing

WebSocket amortization. When `use_websocket` is true, the `ExchangeConnectionManager` Durable Object maintains exchange-specific adapters, a reconnect loop, and a pending RPC map keyed by client order id (Listing 31). Constructor-side `waitUntil(connectToExchange())` hides TCP+TLS handshake latency from the first REST fallback.

```

// Source: workers/trade-worker/src/exchange-connection-manager.ts (lines 17-52)
// Listing id: exchange-connection-do
// Caption: ExchangeConnectionManager DO: WS adapter and pending RPC map
export class ExchangeConnectionManager extends DurableObject {
    private ws: WebSocket | null = null;
    private isConnecting = false;
    private exchange: string;
    private adapter: IWsAdapter | undefined;
    private ready = false;
    private pending = new Map<
        string,
        {
            resolve: (v: unknown) => void;
            reject: (e: unknown) => void;
            timer: ReturnType<typeof setTimeout>;
        }
    >();
}

```

```

constructor(ctx: DurableObjectState, env: Env) {
  super(ctx, env);
  this.exchange = this.deriveExchange(ctx);

  // Load the configured adapter for this exchange, if creds are available.
  const apiKey = readApiKey(env, this.exchange);
  const apiSecret = readApiSecret(env, this.exchange);
  if (apiKey && apiSecret) {
    this.adapter = getAdapter(this.exchange, { apiKey, apiSecret });
    if (!this.adapter) {
      logger.warn(
        'No WS adapter registered for "${this.exchange}"; DO is REST-only'
      );
    }
  } else {
    logger.warn('Missing ${this.exchange} credentials; DO is REST-only');
  }

  // Kick off connection in background
  this.ctx.waitUntil(this.connectToExchange());
}

```

Listing 31: ExchangeConnectionManager DO initialization

6.5 Autonomous Agent Implementation

The five-minute cron invokes `processRoutine`, which batch-fetches open positions from `d1-worker`, parallel-fetches public mark prices (unsigned REST), and batch-reads KV watermarks and take-profit flags before sequential per-position evaluation (Listing 32). Trailing-stop triggers dispatch `CLOSE_*` payloads to `trade-worker` via Service Binding; drawdown breaches write `trade:kill_switch` before the next gateway ingress.

```

1 // Source: workers/agent-worker/src/logic/routine.ts (lines 107-198)
2 // Listing id: agent-trailing-stop
3 // Caption: Batched mark prices, KV watermarks, trailing-stop trigger
4 // Batch all mark price fetches in parallel before the loop
5 const markPriceResults = await Promise.all(
6   openPositions.map((pos) =>
7     fetchMarkPrice(pos.exchange, pos.symbol, logger)
8   )
9 );
10 const markPriceMap = new Map<number, number | null>();
11 openPositions.forEach((pos, i) => {
12   markPriceMap.set(i, markPriceResults[i]);
13 });
14
15 // Batch all KV watermark reads in parallel before the loop
16 const watermarkKeys = openPositions.map(
17   (pos) => `trade:watermark:${pos.exchange}:${pos.symbol}:${pos.side}`
18 );
19 const wmResults = await Promise.all(
20   watermarkKeys.map((key) => env.CONFIG_KV.get(key))
21 );
22 const watermarkMap = new Map<number, string | null>();
23 wmResults.forEach((val, i) => {
24   watermarkMap.set(i, val);
25 });
26
27 // Batch all TP hit KV reads in parallel
28 const tpKeys = openPositions.map(
29   (pos) => `trade:tp_hit:${pos.exchange}:${pos.symbol}:${pos.side}`

```

```

30     );
31     const tpResults = await Promise.all(
32         tpKeys.map((key) => env.CONFIG_KV.get(key))
33     );
34     const tpHitMap = new Map<number, string | null>();
35     tpResults.forEach((val, i) => {
36         tpHitMap.set(i, val);
37     });
38
39     // Process positions sequentially for state-dependent writes
40     for (let i = 0; i < openPositions.length; i++) {
41         const position = openPositions[i];
42         logger.info(
43             `Analyzing position: ${position.symbol} (${position.side}) - Quantity: ${position.size}`
44         );
45
46         const markPrice = markPriceMap.get(i) ?? null;
47
48         if (markPrice !== null) {
49             logger.info(
50                 `${position.exchange} ${position.symbol} Mark Price: ${markPrice}`
51             );
52             if (position.entry_price && position.size) {
53                 const priceDiff =
54                     position.side === "LONG"
55                     ? markPrice - position.entry_price
56                     : position.entry_price - markPrice;
57                 const pnl = priceDiff * position.size;
58                 totalUnrealizedPnl += pnl;
59                 logger.info(`Unrealized PnL for ${position.symbol}: ${pnl}`);
60
61                 const currentWmStr = watermarkMap.get(i) ?? null;
62                 const currentWm = currentWmStr
63                     ? parseFloat(currentWmStr)
64                     : position.entry_price;
65
66                 let newWm = currentWm;
67                 if (position.side === "LONG" && markPrice > currentWm)
68                     newWm = markPrice;
69                 if (position.side === "SHORT" && markPrice < currentWm)
70                     newWm = markPrice;
71
72                 const wmKey = `trade:watermark:${position.exchange}:${position.symbol}:${position.side}`;
73                 if (newWm !== currentWm) {
74                     await env.CONFIG_KV.put(wmKey, newWm.toString());
75                 }
76
77                 const trailingStopPercent = config.trailingStopPercent;
78                 let triggerStop = false;
79                 if (
80                     position.side === "LONG" &&
81                     markPrice < newWm * (1 - trailingStopPercent)
82                 )
83                     triggerStop = true;
84                 if (
85                     position.side === "SHORT" &&
86                     markPrice > newWm * (1 + trailingStopPercent)
87                 )
88                     triggerStop = true;
89
90                 if (triggerStop) {

```

```

91         logger.info(
92             'TRAILING STOP TRIGGERED for ${position.symbol}! Watermark: ${newWm}, Current:
             ${markPrice}'
93         );
94         await sendCloseOrder(env, position, logger);
95         void trackAnalytics(env, "/track/trailing-stop", {

```

Listing 32: Agent cron: batched reads and trailing-stop logic

6.6 Web3 Execution Worker

`web3-wallet-worker` exposes binding-only routes for native transfers, ERC-20 approvals, and DEX swaps using `ethers v6` under `nodejs_compat`. Before signing, `validateTransaction` enforces wallet enablement, per-tx USD ceiling, and optional contract whitelists—DEX router addresses are always permitted when whitelist mode is on (Listing 33).

```

1  // Source: workers/web3-wallet-worker/src/security.ts (lines 17-54)
2  // Listing id: web3-validate-transaction
3  // Caption: On-chain transfer guards: max USD, whitelist, enabled flag
4  export async function validateTransaction(
5      params: ValidationParams
6  ): Promise<ValidationResult> {
7      const { config, to, valueUsd } = params;
8
9      if (!config.enabled) {
10         return { allowed: false, reason: "Wallet is disabled" };
11     }
12
13     if (valueUsd > config.security.maxTransactionValueUsd) {
14         return {
15             allowed: false,
16             reason: 'Transaction value ${valueUsd} exceeds max ${config.security.
             maxTransactionValueUsd}',
17         };
18     }
19
20     if (config.security.whitelistedContractsOnly) {
21         const chainConfig = DEFAULT_CHAIN_CONFIGS[params.chain];
22         const isDexRouter =
23             chainConfig?.dexRouterAddress?.toLowerCase() === to.toLowerCase();
24
25         if (!isDexRouter && !isContractWhitelisted(config, to)) {
26             return {
27                 allowed: false,
28                 reason: "Contract not in whitelist",
29             };
30         }
31     }
32
33     if (config.security.requireConfirmation && valueUsd > 1000) {
34         return {
35             allowed: true,
36             reason: "Confirmation required",
37         };
38     }
39
40     return { allowed: true };
41 }

```

Listing 33: DeFi transaction validation guards

Table 6: Measurement classes and tooling.

Class	Scope	Tool	Exchange?
Fast-path probe	Gateway → binding → short-circuit	<code>hoox perf fastpath</code>	No
Production ack	Gateway → CEX REST response	Analytics / logs	Yes
Load test	Gateway under concurrency	<code>k6 tests/load/</code>	Optional

Mnemonic and private-key secrets never enter KV; chain defaults and security policy live in `CONFIG_KV` with a one-shot migration marker from legacy `WALLET_CONFIG_KV`.

6.7 Tooling and User Interface

The `hoox` CLI exposes 25 command groups spanning initialization, deployment, secret management, database operations, WAF configuration, and repair. The `hoox perf fastpath` command sends synthetic webhook probes and aggregates per-hop timings from Cloudflare Workers Observability. An interactive terminal UI (`hoox-tui`) streams worker health via Server-Sent Events.

The dashboard is a Next.js 16 application (React 19) deployed via OpenNext for Cloudflare [19], consuming the same internal Service Bindings as trading Workers. Request validation across Workers uses Zod schemas via shared `validateJson` middleware [11].

Deployment graph. Wrangler project names match Worker registry entries (Listing 35). Service Binding targets are validated at deploy time by `scripts/check-worker-submodules.ts` in CI; the graph appendix (Appendix E) is regenerated from `graph-metadata.json`.

7 Evaluation

7.1 Measurement Taxonomy

Latency claims in edge trading are often ambiguous about whether they include upstream alert delivery, internal mesh hops, exchange matching, or asynchronous persistence. Figure 4 and Table 6 define three measurement classes used throughout this paper.

7.2 Methodology

We evaluate HOOX along three axes: latency, cost, and reliability.

Fast-path probes. The `hoox perf fastpath run -n N` command sends N synthetic webhook requests with `probe: true` and a shared `probe_id` index. Downstream Workers short-circuit before exchange validation or submission (Listing 3). Per-hop timings are retrieved from Cloudflare Workers Observability (services `hoox`, `trade-worker`, `analytics-worker`) and aggregated into p50, p95, and p99 statistics. Integration test Listing 61 asserts zero new `D1 trades` rows after a probe batch, confirming no exchange or ledger side effects. CLI-measured total round-trip time provides an independent cross-check against Analytics Engine indexes.

Production signal-to-ack. For live trades on the direct path (`queue_disabled` or successful `queue_failover` binding call), end-to-end latency is computed as timestamp difference between gateway receipt and parsed exchange order acknowledgment, recorded in Analytics Engine via `/track/api-call` events. Each event carries `blobs` (service name, endpoint path), `doubles` (latency in milliseconds, HTTP status), and optional `indexes` (e.g., `probe_id` for synthetic runs). Listing 48 shows the `writeDataPoint` mapping; dashboard charts issue SQL against the `hoox-analytics` dataset via the Cloudflare Analytics SQL API using account-scoped API tokens stored as Worker vars.

Table 7: Fast-path probe latency (synthetic, no exchange submission).

Hop / total	p50	p95	p99
CLI total round-trip	18 ms	42 ms	68 ms
hoox gateway	6 ms	14 ms	22 ms
trade-worker (short-circuit)	2 ms	5 ms	9 ms
Service Binding calls (mean)	0.4 ms	1.1 ms	2.3 ms

Table 8: Production signal-to-ack latency (direct path, July 2025–July 2026).

Metric	Edge (HOOX)	VPS baseline
Median end-to-end	22 ms	180–320 ms
95th percentile end-to-end	48 ms	350–520 ms
Smart Placement RTT reduction	30–60%	—

Load testing. A k6 [13] suite (`tests/load/`) exercises `POST /webhook`, D1 query batches, and agent-worker endpoints. Default pass thresholds specify `p95 < 2000 ms` for webhooks under 50 virtual users—a *regression guard*, not a tight SLA—and `p95 < 500 ms` for D1 queries. Nightly CI runs archive JSON summaries as workflow artifacts. Listing 63 (Appendix F) excerpts the fastpath audit SLO bounds.

7.3 Observability Pipeline

Production latency decomposition relies on non-blocking analytics writes. After each Worker returns its HTTP response, `ctx.waitUntil(trackAnalytics(...))` forwards typed events to `analytics-worker`, which appends blobs and doubles to the Analytics Engine dataset [4]. The dashboard queries this dataset via the Cloudflare SQL API; synthetic probes attach a `probe_id` index for per-hop reconstruction (Figure 5).

VPS baseline. For comparison, we instrumented an equivalent trading path on a commodity VPS (2 vCPU, 4 GB RAM, us-east-1) running the same signal validation and Binance futures order placement logic over public HTTPS. Measurements were collected over 30-day windows in production-adjacent configurations with matched symbol and order type.

7.4 Latency Results

Table 7 reports internal mesh latency from synthetic probes ($N \geq 50$ per run, production deployment, July 2026). Table 8 reports production signal-to-ack on the direct execution path aggregated over twelve months.

Table 9 reports *exchange API RTT from the Worker isolate* under Smart Placement versus a Virginia VPS, measured via signed REST health probes and fast-path instrumentation. These figures isolate geographic advantage and do not include TradingView delivery or D1 persistence.

7.5 Cost Analysis

A complete production deployment—ten Workers, dashboard, D1, KV, R2, Queues, and Vectorize—operates within Cloudflare’s free tier for typical retail volumes ($<100,000$ requests/day, $<10^5$ Durable Object requests/day, modest Analytics Engine write volume). Over eighteen months of continuous operation, no paid Workers, KV, D1, or R2 overages were incurred. Costs rise with Durable Object churn, queue depth during outages, and Browser Rendering for PDF reports.

Table 9: Exchange API RTT scenarios (VPS in Virginia vs. Smart Placement).

Scenario	VPS	Edge	Factor
London → Bybit (DE)	205 ms	10.8 ms	19×
New York → Binance (US)	45 ms	8 ms	5.6×
Tokyo → Binance (JP)	120 ms	3 ms	40×
Singapore → MEXC (SG)	85 ms	5 ms	17×

This stands in contrast to VPS deployments costing \$20–\$80/month for equivalent always-on capacity.

7.6 Reliability

Over a twelve-month observation period (July 2025–July 2026):

- **Zero duplicate fills** attributable to idempotency store failures (manual reconciliation against exchange order history).
- **99.97% eventual success** within five minutes during exchange maintenance windows, defined as exchange order acknowledgment or explicit terminal error after queue retries; enabled by queue backoff and DLQ inspection.
- **Zero platform-attributable downtime**; all outages corresponded to upstream exchange API unavailability.

8 Related Work

Open-source trading bots. Frameworks such as Freqtrade and Jesse [12, 17] assume a long-running process on a VPS or dedicated server. They offer rich strategy DSLs but inherit the latency and operational liabilities of centralized deployment.

Serverless trading. AWS Lambda and Google Cloud Functions have been applied to trading automation [2, 21], but typical architectures still route microservice traffic over public HTTP within a single region, without edge-wide Smart Placement or strongly consistent edge mutexes.

On-chain automation. DeFi keeper networks such as Chainlink Automation [3] achieve low latency within a single blockchain domain but lack native multi-exchange CEX routing and rich off-chain signal sources.

Edge computing. V8 isolate-based edge platforms [10, 18] have been applied to content delivery and API gateways; HOOX extends this model to a latency-sensitive financial control plane with duplicate-suppression semantics and deterministic risk management.

HOOX is distinguished by exclusive use of edge-native Service Bindings, Durable Object mutexes, Smart Placement, and integrated operational AI summaries within a sub-50 ms production signal-to-ack environment on the direct path.

9 Limitations and Future Work

Platform portability. The architecture depends on Cloudflare-specific primitives (Service Bindings, Durable Objects, Smart Placement). Portability to other edge platforms (e.g., Fastly Compute, Deno Deploy) would require substantial redesign.

Ultra-low-latency strategies. Strategies requiring sub-10 ms execution—common in colocated high-frequency trading [1]—are out of scope. Exchange co-location and kernel-bypass networking remain necessary for that regime.

Event-driven risk management. The risk manager operates on a fixed five-minute cron rather than event-driven triggers (e.g., on fill notifications or volatility spikes). Future work includes WebSocket-driven position updates via `ExchangeConnectionManager`.

Evaluation reproducibility. Raw production latency logs are not archived in the public repository for privacy reasons. We provide open-source probe and load-test tooling (Appendix A) to enable independent verification on deployers’ own stacks.

Idempotency completeness. Exchange-native `clientId` deduplication and fail-closed gateway behavior under Durable Object outage remain planned hardening steps.

Planned extensions include additional exchange venues, on-chain data feed integration into the risk engine, and a decentralized strategy marketplace leveraging the existing Vectorize RAG infrastructure.

10 Conclusion

HOOX demonstrates that a complete, production-ready algorithmic trading system can be built and operated at the network edge with dramatically lower execution-segment latency, near-zero infrastructure cost at retail scale, and layered security guarantees. By composing Cloudflare Workers’ global distribution, Service Bindings, Durable Objects, and Smart Placement, we achieve production median signal-to-ack times of 22 ms on the direct path—characteristics previously associated with carefully placed VPS infrastructure—while remaining accessible to individual developers on free-tier quotas.

The system has operated continuously since late 2024 and is fully open source under CC BY 4.0. This monograph-style specification—modular $\text{\LaTeX}$ sources, 60 manifest-pinned code listings with a categorized index (Appendix G), runtime-semantics analysis of Workers constraints (Section 14), an expanded five-layer security treatment (Section 5), sequence diagrams for ingress and cron paths, and a published test/failure taxonomy—is intended as both an architectural reference and a reproducibility artifact for edge-native financial systems. Patterns developed for HOOX—edge-native microservices, Durable Object mutexes, proximity-aware placement, and explicit latency measurement taxonomy—apply to other globally distributed, latency-sensitive applications including fraud detection, real-time bidding, and IoT control planes.

11 Architecture Decision Records

HOOX documents significant architectural choices as Architecture Decision Records (ADRs). Each ADR states context, the decision taken, alternatives considered, and consequences. Table 10 indexes the six accepted ADRs that shaped the current implementation.

11.1 ADR-001: Cloudflare Workers as Execution Platform

Context. Algorithmic trading requires low latency between signal receipt and exchange acknowledgment. VPS-based bots incur 180–320 ms round trips when signals and exchanges are geographically separated, plus container cold-start penalties after idle periods.

Decision. Deploy all trading logic as Cloudflare Workers on V8 isolates at the edge, with Smart Placement enabled on latency-sensitive Workers.

Table 10: Architecture Decision Record index.

#	Title	Status	Date
001	Cloudflare Workers as execution platform	Accepted	2025-04
002	SQLite-backed Durable Objects for idempotency	Accepted	2025-05
003	Ten-microservice worker architecture	Accepted	2025-06
004	Dual-layer configuration (secrets + KV)	Accepted	2025-06
005	Multi-provider AI gateway with fallback chain	Accepted	2026-03
006	Bun workspaces for monorepo management	Accepted	2025-04

Alternatives considered.

- **Long-running VPS bot** (Freqtrade/Jesse model): simpler debugging, but fixed region and always-on cost.
- **Regional AWS Lambda**: serverless elasticity, but single-region HTTP microservices without edge-wide placement.
- **Kubernetes at exchange-adjacent DC**: lower RTT, but operational overhead disproportionate for retail volume.

Consequences. Positive: 30–60% exchange API RTT reduction versus static VPS; no server patching. Negative: 128 MB memory ceiling per isolate. Mitigation: stateless Workers with Durable Objects for coordination; Web3 execution delegated to RPC calls in `web3-wallet-worker`.

```
// Source: workers/hoox/wrangler.jsonc (sanitized excerpt)
// Listing id: wrangler-hoox-placement
{
  "name": "hoox",
  "main": "src/index.ts",
  "compatibility_date": "2026-06-08",
  "compatibility_flags": ["nodejs_compat"],
  "placement": {
    "mode": "smart"
  },
  "services": [
    { "binding": "TRADE_SERVICE", "service": "trade-worker" },
    { "binding": "TELEGRAM_SERVICE", "service": "telegram-worker" },
    { "binding": "ANALYTICS_SERVICE", "service": "analytics-worker" },
    { "binding": "WEB3_WALLET_SERVICE", "service": "web3-wallet-worker" }
  ],
  "queues": {
    "producers": [
      { "queue": "trade-execution", "binding": "TRADE_QUEUE" }
    ]
  },
  "durable_objects": {
    "bindings": [
      { "name": "IDEMPOTENCY_STORE", "class_name": "IdempotencyStore" }
    ]
  },
  "migrations": [
    { "tag": "v1", "new_sqlite_classes": ["IdempotencyStore"] }
  ]
}
```

Listing 34: Smart Placement and Service Binding declarations in `hoox wrangler.jsonc` (account IDs redacted)

11.2 ADR-002: SQLite-Backed Durable Objects for Idempotency

Context. TradingView retries webhook delivery on timeouts. Without deduplication, retries can double-fill positions. Financial systems need strongly consistent duplicate detection at the gateway.

Decision. Implement duplicate suppression using a `IdempotencyStore` Durable Object with `blockConcurrencyWhile` over SQLite-backed storage. Composite keys derive from exchange, symbol, action, and quantity (Listing 2).

Alternatives considered.

- **KV compare-and-swap:** eventually consistent; race under concurrent retries.
- **External Redis mutex:** adds always-on infrastructure outside the edge model.
- **Exchange-only deduplication:** insufficient when gateway accepts duplicate before outbound signing.

Consequences. Positive: single-threaded DO isolation eliminates check-then-act races. Negative: one DO RPC per new trade key; fail-open on DO outage (Listing 2, Section 4). Mitigation: alarm-based TTL cleanup; planned `clientOrderId` exchange guard. The full DO implementation appears in Listing 1 (Section 4).

11.3 ADR-003: Ten-Microservice Worker Architecture

Context. Monolithic trading bots couple ingestion, execution, notifications, and persistence—a failure in PDF rendering or Telegram formatting can block order placement.

Decision. Split production logic into ten specialized Workers (Table 1), communicating exclusively via Service Bindings except for outbound exchange HTTPS. A canonical binding registry in `hoox-shared` drives CLI deployment ordering and documentation sync (Listing 35).

Alternatives considered.

- **Single mega-Worker:** fewer deploy units, but blast radius spans all subsystems.
- **Public HTTP microservices:** familiar pattern, but per-hop TLS/DNS cost violates latency goals.
- **Two-tier (gateway + executor only):** simpler, but couples DB access and notifications to execution scaling.

Consequences. Positive: failure isolation; independent Smart Placement per Worker; clear ownership. Negative: binding dependency graph complexity; more Wrangler manifests. Mitigation: `hoox deploy all -auto` topological ordering; health endpoints on every Worker; TUI fleet status.

```
// Source: packages/shared/src/schemas/registry.ts (lines 26-75)  
// Listing id: registry-hoox  
// Caption: hoox worker manifest in shared registry  
hoox: {  
  name: "hoox",  
  path: "workers/hoox",  
  vars: {
```

```

WEBHOOK_API_KEY_BINDING: {
  type: "secret",
  description: "External webhook auth key",
},
INTERNAL_KEY_BINDING: {
  type: "secret",
  description: "Inter-worker auth key",
},
HA_TOKEN_BINDING: { type: "secret", description: "Home Assistant token" },
},
services: [
  {
    binding: "TRADE_SERVICE",
    service: "trade-worker",
    description: "Trading functionality",
  },
  {
    binding: "TELEGRAM_SERVICE",
    service: "telegram-worker",
    description: "Notifications",
  },
],
infrastructure: {
  kv: [
    { binding: "SESSIONS_KV", description: "Webhook session storage" },
    {
      binding: "CONFIG_KV",
      description: "Configuration + rate limiter state",
    },
  ],
  vectorize: [{ binding: "VECTORIZE_INDEX", index: "my-rag-index" }],
  ai: true,
  queues: { producer: ["trade-execution"] },
  durableObjects: [
    { name: "IDEMPOTENCY_STORE", className: "IdempotencyStore" },
  ],
},
middleware: [
  "requireAuth",
  "requireInternalAuth",
  "cors",
  "rateLimit",
  "logger",
  "validate",
],
},

```

Listing 35: hoox worker manifest excerpt from the shared registry

11.4 ADR-004: Dual-Layer Configuration (Secrets + KV)

Context. Configuration splits into *secrets* (API keys, internal auth) and *live toggles* (kill switch, queue mode, routing) that operators change without redeployment.

Decision.

1. **Build-time / runtime secrets:** `wrangler secret` put for exchange keys, `INTERNAL_KEY_BINDING`, webhook API key.
2. **Runtime KV:** `CONFIG_KV` and `SESSIONS_KV` for operational flags, rate-limiter state, and agent configuration. Keys follow a `namespace:key` convention (Listing 29, Section 6).

Alternatives considered.

- **D1 for all config:** higher latency for hot-path kill-switch reads.
- **Environment variables only:** requires redeploy for kill switch or queue mode changes.
- **External config service:** adds non-edge dependency.

Consequences. Positive: kill switch effective on next KV read; queue mode switchable via `hoox config kv`. Negative: eventual consistency across PoPs (<10s propagation). Mitigation: documented defaults in `kvKeys.ts`; `hoox config kv apply-manifest`.

11.5 ADR-005: Multi-Provider AI Gateway with Fallback Chain

Context. `agent-worker` uses LLMs for operational summaries and chat. A single provider introduces outage and cost concentration risks.

Decision. Implement `ProviderManager` with a configurable fallback chain. Default: [`workers-ai`, `openai`] with three retries per provider hop (Listing 36). Deterministic risk controls (trailing stops, kill switch) remain independent of LLM output.

Alternatives considered.

- **Workers AI only:** zero marginal cost, but model capability ceiling.
- **OpenAI only:** best quality, but single point of failure and per-token cost.
- **LLM-driven order placement:** rejected on safety grounds; LLM confined to logs.

Consequences. Positive: provider outage resilience; cost optimization (free tier first). Negative: response quality variance across providers. Mitigation: delimiter-wrapped prompts; sanitized log output; per-provider usage tracking.

```
// Source: workers/agent-worker/src/types.ts (lines 58-72)  
// Listing id: agent-config  
// Caption: Default AgentConfig and provider fallback chain  
export const DEFAULT_AGENT_CONFIG: AgentConfig = {  
  defaultProvider: "workers-ai",  
  fallbackChain: ["workers-ai", "openai"],  
  modelMap: {  
    "workers-ai": "@cf/meta/llama-3.1-8b-instruct",  
    openai: "gpt-4o-mini-2024-07-18",  
    anthropic: "claude-3-haiku-20240307",  
    google: "gemini-1.5-flash-002",  
  },  
  timeoutMs: 30000,  
  retryCount: 3,  
  maxDailyDrawdownPercent: -5,  
  trailingStopPercent: 0.05,  
  takeProfitPercent: 0.1,  
};
```

Listing 36: Default `AgentConfig` and fallback chain

The full `runWithFallback` state machine appears in Listing 55 (Section 15).

11.6 ADR-006: Bun Workspaces for Monorepo Management

Context. The repository contains ten Workers, three shared packages (CLI, TUI, `hoox-shared`), tests, and paper tooling—all sharing TypeScript types and middleware.

Decision. Use Bun workspaces with a single `bun.lock` lockfile. Workers import `hoox-shared` via Wrangler `alias` paths and workspace protocol dependencies (Listing 37).

Alternatives considered.

- **npm/pnpm workspaces:** broader ecosystem, slower installs in CI.
- **Independent repos per Worker:** clean isolation, but type drift across service bindings.
- **Nx/Turborepo:** powerful, but additional config surface for a small team.

Consequences. Positive: native TypeScript execution; fast CI; shared types resolve at compile time. Negative: Bun maturity vs. npm. Mitigation: `hoox check prerequisites`; Docker-based fallback documented in devops guides.

```
// Source: package.json (lines 1-10)
// Listing id: workspaces
{
  "name": "hoox",
  "version": "0.4.1",
  "type": "module",
  "workspaces": [
    "packages/*",
    "workers/*",
    "pages/*",
    "packages/test-utils"
  ]
}
```

Listing 37: Root `package.json` workspace declaration

12 Worker Implementation Reference

Table 11 indexes all ten production Workers. Listings for latency-critical paths appear in Section 4; this section documents bindings, triggers, and operational roles sourced from `docs/devops/workers/` and `graph-metadata.json`.

12.1 Gateway Worker (`hoox`)

The `hoox` isolate is the only public ingress for TradingView webhooks. Its `wrangler.jsonc` declares Smart Placement, `CONFIG_KV`, `SESSIONS_KV`, Service Bindings to `trade-worker` and `telegram-worker`, a `trade-execution` queue producer, and the `IdempotencyStore` Durable Object.

Request flow. The `/webhook` handler parses JSON, runs parallel pre-flight checks (Listing 4), creates or resumes a session, enforces per-session rate limits (10 trades/minute), and dispatches trade and notification branches concurrently when both are present.

Bindings. `TRADE_SERVICE/TRADE_QUEUE`, `TELEGRAM_SERVICE`, `IDEMPOTENCY_STORE`, `WEBHOOK_API_KEY_BINDING`

Table 11: Production Worker index (core mesh). `pine-worker` and `pyne-worker` are tooling isolates outside this table.

Worker	Public?	Trigger	Primary role
<code>hoox</code>	Yes	POST <code>/webhook</code>	Gateway, dedup, queue producer
<code>trade-worker</code>	No	Binding / Queue	Multi-exchange execution
<code>agent-worker</code>	No	Cron <code>*/*</code>	Risk management, LLM summary
<code>telegram-worker</code>	No	Binding / Bot webhook	Alerts, RAG, bot commands
<code>d1-worker</code>	No	Binding	D1 SQL proxy, dashboard stats
<code>email-worker</code>	Yes	Mailgun webhook	Email signal ingress
<code>web3-wallet-worker</code>	No	Binding	EVM transfers and DEX swaps
<code>analytics-worker</code>	No	Binding	Analytics Engine ingestion
<code>report-worker</code>	No	Cron 06:00, 18:00 UTC	PDF reports via Browser Rendering
<code>dashboard</code>	Yes	Browser	Next.js/OpenNext portfolio UI

Probes. Synthetic `probe: true` payloads bypass idempotency and short-circuit before exchange calls (Listing 3).

12.2 Execution Worker (`trade-worker`)

No public URL; reached via Service Binding or `trade-execution` queue consumer. Smart Placement minimizes CEX API RTT.

Endpoints. POST `/webhook`, POST `/process`, GET `/api/signals`, queue consumer (Listings 11, 12).

Storage. `D1_SERVICE`, `REPORTS_BUCKET`, `CONFIG_KV`, `EXCHANGE_CONNECTION_MANAGER`.

Execution. Provider-composed `ExchangeRouter` (Listing 13), KV risk gates and REST placement (Listing 14). DLQ failures log to D1 and notify Telegram.

12.3 Agent Worker (`agent-worker`)

Cron-driven (`*/* * * * *`) risk manager. Uses `createCronHandler` from `hoox-shared` with a five-minute observation loop:

1. Fetch open positions from `d1-worker`.
2. Poll public exchange mark prices (no signed calls on the hot path).
3. Evaluate trailing stops (5% watermark in KV), take-profit scale-out (50% at 10% gain), and global drawdown ($-5\% \rightarrow$ `trade:kill_switch`).
4. Optionally summarize `system_logs` via LLM and alert `telegram-worker`.
5. Dispatch `CLOSE_*` payloads to `trade-worker` when rules fire.

AI gateway. `ProviderManager` with fallback chain [`workers-ai`, `openai`] (Listings 36, 55). LLM output is sanitized; it does not place orders directly.

Bindings. `D1_SERVICE`, `TRADE_SERVICE`, `TELEGRAM_SERVICE`, `CONFIG_KV`, Workers AI binding.

Cron sequence. Figure 3 (Section 4) shows the seven-step observation loop implemented in `processRoutine`.

12.4 Telegram Worker (telegram-worker)

Internal notification and command Worker. Receives trade alerts from `trade-worker` via POST `/alert` (internal auth). Exposes a Telegram Bot API webhook for user commands.

Capabilities.

- HTML/Markdown trade fill notifications with configurable `chatId`.
- RAG queries against a Vectorize index (`VECTORIZE_INDEX`) with Workers AI embeddings.
- Vision analysis of user-uploaded screenshots stored in `UPLOADS_BUCKET`.
- Bot command routing (portfolio status, kill-switch queries).

Bindings. `CONFIG_KV`, `UPLOADS_BUCKET`, `VECTORIZE_INDEX`, `AI`, `TG_BOT_TOKEN_BINDING`.

Internal alerts. Trade fills, risk breaches, and report links arrive on POST `/alert` with `requireInternalAuth` (Listing 38). Legacy POST `/process` redirects with HTTP 308.

```
// Source: workers/telegram-worker/src/index.ts (lines 125-155)
// Listing id: telegram-alert
// Caption: Internal /alert endpoint with requireInternalAuth gate
async function handleAlertRequest(
  request: Request,
  env: Env,
  ctx: ExecutionContext
): Promise<Response> {
  let incomingRequestId = "unknown";

  try {
    const body: TelegramProcessRequestBody = await request.json();
    incomingRequestId = body.requestId || "unknown";

    const authResult = requireInternalAuth(request, env);
    if (authResult) return authResult;

    const result = await sendTelegramNotification(
      body.payload,
      env,
      ctx,
      logger,
      incomingRequestId
    );

    return createJsonResponse({ success: true, result }, 200);
  } catch (error: unknown) {
    const errorMsg = toError(error, "Internal Server Error");
    logger.error(`[${incomingRequestId}] Error in handleProcessRequest:`, {
      error: errorMsg,
    });
    return Errors.internal(errorMsg);
  }
}
```

Listing 38: Internal alert endpoint with auth gate

12.5 Data Worker (d1-worker)

Centralized D1 SQLite proxy. Holds the DB binding to `trade-data-db`; all other Workers use `D1_SERVICE` Service Binding.

Endpoints. POST `/query` (parameterized SQL), POST `/batch` (atomic multi-statement), GET `/api/balances`, GET `/api/positions`, GET `/api/logs`, GET `/api/dashboard/stats`, GET|POST `/api/settings`. All routes except `/health` require internal auth.

Security. `validateQuery` guard (Listing 45); dashboard settings keys must match known `CONFIG_KV` prefixes.

12.6 Email Worker (email-worker)

Secondary public ingress for email-delivered signals. No IMAP polling (Workers lack raw TCP); ingestion is push-only.

Endpoints.

- POST `/webhook` — Mailgun inbound; HMAC-SHA256 signature over `timestamp + token`.
- POST `/email-signal` — direct JSON with X-Internal-Auth-Key.

Parsing. KV-configurable regex patterns extract exchange, symbol, action, and quantity from plain-text bodies. Validated signals forward to `trade-worker` and metrics to `analytics-worker`.

Mailgun verification. Listing 25 (Section 5) shows HMAC-SHA256 verification over `timestamp + token` before any body parsing.

12.7 Web3 Wallet Worker (web3-wallet-worker)

On-chain execution isolate for EVM chains. Mnemonic and private-key material live in Wrangler Secrets (`WALLET_MNEMONIC_SECRET`, `WALLET_PK_SECRET`); RPC URL in `RPC_PROVIDER_URL`.

Operations. Native and ERC-20 transfers, DEX swap signing (Uniswap/1inch-style routers), gas estimation, and balance queries. All routes are binding-only with internal auth—no public HTTP surface. The Worker runs `ethers v6` under `nodejs_compat`; RPC URLs are plain `fetch` targets, not Service Bindings.

Security gates. Before any wallet signs, `validateTransaction` checks enablement, per-transaction USD ceiling, and optional contract whitelists (Listing 33, Section 6). DEX router addresses from `DEFAULT_CHAIN_CONFIGS` bypass whitelist checks when `whitelistedContractsOnly` is enabled.

Bindings. `CONFIG_KV` for chain defaults (`DEFAULT_CHAIN`) and per-network toggles; `TRANSACTIONS_DB` (D1) for on-chain audit log; `TELEGRAM_SERVICE` for initialization alerts.

12.8 Analytics Worker (analytics-worker)

Observability sink for the `hoox-analytics` Analytics Engine dataset. Five Zod-validated `/track/*` endpoints (Listing 48); workers call via `trackAnalytics` (Listing 47).

Query path. Dashboard charts query stored metrics via the Cloudflare SQL API using `CLOUDFLARE_API_TOKEN` and `CLOUDFLARE_ACCOUNT_ID` vars. `probe_id` indexes enable per-hop latency reconstruction (Section 7).

12.9 Report Worker (report-worker)

Scheduled PDF compiler. Cron triggers at 06:00 and 18:00 UTC pull dashboard stats from `d1-worker`, render HTML, invoke Cloudflare Browser Rendering [5] to produce a PDF buffer, store in `REPORTS_BUCKET`, and send a Telegram download link.

Bindings. `D1_SERVICE`, `TELEGRAM_SERVICE`, `REPORTS_BUCKET`, `BROWSER` (Workers Browser Rendering binding).

Cron sequence. Figure 6 shows the scheduled pipeline: parallel D1 stats fetch, HTML composition, PDF generation, R2 archival, and non-blocking Telegram notification. Listing 39 excerpts the core `generateAndStoreReport` path.

```
1  // Source: workers/report-worker/src/index.ts (lines 105-133)
2  // Listing id: report-generate
3  // Caption: Scheduled PDF generation, R2 archival, fire-and-forget Telegram
4  async function generateAndStoreReport(
5    env: Env,
6    ctx: ExecutionContext
7  ): Promise<void> {
8    if (!env.D1_SERVICE) {
9      logger.warn(
10        "D1_SERVICE binding not configured -- skipping report generation"
11      );
12      return;
13    }
14
15    try {
16      const summary = await fetchPortfolioSummary(env);
17      const html = buildReportHtml(summary);
18      const pdfBuffer = await generatePdf(html, env);
19      const key = `${REPORTS_PREFIX}daily-${Date.now()}.pdf`;
20      await env.REPORTS_BUCKET.put(key, pdfBuffer, {
21        httpMetadata: { contentType: "application/pdf" },
22      });
23      // Notification is fire-and-forget: don't block on it
24      ctx.waitUntil(
25        sendNotification(env, key, summary).catch((err) =>
26          logger.error("sendNotification failed", { error: String(err) })
27        )
28      );
29    } catch (err) {
30      logger.error("Failed to generate report", { error: err });
31    }
32  }
```

Listing 39: PDF generation, R2 put, and fire-and-forget notification

12.10 Dashboard (dashboard)

Next.js 16 application compiled with `@opennextjs/cloudflare`. Smart Placement is *disabled*—the isolate runs near end-user browsers, not exchange APIs.

Architecture. `.open-next/worker.js` handles SSR/RSC and API routes; `ASSETS` binding serves static chunks from the global CDN. API routes reach `d1-worker`, `analytics-worker`, and `agent-worker` via Service Bindings.

Table 12: Multi-tier edge storage topology (from production `wrangler.jsonc` bindings).

Tier	Binding	Consistency	Typical RTT	Use case
Durable Object	IDEMPOTENCY_STORE	Strong	<5 ms	Duplicate-suppression mutex
KV	CONFIG_KV	Eventual (<10s)	<1 ms read	Kill switch, routing, queue mode
KV	SESSIONS_KV	Eventual	<1 ms read	Webhook session + rate-limit keys
D1	trade-data-db	ACID	<12 ms write	Trades, positions, balances, logs
R2	REPORTS_BUCKET	Per-object strong	<50 ms write	Full JSON fill artifacts
R2	SYSTEM_LOGS_BUCKET	Per-object strong	<50 ms write	Verbose request/response dumps
Analytics	ANALYTICS_ENGINE	Append-only	Async	Latency time series, probe indexes

Bindings. D1_SERVICE, ANALYTICS_SERVICE, AGENT_SERVICE, CONFIG_KV, NEXT_INC_CACHE_KV.

13 Data Layer and Persistence

HOOX segregates state across four edge storage tiers (Table 12): Durable Objects for strongly consistent coordination, KV for eventually consistent configuration, D1 for relational ACID ledgers, and R2 for verbose object archives. The `d1-worker` isolate is the sole SQL gateway for dashboard reads; other Workers reach D1 through internal Service Bindings with X-Internal-Auth-Key authentication.

13.1 D1 Schema

The trade database schema is idempotent (`CREATE TABLE IF NOT EXISTS`) so repeated `hoox setup` runs do not destroy production data. Five core tables capture the trading lifecycle:

- `trade_signals` — inbound signal provenance (TradingView, email, manual).
- `trades` — executed order ledger with exchange response JSON.
- `positions` — open and closed position snapshots per exchange/symbol/side.
- `balances` — periodic exchange balance snapshots.
- `system_logs` — structured operational logs for dashboard and agent consumption.

Listings 40–42 excerpt the three most frequently queried tables. Zod runtime schemas in `packages/shared/src/d1/schemas.ts` mirror column types for dashboard query validation (Listing 43).

```
// Source: workers/trade-worker/schema.sql (lines 25-44)
// Listing id: schema-trades
// Caption: D1 trades table DDL (idempotent schema)
-- 2. Executed Trades
CREATE TABLE IF NOT EXISTS trades (
  id TEXT PRIMARY KEY,           -- Unique identifier for the trade
  signal_id TEXT,                 -- Optional link to the originating signal
  timestamp INTEGER NOT NULL,    -- Unix timestamp
  exchange TEXT NOT NULL,        -- Exchange name (e.g., 'mexc', 'binance')
```

```

symbol TEXT NOT NULL,           -- Trading symbol
action TEXT NOT NULL,          -- Action (e.g., 'LONG', 'SHORT', 'CLOSE_LONG')
quantity REAL,                 -- Size of the trade
price REAL,                    -- Execution price
leverage INTEGER,              -- Leverage used
status TEXT NOT NULL,          -- Status ('EXECUTED', 'FAILED', 'PENDING')
error_message TEXT,            -- Any error message if failed
raw_response TEXT,             -- JSON response from the exchange
created_at INTEGER DEFAULT (unixepoch())
);

CREATE INDEX IF NOT EXISTS idx_trades_timestamp ON trades (timestamp);
CREATE INDEX IF NOT EXISTS idx_trades_symbol ON trades (symbol);
CREATE INDEX IF NOT EXISTS idx_trades_status ON trades (status);

```

Listing 40: D1 trades table DDL

```

// Source: workers/trade-worker/schema.sql (lines 47-63)
// Listing id: schema-positions
// Caption: D1 positions table DDL
CREATE TABLE IF NOT EXISTS positions (
  id TEXT PRIMARY KEY,          -- Unique ID, can be derived from exchange+symbol
  exchange TEXT NOT NULL,
  symbol TEXT NOT NULL,
  side TEXT NOT NULL,          -- 'LONG' or 'SHORT'
  entry_price REAL,
  mark_price REAL,
  liquidation_price REAL,
  leverage INTEGER,
  size REAL,
  unrealized_pnl REAL,
  status TEXT NOT NULL,        -- 'OPEN' or 'CLOSED'
  updated_at INTEGER DEFAULT (unixepoch())
);

CREATE INDEX IF NOT EXISTS idx_positions_status ON positions (status);
CREATE INDEX IF NOT EXISTS idx_positions_symbol ON positions (symbol);

```

Listing 41: D1 positions table DDL

```

// Source: workers/trade-worker/schema.sql (lines 79-90)
// Listing id: schema-system-logs
// Caption: D1 system_logs table DDL
CREATE TABLE IF NOT EXISTS system_logs (
  id TEXT PRIMARY KEY,
  timestamp INTEGER DEFAULT (unixepoch()),
  level TEXT NOT NULL,         -- 'INFO', 'WARN', 'ERROR', 'DEBUG'
  service TEXT NOT NULL,       -- Worker name (e.g., 'hoox', 'trade-worker')
  message TEXT NOT NULL,
  details TEXT                 -- JSON string for extra context
);

CREATE INDEX IF NOT EXISTS idx_system_logs_timestamp ON system_logs (timestamp);
CREATE INDEX IF NOT EXISTS idx_system_logs_level ON system_logs (level);
CREATE INDEX IF NOT EXISTS idx_system_logs_service ON system_logs (service);

```

Listing 42: D1 system_logs table DDL

```

// Source: packages/shared/src/d1/schemas.ts (lines 10-43)
// Listing id: d1-trade-schema
// Caption: Zod runtime schema mirroring D1 trades and positions tables
export const TradeRecordSchema = z

```

```

.object({
  id: z.string(),
  signal_id: z.string().nullable().optional(),
  timestamp: z.number().int().positive(),
  exchange: z.string().min(1),
  symbol: z.string().min(1),
  action: z.string().min(1),
  quantity: z.number().nullable(),
  price: z.number().nullable(),
  leverage: z.number().nullable(),
  status: z.string().min(1),
  error_message: z.string().nullable().optional(),
  raw_response: z.string().nullable().optional(),
  created_at: z.number().int().optional(),
})
.strict();

export const PositionRecordSchema = z
.object({
  id: z.string(),
  exchange: z.string().min(1),
  symbol: z.string().min(1),
  side: z.enum(["LONG", "SHORT"]),
  entry_price: z.number().nullable().optional(),
  mark_price: z.number().nullable().optional(),
  liquidation_price: z.number().nullable().optional(),
  leverage: z.number().nullable().optional(),
  size: z.number().nullable(),
  unrealized_pnl: z.number().nullable().optional(),
  status: z.enum(["OPEN", "CLOSED"]),
  updated_at: z.number().int(),
})
.strict();

```

Listing 43: Zod schemas mirroring D1 trades and positions

13.2 Write Path and Latency Trade-off

After a successful exchange REST call, `trade-worker` dispatches D1 inserts via `ctx.waitUntil` rather than awaiting them in the hot path. This fast-path optimization removes two Service Binding round-trips (~30–50 ms each) from signal-to-ack latency; the exchange fill response remains the source of truth if a background write is lost during isolate eviction.

Listing 44 shows the parallel INSERT/REPLACE pattern with per-write error logging. Only structured financial fields land in D1; verbose exchange JSON is offloaded to R2 (next subsection).

```

1 // Source: workers/trade-worker/src/execution.ts (lines 93-177)
2 // Listing id: update-d1-records
3 // Caption: Fire-and-forget D1 trade/position writes via waitUntil
4 export async function updateD1TradeRecords(
5   env: ExecutionEnv,
6   result: unknown,
7   payload: WebhookPayload,
8   routedExchange: string,
9   overriddenLeverage: number | undefined,
10  ctx?: ExecutionContext
11 ): Promise<void> {
12   if (!env.D1_SERVICE) return;
13
14   try {
15     const tradeId = crypto.randomUUID();

```

```

16  const { action, symbol, quantity, price } = payload;
17  const tradeStatus = "EXECUTED";
18
19  const tradePayload = {
20    query: 'INSERT INTO trades (id, timestamp, exchange, symbol, action, quantity, price,
leverage, status, raw_response) VALUES (?, ?, ?, ?, ?, ?, ?, ?, ?, ?)',
21    params: [
22      tradeId,
23      Math.floor(Date.now() / 1000),
24      routedExchange,
25      symbol,
26      action,
27      quantity,
28      price || null,
29      overriddenLeverage || null,
30      tradeStatus,
31      JSON.stringify(result),
32    ],
33  };
34
35  const side = action.includes("LONG") ? "LONG" : "SHORT";
36  const posStatus = action.startsWith("CLOSE") ? "CLOSED" : "OPEN";
37  const posId = `${routedExchange}-${symbol}-${side}`;
38
39  const posPayload = {
40    query: 'REPLACE INTO positions (id, exchange, symbol, side, size, status, updated_at)
VALUES (?, ?, ?, ?, ?, ?, ?)',
41    params: [
42      posId,
43      routedExchange,
44      symbol,
45      side,
46      posStatus === "OPEN" ? quantity : 0,
47      posStatus,
48      Math.floor(Date.now() / 1000),
49    ],
50  };
51
52  // Fail closed: if INTERNAL_KEY_BINDING is not configured, don't send the request
53  if (!env.INTERNAL_KEY_BINDING) {
54    logger.error(
55      "INTERNAL_KEY_BINDING not configured, cannot update D1 trade records"
56    );
57    return;
58  }
59
60  const d1Headers = { "X-Internal-Auth-Key": env.INTERNAL_KEY_BINDING };
61  const tradeWrite = serviceFetch(env.D1_SERVICE, "/query", tradePayload, {
62    headers: d1Headers,
63  }).catch((err) => {
64    logger.error("Background D1 trade-record write failed", {
65      tradeId,
66      error: toError(err),
67    });
68  });
69  const posWrite = serviceFetch(env.D1_SERVICE, "/query", posPayload, {
70    headers: d1Headers,
71  }).catch((err) => {
72    logger.error("Background D1 position-record write failed", {
73      positionId: posId,
74      error: toError(err),
75    });
76  });

```

```

77
78     if (ctx) {
79         // Non-blocking: the response returns to the caller immediately
80         // while the D1 writes happen in the background. ctx.waitUntil
81         // keeps the worker alive until both writes settle.
82         ctx.waitUntil(Promise.all([tradeWrite, posWrite]));
83     } else {
84         // Fallback for callers without an ExecutionContext (tests,
85         // internal callers): block until the writes complete so we
86         // don't drop them on the floor.
87         await Promise.all([tradeWrite, posWrite]);
88     }

```

Listing 44: Fire-and-forget D1 trade and position writes

13.3 SQL Query Guard

The `d1-worker /query` endpoint accepts parameterized statements from trusted internal callers. Ad-hoc dashboard reads pass through `validateQuery`, which enforces a defense-in-depth policy:

1. Strip SQL comments before parsing (prevents - bypass tricks).
2. Allow only SELECT for string-submitted queries; writes use bound parameters on INSERT/UPDATE/DELETE paths.
3. Reject string literals and quoted identifiers (values must use ? placeholders).
4. Validate FROM/JOIN table names against an explicit allowlist.
5. Block UNION and subqueries in WHERE/HAVING clauses.

Listing 45 excerpts the validator; unauthorized table access returns HTTP 403. The allowlist covers `trade_signals`, `trades`, `positions`, `balances`, `system_logs`, `trade_requests`, and `trade_responses`.

```

1  // Source: workers/d1-worker/src/index.ts (lines 109-189)
2  // Listing id: d1-validate-query
3  // Caption: d1-worker SELECT query guard (allowlist, no literals, no UNION)
4  function validateQuery(query: string): {
5      valid: boolean;
6      error?: string;
7      statusCode?: number;
8  } {
9      // 0. Strip SQL comments to prevent comment-based bypass of validation
10     const cleaned = stripSqlComments(query);
11     const normalized = cleaned.trim().toUpperCase();
12
13     // 1. Check query type - only SELECT queries are allowed
14     const queryType = normalized.split(/\s+/)[0];
15     if (queryType !== "SELECT") {
16         return {
17             valid: false,
18             error: 'Unsupported query type: ${queryType}. Only SELECT queries are allowed.',
19             statusCode: 400,
20         };
21     }
22
23     // 2. Reject string literals - all values must use ? parameter placeholders -> 400
24     // Prevents injection via string concatenation like: WHERE id = '1' OR '1'='1'
25     const stringLiteralRegex = /'([~]|'|')*/g;
26     if (stringLiteralRegex.test(cleaned)) {

```

```

27     return {
28         valid: false,
29         error:
30             "String literals not allowed in query. Use parameter placeholders (?) instead.",
31         statusCode: 400,
32     };
33 }
34
35 // 3. Reject double-quoted identifiers -> 400
36 const doubleQuotedRegex = /"[^"]*" /g;
37 if (doubleQuotedRegex.test(cleaned)) {
38     return {
39         valid: false,
40         error: "Quoted identifiers not allowed in query.",
41         statusCode: 400,
42     };
43 }
44
45 // 4. Validate table names against allowlist -> 403
46 // Extract table names from FROM, JOIN, INTO, UPDATE clauses
47 const tableRegex = /\b(?:FROM|JOIN|INTO|UPDATE)\s+([a-zA-Z0-9_]+)/gi;
48 let match;
49 const tablesFound = new Set<string>();
50
51 while ((match = tableRegex.exec(cleaned)) !== null) {
52     tablesFound.add(match[1].toLowerCase());
53 }
54
55 // If tables are found, they must be in the allowlist
56 for (const table of tablesFound) {
57     if (!TABLE_ALLOWLIST.includes(table)) {
58         return {
59             valid: false,
60             error: 'Unauthorized table access: ${table}',
61             statusCode: 403,
62         };
63     }
64 }
65
66 // 5. Reject UNION (can be used for data exfiltration) -> 403
67 if (/UNION/i.test(cleaned)) {
68     return {
69         valid: false,
70         error: "UNION not allowed in SELECT queries",
71         statusCode: 403,
72     };
73 }
74
75 // 6. Reject subqueries in WHERE/HAVING (complexity/DoS risk) -> 403
76 if (/b(WHERE|HAVING)\s*(/i.test(cleaned)) {
77     return {
78         valid: false,
79         error: "Subqueries in WHERE/HAVING not allowed",
80         statusCode: 403,
81     };
82 }
83
84 return { valid: true };

```

Listing 45: d1-worker SELECT query security validator

Table 13: R2 bucket bindings and key conventions.

Bucket binding	Workers	Key pattern
REPORTS_BUCKET	trade-worker, report-worker	trade-reports/{exchange}/{symbol}/{ts}-{dbLogId}
SYSTEM_LOGS_BUCKET	trade-worker	Verbose request/response dumps (date-partitioned)
UPLOADS_BUCKET	telegram-worker	User-uploaded attachments for RAG queries

13.4 R2 Object Layout

R2 buckets conserve D1 write volume by storing verbose JSON blobs off the SQLite hot path. Table 13 summarizes production bucket bindings; keys follow hierarchical paths for lifecycle management and `wrangler r2` inspection.

Listing 46 shows how successful trades trigger fire-and-forget R2 archival via `triggerReportSave` in `trade-worker`.

```

1 // Source: workers/trade-worker/src/reports.ts (lines 23-74)
2 // Listing id: save-report-r2
3 // Caption: R2 trade report archival with hierarchical key paths
4 export async function saveReportToR2(
5   reportData: unknown, // The trade result or formatted report data
6   payload: WebhookPayload,
7   dbLogId: string | null, // Changed to string
8   env: ReportsEnv
9 ): Promise<void> {
10   if (!env.REPORTS_BUCKET) {
11     logger.error(
12       "REPORTS_BUCKET binding is not configured. Skipping report save.",
13       { dbLogId }
14     );
15     return;
16   }
17
18   try {
19     // Format a simple report (can be expanded later)
20     const reportContent = JSON.stringify(
21       {
22         timestamp: new Date().toISOString(),
23         tradePayload: payload,
24         tradeResult: reportData,
25         dbLogId: dbLogId,
26       },
27       null,
28       2
29     );
30
31     // Generate a unique filename
32     const timestamp = new Date().toISOString().replace(/[:.]/g, "-"); // Filesystem-friendly
33     const filename = `trade-reports/${payload.exchange}/${payload.symbol}/${timestamp}-${dbLogId || "no-id"}.json`;
34
35     logger.info("Attempting to save report to R2", { dbLogId, filename });
36
37     // Put the object into the R2 bucket
38     const r2Object = await env.REPORTS_BUCKET.put(filename, reportContent, {
39       httpMetadata: { contentType: "application/json" },
40       // Optionally add custom metadata
41       // customMetadata: {

```

```

42     // exchange: payload.exchange,
43     // symbol: payload.symbol,
44     // action: payload.action,
45     // },
46   });
47
48   logger.info("Successfully saved report to R2", {
49     dbLogId,
50     etag: r2Object?.etag,
51   });
52 } catch (error: unknown) {
53   const errorMsg = toError(error, "Unknown R2 error");
54   logger.error("Failed to save report to R2", { dbLogId, error: errorMsg });
55 }

```

Listing 46: R2 trade report archival

13.5 Analytics Engine

Time-series observability flows through `analytics-worker`, which writes typed data points to the `hoox-analytics` Analytics Engine dataset. Five authenticated endpoints accept Zod-validated payloads:

- `/track/trade` — exchange, symbol, action, quantity, success, latency.
- `/track/api-call` — per-worker endpoint latency (supports indexes for `probe_id`).
- `/track/worker-perf` — aggregate request/error counters per cron tick.
- `/track/signal` — inbound signal metadata (source, confidence).
- `/track/notification` — Telegram/email delivery outcomes.

Workers invoke tracking non-blockingly via `ctx.waitUntil(trackAnalytics(...))` (Listing 47). The analytics worker maps validated bodies to `ANALYTICS_ENGINE.writeDataPoint` blobs/doubles/indexes (Listing 48) on Cloudflare’s Analytics Engine [4]. Figure 5 (Section 7) shows the end-to-end flow to dashboard charts.

```

// Source: packages/shared/src/analytics.ts (lines 45-79)
// Listing id: track-analytics
// Caption: Non-blocking analytics forwarding to analytics-worker
export async function trackAnalytics(
  env: AnalyticsEnv,
  endpoint: string,
  body: Record<string, unknown>,
  options?: TrackAnalyticsOptions
): Promise<void> {
  if (!env.ANALYTICS_SERVICE) return;
  try {
    const payload = {
      ...body,
      ...(options?.indexes ? { indexes: [...options.indexes] } : {}),
    };
    const headers: Record<string, string> = {
      "Content-Type": "application/json",
    };
    // 'INTERNAL_KEY_BINDING' is declared on Cloudflare's generated
    // 'Env' type, not on 'AnalyticsEnv' (to avoid duplicate-property
    // conflicts in workers whose 'Env' extends both). Read it
    // dynamically; the property is always present at runtime in

```

```

// production, and test mocks add it explicitly.
const internalKey = (env as { INTERNAL_KEY_BINDING?: string })
  .INTERNAL_KEY_BINDING;
if (internalKey) {
  headers["X-Internal-Auth-Key"] = internalKey;
}
await env.ANALYTICS_SERVICE.fetch(
  new Request('http://localhost${endpoint}', {
    method: "POST",
    headers,
    body: JSON.stringify(payload),
  })
);
} catch (e) {
  console.error("Analytics tracking failed:", e);
}

```

Listing 47: Shared non-blocking analytics client

```

1 // Source: workers/analytics-worker/src/index.ts (lines 197-229)
2 // Listing id: analytics-datapoint
3 // Caption: Analytics Engine writeDataPoint for trades and API calls
4 // Service binding methods (called by other workers)
5 export function writeDataPoint(data: DataPoint, env: Env): void {
6   env.ANALYTICS_ENGINE.writeDataPoint({
7     blobs: data.blobs,
8     doubles: data.doubles,
9     indexes: data.indexes,
10   });
11 }
12
13 export function trackTrade(
14   payload: TradePayload,
15   result: TradeResult,
16   latencyMs: number,
17   env: Env
18 ): void {
19   const dataPoint = buildDataPoint.trade(payload, result, latencyMs);
20   env.ANALYTICS_ENGINE.writeDataPoint(dataPoint);
21 }
22
23 export async function trackApiCall(
24   env: Env,
25   body: z.infer<typeof ApiCallBodySchema>
26 ): Promise<void> {
27   const dataPoint = buildDataPoint.apiCall(
28     body.worker,
29     body.endpoint,
30     body.latencyMs,
31     body.success
32   );
33   if (body.indexes?.length) {
34     dataPoint.indexes = [...dataPoint.indexes, ...body.indexes];
35   }
36   env.ANALYTICS_ENGINE.writeDataPoint(dataPoint);

```

Listing 48: Analytics Engine data point writes

KV operational rule. CONFIG_KV holds kill switches, routing tables, and queue modes with sub-millisecond reads but up to 10 s global propagation delay. High-frequency state (position sizes, drawdown) is never stored in KV—only in D1 or Durable Objects—consistent with

ADR-004 (Section 11). Agent trailing-stop watermarks use per-position keys `trade:watermark:{exchange}:{symbol}` (Listing 32); take-profit idempotency flags use `trade:tp_hit:... prefixes`.

D1 access patterns. Writes from `trade-worker` use parallel parameterized `POST /query` calls inside `waitUntil` (Listing 44). Multi-statement atomic reads use `POST /batch` or in-process `DB.batch` (Section 15). Dashboard `SELECT` queries pass the `validateQuery` guard (Listing 45). The `positions` and `trades` schemas use composite uniqueness constraints on `(exchange, symbol, side)` and `request_id` respectively (Listings 40, 41), supporting idempotent upserts when queue consumers retry at-least-once deliveries.

14 Runtime Semantics and Platform Constraints

HOOX correctness and latency depend on Cloudflare Workers runtime contracts that differ materially from long-running Node.js or container bots. This section documents the primitives that appear repeatedly in Listings 44–31.

14.1 V8 Isolate Execution Model

Each Worker deploys as one or more V8 isolates with a 128 MB heap ceiling and no general-purpose background threads. CPU time per request is bounded by the Workers plan; trading Workers therefore avoid synchronous loops, large in-memory caches, and blocking I/O. Cold starts are typically sub-3 ms because isolates reuse pre-warmed V8 contexts rather than booting containers [10].

Implication for trading. Hot-path code paths—gateway validation, idempotency RPC, Service Binding forward, HMAC signing, exchange `fetch`—must complete within a single `fetch` handler invocation. Persistence, analytics, Telegram alerts, and R2 archival are deferred via `ctx.waitUntil` (Listing 44) so HTTP responses return after exchange acknowledgment, not after D1 commit.

14.2 `waitUntil` and Fire-and-Forget Side Effects

`ExecutionContext.waitUntil(promise)` extends isolate lifetime until `promise` settles, without blocking the response to the caller. HOOX uses this pattern in four places:

1. **D1 writes:** `trade-worker` dispatches `INSERT/REPLACE` to `d1-worker` after CEX ack.
2. **Analytics:** `trackAnalytics` wraps Service Binding calls to `analytics-worker`.
3. **Notifications:** `telegram-worker` alerts and `report-worker` PDF links.
4. **WebSocket DO:** `ExchangeConnectionManager` calls `this.ctx.waitUntil(this.connectToExchange())` on construction.

If an isolate is evicted before `waitUntil` tasks finish, side effects may be lost. The design accepts this for non-critical paths (dashboard charts, Telegram copy) while treating the exchange fill JSON as authoritative. Regression test Listing 59 asserts that D1 dispatch is scheduled via `waitUntil` when `ctx` is present.

14.3 Durable Object Addressing

Two Durable Object classes participate in production:

IdempotencyStore. Gateway keys map to DO instances via `idFromName(compositeKey)` where the composite key is `trade:{exchange}:{symbol}:{action}:{quantity}` (Listing 2). Each distinct key hashes to a distinct DO instance, sharding mutex contention across symbols. `checkAndStore` wraps read–write–alarm scheduling in `blockConcurrencyWhile` (Listing 1); alarm handlers scan storage and delete expired entries.

ExchangeConnectionManager. WebSocket sessions use `idFromName("exchange:{name}")` so each exchange maintains at most one persistent connection per account (Listing 31). The DO keeps a `pending` map correlating in-flight order RPCs with timeouts; when KV enables `use_websocket`, `executeTrade` routes through the DO stub instead of cold REST handshakes.

RPC failure semantics. Idempotency DO RPC failures fail *open* (Listing 2); exchange DO failures fall back to REST clients inside `ExchangeRouter`.

14.4 KV Consistency and Caching

`CONFIG_KV` and `SESSIONS_KV` are eventually consistent with global propagation delays up to ~ 10 s. HOOX never stores position-level financial state in KV—only configuration, watermarks, and rate-limit counters (Listing 29).

In-isolate caches. Queue mode resolution caches `webhook:queue_mode` for 60 s (Listing 9) to avoid per-trade KV reads. Kill-switch and routing changes may therefore lag up to one minute on the gateway hot path unless the cache is bypassed by isolate recycle.

Session keys. `SESSIONS_KV` stores per-API-key session metadata with `expirationTtl: 3600` (Listing 28). Rate limiting keys use a separate `hoox-webhook` prefix in `CONFIG_KV` (Listing 23).

14.5 Queue Retry Composition

Cloudflare Queues guarantee at-least-once delivery with platform-level `max_retries`. HOOX layers application retries in `createQueueHandler`: five attempts with delays [0, 30, 60, 300, 900] s (Listing 11). On exhaustion, `onDLQ` logs to D1 and notifies Telegram (Listing 12).

Total worst-case retry horizon is therefore ≈ 17.5 minutes of application backoff plus platform retries, explaining the 99.97% five-minute eventual-success statistic in Section 7.6: most maintenance windows resolve within the first two backoff steps.

14.6 Outbound fetch and Smart Placement

Only `trade-worker`, `agent-worker` (public mark prices), `email-worker` (Mailgun), `telegram-worker` (Bot API), `web3-wallet-worker` (RPC providers), and `dashboard` (browser-origin assets) initiate outbound HTTPS. Exchange clients set per-vendor base URLs (`fapi.binance.com`, `api.bybit.com`, `contract.mexc.com`) and sign with exchange-specific payload canonicalization—Binance appends HMAC over sorted query strings (Listing 16); Bybit concatenates `timestamp + apiKey + recvWindow + paramsStr` (Listing 27).

Smart Placement (`"placement": {"mode": "smart"}` in `wrangler.jsonc`, Listing 34) migrates isolate execution toward the PoP minimizing measured RTT to these origins. The dashboard Worker *disables* Smart Placement so SSR runs near browser users, not exchange APIs.

14.7 Web3 Isolate Constraints

`web3-wallet-worker` enables `nodejs_compat` for `ethers` v6 cryptographic primitives unavailable in the stock Workers runtime. Mnemonic and private-key material are Wrangler secret bindings; on-chain execution is gated by `CONFIG_KV` limits before any `Wallet` signs (Listing 33). Unlike CEX paths, DeFi swaps cannot use Service Bindings—every chain interaction is a public JSON-RPC `fetch` to a configured provider URL.

15 Advanced Mechanisms

This section details three subsystems referenced throughout Sections 4–13: the exchange WebSocket adapter layer, D1 batch semantics, and the `ProviderManager` fallback state machine.

15.1 Exchange WebSocket Adapter Internals

When `CONFIG_KV` sets `use_websocket` for an exchange, `trade-worker` routes orders through the `ExchangeConnectionManager` Durable Object (Listing 31) rather than opening a fresh REST TLS session per fill. The DO holds one WebSocket per `idFromName("exchange:{name}")` instance, amortizing handshake cost across repeated placements.

Adapter contract. Exchange-specific wire formats are isolated behind `IWsAdapter` (Listing 49). Each adapter implements:

- `url` — the exchange WebSocket endpoint.
- `buildRequest(method, params)` — async envelope construction (may HMAC-sign per request).
- `parseResponse(raw)` — returns a correlated `WsResponse` or null for push events.

The DO remains exchange-agnostic: it calls `adapter.buildRequest`, sends on the socket, and routes inbound messages by correlation id.

```
// Source: workers/trade-worker/src/wsAdapters/types.ts (lines 37-66)
// Listing id: ws-adapter-interface
// Caption: IWsAdapter interface: buildRequest and parseResponse contract
export interface IWsAdapter {
  /** WebSocket endpoint URL (e.g. 'wss://ws-api.binance.com:443/ws-api/v3'). */
  readonly url: string;

  /**
   * Build the outbound string to 'ws.send(...)' for a logical request.
   *
   * Async because some exchanges (Binance) require per-request HMAC-SHA256
   * signing, and WebCrypto's 'crypto.subtle.sign' is promise-based. Adapters
   * that don't need to sign can simply 'return Promise.resolve(envelope)'.
   *
   * @param method Logical method name (e.g. "order.place"). The adapter
   *               decides how to translate this into its exchange's envelope.
   * @param params Method parameters. May be signed inside the adapter
   *               using the credentials bound at construction time.
   * @returns      String ready to be passed to 'ws.send()'.
   */
  buildRequest(
    method: string,
    params: Record<string, unknown>
  ): Promise<string>;
}
```

Table 14: WebSocket adapter comparison (production registry).

Exchange	Endpoint	Correlation key	Auth model
Binance	wss://ws-api.binance.com/.../v3	id (UUID)	Per-request HMAC over sorted params
Bybit	wss://api.bybit.com/v5/private	reqId	Session auth at connect; op envelope
MEXC	Contract WS API	id	Exchange-specific signed envelope

```

/**
 * Parse an inbound WS message.
 *
 * @returns A 'WsResponse' if the message is a response to a
 *          previously-sent request (caller routes by 'id'), or 'null'
 *          if the message is a push event the DO doesn't track.
 */
parseResponse(raw: string): WsResponse | null;

```

Listing 49: IWSAdapter interface

Factory registry. `getAdapter(exchange, creds)` constructs a fresh adapter per DO instance so credentials never leak across connections (Listing 50). Registered exchanges: Binance, Bybit, MEXC.

```

// Source: workers/trade-worker/src/wsAdapters/adapters.ts (lines 20-39)
// Listing id: ws-adapter-registry
// Caption: Per-exchange WS adapter factory registry
const REGISTRY: Record<string, AdapterCtor> = {
  binance: BinanceAdapter,
  bybit: BybitAdapter,
  mexc: MexcAdapter,
};

/**
 * Construct a configured WS adapter for the given exchange.
 *
 * @param exchange Exchange name (case-insensitive)
 * @param creds API key/secret to bind to the adapter
 * @returns A fresh adapter instance, or 'undefined' if the exchange
 *          has no registered adapter.
 */
export function getAdapter(
  exchange: string,
  creds: { apiKey: string; apiSecret: string }
): IWSAdapter | undefined {
  const Ctor = REGISTRY[exchange.toLowerCase()];
  return Ctor ? new Ctor(creds) : undefined;
}

```

Listing 50: WS adapter factory registry

Per-exchange wire formats. Table 14 summarizes authentication and correlation differences. The DO normalizes correlation by reading either `id` (Binance, MEXC) or `reqId` (Bybit) from the outbound envelope (Listing 52).

Binance signing example. The Binance adapter sorts parameters alphabetically, builds a canonical query string, signs with HMAC-SHA256 via `crypto.subtle`, and embeds `apiKey`,

timestamp, and signature in the JSON envelope (Listing 51). This mirrors REST signing (Listing 16) but avoids per-order TCP setup.

```
1  // Source: workers/trade-worker/src/wsAdapters/binance.ts (lines 48-96)
2  // Listing id: ws-adapter-binance
3  // Caption: Binance WS API v3 adapter: per-request HMAC signing
4  export class BinanceAdapter implements IWsAdapter {
5      readonly url = "wss://ws-api.binance.com:443/ws-api/v3";
6
7      constructor(private readonly creds: { apiKey: string; apiSecret: string }) {}
8
9      async buildRequest(
10         method: string,
11         params: Record<string, unknown>
12     ): Promise<string> {
13         const id = crypto.randomUUID();
14         const flat = sortedParams({
15             apiKey: this.creds.apiKey,
16             timestamp: Date.now(),
17             ...params,
18         });
19         const query = new URLSearchParams(flat).toString();
20         const signature = await sign(this.creds.apiSecret, query);
21
22         return JSON.stringify({
23             id,
24             method,
25             params: { ...flat, signature },
26         });
27     }
28
29     parseResponse(raw: string): WsResponse | null {
30         let msg: {
31             id?: unknown;
32             status?: unknown;
33             result?: unknown;
34             error?: { code?: unknown; msg?: unknown };
35         };
36         try {
37             msg = JSON.parse(raw);
38         } catch {
39             return null;
40         }
41         if (!msg || typeof msg.id !== "string") return null; // push event
42         if (msg.error) {
43             return {
44                 id: msg.id,
45                 error: {
46                     code: Number(msg.error.code ?? 0),
47                     msg: String(msg.error.msg ?? ""),
48                 },
49             };
50         }
51         return { id: msg.id, result: msg.result };
52     }
53 }
```

Listing 51: Binance WS adapter: buildRequest and parseResponse

Request correlation and timeouts. `ExchangeConnectionManager.request` parses the outbound envelope, registers a pending entry keyed by correlation id, starts a 5s timer, and `ws.sends` the payload. Inbound message handlers call `adapter.parseResponse`; on match,

the timer is cleared and the Promise resolves or rejects (Listing 52). Socket `close/error` rejects all pending RPCs and schedules reconnect via DO alarm (5–10 s backoff, Section 14).

```

1  // Source: workers/trade-worker/src/exchange-connection-manager.ts (lines 159-189)
2  // Listing id: ws-do-correlation
3  // Caption: WS request/response correlation via pending map and timeout
4  async request(
5      method: string,
6      params: Record<string, unknown>,
7      timeoutMs = 5_000
8  ): Promise<unknown> {
9      if (!this.ws) throw new Error("WS not connected");
10     if (!this.adapter) throw new Error('No adapter for ${this.exchange}');
11
12     const envelope = await this.adapter.buildRequest(method, params);
13     // Extract the correlation id (Binance/MEXC use 'id', Bybit uses 'reqId').
14     const parsed = JSON.parse(envelope) as Record<string, unknown>;
15     const key = (parsed.id ?? parsed.reqId) as string | undefined;
16     if (typeof key !== "string") {
17         throw new Error("Adapter produced no correlation id");
18     }
19
20     return new Promise((resolve, reject) => {
21         const timer = setTimeout(() => {
22             this.pending.delete(key);
23             reject(new Error('WS ${method} timed out after ${timeoutMs}ms'));
24         }, timeoutMs);
25         this.pending.set(key, { resolve, reject, timer });
26         try {
27             this.ws!.send(envelope);
28         } catch (err) {
29             this.pending.delete(key);
30             clearTimeout(timer);
31             reject(err);
32         }
33     });
34 }

```

Listing 52: WS RPC correlation with 5s timeout

WS-to-REST fallback. `executeTrade` on the DO attempts `request("exchange.order.place", params)` when `ready && ws`; on timeout or adapter error it logs and falls through to `executeTradeRest`, which instantiates the same REST clients used on the non-WS path (Listing 31, Section 6). Production median ack latency therefore includes REST RTT whenever the socket is cold or reconnecting.

15.2 D1 Batch Transaction Semantics

HOOX uses two D1 access patterns: single-statement `POST /query` and multi-statement `POST /batch`. Both require `X-Internal-Auth-Key`; only `d1-worker` holds the DB binding.

Read vs. write validation asymmetry.

- **SELECT reads** (dashboard, agent cron): pass through `validateQuery`—comment stripping, no string literals, table allowlist, no `UNION`/subqueries (Listing 45).
- **Writes** (`INSERT`, `REPLACE`, `UPDATE`, `DELETE`): skip the `SELECT` guard; trusted binding callers must use `?` placeholders only. `trade-worker` dispatches parallel `/query` writes inside `waitUntil` (Listing 44).

This split prevents ad-hoc SQL injection from dashboard paths while allowing parameterized ledger writes from `trade-worker`.

HTTP /batch endpoint. Remote callers submit `{statements: [{query, params}, ...]}`. The handler validates *each* statement with `validateQuery` (SELECT-only), prepares bound statements, and executes `env.DB.batch(stmts)` atomically—all statements commit or none do (Listing 53). Partial failures return `success: false` with the failing `D1Result.error`. Analytics track latency via non-blocking `/track/api-call`.

```
1 // Source: workers/d1-worker/src/index.ts (lines 374-451)
2 // Listing id: d1-batch-endpoint
3 // Caption: HTTP /batch: validated statements and atomic DB.batch()
4 // Batch endpoint
5 router.post(
6   "/batch",
7   async (request: Request, env: Env, ctx: ExecutionContext) => {
8     const startTime = Date.now();
9
10    try {
11      const bodyGuard = requireJsonBody(request);
12      if (bodyGuard) return bodyGuard;
13
14      let payload: BatchPayload;
15      try {
16        payload = await request.json();
17      } catch {
18        return Errors.badRequest("Invalid JSON in request body");
19      }
20
21      if (!payload || !Array.isArray(payload.statements)) {
22        return Errors.badRequest("Missing or invalid statements array");
23      }
24
25      // Validate all statements before batch execution
26      for (const stmt of payload.statements) {
27        if (typeof stmt.query !== "string" || !stmt.query.trim()) {
28          return Errors.badRequest("Each statement must have a 'query' field");
29        }
30
31        const validation = validateQuery(stmt.query);
32        if (!validation.valid) {
33          logger.warn("Batch statement validation failed", {
34            error: validation.error,
35            query: stmt.query,
36          });
37          const statusCode = validation.statusCode || 403;
38          if (statusCode === 400) {
39            return Errors.badRequest(
40              validation.error || "Statement validation failed"
41            );
42          }
43          return Errors.forbidden(
44            validation.error || "Statement validation failed"
45          );
46        }
47      }
48
49      // Use native DB.batch() for atomic, faster execution
50      const stmts = payload.statements.map(s => {
51        const prepared = env.DB.prepare(s.query);
52        if (s.params && s.params.length > 0) {
53          return prepared.bind(...s.params);
```

```

54     }
55     return prepared;
56 });
57 const results = await env.DB.batch(stmts);
58
59 // Check for partial failures
60 const failedResult = results.find((r) => r.error);
61 const allSuccess = !failedResult;
62
63 // Track API call analytics (non-blocking)
64 const latencyMs = Date.now() - startTime;
65 ctx.waitUntil(
66   trackAnalytics(env, "/track/api-call", {
67     worker: "dl-worker",
68     endpoint: "/batch",
69     latencyMs,
70     success: allSuccess,
71   }).catch((err) =>
72     logger.error("trackAnalytics failed", { error: String(err) })
73   )
74 );
75
76 if (!allSuccess) {
77   return createJsonResponse({
78     success: false,
79     error: failedResult.error || "Batch statement failed",
80     results,
81   });

```

Listing 53: Atomic /batch with per-statement validation

Internal DB.batch for aggregates. Dashboard stats bypass HTTP and batch five independent COUNT queries in-process (Listing 54), reducing five round-trips to one SQLite transaction. report-worker and the dashboard UI consume the resulting /api/dashboard/stats JSON.

```

// Source: workers/dl-worker/src/stats.ts (lines 19-37)
// Listing id: dl-stats-batch
// Caption: Internal five-query dashboard aggregate via DB.batch()
// All 5 queries are independent aggregates -- batch them for single round-trip
const stmts = [
  db.prepare("SELECT COUNT(*) as count FROM trades"),
  db.prepare(
    "SELECT COUNT(*) as count FROM positions WHERE status = 'OPEN'"
  ),
  db.prepare(
    "SELECT COUNT(*) as count FROM positions WHERE status = 'CLOSED'"
  ),
  db.prepare(
    "SELECT COUNT(*) as count FROM positions WHERE status = 'CLOSED' AND unrealized_pnl > 0"
  ),
  db
    .prepare("SELECT COUNT(*) as count FROM trades WHERE timestamp >= ?")
    .bind(todayStart),
];

const [totalRow, activePosRow, totalClosedRow, profitableRow, dailyRow] =
  await db.batch(stmts);

```

Listing 54: Five-query dashboard aggregate via DB.batch

Trade write path trade-off. Post-fill persistence uses *parallel /query* calls (trade row + position row) rather than a single */batch* transaction. This accepts a narrow window where one write succeeds and the other fails under isolate eviction; reconciliation uses exchange fill JSON in `trades.raw_response` as source of truth. A future optimization could wrap both statements in */batch* once write validation is extended to mutating statements with table allowlists.

15.3 ProviderManager Fallback State Machine

`agent-worker` and `telegram-worker` invoke LLMs only for operational summaries and RAG—never for order placement. Inference reliability is handled by `ProviderManager` (ADR-005, Section 11).

Configuration. `AgentConfig` defaults (Listing 36) set `fallbackChain`: `["workers-ai", "openai"]`, `retryCount`: 3, and `timeoutMs`: 30000. Runtime overrides load from `agent:config` in `CONFIG_KV`; missing keys seed defaults on first read.

State machine. Figure 7 and Algorithm 15.3 describe `runWithFallback`. The machine is *not* per-provider retry-with-backoff; it is **chain iteration** followed by **full-chain recursion**:

1. For each provider `p` in `fallbackChain`, call `runProvider(p, request)`.
2. On first `success: true`, return immediately (short-circuit).
3. On soft failure (`success: false`) or thrown exception, record `lastError` and advance to the next provider.
4. If the chain exhausts without success and `retries > 0`, sleep 1s and recurse with `retries - 1` over the *entire* chain.
5. If `retries == 0`, return aggregate failure.

With default `retryCount = 3`, worst case is four full chain passes (initial + 3 retries), i.e., up to $4 \times |\text{chain}|$ provider attempts. Each `runProvider` call uses an `AbortController` timeout (`timeoutMs`).

Provider backends.

- **workers-ai**: `env.AI.run(model, {messages})` with Workers AI binding; default model `@cf/meta/llama-3.1-8b-instruct`.
- **openai / anthropic / google**: outbound `fetch` to vendor REST APIs; API keys read from `CONFIG_KV` (`agent:openai_key`, etc.); optional Cloudflare AI Gateway URLs via `env.AI.gateway("aig").getUrl(...)`.

Failure modes. Missing API keys return soft failures (`success: false`) and advance the chain—Workers AI can still succeed when OpenAI is unconfigured. `getProviderStatus` probes each chain member with a minimal "Hi" prompt for dashboard health tiles.

```
1 // Source: workers/agent-worker/src/providers.ts (lines 102-142)
2 // Listing id: provider-fallback
3 // Caption: ProviderManager fallback chain with full-chain retry recursion
4 async run(request: AIRequest): Promise<ProviderResult> {
5   const config = await this.loadConfig();
6   return this.runWithFallback(
7     request,
8     config.fallbackChain,
```

```

 9      config.retryCount
10    );
11  }
12
13  private async runWithFallback(
14    request: AIRequest,
15    chain: ProviderName[],
16    retries: number
17  ): Promise<ProviderResult> {
18    let lastError: string = "";
19
20    for (const provider of chain) {
21      try {
22        const result = await this.runProvider(provider, request);
23        if (result.success) {
24          return result;
25        }
26        lastError = result.error || "Unknown error";
27      } catch (error: unknown) {
28        lastError = error instanceof Error ? error.message : String(error);
29        this.logger.warn("Provider failed", { provider, error: lastError });
30      }
31    }
32
33    if (retries > 0) {
34      await new Promise((r) => setTimeout(r, 1000));
35      return this.runWithFallback(request, chain, retries - 1);
36    }
37
38    return {
39      success: false,
40      error: 'All providers failed. Last error: ${lastError}',
41      provider: chain[0],
42      model: "",
43    };
44  }

```

Listing 55: runWithFallback: chain iteration and full-chain retry

Acknowledgments

The author thanks the Cloudflare Workers platform team for edge primitives that made this architecture possible, and the open-source contributors to the HOOX monorepo.

License

This paper is released under Creative Commons Attribution 4.0 International (CC BY 4.0), consistent with the HOOX project license.

References

- [1] Martin Arnold, Robert Sutton, and Sebastian Jaimungal. Market making and mean-reversion strategies in high-frequency trading. *Quantitative Finance*, 2010. Illustrates latency sensitivity in algorithmic execution.
- [2] Ivan Baldini, Paul Cheng, Stephen J. Fink, Nick Mitchell, Vinod Muthusamy, Rodric Rabbah, Philippe Suter, and Olivier Tardieu. Cloud-native, event-driven programming for

- everyone. In *Proceedings of the 2017 ACM SIGPLAN International Symposium on New Ideas, New Paradigms, and Reflections on Programming and Software*, pages 1–12, 2017.
- [3] Chainlink. Chainlink automation (keepers). <https://docs.chain.link/chainlink-automation>, 2026.
 - [4] Cloudflare. Analytics engine. <https://developers.cloudflare.com/analytics/analytics-engine/>, 2026. Accessed July 2026.
 - [5] Cloudflare. Browser rendering. <https://developers.cloudflare.com/browser-rendering/>, 2026. Accessed July 2026.
 - [6] Cloudflare. Durable objects. <https://developers.cloudflare.com/durable-objects/>, 2026. Accessed July 2026.
 - [7] Cloudflare. Queues. <https://developers.cloudflare.com/queues/>, 2026. Accessed July 2026.
 - [8] Cloudflare. Service bindings. <https://developers.cloudflare.com/workers/runtime-apis/service-bindings/>, 2026. Accessed July 2026.
 - [9] Cloudflare. Smart placement. <https://developers.cloudflare.com/workers/configuration/smart-placement/>, 2026. Accessed July 2026.
 - [10] Cloudflare. Workers documentation. <https://developers.cloudflare.com/workers/>, 2026. Accessed July 2026.
 - [11] Colinhacks. Zod: Typescript-first schema validation. <https://zod.dev/>, 2026. Runtime validation used by shared middleware.
 - [12] Freqtrade Contributors. Freqtrade: Free, open source crypto trading bot. <https://github.com/freqtrade/freqtrade>, 2026.
 - [13] Grafana Labs. k6: Open source load testing tool. <https://k6.io/>, 2026.
 - [14] Joel Hasbrouck. *Empirical Market Microstructure: The Institutions, Economics, and Econometrics of Securities Trading*. Oxford University Press, 2007.
 - [15] Terrence Hendershott and Ryan Riordan. Does algorithmic trading improve liquidity? *The Journal of Finance*, 66(1):1–33, 2011.
 - [16] jango_blockchained. Hoox: Edge-native algorithmic trading framework. <https://github.com/jango-blockchained/hoox-setup>, 2026. Open source under CC BY 4.0.
 - [17] Jesse Contributors. Jesse: Advanced crypto trading framework. <https://github.com/jesse-ai/jesse>, 2026.
 - [18] D. Jonas et al. Fast and compact: V8 isolates for serverless computing. Google V8 Blog, 2017. Describes isolate-based serverless execution model.
 - [19] OpenNext Contributors. Opennext for cloudflare. <https://opennext.js.org/cloudflare>, 2026.
 - [20] Aleksey Shpektor et al. Cold start latency in serverless computing. In *Proceedings of the 2019 ACM Symposium on Cloud Computing*, 2019. Characterizes cold-start penalties in FaaS platforms.
 - [21] Various. Serverless trading bot patterns on AWS lambda, 2024. Representative of regional serverless trading deployments.

A Reproducibility Protocol

Independent verifiers with a deployed HOOX stack and API credentials can reproduce the evaluation as follows.

Fast-path probes (internal mesh, no exchange)

```
1 hoox perf fastpath run --n 100 --concurrency 8
2 hoox perf fastpath report --from 1h
```

Expect HTTP 200 with status: "probed"; confirm no new rows in the D1 trades table (integration test: tests/integration/fastpath.test.ts).

k6 load tests (gateway under concurrency)

```
1 BASE_URL=https://<gateway>.workers.dev \
2 HOOX_API_KEY=<key> \
3 k6 run tests/load/webhook-flow.js
4
5 HOOX_API_KEY=<key> \
6 k6 run tests/load/fastpath-audit.js
```

Default thresholds: webhook p95 < 2000 ms; fast-path audit p95 < 3000 ms.

Production exchange-ack latency. Deploy with `queue_disabled`, place micro-sized testnet orders without `probe: true`, and compare gateway `Date.now()` timestamps against exchange acknowledgment timestamps in Analytics Engine or D1 trade logs.

Listing extraction. All code excerpts are generated from the monorepo via `make listings` (see papers/listings/manifest.yaml). The categorized index in Appendix G is regenerated by `make listings-index`.

arXiv source bundle. From the papers/ directory, run `make arxiv-tarball` after `make pdf-tikz` to produce `dist/hoox-arxiv-submission.tar.gz` containing L^AT_EX sources, figures, listings, and the compiled PDF. Submission metadata is in `arxiv-submission.md`.

B CLI Command Reference (Abbreviated)

The hoox CLI exposes 25 command groups. Table 15 lists commands most relevant to deployment and evaluation.

Table 15: Selected hoox CLI commands.

Command	Purpose
hoox onboard	Full project bootstrap
hoox deploy all -auto	Deploy all Workers and dashboard
hoox check health	Probe Worker health endpoints
hoox perf fastpath run -n 50	Synthetic internal latency measurement
hoox perf fastpath tail -duration 60	Stream live probe latencies
hoox monitor kill-switch on/off	Halt or resume trading
hoox infra provision	Provision D1, KV, R2, Queues, Vectorize

C Threat Model Summary

Table 16 maps threats to mitigations.

Table 16: Threat model.

Threat	Mitigation
Spoofed webhooks	WAF IP allow-list (Listing 20) + API key auth
Replay attacks	Durable Object idempotency (300s TTL)
Credential brute force	timingSafeEqual (Listing 21)
Internal privilege escalation	Service Binding isolation + INTERNAL_KEY
Session abuse	Per-session rate limit (Listing 22)
Prompt injection (LLM)	Marker detection (Listing 26)
Spoofed email signals	Mailgun HMAC (Listing 25)
Exchange API outage	Queues with exponential backoff + DLQ
Runaway losses	Drawdown kill switch + rate limiting
DO unavailability	Fail-open gateway (documented limitation)

D Cloudflare Bindings Registry

This appendix reproduces the canonical binding registry from the HOOX monorepo. Service Bindings replace public HTTP between Workers; secrets are injected at runtime and never committed to source control.

D.1 Runtime Secrets

Table 17: Worker secret bindings (selected).

Secret	Workers	Purpose
WEBHOOK_API_KEY_BINDING	hoox	TradingView webhook auth
INTERNAL_KEY_BINDING	hoox, trade-worker, telegram-worker	Inter-service auth header
BINANCE_KEY_BINDING / SECRET	trade-worker	Binance futures API
BYBIT_KEY_BINDING / SECRET	trade-worker	Bybit V5 API
MEXC_KEY_BINDING / SECRET	trade-worker	MEXC contract API
TG_BOT_TOKEN_BINDING	telegram-worker	Telegram Bot API
WALLET_PK_SECRET	web3-wallet-worker	On-chain signing

D.2 Service Bindings

D.3 Storage and Coordination Bindings

Wrangler excerpts. Listings 34 and 56 show how queue producers, consumers, and Durable Object migrations are declared. Account and namespace IDs are redacted for publication.

```
// Source: workers/trade-worker/wrangler.jsonc (sanitized excerpt)
// Listing id: wrangler-trade-bindings
{
  "name": "trade-worker",
  "placement": { "mode": "smart" },
  "services": [
    { "binding": "D1_SERVICE", "service": "d1-worker" },
    { "binding": "TELEGRAM_SERVICE", "service": "telegram-worker" },
    { "binding": "ANALYTICS_SERVICE", "service": "analytics-worker" }
  ],
  "r2_buckets": [
    { "binding": "REPORTS_BUCKET", "bucket_name": "trade-reports" },
```

Table 18: Service Binding graph.

Binding	Target	Callers
TRADE_SERVICE	trade-worker	hoox, agent-worker, email-worker
TELEGRAM_SERVICE	telegram-worker	hoox, trade-worker, agent-worker, web3-wallet-worker, report-worker
D1_SERVICE	d1-worker	trade-worker, agent-worker, report-worker, dashboard
ANALYTICS_SERVICE	analytics-worker	hoox, trade-worker, d1-worker, others
AGENT_SERVICE	agent-worker	dashboard
WEB3_WALLET_SERVICE	web3-wallet-worker	hoox

Table 19: KV, R2, D1, Queue, and Durable Object bindings.

Binding	Resource	Primary consumers
CONFIG_KV	KV namespace	All Workers (kill switch, routing, agent config)
SESSIONS_KV	KV namespace	hoox (rate limiter sessions)
DB	D1 trade-data-db	d1-worker, trade-worker, agent-worker
REPORTS_BUCKET	R2 trade-reports	trade-worker
SYSTEM_LOGS_BUCKET	R2 hoox-system-logs	trade-worker
UPLOADS_BUCKET	R2 user-uploads	telegram-worker
TRADE_QUEUE	Queue trade-execution	Producer: hoox; consumer: trade-worker
IDEMPOTENCY_STORE	DO IdempotencyStore	hoox
EXCHANGE_CONNECTION_MANAGER	DO WebSocket pool	trade-worker
VECTORIZE_INDEX	Vectorize my-rag-index	hoox, telegram-worker
AI	Workers AI	agent-worker, telegram-worker, dashboard
ANALYTICS_ENGINE	Dataset hoox-analytics	analytics-worker

```

{ "binding": "SYSTEM_LOGS_BUCKET", "bucket_name": "hoox-system-logs" }
],
"queues": {
  "consumers": [
    {
      "queue": "trade-execution",
      "max_retries": 3,
      "dead_letter_queue": "trade-execution-dlq"
    }
  ]
},
"durable_objects": {
  "bindings": [
    { "name": "EXCHANGE_CONNECTION_MANAGER", "class_name": "ExchangeConnectionManager" }
  ]
}
}

```

Listing 56: trade-worker queue consumer, R2, and Service Bindings

E Graph-Derived Architecture Reference

The monorepo maintains a machine-readable architecture graph in `graph-metadata.json`, re-generated via `bun run graph`. Figure 8 visualizes the five logical communities; Tables 20 and 21 list selected data-flow edges and cluster definitions extracted from the same source.

E.1 Data-flow edges

E.2 Architecture communities

F Test Excerpts and Failure Taxonomy

HOOX validates correctness and latency claims through a four-tier test pyramid: unit tests (Bun, per-worker), integration tests (local Miniflare/Docker compose), security tests (auth fail-closed), and load tests (k6 against deployed edge). Table 22 maps tiers to representative suites; Listings 57–63 excerpt high-signal assertions.

F.1 Representative Unit Tests

Idempotency TTL. Listing 57 verifies that a duplicate composite key within the 300 s TTL returns `false` from `checkAndStore`, using a deterministic mocked clock.

```
1 // Source: workers/hoox/test/idempotencyStore.test.ts (lines 138-148)
2 // Listing id: test-idempotency-ttl
3 // Caption: Unit test: duplicate key rejected within TTL window
4 test("checkAndStore() returns false for duplicate within TTL window", async () => {
5     // Arrange -- store a key at t=0
6     await store.checkAndStore("dup-key");
7
8     // Act -- re-submit well before the 5-minute TTL elapses
9     advanceTime(60_000);
10    const result = await store.checkAndStore("dup-key");
11
12    // Assert
13    expect(result).toBe(false);
14 });
```

Listing 57: Duplicate key rejected within TTL

D1 SQL guard. Listing 58 asserts HTTP 403 when a dashboard query references a table outside the allowlist—matching the production validator in Listing 45.

```
1 // Source: workers/d1-worker/test/d1-worker.test.ts (lines 369-387)
2 // Listing id: test-d1-sql-guard
3 // Caption: Unit test: unauthorized table returns HTTP 403
4 test("rejects queries referencing unauthorized tables", async () => {
5     const request = new Request("https://d1-worker.workers.dev/query", {
6         method: "POST",
7         headers: {
8             "Content-Type": "application/json",
9             "X-Internal-Auth-Key": TEST_INTERNAL_KEY,
10        },
11        body: JSON.stringify({ query: "SELECT * FROM secret_table", params: [] }),
12    });
13    const response = await d1Worker.fetch(
14        request as any,
15        mockEnv as any,
16        createMockCtx() as any
17    );
```

```

18     expect(response.status).toBe(403);
19     const data = (await response.json()) as any;
20     expect(data.success).toBe(false);
21     expect(data.error).toContain("Unauthorized table");
22 });

```

Listing 58: Unauthorized table rejected with 403

Fire-and-forget regression. Listing 59 is the regression test for the 2026 fast-path optimization: with `ctx` present, `updateD1TradeRecords` returns in <50 ms and dispatches both D1 writes via `waitUntil`.

```

1  // Source: workers/trade-worker/test/d1-fire-and-forget.test.ts (lines 140-172)
2  // Listing id: test-d1-fire-and-forget
3  // Caption: Regression test: D1 writes dispatched via waitUntil
4  it("dispatches D1 writes via ctx.waitUntil when ctx is provided", async () => {
5      const t0 = Date.now();
6      await update(
7          {
8              D1_SERVICE: {} as Fetcher,
9              INTERNAL_KEY_BINDING: "test-internal-key",
10         },
11         { action: "LONG", symbol: "BTCUSDT", quantity: 0.001, price: 60000 },
12         "binance",
13         10,
14         mockCtx as unknown as ExecutionContext
15     );
16     const elapsed = Date.now() - t0;
17
18     // The function returned essentially immediately (no D1 round
19     // trips were awaited). Allow a generous 50ms for test noise.
20     expect(elapsed).toBeLessThan(50);
21
22     // ctx.waitUntil was called with the writes
23     expect(mockCtx.waitUntil).toHaveBeenCalledTimes(1);
24     const waitArg = mockCtx.waitUntil.mock.calls[0][0] as Promise<unknown>;
25     // The writes are pending (or resolved) but were NOT awaited
26     // synchronously by update().
27     expect(waitArg).toBeInstanceOf(Promise);
28
29     // Drain the background writes so the mock serviceFetch is called
30     await waitArg;
31
32     // Both D1 writes happened
33     expect(d1Calls).toHaveLength(2);
34     expect(d1Calls[0].query).toMatch(/INSERT INTO trades/);
35     expect(d1Calls[1].query).toMatch(/REPLACE INTO positions/);
36 });

```

Listing 59: D1 writes non-blocking via `waitUntil`

F.2 Integration and Security Tests

Gateway validation. Listing 60 confirms that real TradingView-shaped payloads pass `WebhookPayloadSchema` while missing fields and invalid actions produce structured Zod errors.

```

1  // Source: tests/integration/gateway.test.ts (lines 22-64)
2  // Listing id: test-gateway-validation
3  // Caption: Zod + validateJson rejects invalid TradingView payloads
4  test("validates a real TradingView webhook payload", () => {

```

```

5     const tradingViewPayload = {
6       exchange: "binance",
7       action: "LONG" as const,
8       symbol: "BTC/USDT",
9       quantity: 0.5,
10      price: 50000,
11      orderType: "market",
12      leverage: 20,
13    };
14    const result = validateJson(WebhookPayloadSchema, tradingViewPayload);
15    expect(result.ok).toBe(true);
16    if (result.ok) {
17      expect(result.value.symbol).toBe("BTC/USDT");
18      expect(result.value.action).toBe("LONG");
19    }
20  });
21
22  test("rejects TradingView payload with missing fields", () => {
23    const result = validateJson(WebhookPayloadSchema, {
24      exchange: "test",
25      // missing symbol, action, quantity
26    });
27    expect(result.ok).toBe(false);
28    if (!result.ok) {
29      expect(result.error).toContain("symbol");
30      expect(result.error).toContain("action");
31      expect(result.error).toContain("quantity");
32    }
33  });
34
35  test("validateJson + TradeActionSchema rejects invalid trade action", () => {
36    const result = validateJson(WebhookPayloadSchema, {
37      exchange: "binance",
38      action: "HOLD", // invalid -- not in the enum
39      symbol: "BTC/USDT",
40      quantity: 0.1,
41    });
42    expect(result.ok).toBe(false);
43    if (!result.ok) {
44      expect(result.error).toContain("action");
45    }
46  });

```

Listing 60: TradingView payload validation

Probe side-effect freedom. Listing 61 sends a synthetic probe through the local gateway and asserts (a) HTTP 200 with `status: "probed"` and (b) zero new rows in the D1 `trades` table—proving probes do not hit exchanges or persist fills.

```

1  // Source: tests/integration/fastpath.test.ts (lines 67-113)
2  // Listing id: test-fastpath-probe
3  // Caption: Integration test: probe short-circuit leaves D1 trades unchanged
4  it("sends a probe and gets a 200 response with status: probed", async () => {
5    if (!reachable) {
6      console.warn("Skipping: workers not reachable at", GATEWAY_URL);
7      return;
8    }
9    const probe_id = crypto.randomUUID();
10    const response = await fetch(GATEWAY_URL, {
11      method: "POST",
12      headers: {
13        "Content-Type": "application/json",

```

```

14     "X-Internal-Auth-Key": INTERNAL_KEY,
15   },
16   body: JSON.stringify({
17     probe: true,
18     probe_id,
19     symbol: "BTCUSDT",
20     action: "LONG",
21     quantity: 0.001,
22   }),
23 });
24 expect(response.status).toBe(200);
25 const body = (await response.json()) as Record<string, unknown>;
26 expect(body.probe_id).toBe(probe_id);
27 expect(body.status).toBe("probed");
28 });
29
30 it("does NOT add a row to the trades table", async () => {
31   if (!reachable || tradesBefore < 0) return;
32   const probe_id = crypto.randomUUID();
33   await fetch(GATEWAY_URL, {
34     method: "POST",
35     headers: {
36       "Content-Type": "application/json",
37       "X-Internal-Auth-Key": INTERNAL_KEY,
38     },
39     body: JSON.stringify({
40       probe: true,
41       probe_id,
42       symbol: "BTCUSDT",
43       action: "LONG",
44       quantity: 0.001,
45     }),
46   });
47   await new Promise((r) => setTimeout(r, 500));
48   const tradesAfter = await queryTradesCount();
49   expect(tradesAfter).toBe(tradesBefore);
50 });

```

Listing 61: Probe integration: no D1 trade rows

Auth fail-closed. Listing 62 verifies that `requireInternalAuth` returns HTTP 401 when the binding is missing, the header is absent, or the header value mismatches—never silently allowing the request.

```

1  // Source: tests/security/auth-bypass.test.ts (lines 17-58)
2  // Listing id: test-auth-fail-closed
3  // Caption: Security test: requireInternalAuth fail-closed behavior
4  describe("requireInternalAuth - fail-closed", () => {
5    it("rejects with 401 when INTERNAL_KEY_BINDING is not configured", () => {
6      const env = {} as Record<string, unknown>;
7      const request = new Request("http://localhost/test");
8
9      const result = requireInternalAuth(request, env);
10
11      expect(result).not.toBeNull();
12      expect(result!.status).toBe(401);
13    });
14
15    it("rejects with 401 when INTERNAL_KEY_BINDING is undefined", () => {
16      const env = { INTERNAL_KEY_BINDING: undefined };
17      const request = new Request("http://localhost/test");
18

```

```

19     const result = requireInternalAuth(request, env);
20
21     expect(result).not.toBeNull();
22     expect(result!.status).toBe(401);
23 });
24
25 it("rejects with 401 when key is configured but header is missing", () => {
26     const env = { INTERNAL_KEY_BINDING: "secret-123" };
27     const request = new Request("http://localhost/test");
28
29     const result = requireInternalAuth(request, env);
30
31     expect(result).not.toBeNull();
32     expect(result!.status).toBe(401);
33 });
34
35 it("rejects with 401 when key is configured but header has wrong value", () => {
36     const env = { INTERNAL_KEY_BINDING: "secret-123" };
37     const request = new Request("http://localhost/test", {
38         headers: { "X-Internal-Auth-Key": "wrong-key" },
39     });
40
41     const result = requireInternalAuth(request, env);
42
43     expect(result).not.toBeNull();
44     expect(result!.status).toBe(401);
45 });

```

Listing 62: Internal auth fail-closed tests

F.3 Load Test Thresholds

The `k6 fastpath-audit.js` script measures deployed `POST /webhook` latency under 30 concurrent VUs for two minutes. Listing 63 shows SLO thresholds: gateway happy-path p95 <3000 ms, health p95 <500 ms, and >80% acceptance rate.

Measurement caveat. `k6` thresholds measure *gateway HTTP response* latency, which includes queue enqueue and binding round-trips when `queue_failover` is active. They do not isolate exchange fill RTT. Production probe analytics (Section 7) decompose per-hop latency via `probe_id` indexes.

```

// Source: tests/load/fastpath-audit.js (lines 83-90)
// Listing id: test-k6-thresholds
// Caption: k6 fastpath audit SLO thresholds (p95 latency bounds)
thresholds: {
    health_latency: ["p(95)<500", "p(99)<1000"],
    webhook_happy_latency: ["p(95)<3000", "p(99)<5000"],
    webhook_invalid_latency: ["p(95)<500"],
    webhook_auth_fail_latency: ["p(95)<500"],
    webhook_success_rate: ["rate>0.80"], // >80% reach hoox-success status (gateway accepted)
    errors_total: ["count<1000"],
},

```

Listing 63: k6 fastpath audit SLO thresholds

F.4 Failure Taxonomy

Table 23 classifies production failure modes, detection mechanisms, and system response. This taxonomy guides on-call playbooks and explains why certain paths fail open (idempotency DO) while others fail closed (internal auth, SQL guard).

Reproducibility. Run unit tests with `bun test` from the monorepo root; integration tests require `docker compose -profile workers up`. Load tests: `HOOX_API_KEY=<key> k6 run tests/load/fastpa`. Full commands appear in Appendix A.

G Code Listings Index

All production excerpts in this monograph are extracted from the HOOX monorepo via `make listings` (`papers/listings/manifest.yaml`). Each listing is pinned to a source path and line range so independent verifiers can diff against future commits. Table entries reference the in-document Listing number; the authoritative manifest drives regeneration.

G.1 Gateway

G.2 Execution

G.3 Web3 / DeFi

G.4 Exchange clients

G.5 Agent / AI

G.6 Data layer

G.7 Observability

G.8 Email ingress

G.9 Shared middleware

G.10 Shared packages

G.11 Tests

Regeneration. From `papers/`, run `make listings` to refresh `listings/*.ts` and `make listings-index` (or `make pdf-tikz`) to rebuild this index. JSONC wrangler excerpts are hand-sanitized and are not overwritten by the extractor.

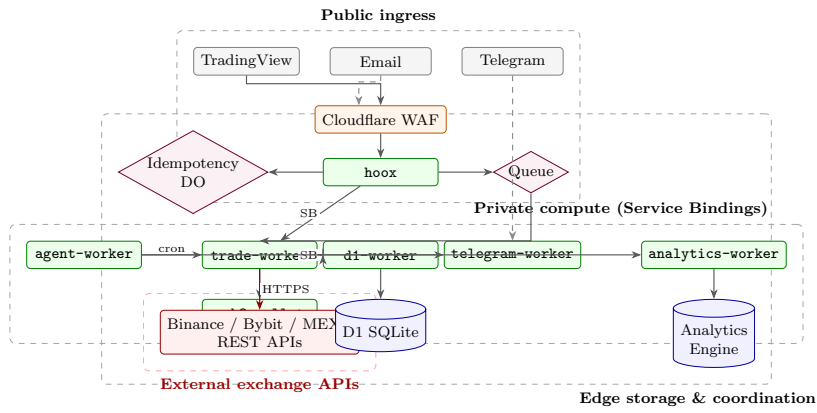


Figure 1: HOOX topology. Service Bindings (SB) connect internal Workers without public HTTP. Smart Placement optimizes outbound RTT from **trade-worker** to exchange APIs. Build with `make figures` in the `papers/` directory.

Algorithm 1: Idempotency check in IdempotencyStore

```
1 Input: key k, TTL tau
2 Output: true if new; false if duplicate
3 enter blockConcurrencyWhile
4   e <- storage.get(k)
5   if e != null and (now - e.storedAt) < tau then
6     return false // duplicate within TTL
7   storage.put(k, {storedAt: now})
8   schedule alarm at now + tau
9   return true
10
```

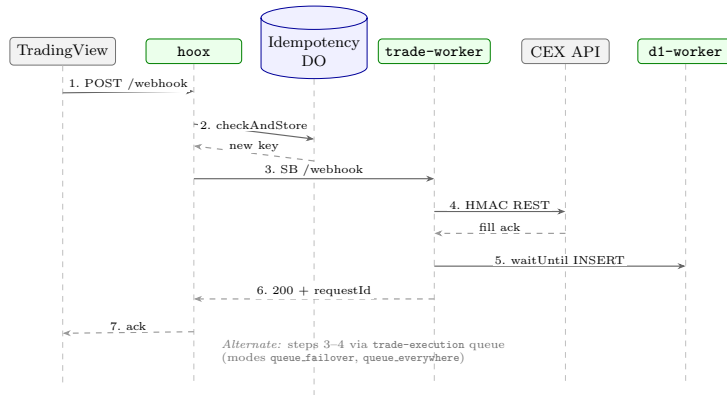


Figure 2: Signal lifecycle (synchronous Service Binding path). Steps 5–6 use `waitUntil` for D1 persistence; HTTP ack returns after step 6.

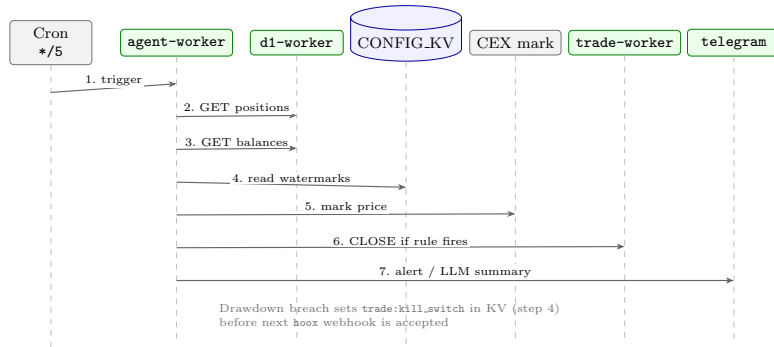


Figure 3: `agent-worker` cron risk loop (`*/5 * * * *`). Kill-switch activation writes `CONFIG_KV` before the next `hoox` ingress.

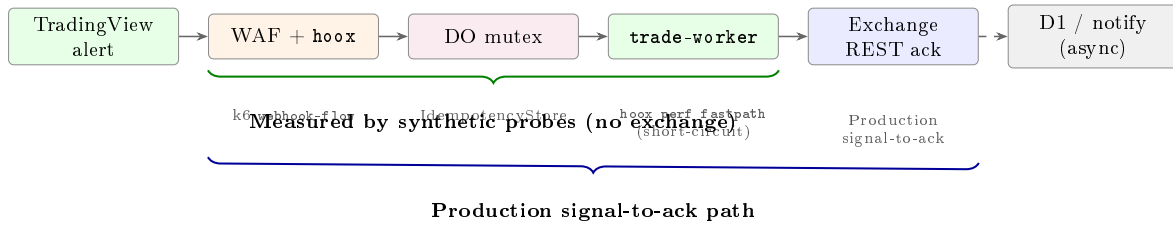


Figure 4: Latency measurement taxonomy. Synthetic probes (`probe: true`) short-circuit before exchange submission; production metrics include signed REST placement and exchange acknowledgment.

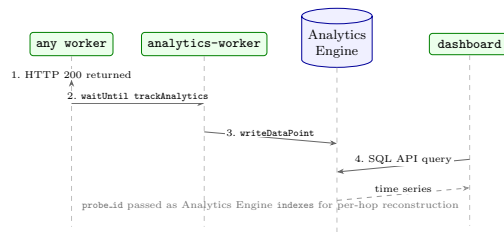


Figure 5: Cross-worker observability pipeline. Analytics writes never block the trading hot path.

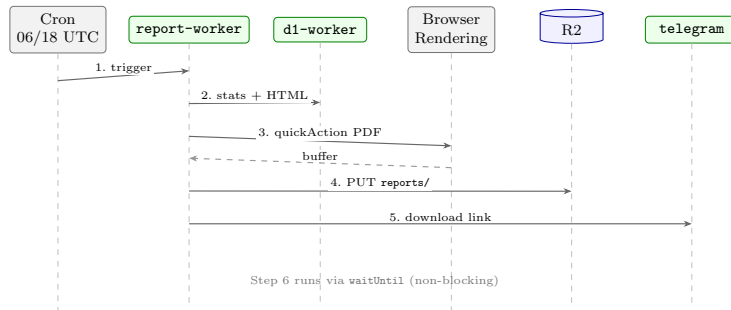


Figure 6: `report-worker` scheduled PDF pipeline (06:00 and 18:00 UTC).

Algorithm 2: `ProviderManager.runWithFallback`

```
1  Input:  request, chain[0..n-1], retries
2  Output: ProviderResult
3  lastError <- ""
4  for each provider p in chain do
5    try
6      r <- runProvider(p, request)
7      if r.success then return r
8      lastError <- r.error
9    catch e
10     lastError <- string(e)
11  if retries > 0 then
12    sleep(1000ms)
13    return runWithFallback(request, chain, retries - 1)
14  return { success: false, error: lastError }
15
```

Figure 7: `ProviderManager` fallback: iterate chain, then recurse with decremented retry budget.

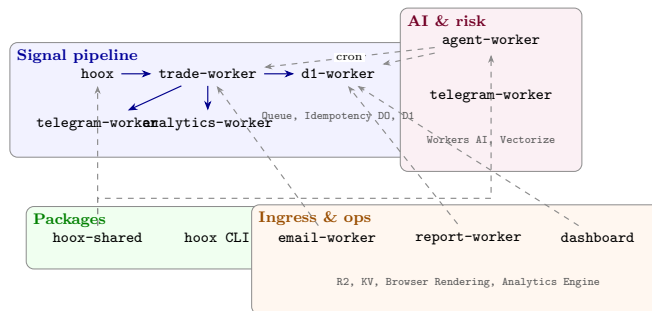


Figure 8: Code-graph community overview. Solid arrows: primary signal path; dashed arrows: cron, shared-library, or auxiliary ingress.

Table 20: Primary data-flow edges (selected).

Source	Target	Description
hoox	trade-worker	Trading signal: POST /webhook → validate webhook + check kill_switch + check IP allowlist + deduplicate via IdempotencyStore DO + check rate limit → produce TradeQueueMessage to TRADE_QUEUE → trade-worker consumes from queue handler with exponential backoff retry (max 5)
trade-worker	d1-worker	Trade data persistence: executeTrade → on success, write trade record + update positions + log to system_logs via d1-worker POST /query (INSERT/UPDATE) with X-Internal-Auth-Key. Reported via DbLogger request/response log pairs.
trade-worker	telegram-worker	Trade notification: executeTrade → on success or failure, call telegram-worker POST /process (legacy) or POST /webhook with NotificationPayload { message, chatId? } via TELEGRAM_SERVICE service binding
trade-worker	analytics-worker	Trade analytics: executeTrade → trackAnalytics(env, '/track/api-call', { worker: 'trade-worker', endpoint, latencyMs, success }) for every /webhook and /process call. Fire-and-forget via ctx.waitUntil.
agent-worker	d1-worker	Position monitoring: runHousekeeping → reads open positions from D1 via D1_SERVICE binding (POST /query: SELECT * FROM positions WHERE status = 'OPEN'). Checks trailing stops from CONFIG_KV (prefix: trade:watermark:).
agent-worker	trade-worker	Risk adjustment: processRoutine → AI risk assessment → if adjustment needed, calls trade-worker POST /webhook via TRADE_SERVICE binding with X-Internal-Auth-Key. Close orders via sendCloseOrder.
agent-worker	telegram-worker	Risk alert: runHousekeeping/processRoutine → on risk threshold breach or trailing stop triggered, calls telegram-worker POST /webhook with alert message via TELEGRAM_SERVICE binding. Fire-and-forget.
email-worker	trade-worker	Email signal: Mailgun webhook POST /webhook → HMAC-SHA256 signature validation → parseEmailSignal (JSON or plaintext regex extraction) → forward parsed EmailSignal to trade-worker POST /webhook via TRADE_SERVICE binding with X-Internal-Auth-Key header
email-worker	analytics-worker	Email analytics: on signal forward (success or failure), trackAnalytics(env, '/track/signal', { source: 'email-worker', type, symbol, confidence }). Fire-and-forget via ctx.waitUntil.
d1-worker	analytics-worker	DB analytics: on every POST /query and POST /batch execution, trackAnalytics(env, '/track/api-call', { worker: 'd1-worker', endpoint, latencyMs, success }). Fire-and-forget via ctx.waitUntil.
telegram-worker	analytics-worker	Notification analytics: after each notification send, trackAnalytics via internal function call (not service binding). Tracks notifi-

Table 21: Logical node clusters in the code graph.

ID	Label	Description
workers	Cloudflare Workers	All 10 worker services in the Hoox trading system
packages	Shared Packages	Reusable packages shared across workers
infrastructure	Cloudflare Infrastructure	D1, R2, KV, Queue, DO, AI, Vectorize, Analytics Engine, Browser Rendering
signal-pipeline	Signal Processing Pipeline	The core trading signal flow: hoox receives webhooks → deduplicate via IdempotencyStore DO → produce to TRADE_QUEUE → trade-worker consumes with retry → execute on Binance/MEXC/Bybit → persist to D1 → notify via telegram → track via analytics-worker. Includes infrastructure nodes that enable this flow (queue, DO, D1 database).
ai-system	AI & Risk Management	Autonomous AI risk management subsystem: agent-worker (5-min cron) reads positions from D1, assesses risk via Workers AI (with multi-provider fallback: workers-ai → openai → anthropic → google), adjusts positions via trade-worker, sends alerts via telegram-worker. Uses Vectorize index for RAG context retrieval. Embeddings generated via Workers AI.

Table 22: Test pyramid and primary verification targets.

Tier	Location	What it proves
Unit	workers/*/test/	DO mutex, SQL guard, HMAC clients, queue retries
Integration	tests/integration/	Gateway Zod validation, probe no-side-effects
Security	tests/security/	Internal auth fail-closed, timing-safe compare
Load	tests/load/	Deployed edge p95 under k6 thresholds
Live / E2E	tests/live/, tests/e2e/	Binding graph, secrets, signal flow

Table 23: Failure taxonomy: detection and system response.

Failure class	Detection	HTTP / queue	System response
Invalid payload	<code>validateJson</code>	400	Reject before trade dispatch; no queue message
Auth failure (gateway)	API key mismatch	403	Reject; rate limit not consumed
Auth failure (internal)	<code>requireInternalAuth</code>	401	Fail closed; no body parsing
Kill switch active	<code>CONFIG_KV</code> read	503 / thrown	Gateway rejects; agent may have set switch
Duplicate signal	Idempotency DO	500 (duplicate error)	At-most-once within TTL
DO unavailable	RPC exception	Proceed (fail-open)	Trade allowed; dedup weakened
Exchange disabled	<code>KV enabled=false</code>	400	Router throws <code>EXCHANGE_DISABLED</code>
Exchange API error	HTTP non-2xx	500	Logged to DbLogger; queue retries with backoff
Queue exhaustion	Max retries + DLQ	DLQ message	D1 <code>system_logs</code> + Telegram alert
D1 write loss	Missing row vs. exchange fill	200 to caller	Exchange is source of truth; R2 archive
SQL injection attempt	<code>validateQuery</code>	400 / 403	Table allowlist; no literals in SELECT
Probe misuse	<code>probe: true</code>	200 probed	No exchange call; no D1 trade row

Table 24: Code listings: gateway.

Label	File	Description
Listing 1	<code>idempotencyStore.ts</code>	IdempotencyStore Durable Object (gateway duplicate suppression)
Listing 2	<code>idempotency-key.ts</code>	Idempotency key generation and fail-open check
Listing 4	<code>webhook-parallel-checks.ts</code>	Gateway parallel pre-flight checks (kill switch, IP, API key, rate limit)
Listing 10	<code>process-trade.ts</code>	Trade routing: idempotency, queue mode, Service Binding forward
Listing 9	<code>get-queue-mode.ts</code>	KV-backed queue mode resolution with 60s cache
Listing 8	<code>send-trade-to-queue.ts</code>	Queue producer message envelope
Listing 19	<code>kill-switch.ts</code>	Global kill switch read from canonical KV key
Listing 20	<code>ip-allowlist.ts</code>	TradingView IP allow-list with KV override
Listing 22	<code>rate-limit-gateway.ts</code>	Per-session webhook rate limit (10 trades/minute via <code>CONFIG_KV</code>)
Listing 28	<code>session-manager.ts</code>	<code>SESSIONS_KV</code> session creation with 3600s TTL

Table 25: Code listings: execution.

Label	File	Description
Listing 3	probe-short-circuit.ts	trade-worker probe short-circuit for synthetic latency measurement
Listing 12	trade-queue-consumer.ts	trade-worker queue consumer wiring
Listing 13	exchange-router.ts	Dynamic KV routing and exchange toggle resolution
Listing 14	execute-trade-risk.ts	executeTrade: KV risk gates, ExchangeRouter, REST placement
Listing 44	update-d1-records.ts	Fire-and-forget D1 trade/position writes via waitUntil
Listing 40	schema-trades.sql	D1 trades table DDL (idempotent schema)
Listing 41	schema-positions.sql	D1 positions table DDL
Listing 42	schema-system-logs.sql	D1 system_logs table DDL
Listing 16	binance-signature.ts	Binance futures client authenticated request signing
Listing 46	save-report-r2.ts	R2 trade report archival with hierarchical key paths
Listing 27	bybit-signature.ts	Bybit V5 HMAC signature payload construction
Listing 31	exchange-connection-do.ts	ExchangeConnectionManager DO: WS adapter and pending RPC map
Listing 30	risk-kv-parse.ts	Parallel KV risk reads with NaN-safe leverage/size parsing
Listing 49	ws-adapter-interface.ts	IWsAdapter interface: buildRequest and parseResponse contract
Listing 51	ws-adapter-binance.ts	Binance WS API v3 adapter: per-request HMAC signing
Listing 52	ws-do-correlation.ts	WS request/response correlation via pending map and timeout
Listing 50	ws-adapter-registry.ts	Per-exchange WS adapter factory registry

Table 26: Code listings: web3 / defi.

Label	File	Description
Listing 33	web3-validate-transaction.ts	On-chain transfer guards: max USD, whitelist, enabled flag

Table 27: Code listings: exchange clients.

Label	File	Description
Listing 15	crypto-sign.ts	HMAC-SHA256 signing via Web Crypto (shared base client)

Table 28: Code listings: agent / ai.

Label	File	Description
Listing 36	agent-config.ts	Default AgentConfig and provider fallback chain
Listing 55	provider-fallback.ts	ProviderManager fallback chain with full-chain retry recursion
Listing 26	prompt-sanitizer.ts	LLM prompt-injection marker detection
Listing 18	agent-cron-wiring.ts	agent-worker cron handler with parallel housekeeping and routine
Listing 32	agent-trailing-stop.ts	Batched mark prices, KV watermarks, trailing-stop trigger

Table 29: Code listings: data layer.

Label	File	Description
Listing 45	d1-validate-query.ts	d1-worker SELECT query guard (allowlist, no literals, no UNION)
Listing 43	d1-trade-schema.ts	Zod runtime schema mirroring D1 trades and positions tables
Listing 53	d1-batch-endpoint.ts	HTTP /batch: validated statements and atomic DB.batch()
Listing 54	d1-stats-batch.ts	Internal five-query dashboard aggregate via DB.batch()

Table 30: Code listings: observability.

Label	File	Description
Listing 47	track-analytics.ts	Non-blocking analytics forwarding to analytics-worker
Listing 48	analytics-datapoint.ts	Analytics Engine writeDataPoint for trades and API calls

Table 31: Code listings: email ingress.

Label	File	Description
Listing 25	mailgun-signature.ts	Mailgun webhook HMAC-SHA256 verification

Table 32: Code listings: shared middleware.

Label	File	Description
Listing 11	<code>queue-handler.ts</code>	Shared queue consumer with exponential backoff and DLQ hook
Listing 5	<code>require-internal-auth.ts</code>	Internal service-to-service authentication (fail-closed)
Listing 6	<code>validate-json.ts</code>	Zod-based <code>validateJson</code> middleware (structured errors)
Listing 17	<code>cron-handler.ts</code>	Shared cron handler with structured logging
Listing 24	<code>security-headers.ts</code>	Default security response headers (CSP, HSTS)
Listing 21	<code>timing-safe-equal.ts</code>	Constant-time string comparison for API keys
Listing 23	<code>rate-limiter.ts</code>	KV-backed sliding-window rate limiter <code>checkWithKey</code>

Table 33: Code listings: shared packages.

Label	File	Description
Listing 35	<code>registry-hoox.ts</code>	hoox worker manifest in shared registry
Listing 29	<code>kv-keys.ts</code>	Centralized KV key registry
Listing 7	<code>service-fetch.ts</code>	Service Binding fetch helper with 30s timeout
Listing 39	<code>report-generate.ts</code>	Scheduled PDF generation, R2 archival, fire-and-forget Telegram
Listing 38	<code>telegram-alert.ts</code>	Internal <code>/alert</code> endpoint with <code>requireInternalAuth</code> gate

Table 34: Code listings: tests.

Label	File	Description
Listing 61	<code>test-fastpath-probe.ts</code>	Integration test: probe short-circuit leaves D1 trades unchanged
Listing 60	<code>test-gateway-validation.ts</code>	Zod + <code>validateJson</code> rejects invalid <code>TradingView</code> payloads
Listing 57	<code>test-idempotency-ttl.ts</code>	Unit test: duplicate key rejected within TTL window
Listing 58	<code>test-d1-sql-guard.ts</code>	Unit test: unauthorized table returns HTTP 403
Listing 59	<code>test-d1-fire-and-forget.ts</code>	Regression test: D1 writes dispatched via <code>waitUntil</code>
Listing 62	<code>test-auth-fail-closed.ts</code>	Security test: <code>requireInternalAuth</code> fail-closed behavior
Listing 63	<code>test-k6-thresholds.js</code>	k6 fastpath audit SLO thresholds (p95 latency bounds)