

# Supplementary Appendix

The FAIRification of research in real-world evidence: A practical introduction to reproducible analytic workflows using Git and R

## Table of contents

<b>Supplementary material</b>	<b>2</b>
Branching . . . . .	2
Advanced readings on Git and other resources . . . . .	4
<b>Supplementary Figures</b>	<b>5</b>


## Supplementary material

### Branching

Sometimes it is necessary to implement changes to a document or code without wanting to interfere with a current "production" version of a document or code. However, a researcher may still want to be able to "merge" back potential changes, e.g. to integrate new analyses into a script or to develop a new set of features or functions to an application. To do this in a safe, transparent and efficient manner, **Git** provides the option to **branch** our repository. The default branch of any repository is the **main** branch.

Branching is a concept that is highly adapted in software development where the **main** branch reflects the software version that is deployed for public use (i.e., the production version) and a **development** branch that is the version that implements new features (i.e., the beta version). Hence, **branches** are used in order to have the flexibility to develop new features without jeopardizing the current **main** and **development** versions.

Branching can have two very useful use cases for adaption in real-world evidence (RWE) studies. First, new analyses or improvements of existing analyses can be implemented without having to "mess" with existing code which works perfectly. Once a new analysis or visualization of results was established in a new **named branch** and works without errors, this branch can be **merged** back to the **main** branch (as depicted in the illustration below).

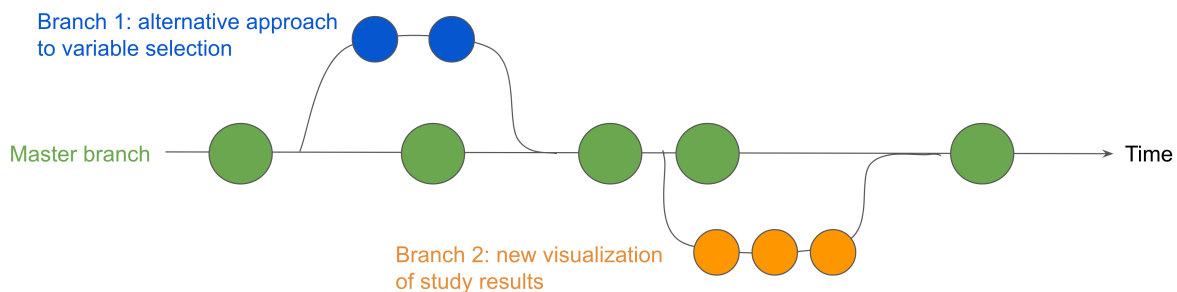

Second, branches can be re-purposed as backup versions of the repository at project landmarks. Examples could range from the first round of review among co-authors to the initial submission of a manuscript draft to a journal, corresponding rounds of revisions and the final version. This way it can be ensured that also prior versions of analyses can be reproduced without problems.

To create a new branch and switch to it from the main branch, you can run the `git checkout` command with the `-b` switch. Let's say we call the new branch `lasso_variable_selection`.

```
git checkout -b lasso_variable_selection
```

This is shorthand for:

```
git branch lasso_variable_selection
git checkout lasso_variable_selection
```

It is possible to switch between multiple branches back and forth and it's important to keep in mind that changes need to be committed before switch to the new branch. A user can e.g. switch back to the master branch by running the following command:

```
git checkout master
```

Suppose we have decided that the `lasso_variable_selection` approach led to a better balancing of the two new user cohorts after propensity score matching and we are ready to merge the implemented changes back into our main branch. This can be achieved by checking out the branch you wish to merge into (in this case `main` and then run the `git merge` command:

```
git checkout main
git merge lasso_variable_selection
```

If the branch is merged and there is no desire anymore to use this branch any longer, the `lasso_variable_selection` branch can be deleted with the following command:

```
git branch -d lasso_variable_selection
```

These steps can also easily be done on remote repositories like GitHub or GitLab. The only difference to keep in mind is that GitHub counterintuitively calls the procedure of merging two branches `pull request` while GitLab refers to it as `merge request`.


In case `Git` recognizes any clashes or incompatibilities of the new code with the existing code it will notify the user and give us the chance to reconcile inconsistencies.

## Advanced readings on Git and other resources

- Main Git website to download and learn more about Git: <https://git-scm.com>
- *Pro Git* by Scott Chacon and Ben Straub.
- Cheatsheet on most important Git commands: <https://education.github.com/git-cheat-sheet-education.pdf>
- GitHub Desktop App: <https://desktop.github.com/>
- Git manual by *Atlassian* (provider of the Bitbucket platform): <https://www.atlassian.com/git>
- Coursera courses:
  - *Introduction to Git and GitHub* (Google)
  - *Version Control with Git* (Atlassian)
  - *Getting Started with Git and GitHub* (IBM)
  - *Making Data Science Work for Clinical Reporting* (Genentech)
- Quarto (open-source scientific and technical publishing system for reproducible research): <https://quarto.org>
- Choosing a suitable license for a remote repository: Public repositories need to be licensed to be truly open source. If no license is provided, the work is by default under exclusive copyright. The website <https://choosealicense.com> provides an excellent overview of the different types of licenses.
- Useful Git repositories for observational healthcare research:
  - Division of Pharmacoepidemiology and Pharmacoeconomics: <https://gitlab-scm.partners.org/drugapi>
  - Observational Health Data Sciences and Informatics (OHDSI): <https://github.com/OHDSI>
  - Darwin EU® Private Development Repository: <https://github.com/darwin-eu-dev>
  - Pharmaverse (Network of developers of curated open source R packages for clinical reporting): <https://pharmaverse.org> & <https://github.com/pharmaverse/>

## Supplementary Figures

Supplementary Figure 1: Starting a new repository through the GitHub GUI.

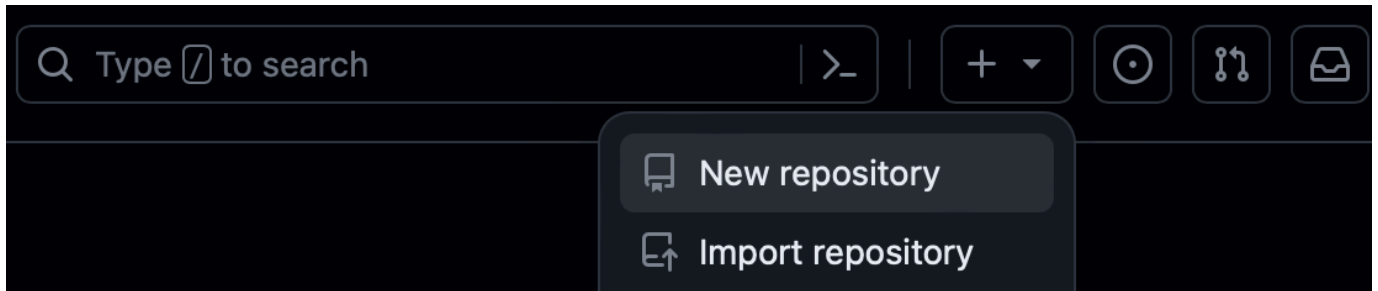


Supplementary Figure 2: Populating basic information about the new repository.

## Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository.](#)

---

*Required fields are marked with an asterisk (\*).*

**Owner \***  
 janickweberpals ▾

**Repository name \***  
rwe\_study


✔ rwe\_study is available.


Great repository names are short and memorable. Need inspiration? How about **studious-potato** ?

**Description** (optional)

This repository will investigate the real-world evidence of drug xyz

---

☒  **Public**  
Anyone on the internet can see this repository. You choose who can commit.

☐  **Private**  
You choose who can see and commit to this repository.

---

**Initialize this repository with:**

☒ **Add a README file**  
This is where you can write a long description for your project. [Learn more about READMEs.](#)

**Add .gitignore**


.gitignore template: R ▾

Choose which files not to track from a list of templates. [Learn more about ignoring files.](#)


**Choose a license**

License: MIT License ▾

A license tells others what they can and can't do with your code. [Learn more about licenses.](#)

This will set  main as the default branch. Change the default name in your [settings](#).

---

 You are creating a public repository in your personal account.

---

Create repository

Supplementary Figure 3: Clone a GitHub repository using the HTTPS link and the git clone command

