

BPL_TEST2_Fedbatch - demo

```
In [1]: # Import the application model and context variables
        from BPL_TEST2_Fedbatch import*
```

Windows - run FMU pre-compiled JModelica 2.14

```
In [2]: # Impprt the general FMU_explore functions ana adapt them to the application
        from fmu_explore_pyfmi import fmu_explore

        Dummy = fmu_explore(model, parValue, parLocation, parCheck, fmu_model, fmu_proc
                             MSL_usage, MSL_version, BPL_version, \
                             opts_std, simulationTime, timeDiscreteStates, stateValue, \
                             diagrams, ax, lines)

        par = Dummy.par
        init = Dummy.init
        disp = Dummy.disp
        simu = Dummy.simu
        show = Dummy.show
        resetPen = Dummy.resetPen
        process_diagram = Dummy.process_diagram
        describe_general = Dummy.describe_general
        describe_parts = Dummy.describe_parts
        describe_MSL = Dummy.describe_MSL
        FMU_explore_info = Dummy.FMU_explore_info
        system_info = Dummy.system_info
        SDG = Dummy.SDG
```

Bring in the user defined FMU_explore functions describe() and newplot()

```
In [3]: run -i BPL_TEST2_Fedbatch_explore.py
```

Model for the process has been setup. Key commands:

- par() - change of parameters and initial values
- init() - change initial values only
- simu() - simulate and plot
- newplot() - make a new plot
- show() - show plot from previous simulation
- disp() - display parameters and initial values from the last simulation
- describe() - describe culture, broth, parameters, variables with values/units

Note that both disp() and describe() takes values from the last simulation and the command process_diagram() brings up the main configuration


Brief information about a command by help(), eg help(simu)

Key system information is listed with the command system_info()

```
In [4]: %matplotlib inline
        plt.rcParams['figure.figsize'] = [25/2.54, 20/2.54]
```

```
In [5]: process_diagram()
```

No processDiagram.png file in the FMU, but try the file on disk.

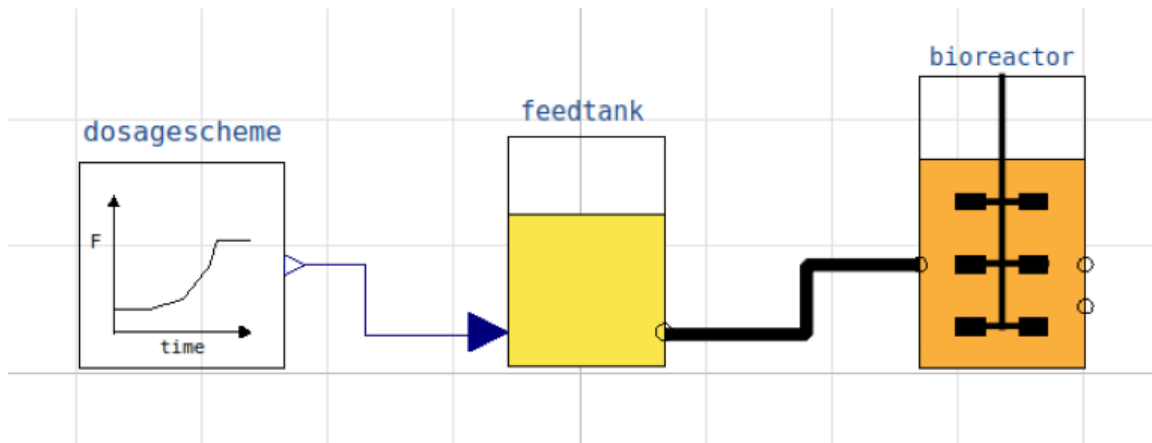

```
In [6]: describe('process')
```

```
In [7]: describe('culture')
```

Simplified text book model - only substrate S and cell concentration X

```
In [8]: disp('dosagescheme')
```

```
F_start : 0.0
mu_feed : 0.2
t_startExp : 2.0
F_startExp : 0.12
F_max : 3.0
```

```
In [9]: disp('feedtank')
```

```
feedtank.S_in : 0.0
feedtank.V_start : 100.0
```


```
In [10]: disp('bioreactor', mode='long')
```

```
bioreactor.V_start : V_start : 1.0
bioreactor.m_start[1] : VX_start : 0.0
bioreactor.m_start[2] : VS_start : 0.0
bioreactor.culture.Y : Y : 0.5
bioreactor.culture.qSmax : qSmax : 1.0
bioreactor.culture.Ks : Ks : 0.1
```

```
In [11]: # Simulation with default values of the process
newplot(plotType='TimeSeries'); ax[1].set_ylim(0,0.6)

simu(20)
```

```
Out[11]: <pyfmi.fmi_algorithm_drivers.FMIResult at 0x1afa52e9340>
```

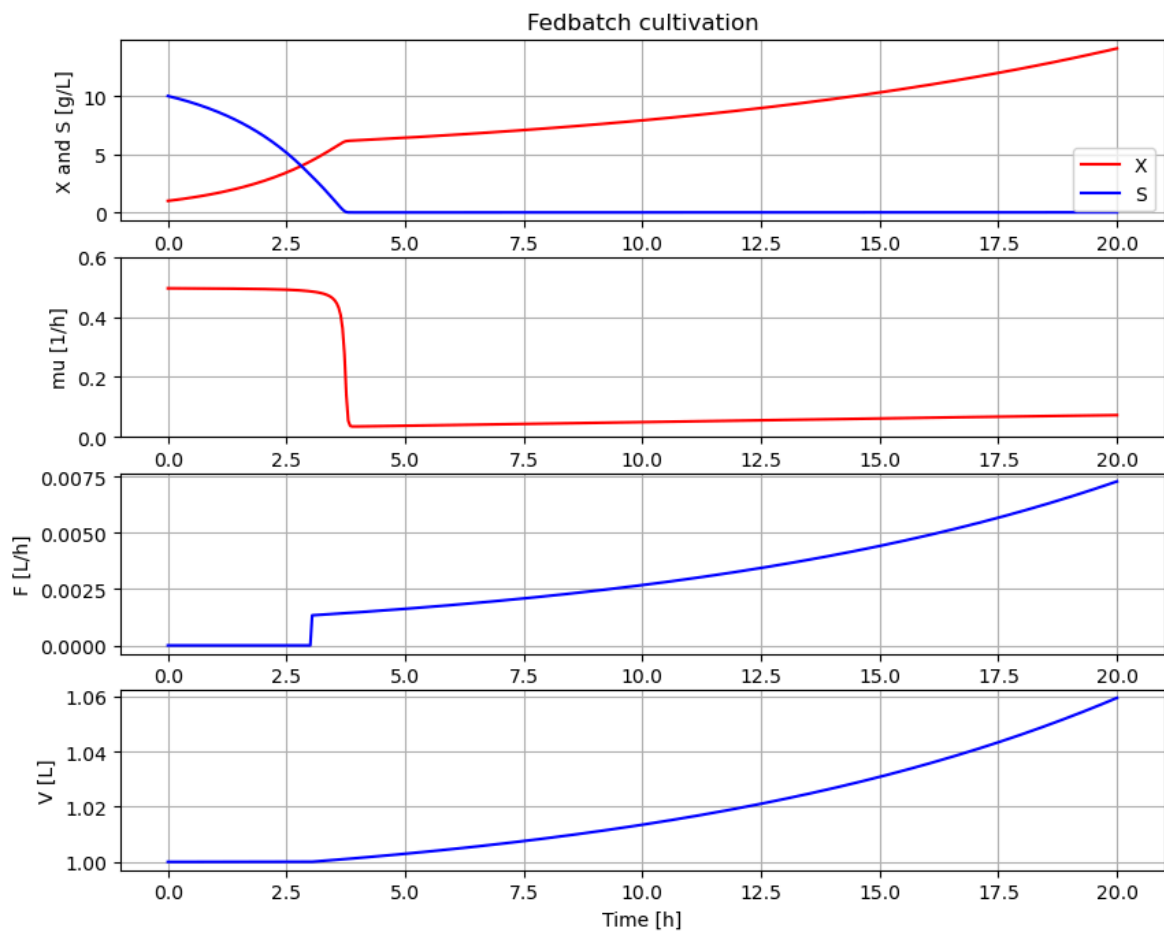


```
In [12]: show()
```

```
In [13]: simu()
```

```
Out[13]: <pyfmi.fmi_algorithm_drivers.FMIResult at 0x1afa5713e60>
```

```
In [14]: show()
```

```
In [15]: newplot()  
show()
```

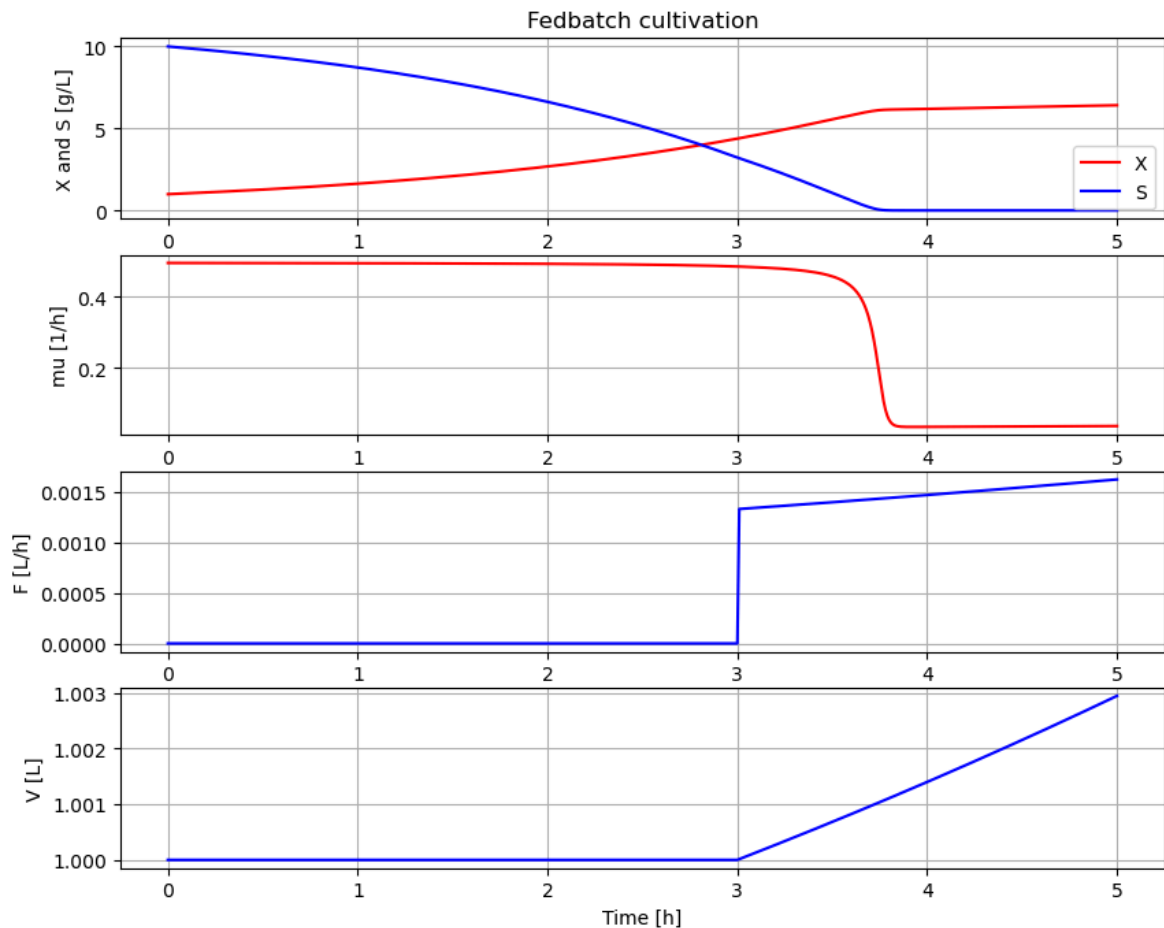

```
In [16]: # Let us display and then save the feedprofile
         disp('dosagescheme')
```


```
F_start : 0.0
mu_feed : 0.1
t_startExp : 3.0
F_startExp : 0.001
F_max : 0.3
```

```
In [17]: feedprofile_1={'F_start':0, 'mu_feed':0.1, 't_startExp':3, 'F_startExp':0.001, 'F_max':0.3}
```

```
In [18]: # Let us develop a feedprofile with mu_feed=0.15 1/h instead
         newplot(plotType='TimeSeries'); ax[1].set_ylim(0,0.6)

         # Choose mu_feed
         par(mu_feed=0.15)

         # Tune F_startExp value to get a stable culture growth rate at mu 0.15 1/h
         for value in [0.004, 0.006, 0.008]:
             par(F_startExp=value)
             simu(20)
```

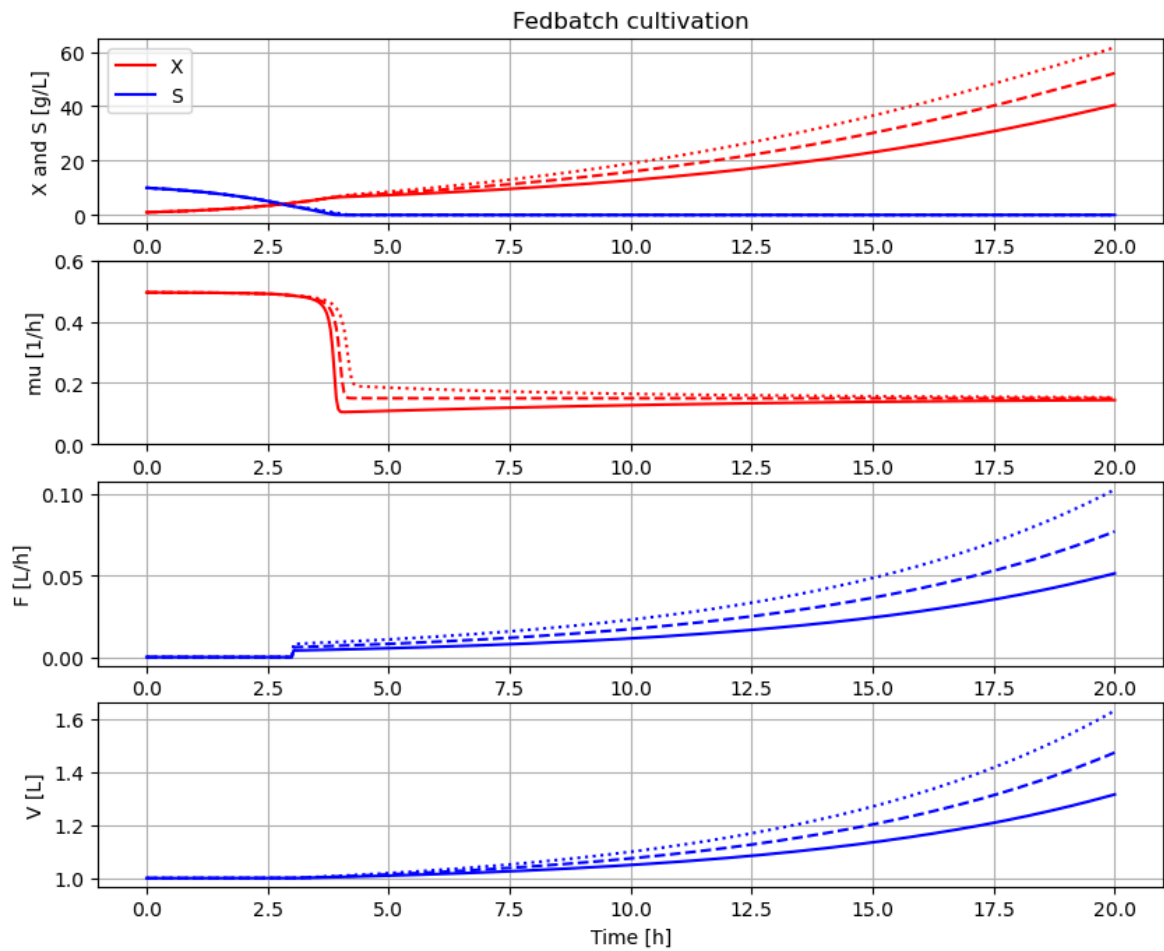


```
In [19]: # We choose F_startExp = 0.008 and save the new feedprofile
feedprofile_2={'F_start':0, 'mu_feed':0.15, 't_startExp':3, 'F_startExp':0.006,
```

```
In [20]: # Compare the result of ot the two
newplot(plotType='TimeSeries'); ax[1].set_ylim(0,0.6)

for feedprofile in [feedprofile_1, feedprofile_2]:
    par(feedprofile)
    simu(20)

# Restore the original feedprofile
par(feedprofile_2)
```

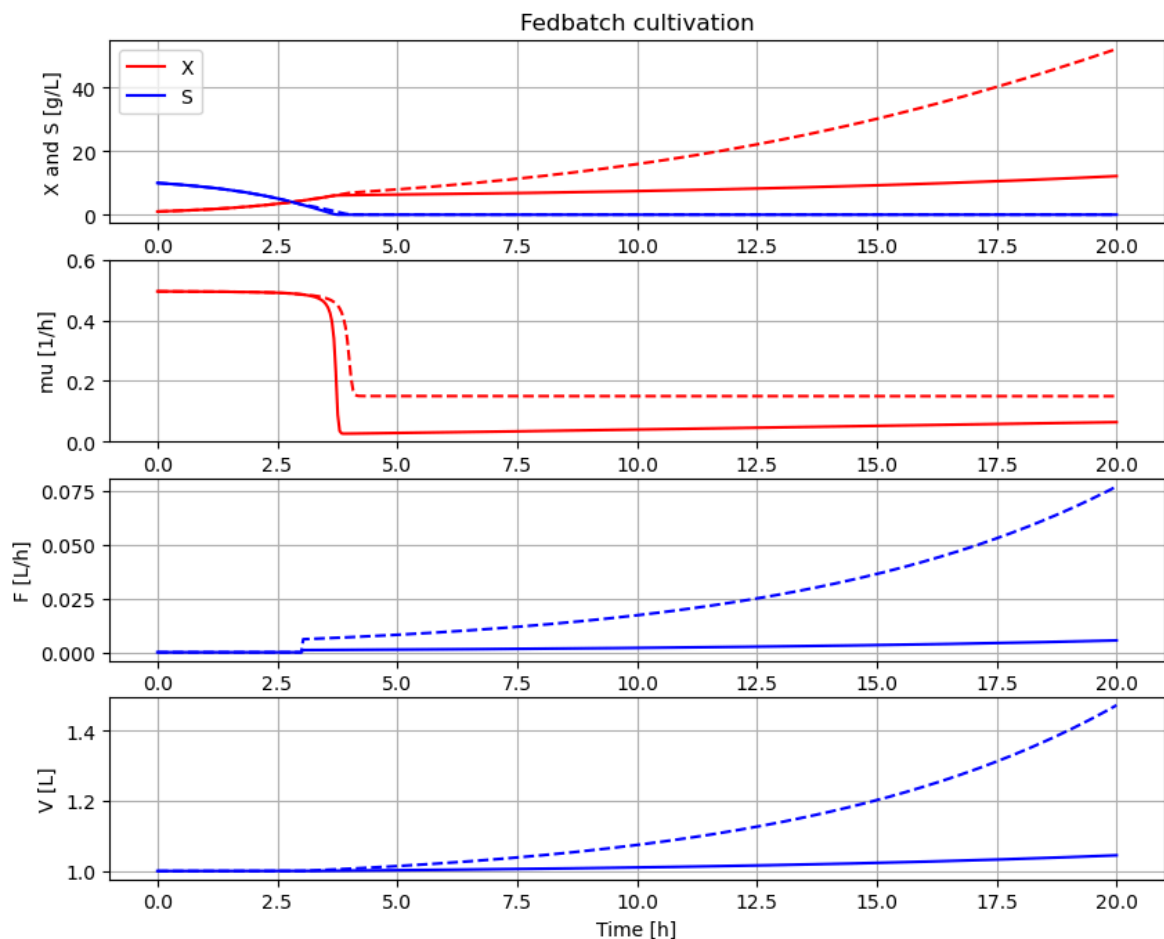

```
In [21]: describe('mu')
```

Cell specific growth rate variable : 0.15 [1/h]

```
In [22]: describe('parts')
```

['bioreactor', 'bioreactor.culture', 'dosagescheme', 'feedtank', 'MSL']

```
In [23]: describe('MSL')
```

MSL: RealInput, RealOutput

```
In [24]: system_info()
```

System information

- OS: Windows
- Python: 3.12.11
- Scipy: not installed in the notebook
- PyFMI: 2.21.0
- FMU by: JModelica.org
- FMI: 2.0
- Type: FMUModelCS2
- Name: BPL.Examples_TEST2.Fedbatch
- Generated: 2025-07-26T09:38:43
- MSL: 3.2.2 build 3
- Description: Bioprocess Library version 2.3.1
- Interaction: FMU-explore version 1.1.3

```
In [25]: SDG()
```