

BPL_TEST2_Fedbatch - demo

```
In [1]: # Import the application model and context variables
        from BPL_TEST2_Fedbatch_fmpy import*
```

Windows - run FMU pre-compiled JModelica 2.14

```
In [2]: # Import the general FMU_explore functions and adapt them to the application
        from fmu_explore_fmpy import fmu_explore

        Dummy = fmu_explore(model_description, parValue, parLocation, parCheck, fmu_mod
                             MSL_usage, MSL_version, BPL_version, \
                             opts_std, simulationTime, timeDiscreteStates, stateValue, st
                             diagrams, ax, lines)

        par = Dummy.par
        init = Dummy.init
        disp = Dummy.disp
        simu = Dummy.simu
        show = Dummy.show
        resetPen = Dummy.resetPen
        process_diagram = Dummy.process_diagram
        describe_general = Dummy.describe_general
        describe_parts = Dummy.describe_parts
        describe_MSL = Dummy.describe_MSL
        FMU_explore_info = Dummy.FMU_explore_info
        system_info = Dummy.system_info
        SDG = Dummy.SDG
```

```
In [3]: run -i BPL_TEST2_Fedbatch_fmpy_explore.py
```

Model for the process has been setup. Key commands:

- par() - change of parameters and initial values
- init() - change initial values only
- simu() - simulate and plot
- newplot() - make a new plot
- show() - show plot from previous simulation
- disp() - display parameters and initial values from the last simulation
- describe() - describe culture, broth, parameters, variables with values/units

Note that both disp() and describe() takes values from the last simulation and the command process_diagram() brings up the main configuration


Brief information about a command by help(), eg help(simu)

Key system information is listed with the command system_info()


```
In [4]: %matplotlib inline
        plt.rcParams['figure.figsize'] = [25/2.54, 20/2.54]
```

```
In [5]: process_diagram()
```

No processDiagram.png file in the FMU, but try the file on disk.

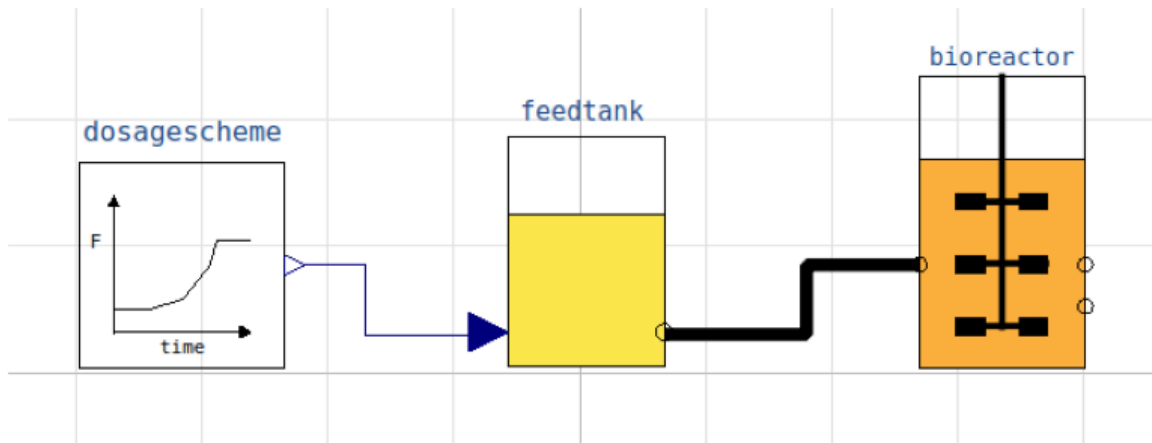

```
In [6]: # Simulation with default values of the process
newplot(plotType='TimeSeries')
simu(20)
```

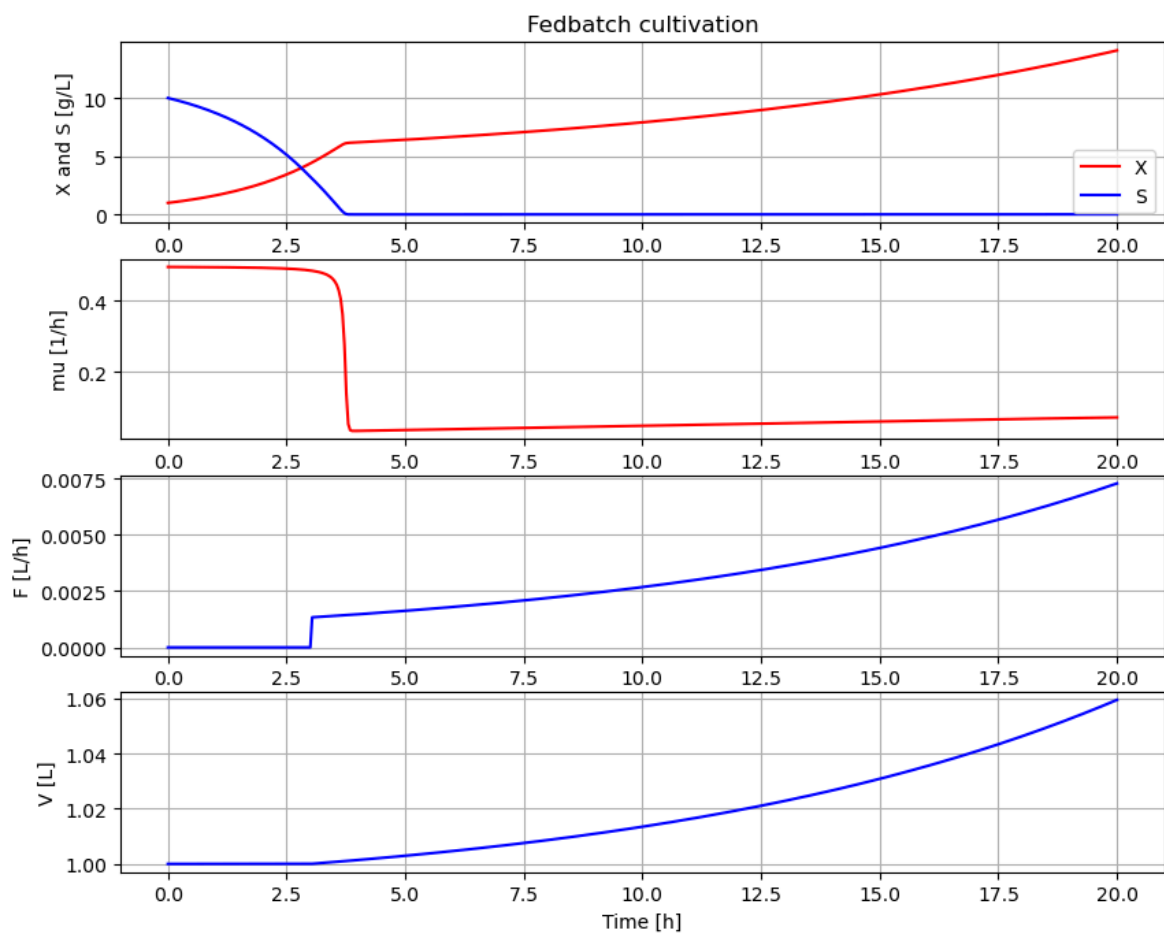

```
In [7]: # Let us display and then save the feedprofile
disp('dosagescheme')
```


```
F_start : 0.0
mu_feed : 0.2
t_startExp : 2.0
F_startExp : 0.12
F_max : 3.0
```

```
In [8]: feedprofile_1={'F_start':0, 'mu_feed':0.1, 't_startExp':3, 'F_startExp':0.001, 'F_max':3.0}
```

```
In [9]: # Let us develop a feedprofile with mu_feed=0.15 1/h instead
newplot(plotType='TimeSeries'); ax[1].set_ylim(0,0.6)
```

```
# Choose mu_feed
par(mu_feed=0.15)

# Tune F_startExp value to get a stable culture growth rate at mu 0.15 1/h
for value in [0.004, 0.006, 0.008]:
    par(F_startExp=value)
    simu(20)
```

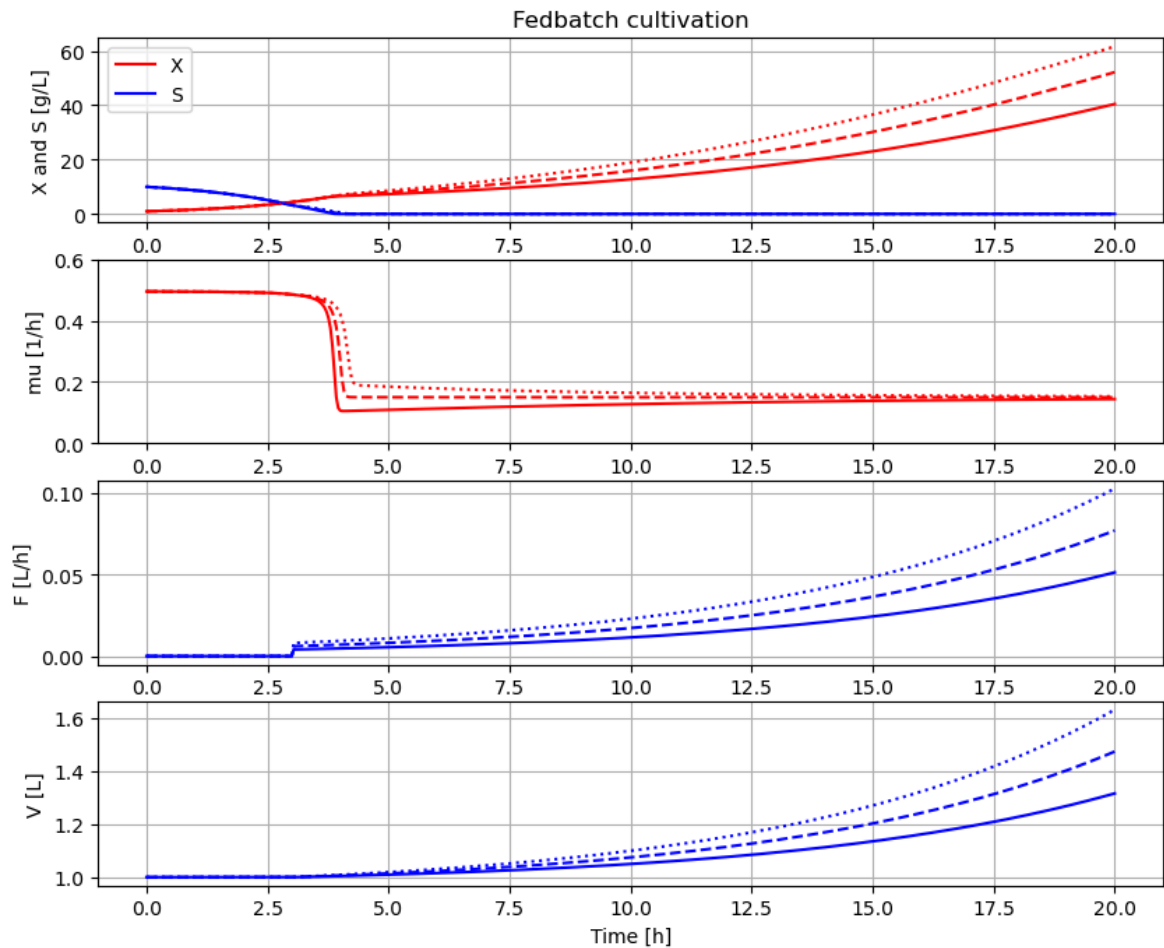


```
In [10]: # We choose F_startExp = 0.008 and save the new feedprofile
feedprofile_2={'F_start':0, 'mu_feed':0.15, 't_startExp':3, 'F_startExp':0.006,
```

```
In [11]: # Compare the result of ot the two
newplot(plotType='TimeSeries'); ax[1].set_ylim(0,0.6)

for feedprofile in [feedprofile_1, feedprofile_2]:
    par(feedprofile)
    simu(20)

# Restore the original feedprofile
par(feedprofile_2)
```

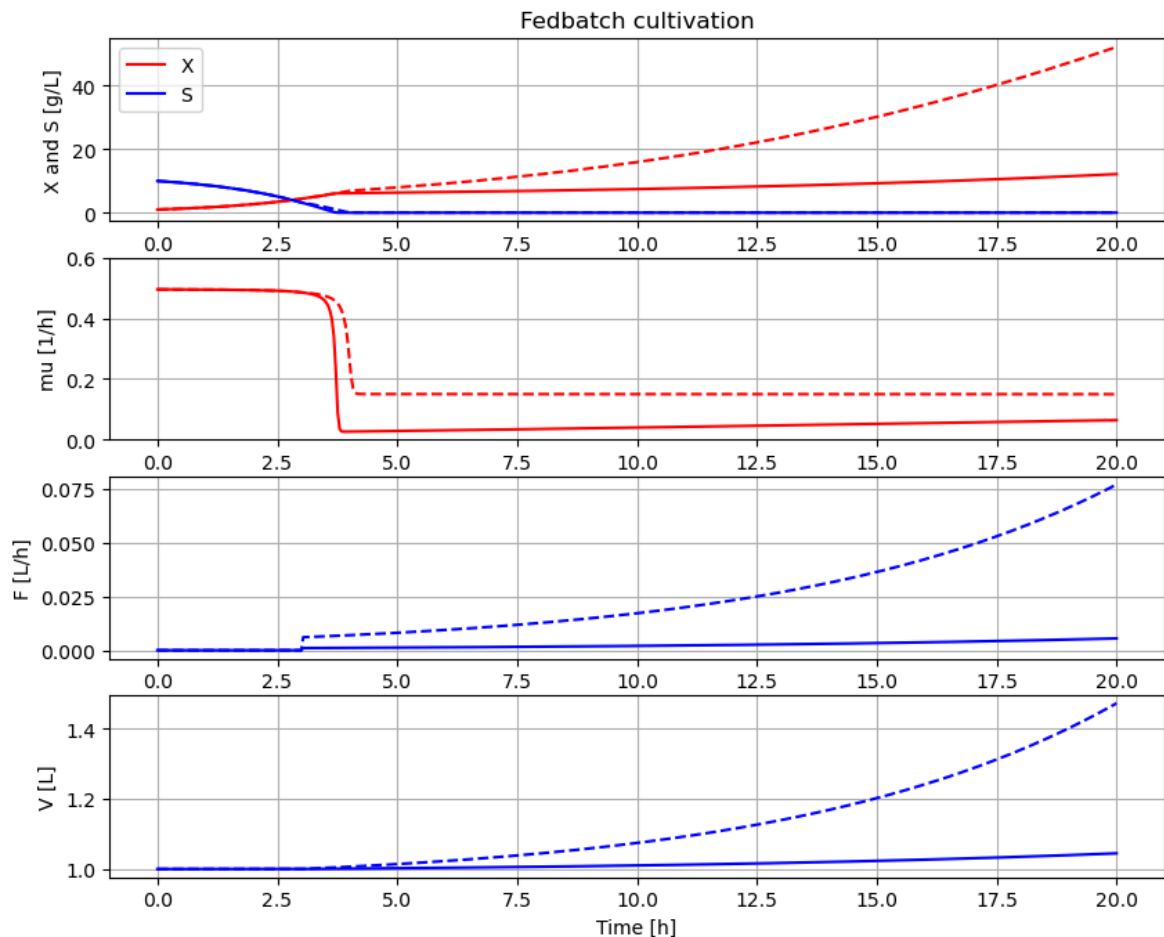

```
In [12]: describe('mu')
```

Cell specific growth rate variable : 0.15 [1/h]

```
In [13]: describe('parts')
```

['bioreactor', 'bioreactor.culture', 'dosagescheme', 'feedtank', 'MSL']

```
In [14]: describe('MSL')
```

MSL: RealInput, RealOutput

```
In [15]: system_info()
```

System information

- OS: Windows
- Python: 3.12.11
- Scipy: not installed in the notebook
- FMPy: 0.3.27
- FMU by: JModelica.org
- FMI: 2.0
- Type: CS
- Name: BPL.Examples_TEST2.Fedbatch
- Generated: 2025-07-26T09:38:43
- MSL: 3.2.2 build 3
- Description: Bioprocess Library version 2.3.1
- Interaction: FMU-explore version 1.1.5

```
In [16]: !lsb_release -a
```

'lsb_release' is not recognized as an internal or external command, operable program or batch file.

In []: