Notes YEAST_COB_Batch constraint-based approach

```
In [1]: run -i BPL YEAST COB Batch fmpy explore.py
        Linux - run FMU pre-comiled OpenModelica 1.21.0
        Model for bioreactor has been setup. Key commands:
                      - change of parameters and initial values
         - init()
                      - change initial values only
         - simu()

    simulate and plot

         - newplot() - make a new plot
         - show() - show plot from previous simulation
                      - display parameters and initial values from the last sim
         - disp()
        ulation

    describe() - describe culture, broth, parameters, variables with val

        ues/units
        Note that both disp() and describe() takes values from the last simulati
        Brief information about a command by help(), eg help(simu)
        Key system information is listed with the command system_info()
In [2]: plt.rcParams['figure.figsize'] = [20/2.54, 16/2.54]
```

Try using LP in each step

```
In [3]:
       from optlang import Model, Variable, Constraint, Objective
In [4]: # Define culture constraint-based model
        def culture(G, E):
            # LP calculation of the optimal qGr, qEr based on G and E values
            # - parameters
            q02max = 6.9e-3; kog = 2.3; koe = 1.6; YGr = 3.5; YEr = 1.32;
            alpha = 0.01; beta = 1.0
            # - transfer data from dynamic reactor model to static LP model
            qGr opt = Variable('qGr_opt', lb=0)
            qEr opt = Variable('qEr opt', lb=0)
            # - LP model constraint and objective
            mu max = Objective(YGr*qGr opt + YEr*qEr opt, direction='max')
            q02lim = Constraint(kog*qGr opt + koe*qEr opt, ub=q02max)
            gGlim = Constraint(gGr opt, ub=alpha*max(0,G))
            qElim = Constraint(qEr opt, ub=beta*max(0,E))
            # - put together the LP model
            yeast model = Model(name='Yeast bottleneck model')
            yeast model.objective = mu max
            yeast model.add(q02lim)
            yeast model.add(qGlim)
```

```
yeast_model.add(qElim)


# - do LP optimization
yeast_model.optimize()

return (yeast_model.objective.value, yeast_model.variables.qGr_opt.pr
```

```
In [5]: # Initialization
    V_0=1.0
    init(V_0=V_0, VX_0=V_0*2.0, VG_0=V_0*10, VE_0=3.0)
```

```
In [6]: # Loop of simulations
    t_final = 8.0
    t_samp = 0.0333
    n_samp = t_final/t_samp + 1
```

```
In [7]: # Simulate n sample steps
newplot(title='Batch cultivation', plotType='TimeSeries2')
ax1.set_xlim([0, t_final]); ax2.set_xlim([0, t_final]); ax3.set_xlim([0,
simu(t_samp, options=opts_fast)
for i in range(int(n_samp)):
    (mum_opt, qGr_opt, qEr_opt, q02_opt) = culture(sim_res['bioreactor.c[
    par(mum=mum_opt, qGr=qGr_opt, qEr=qEr_opt, q02=q02_opt)
    simu(t_samp, 'cont', options=opts_fast)
```

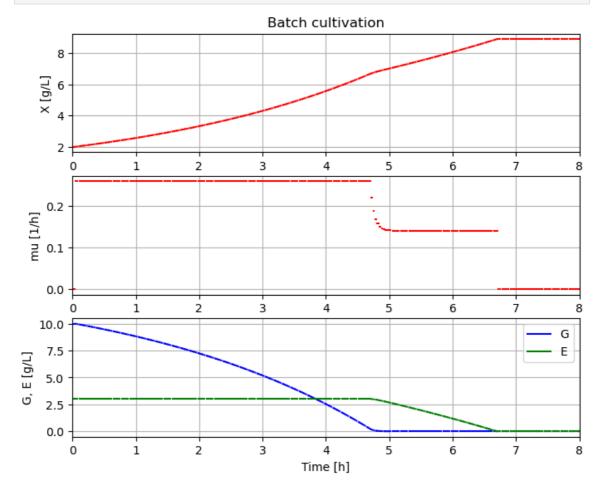

```
In [8]: system_info()
```

```
System information
         -OS: Linux
         -Python: 3.8.16
         -Scipy: not installed in the notebook
         -FMPy: 0.3.15
         -FMU by: OpenModelica Compiler OpenModelica 1.21.0
         -FMI: 2.0
         -Type: ME
         -Name: BPL_YEAST_COB.Batch
         -Generated: 2023-05-31T09:43:28Z
         -MSL: 3.2.3
         -Description: Bioprocess Library version 2.1.1
         -Interaction: FMU-explore for FMPy version 0.9.8
In [9]:
       !conda list optlang
        # packages in environment at /home/colab/miniconda3/envs/fmpy:
        #
                                                                    Channel
        # Name
                                  Version
                                                             Build
                                   1.7.0
                                                                      conda-forge
        optlang
                                                      pyhd8ed1ab 0
In [ ]:
```