



Lab 3 Submission


Question 1

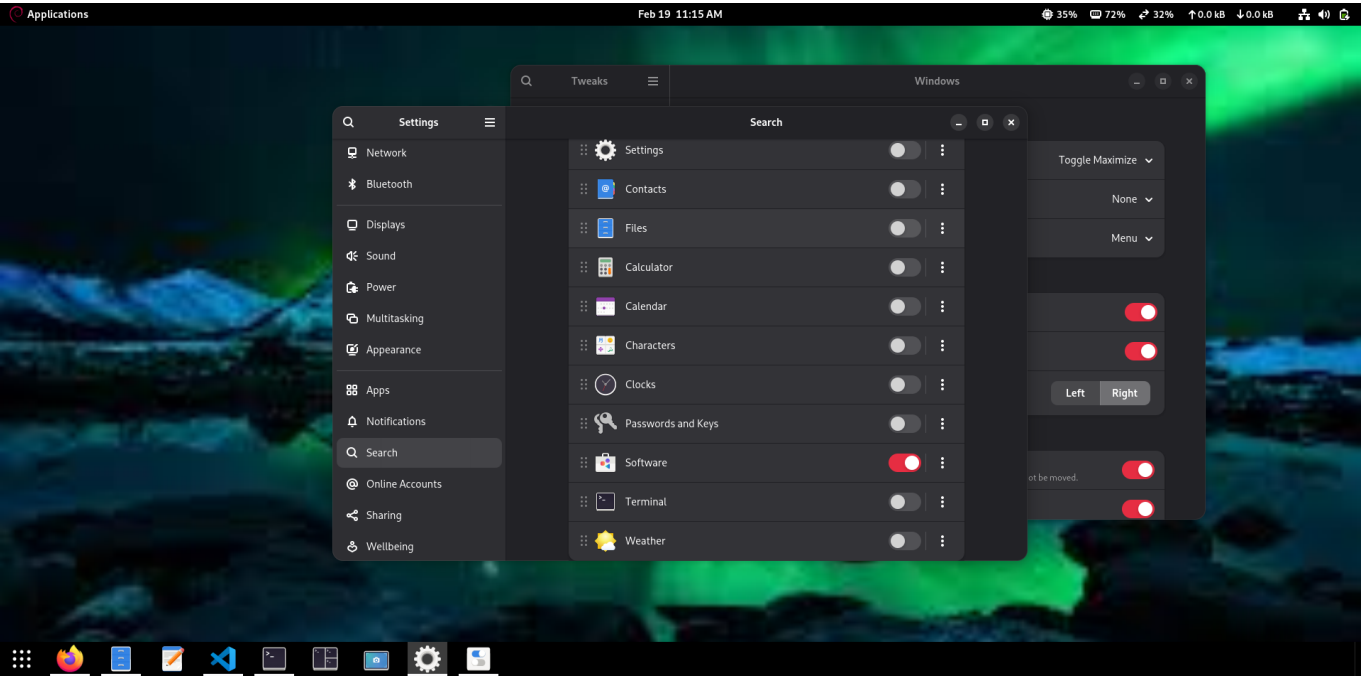

Question 2

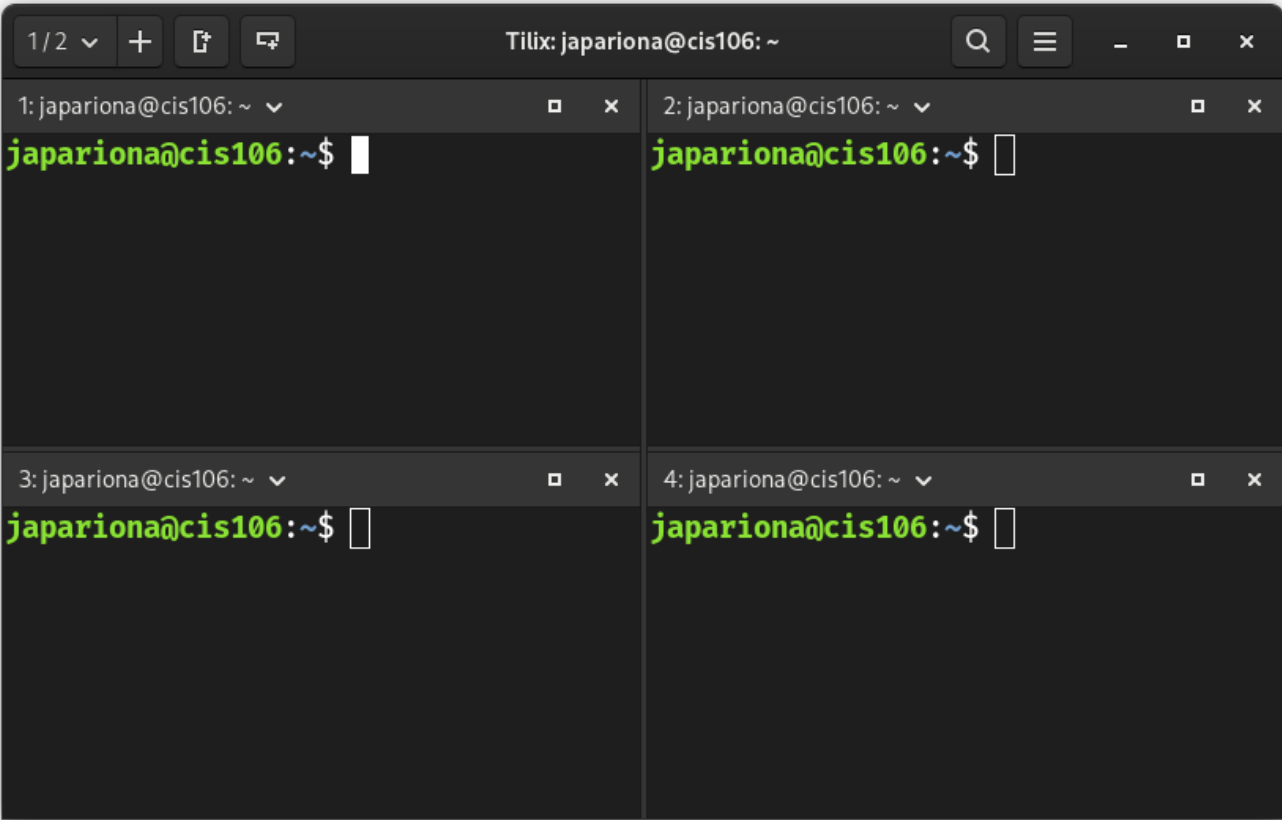

Question 3

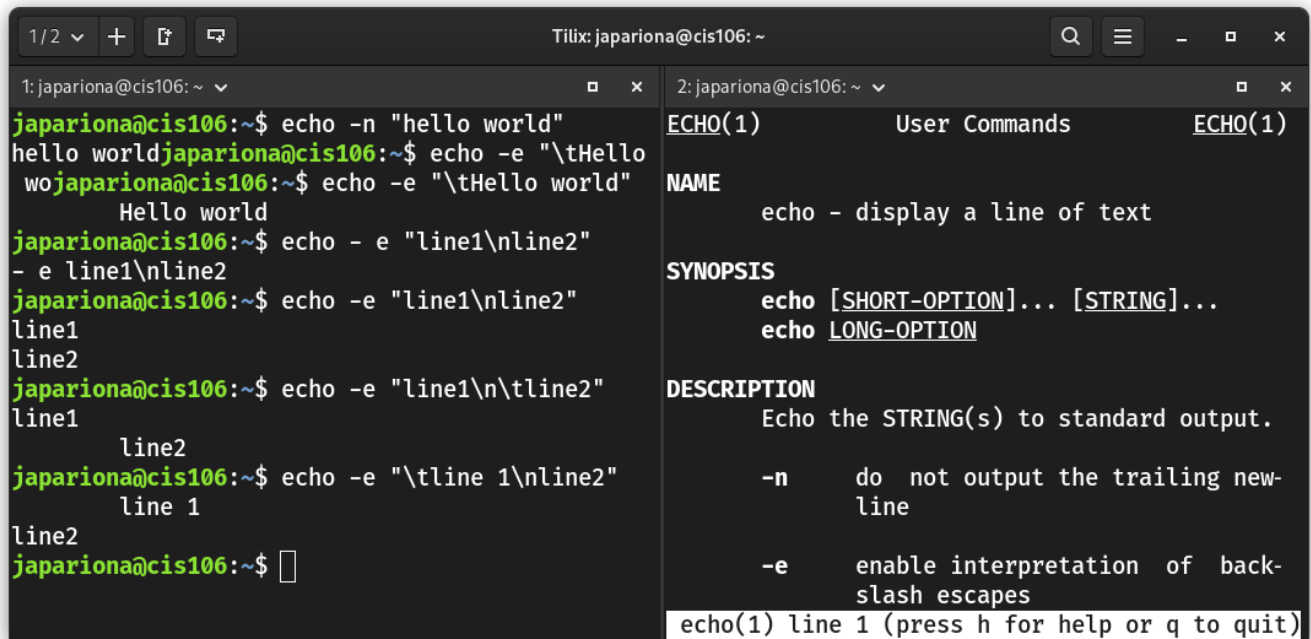

The image shows a terminal window with two panes. The left pane shows a series of commands and their outputs for the 'echo' command. The right pane shows the man page for 'echo(1)'.

Terminal Output (Left Pane):

```
japariona@cis106:~$ echo -n "hello world"
hello worldjapariona@cis106:~$ echo -e "\tHello
wojapariona@cis106:~$ echo -e "\tHello world"
    Hello world
japariona@cis106:~$ echo -e "line1\nline2"
line1
line2
japariona@cis106:~$ echo -e "line1\nline2"
line1
line2
japariona@cis106:~$ echo -e "line1\n\tline2"
line1
    line2
japariona@cis106:~$ echo -e "\tline 1\nline2"
    line 1
line2
japariona@cis106:~$
```

Man Page (Right Pane):

ECHO(1) User Commands **ECHO(1)**

NAME

echo - display a line of text

SYNOPSIS

echo **[SHORT-OPTION]**... **[STRING]**...

echo **LONG-OPTION**

DESCRIPTION

Echo the STRING(s) to standard output.

-n do not output the trailing new-line

-e enable interpretation of backslash escapes

echo(1) line 1 (press h for help or q to quit)

Challenge Question

```

1/2  +  [icon] [icon]
Tilix: japariona@cis106: ~
1: japariona@cis106: ~
japariona@cis106:~$ free -h
              total        used        free
  shared buff/cache   available
Mem:      3.8Gi       2.8Gi       286Mi
       115Mi        1.1Gi        1.0Gi
Swap:      2.6Gi         833Mi        1.8Gi
japariona@cis106:~$

2: japariona@cis106: ~
Your shell may have its own version of
echo, which usually supersedes the ver-
sion described here. Please refer to
your shell's documentation for details
about the options it supports.

Consider using the printf(1) command
instead, as it avoids problems when
outputting option-like strings.

AUTHOR
Written by Brian Fox and Chet Ramey.

REPORTING BUGS
GNU      coreutils      online      help:
<https://www.gnu.org/software/core-
echo(1) line 56 (press h for help or q to quit)

```

```


1/2  +  [icon] [icon]
Tilix: japariona@cis106: ~
1: japariona@cis106: ~
japariona@cis106:~$ free -h
              total        used        free
  shared buff/cache   available
Mem:      3.8Gi       2.8Gi       286Mi
       115Mi        1.1Gi        1.0Gi
Swap:      2.6Gi         833Mi        1.8Gi
japariona@cis106:~$ uname -a
Linux cis106 6.12.69+deb13-amd64 #1 SMP PREEMPT
_DYNAMIC Debian 6.12.69-1 (2026-02-08) x86_64 G
NU/Linux
japariona@cis106:~$

2: japariona@cis106: ~
readable name.

-a, -all
executes specified command over
all objects, it depends if com-
mand supports this option.

-c[color][={always|auto|never}]
Configure color output. If para-
meter is omitted or always,
color output is enabled regard-
less of stdout state. If parame-
ter is auto, stdout is checked
to be a terminal before enabling
color output. If parameter is
never, color output is disabled.
If specified multiple times, the
ip(8) line 135 (press h for help or q to quit)

```

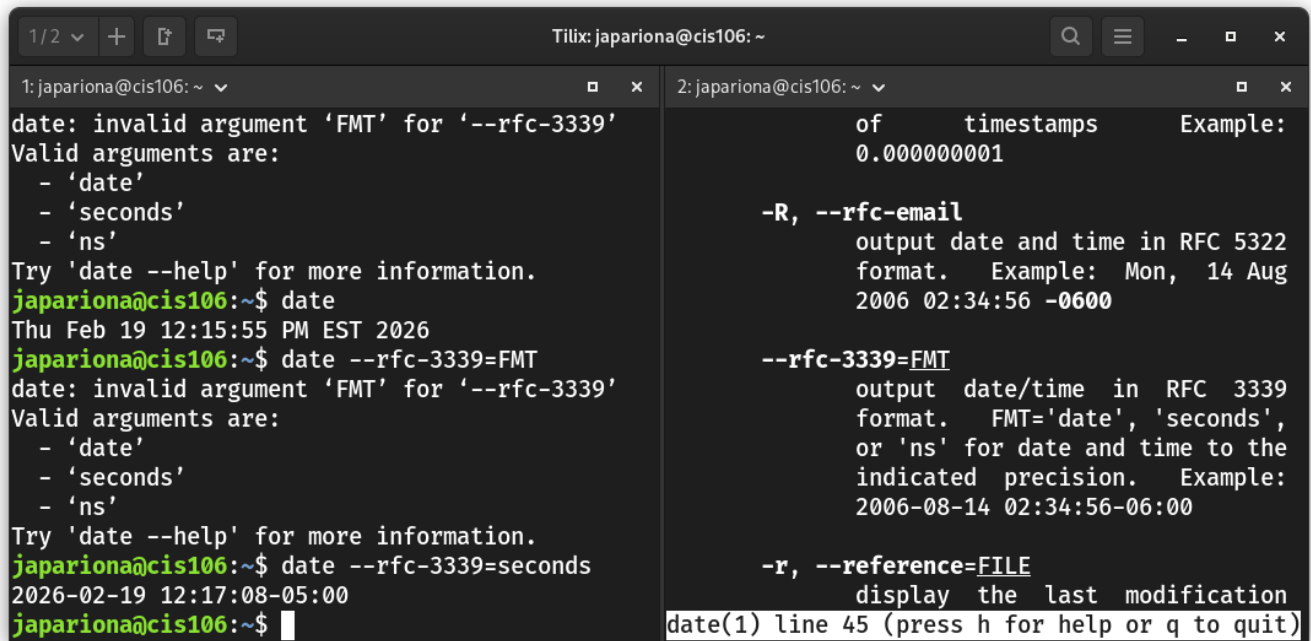

```
1/2 + [?] [x] Tilix: japariona@cis106: ~
1: japariona@cis106: ~
date: invalid argument 'FMT' for '--rfc-3339'
Valid arguments are:
- 'date'
- 'seconds'
- 'ns'
Try 'date --help' for more information.
japariona@cis106:~$ date
Thu Feb 19 12:15:55 PM EST 2026
japariona@cis106:~$ date --rfc-3339=FMT
date: invalid argument 'FMT' for '--rfc-3339'
Valid arguments are:
- 'date'
- 'seconds'
- 'ns'
Try 'date --help' for more information.
japariona@cis106:~$ date --rfc-3339=seconds
2026-02-19 12:17:08-05:00
japariona@cis106:~$

2: japariona@cis106: ~
of timestamps Example:
0.000000001

-R, --rfc-email
output date and time in RFC 5322
format. Example: Mon, 14 Aug
2006 02:34:56 -0600

--rfc-3339=FMT
output date/time in RFC 3339
format. FMT='date', 'seconds',
or 'ns' for date and time to the
indicated precision. Example:
2006-08-14 02:34:56-06:00

-r, --reference=FILE
display the last modification
date(1) line 45 (press h for help or q to quit)
```