

R Programming For Natural Resource Professionals

Lecture 10
ggplot2 pt 2

Paper discussions

- Open this link now by typing it into a browser: <https://bit.ly/3GVPwuV>
- Talk with your group to identify one or two thoughts, questions, and epiphanies that resonate then record them in the Google Doc.
- Read through the list as it updates.

Learning objectives for this week

1. Further develop ggplot skills
2. Control ggplot outputs in RMarkdowns
3. Explore non-Tidyverse ggplot packages

List arguments inside or outside aes()?

Inside aes (): Aesthetic determined by a variable from your data.

- `aes(..., color = Var1)`

Outside aes(): Aesthetic determined a constant value.


- `color = "blue"`

In class plotting exercise 1

- Data set: `Iterdatasampler::ntl_icecover`
- Create a scatterplot for ice duration across years
- Add custom x and y labels
- Add a loess smoothed trend line with a "span" value of 1.5
- Clean it up using a theme of your choosing


ggplot2 – symbol types

- `aes(shape = ...)` to establish distinct symbols based on a specific variable
- `scale_[shape or size]_manual()`

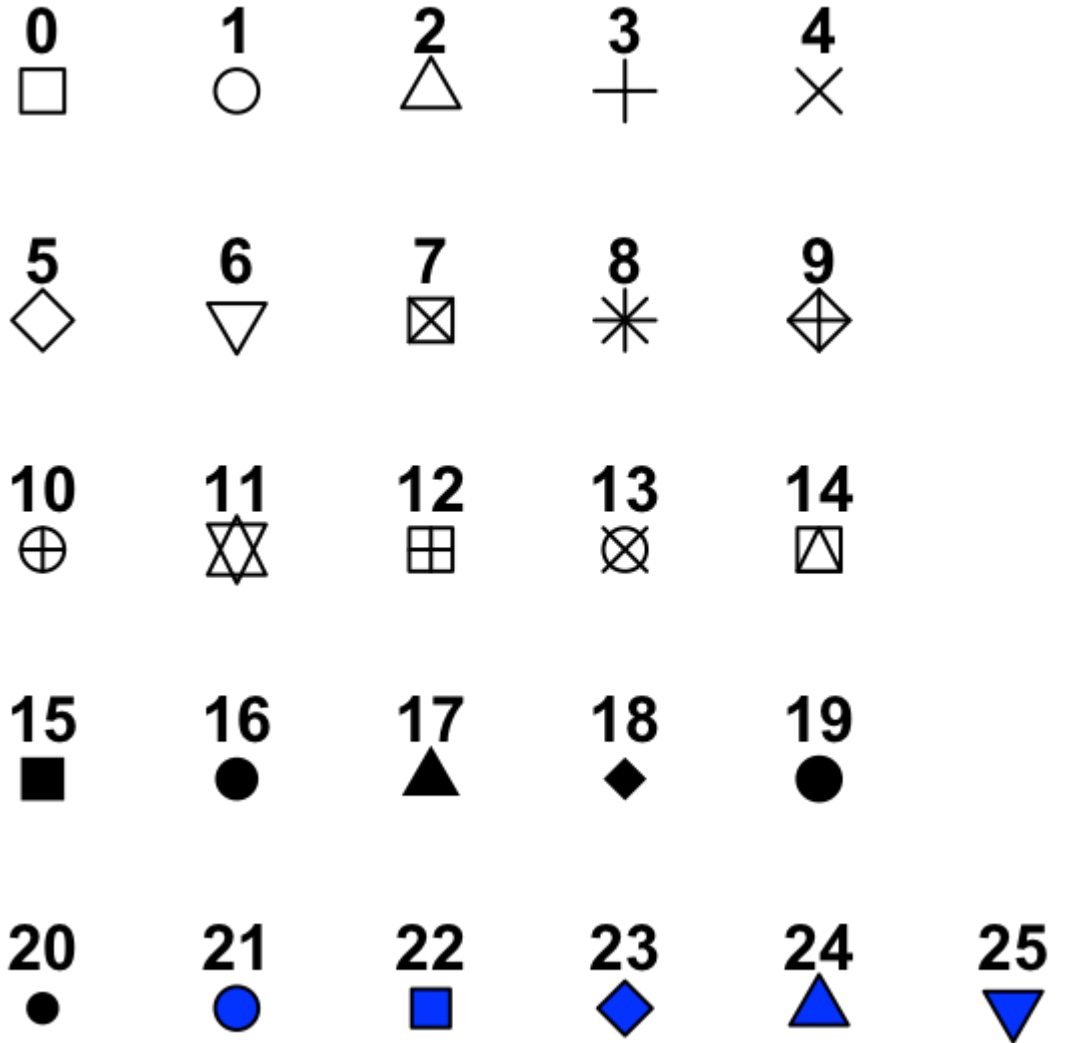


ggplot2 - colors

- `aes(color = ...)` to establish distinct colors based on a specific variable
- `scale_[color or fill]_manual`
 - Declare hex values or words in a vector
 - <https://www.color-hex.com/>
 - https://www.w3schools.com/colors/colors_picker.asp

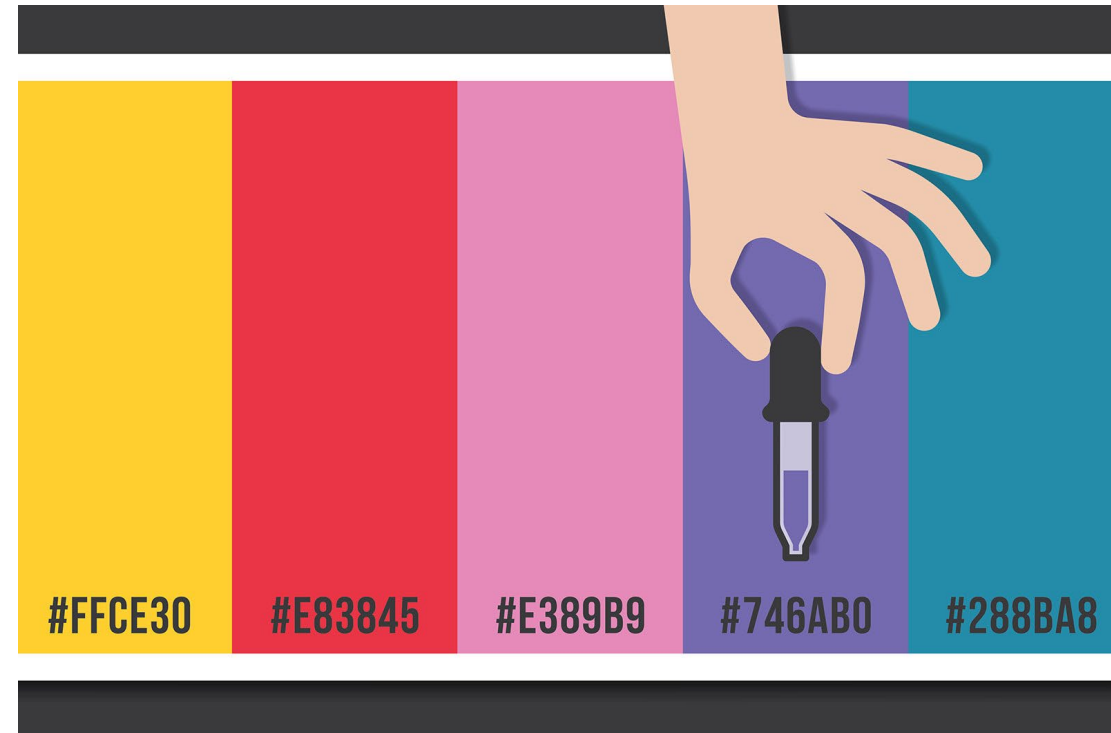


ggplot2 – color packages

rcolorbrewer

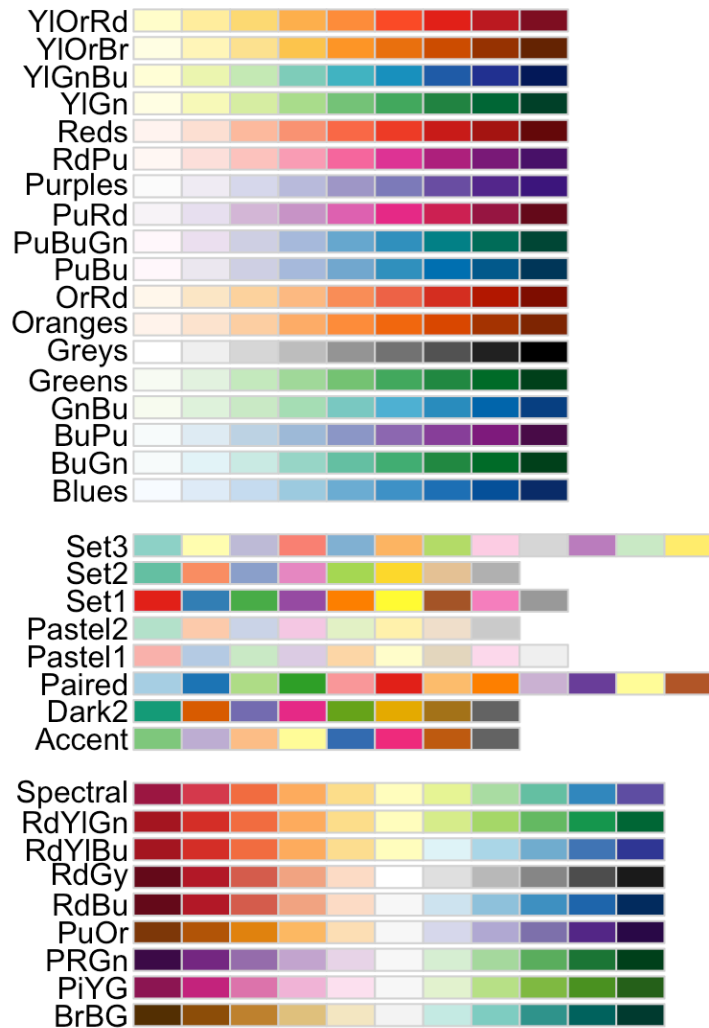

RSkittleBrewer

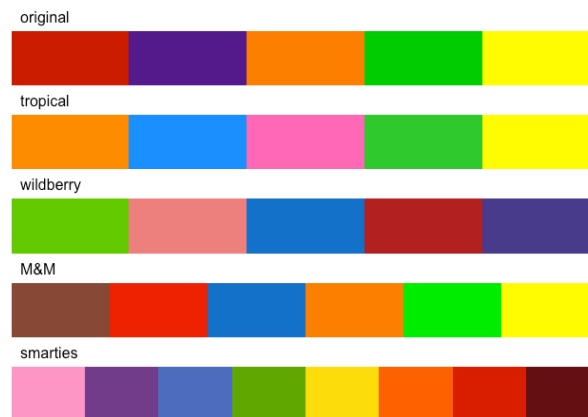

NineteenEightR



LaCroixColorR



ggplot2 – color packages

```
```{r}  
paletteer_d()
```
```




ggplot2 – legends

- Most modifications stated using `theme()` placed at end of ggplot pipe
 - `legend.position = "none" or "top" or "bottom" or "c(1,1)" or...`
 - `legend_title = element_text(color, size, face)`
 - `legend_text = element_text(color, size, face)`
 - `legend.background = element_rect(fill, size, linetype)`
- Change labels and title using `scale_[color]_discrete()`
 - `scale_color_discrete(name = "New title", labels = c("label1", "label2"))`

ggplot2 – Arranging multiple plots

- `facet_wrap(~ var, nrow, ncol)`
 - Native ggplot approach
- Also check out:
 - `cowplot`
 - `gridExtra`
 - `egg`
 - `patchwork`

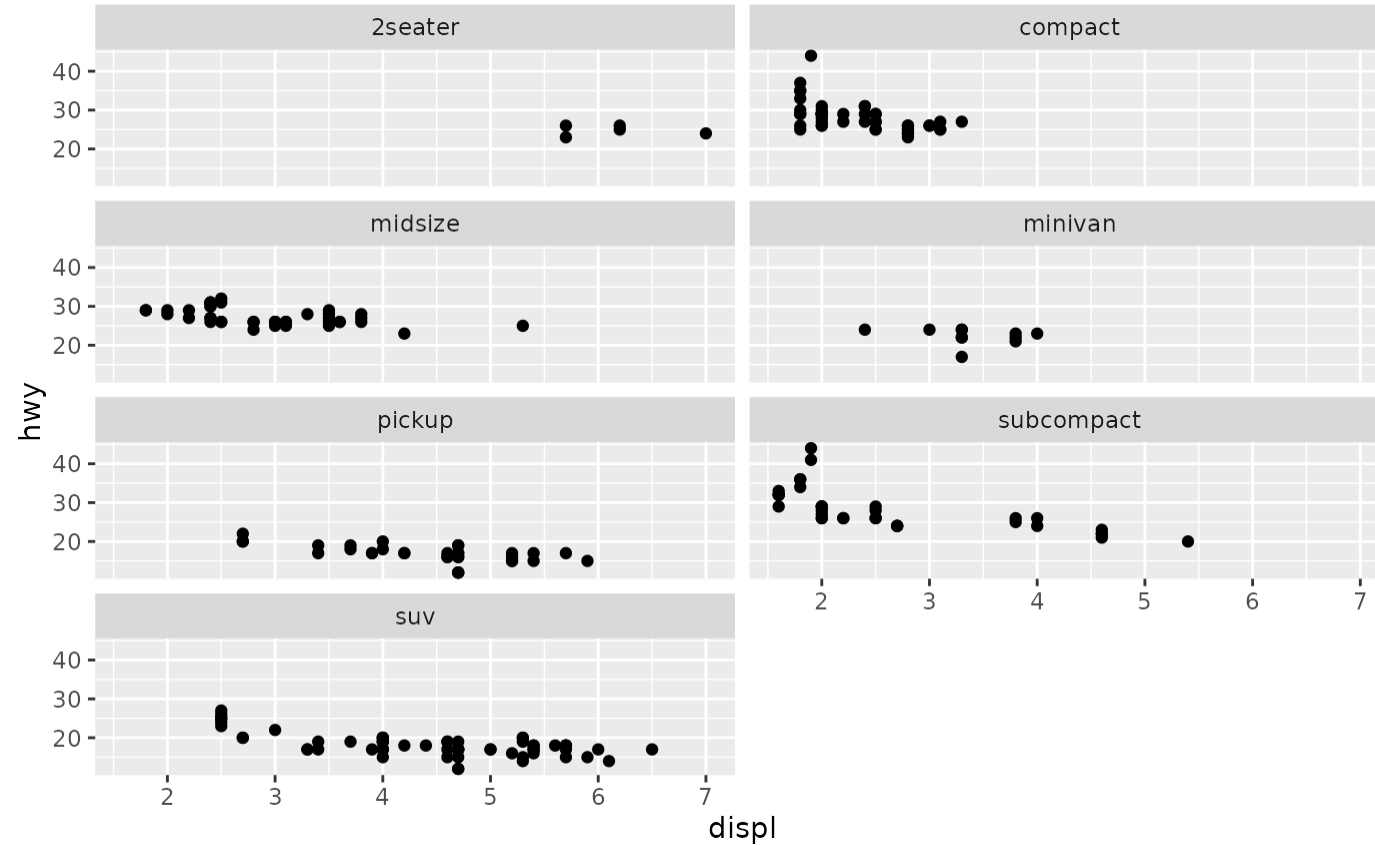

Annotating plots

- `annotate("type", x, y)`
 - "text"
 - `Parse =`
 - "rect"
 - "segment"


ggplot2 – Rmarkdown plotting

Code chunk header arguments

- `fig.show`
- `fig.width`
 - In inches. E.g., `fig.width = 7`
- `fig.height`
 - In inches. E.g., `fig.height = 5`
- `dpi`
 - Dots per inch. E.g., `dpi = 72`
- `fig.align`
 - 'left', 'right', 'center'
- `fig.cap`
 - Figure caption. E.g., `fig.cap = "This is the caption"`

ggrepel

- `geom_text_repel(aes(label =))`
- `geom_label_repel(aes(label =))`
- Lots and lots of other options
 - <https://ggrepel.slowkow.com/articles/examples.html>

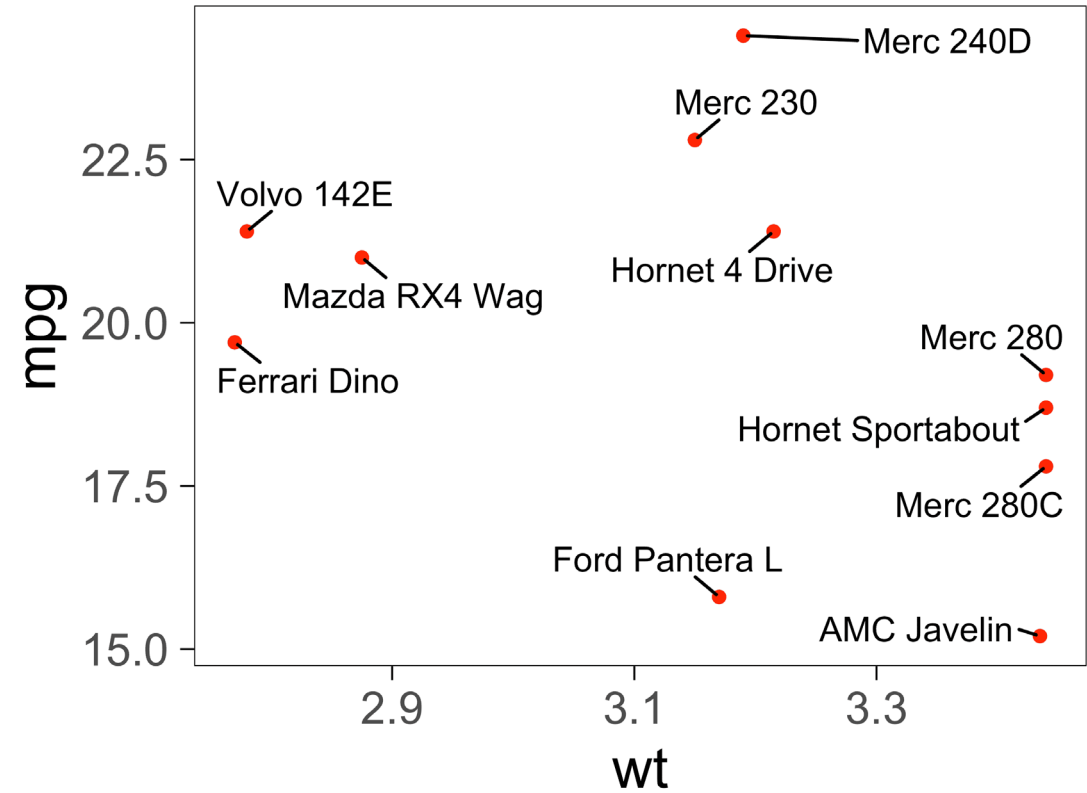


In class plotting exercise 2

- Data set: `Iterdatasampler::and_vertebrates`
- Filter to just cutthroat trout
- Create a density plot of `weight_g`
- Add custom x and y labels
- Clean it up using a theme of your choosing

Less common but useful plot types

Rug plots


- `geom_rug()`

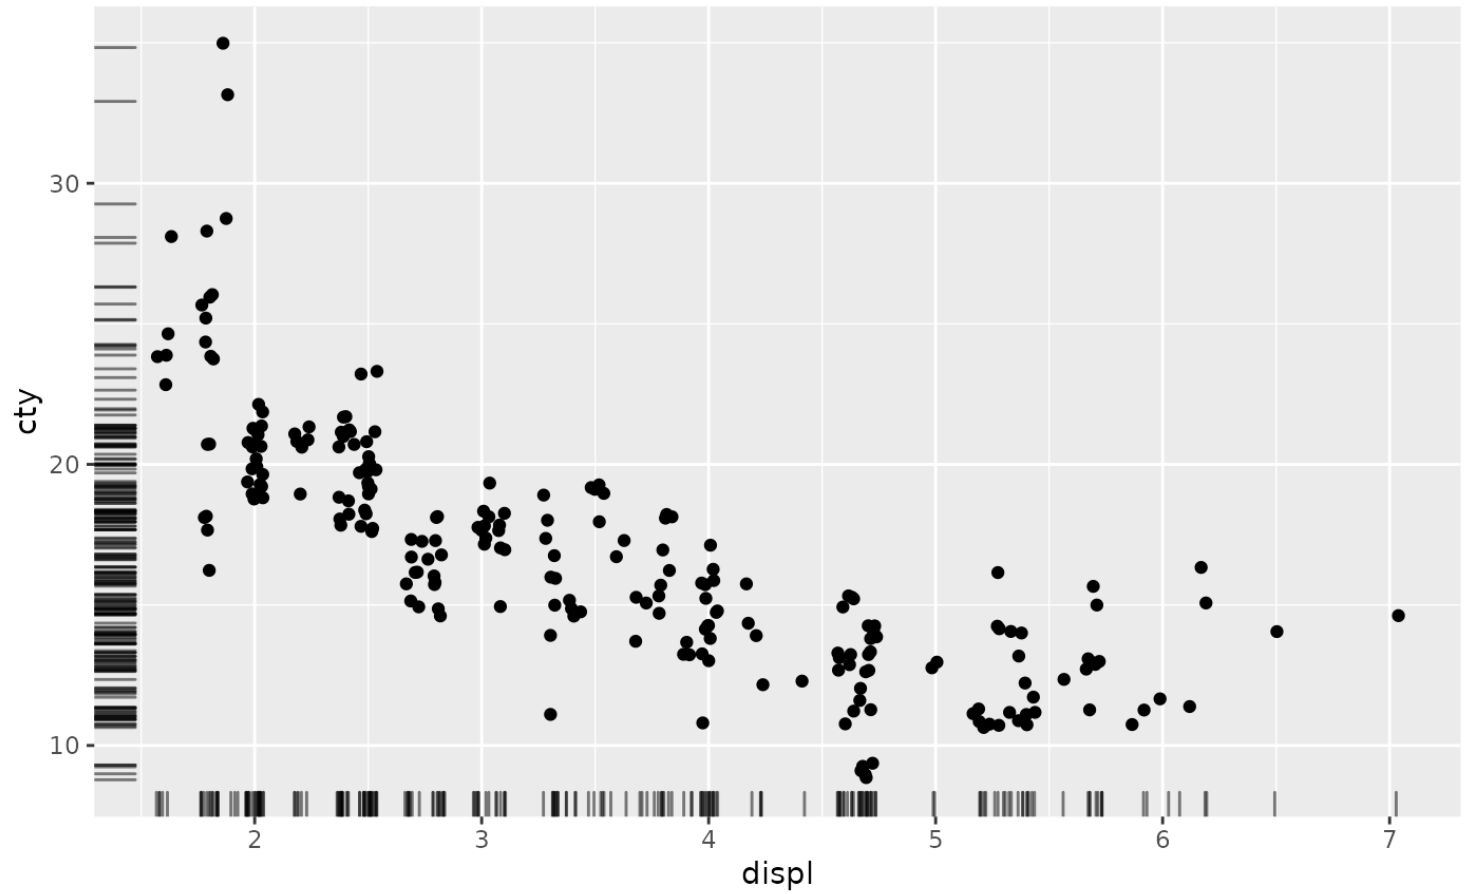

Less common but useful plot types

2D density


- `geom_density_2d_filled()`
- `geom_density_2d`

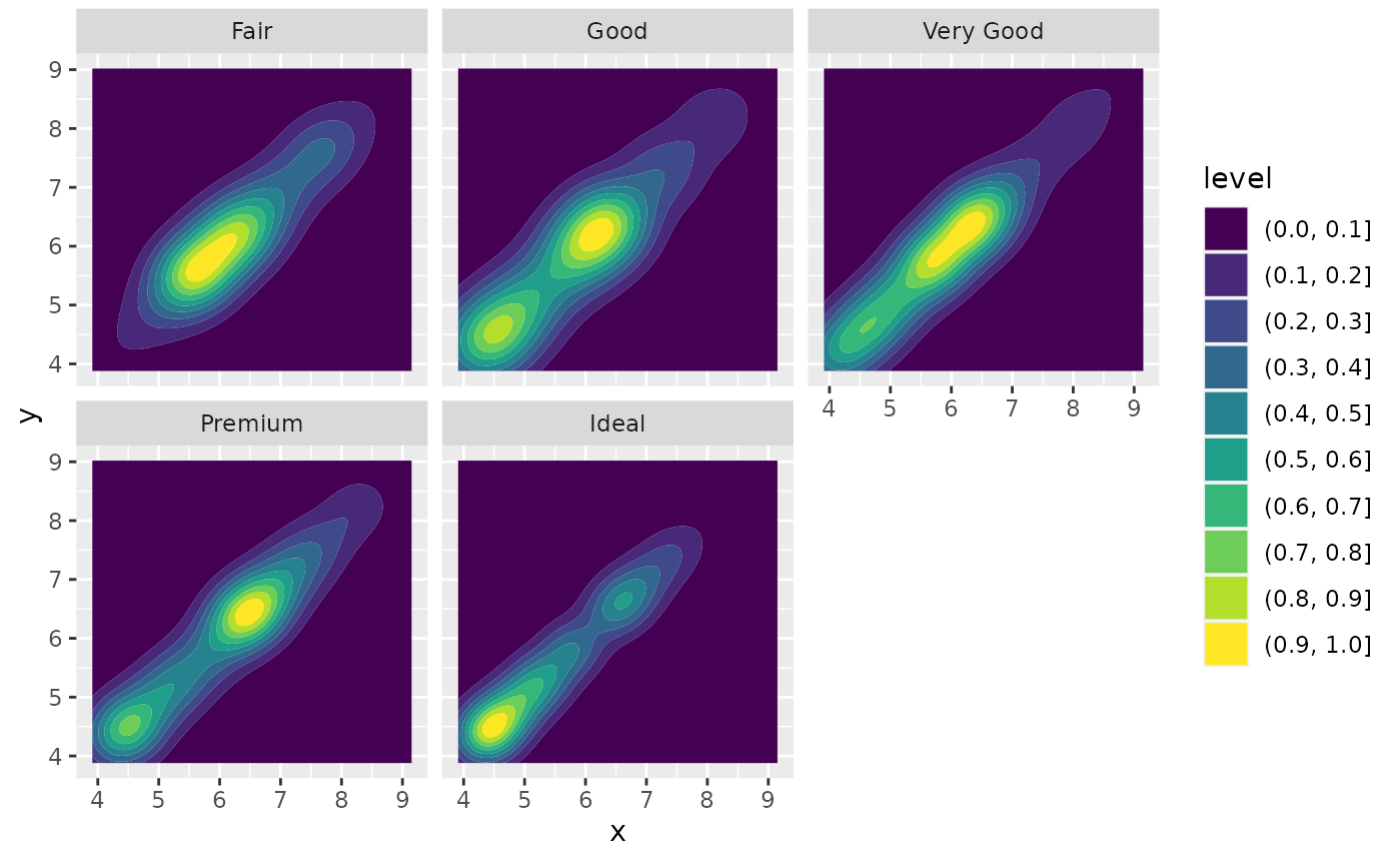

Less common but useful plot types

Bubble plot


```
ggplot(aes(x, y, size)) +  
geom_point() +  
scale_size(range = c(min, max))
```

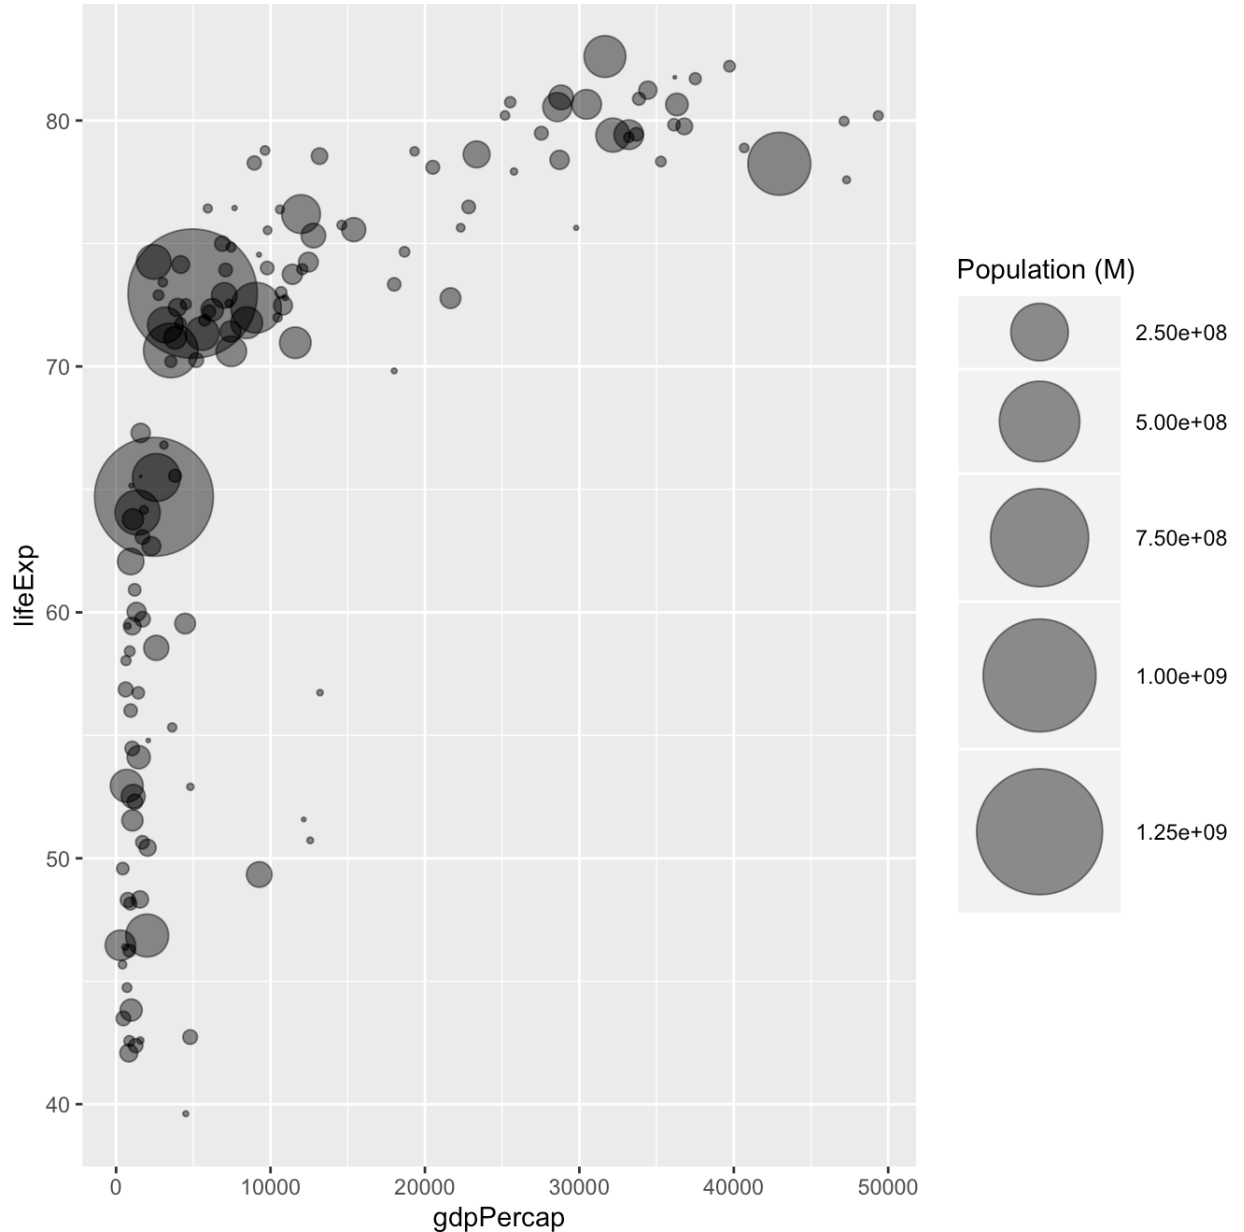

Less common but useful plot types

Before/After plot

```
ggplot(aes(x, y, group, shape)) +  
  geom_line() +  
  geom_point()
```

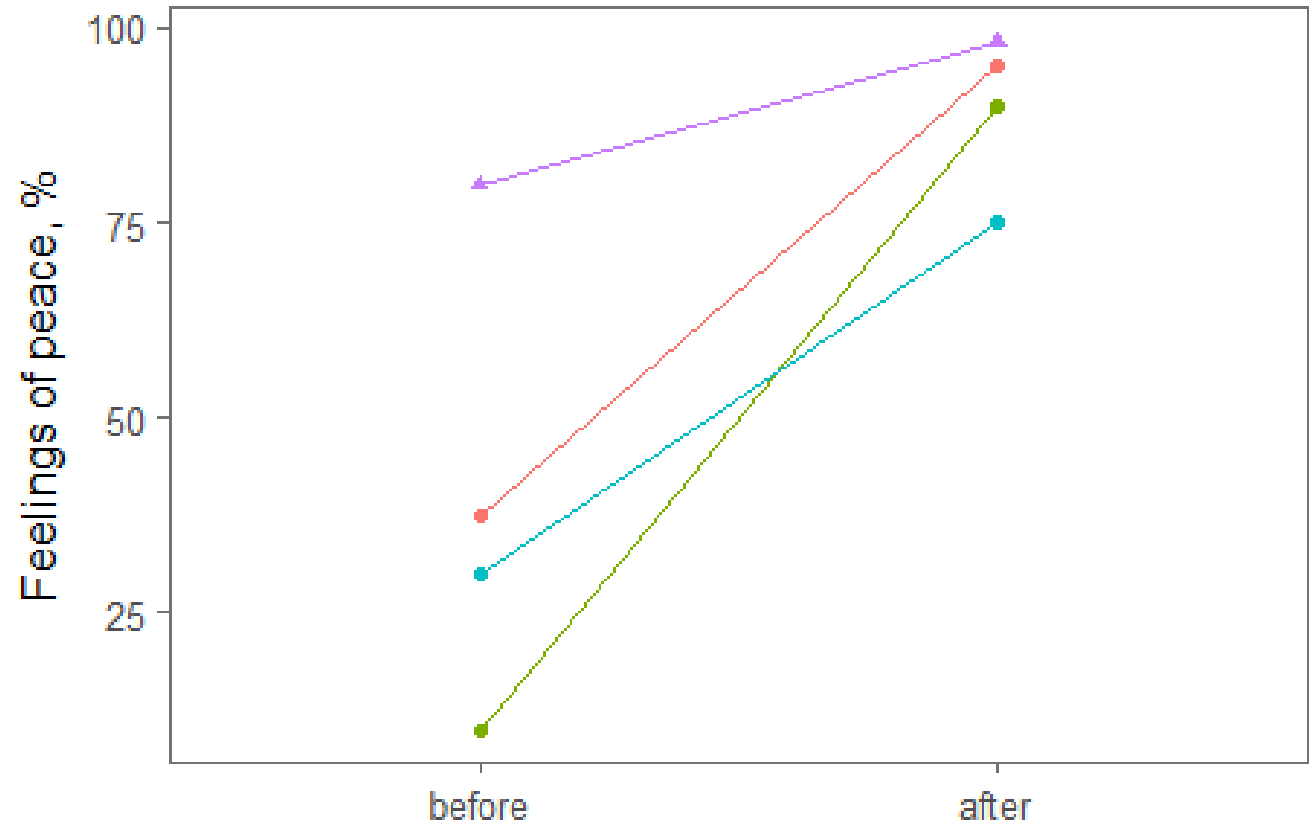

Less common but useful plot types

Piecharts



- Note words of warning: <https://www.data-to-viz.com/caveat/pie.html>

```
ggplot(aes(x="", y, fill)) +  
  geom_bar(stat = "identity", color = "white") +  
  coord_polar("y", start = 0) +  
  theme_void()
```

