


## Code in VS Code

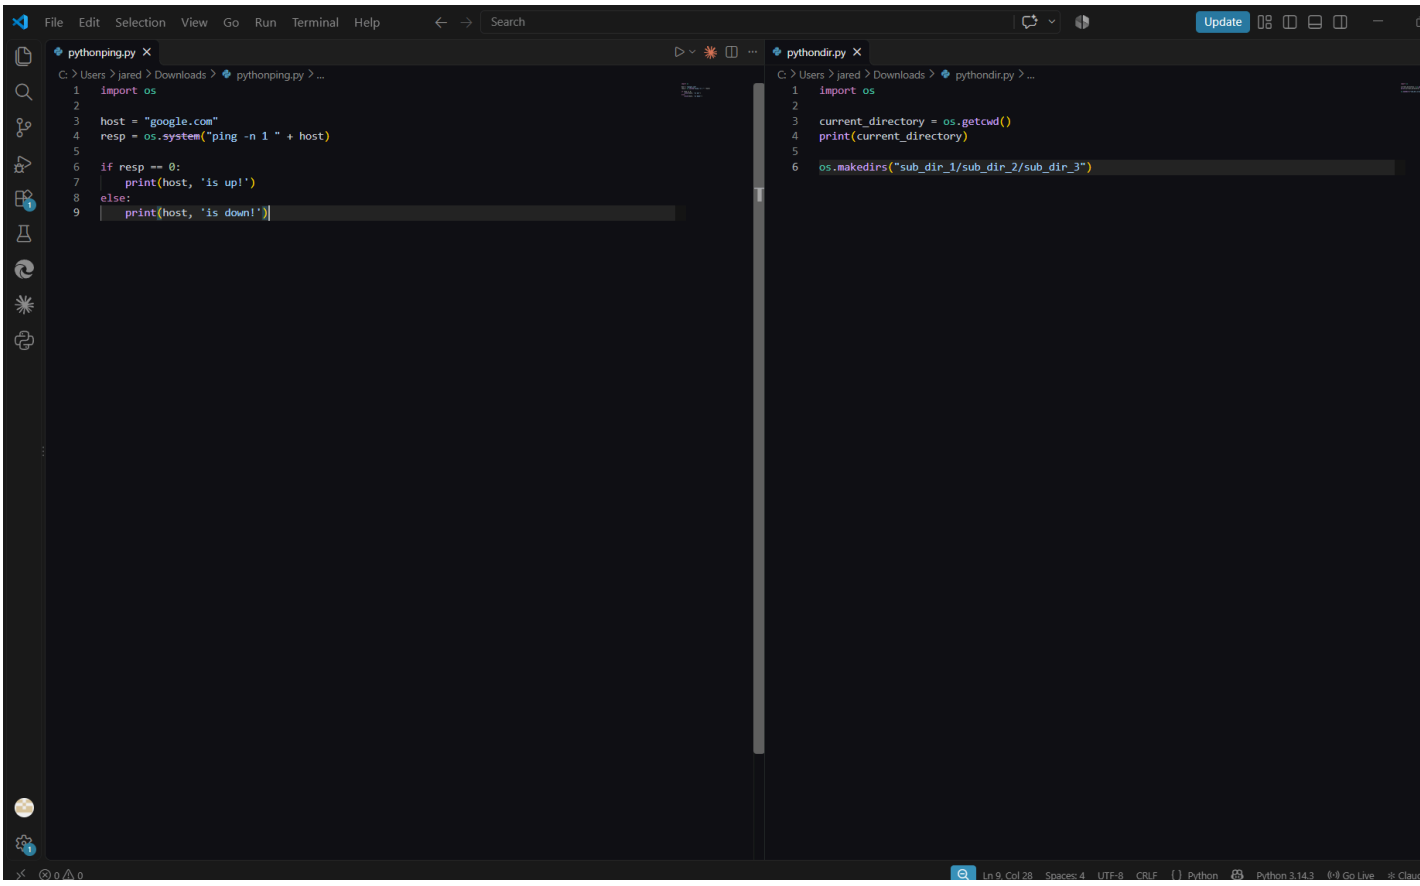


## Output

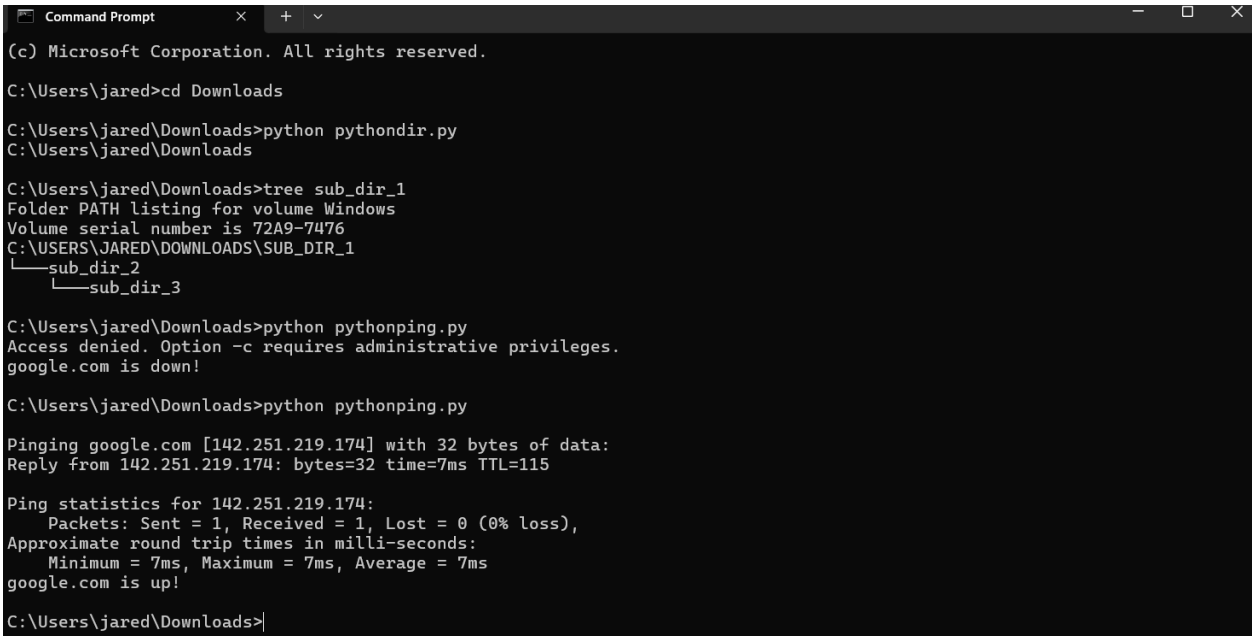


**Activity 9 Answers:**

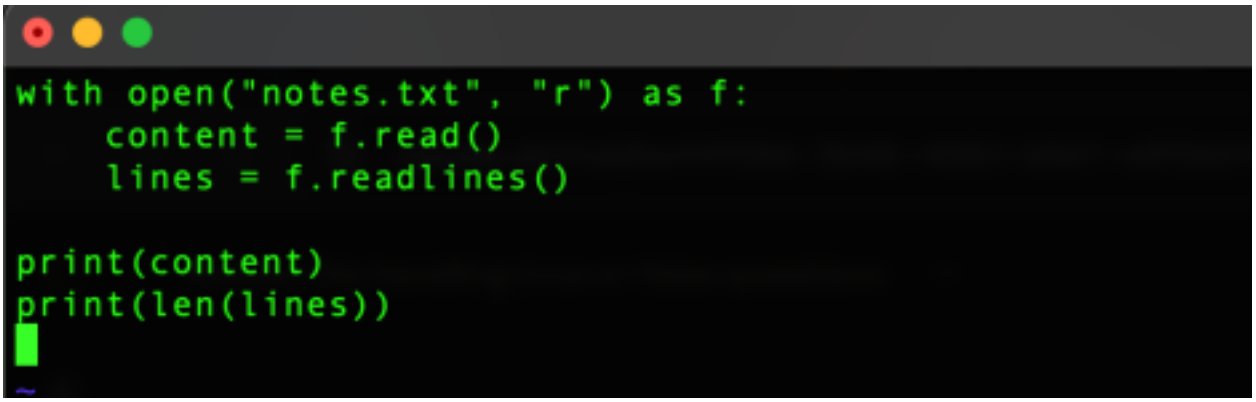

```
with open("notes.txt", "r") as f:
    content = f.read()
    lines = f.readlines()

print(content)
print(len(lines))
```

| | |
|---|---|
| The file is opened in write mode. | True or False? Brief reason if False. **False.** "r" is read mode, not write. |
| The with block automatically closes the file when done. | True or False? Brief reason if False. **True.** |
| After f.read() runs, calling f.readlines() will return all lines of the file. | True or False? Brief reason if False. **False.** read() moves the pointer to the end. readlines() returns an empty list . |
| If notes.txt does not exist, the program will raise a FileNotFoundError. | True or False? Brief reason if False. **True.** |
| len(lines) will give the number of characters in the file. | True or False? Brief reason if False. **False.** It counts lines (list items), not characters. Here it prints 0. |

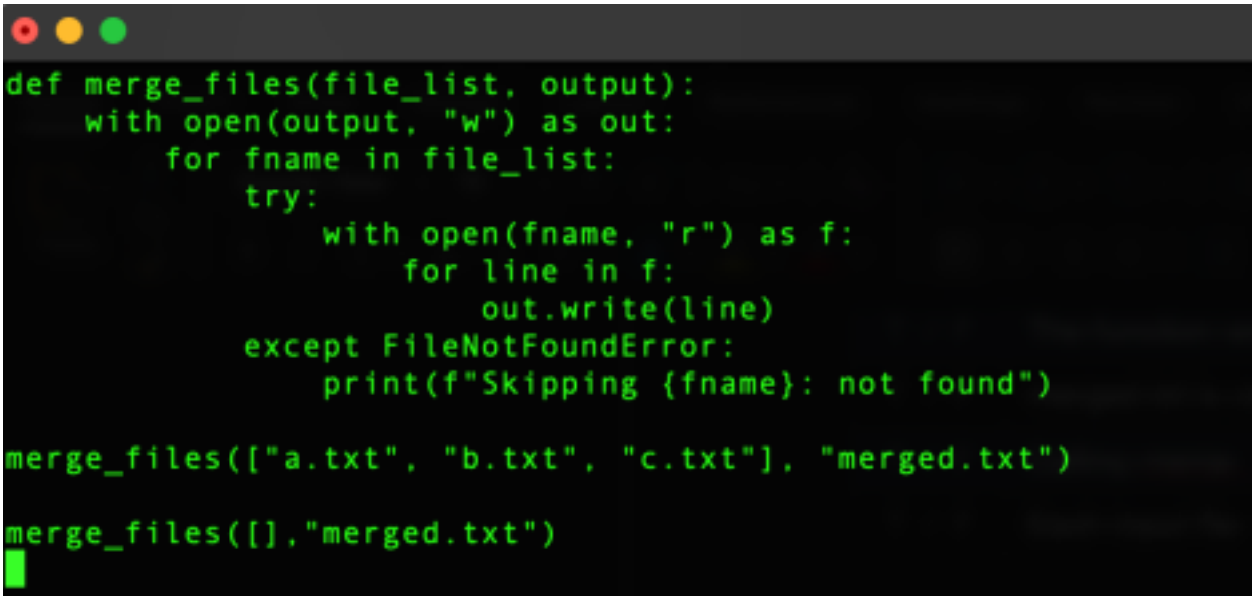

```
def merge_files(file_list, output):
    with open(output, "w") as out:
        for fname in file_list:
            try:
                with open(fname, "r") as f:
                    for line in f:
                        out.write(line)
            except FileNotFoundError:
                print(f"Skipping {fname}: not found")

merge_files(["a.txt", "b.txt", "c.txt"], "merged.txt")

merge_files([],"merged.txt")
```

| | |
|---|---|
| The output file is opened in append mode, so existing content is preserved. | True or False? Brief reason if False. **False.** "w" is write mode, so merged.txt is re-written each time it runs. |
| If b.txt does not exist, the program will crash and stop entirely. | True or False? Brief reason if False. **False.** The 'except' catches it, printing "Skipping b.txt: not found" and keeping the code moving |
| The function writes files line by line rather than reading each entire file at once. | True or False? Brief reason if False. **True.** |
| merged.txt is created outside any try/ except, so a write error would be unhandled. | True or False? Brief reason if False. **True.** open(output, "w") is outside the 'try', and the 'except' only catches FileNotFoundError. |
| Calling merge_files([], "merged.txt") would raise an exception. | True or False? Brief reason if False. **False.** The loop doesn't run, so it just creates an empty merged.txt. |
| Each input file is automatically closed after its with block exits. | True or False? Brief reason if False. **True.** |