
Cyber Kill Chain Framework

- In considering the events of the Cyber Attack, it is useful to bear in mind the <u>7 Steps Cyber Kill Chain framework</u> developed by Lockheed Martin, which identifies what adversaries must complete in order to achieve their objectives, going through 7 stages starting from early reconnaissance to the final goal of data exfiltration.
- Having this framework in mind will facilitate understanding of the actions and the tactics, techniques and procedures ("TTPs") of the attacker in this case.

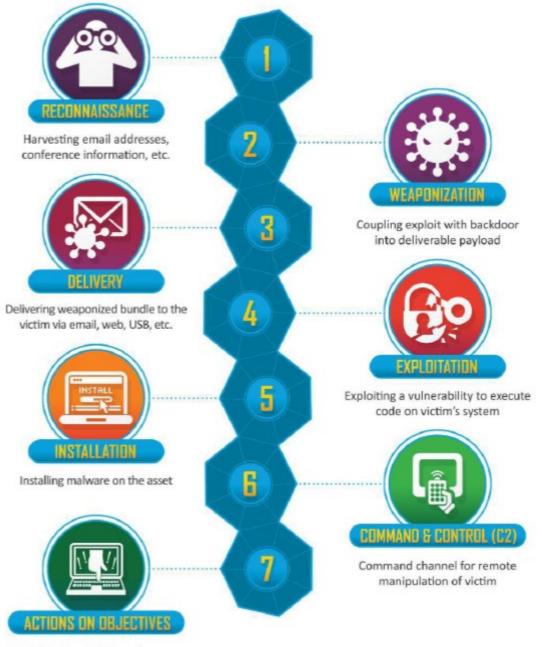

With 'Hands on Keyboard' access, intruders accomplish their original Health Cyber Breach

First evidence of breach and establishing control over Workstation A – August to December 2017

 Forensic investigations uncovered signs of callbacks to an overseas command & control server ("C2 server") from 23 August 2017.

 Callbacks refer to communications between malware and C2 servers, to either fetch updates and instructions, or send back stolen information.

First evidence of breach and establishing control over Workstation A – August to December 2017

- CSA discovered many malicious artefacts in Workstation A, including

 (i) a log file which was a remnant of a malware set;
- (ii) a publicly available hacking tool,
- (iii) a <u>customised</u> Remote Access Trojan referred to as "RAT 1".
 - (i) The log file was a remnant file from a known malware which has password dumping capability;
 - (iii) **RAT 1** provided the attacker with the <u>capability to access and control the</u> <u>workstation</u>, enabling the attacker to perform functions such as executing shell scripts remotely, and uploading and downloading files.

First evidence of breach and establishing control over Workstation A – August to December 2017

• (ii) The publicly available hacking tool enables an attacker to maintain a <u>persistent presence</u> once an email account has been breached, <u>even if the password</u> to the account <u>is subsequently changed</u>.

- Hacking tool also allows an attacker to
 - interact remotely with mail exchange servers,
 - perform simple brute force attacks on the user's email account password,
 - and serve as a hidden backdoor for the attacker to regain entry into the system in the event that the initial implants are removed;