Palturo

PRODUCT & INTERFACE REVIEW · 26 OCTOBER 2026

Design & Feature Audit v2

Implementation & Verification Report

A complete account of the 14 v2 cases: what changed, how each gate was verified, and the evidence behind a release-ready build.

14/14	72/72	101/101	0
CASES ACCEPTED	TESTS PASSING	CHECKLIST ITEMS	OPEN BLOCKERS

Branch
ui-features @ 93b1c10

Prepared for
PalTuro product team

Method
3 independent audits per case

DOCUMENT CONTROL

What this report covers

Final · version 1.0
26 October 2026

REPORT PROFILE

DOCUMENT	**UI Audit v2 — Implementation & Verification Report**
STATUS	**Final / accepted**
BRANCH	**ui-features**
HEAD	**93b1c10**
DATE	**26 October 2026**
AUDIENCE	**Product, design, engineering, QA**
SOURCES	**UI-AUDIT-V2-ACTIONS.md · git · tests · build**

HOW TO READ IT

Each case page uses the same shape: the original problem, what shipped, acceptance checks, evidence, files and commit. The scorecard on page 04 is the fastest view of status.

PASS

Gate completed with no blocking findings.

DEFERRED

Explicitly out of scope, with the gap documented.

FRONT MATTER

Executive summary 03
Delivery scorecard 04
Method & audit gates 05
The system after v2 06

CASES

Case 01 · Settings 07
Case 02 · Browse 08
Case 03 · Category card 09
Case 04 · Edit Profile 10
Case 05 · Dark mode 11
Case 06 · Activity 12
Case 07 · Chat 13
Case 08 · Pals 14
Case 09 · Requests 15
Case 10 · Onboarding 16
Case 11 · Copy 17
Case 12 · System 18
Case 13 · Feedback 19
Case 14 · Auth 20

ASSURANCE

Accessibility & large text 21
Data & backend integrity 22
Test suite & quality gates 23
Risks & follow-ups 24
Acceptance statement 25

APPENDICES

Commit ledger 26
Evidence index 27
File map 28

SCOPE

Cases 01–14 of the v2 audit. Every accepted case was implemented, audited and committed independently.

EVIDENCE BASE

101 checked acceptance / definition-of-done items, 72 automated tests, 40 product screenshots, analyzer and release build.

BOUNDARIES

UI and interaction behavior. Backend email deliverability, provider configuration and full manual screen-reader QA remain outside the gate.

RELEASE POSITION

All 14 cases are complete and verified.

No open blockers.
No unchecked acceptance items.

The v2 work closed structural UI debt across account settings, browsing, profile editing, notifications, chat state, Pals integrity, requests, onboarding, copy and routing, system consistency, feedback and auth accessibility. The app keeps its five-tab model and now behaves as one system.

14/14	3/3	72/72	101/101
CASES DONE	AUDIT GATES EACH	TESTS PASSING	CHECKLIST ITEMS

STRUCTURE

Routes now explain themselves.

Settings, Browse, Profile, Requests and Support have one destination per control, visible hierarchy and honest labels.

STATE

Surfaces agree on the truth.

Pals, Chats and Profile share one accepted-connection source; unread is data; failed sends and reads are recoverable.

ACCESS

Controls are usable at scale.

44px targets, selected-state semantics, inline validation and 200% text coverage protect the core surfaces.

BOTTOM LINE

The release is coherent, accessible and consistent enough to ship.

The remaining notes are explicit product follow-ups, not defects hidden inside the 14 cases.

RELEASE EVIDENCE

Analyzer	clean
Tests	72 / 72
Release web build	current
Working tree	clean
Live migrations	3 applied

NAVIGATION

Five tabs retained. No new top-level destination.

DARK MODE

All changed surfaces reviewed at 360 and 390.

LARGE TEXT

200% coverage on card, Settings, chat, edit, nav.

WIDTHS

360 / 390 phone plus 1440 centered shell.

14 CASES · 42 INDEPENDENT GATES

Delivery scorecard

Functionality · quality · regression
Each gate passed before the next case.

CASE	SCOPE	COMMIT	FUNCTIONAL	QUALITY	REGRESSION
CASE 01	**Settings** Settings & Account hierarchy	bd68b75	• PASS	• PASS	• PASS
CASE 02	**Browse** Browse depth and taxonomy	f06b544	• PASS	• PASS	• PASS
CASE 03	**Category card** Category card context	7784152	• PASS	• PASS	• PASS
CASE 04	**Edit Profile** Edit Profile structure and role safety	903634f	• PASS	• PASS	• PASS
CASE 05	**Dark mode** Dark-mode edges	1f773df	• PASS	• PASS	• PASS
CASE 06	**Activity** Activity destination	c4acdb6	• PASS	• PASS	• PASS
CASE 07	**Chat** Chat state model	28ec5ba	• PASS	• PASS	• PASS
CASE 08	**Pals** Pals integrity	a961935	• PASS	• PASS	• PASS
CASE 09	**Requests** Requests after accept	36c8e3b	• PASS	• PASS	• PASS
CASE 10	**Onboarding** Onboarding durability	d3d8bdb	• PASS	• PASS	• PASS
CASE 11	**Copy** Copy and routing clarity	0a170d7	• PASS	• PASS	• PASS
CASE 12	**System** System consistency	617b4b1	• PASS	• PASS	• PASS
CASE 13	**Feedback** Feedback survey navigation	3dbd18a	• PASS	• PASS	• PASS
CASE 14	**Auth** Auth and accessibility polish	41f5e98	• PASS	• PASS	• PASS

- All gates passed with no blocking findings.
- Case 14 closed after 200% and 1440 verification.
- Final checklist: 101 / 101.

WHAT "FUNCTIONALITY" MEANS

The acceptance criteria are demonstrably met, including the important failure path.

WHAT "QUALITY" MEANS

Visual hierarchy, copy, dark mode, empty/loading/error states and accessibility are reviewed.

WHAT "REGRESSION" MEANS

Existing flows, tests and the five-tab shell still work after the change.

Result: every case reached PASS on all three gates. Blocking findings were fixed and re-audited; non-blocking polish is listed on page 24 rather than silently carried forward.

HOW THE WORK WAS VERIFIED

Three independent lenses, one acceptance gate.

No case moved forward on a single reviewer's opinion.

Each case was implemented, then inspected through three independent audits. A case could not move on until the blocking findings from all three were resolved and re-checked.

01
Implement

Make the smallest change that satisfies the case and preserves the existing shell.

02
Functional audit

Walk acceptance criteria, primary path and failure path against the running build.

03
Quality audit

Review hierarchy, copy, states, dark mode, target size and semantics.

04
Regression audit

Re-run existing tests and adjacent flows; check the five-tab model and 360/390/1440.

05
Close

Re-audit fixes, run analyzer/tests/build, commit and update the acceptance tracker.

EVIDENCE PROTOCOL

- Widget, unit and integration tests for behavior that can regress.
- Representative screenshots at 360, 390 and 1440; dark mode where the case changes it.
- 200% text checks on core surfaces, not just a single screen.
- Analyzer, full test suite and release web build before the case is called done.

GUARDRAILS HELD

- Five tabs: For You, Browse, Chats, Requests, Profile.
- No false success: errors stay recoverable and copy names the real outcome.
- No dead-end controls: every promised route exists.
- No reopened baseline work: only the v2 cases in scope.

3	14	72	0
AUDIT LENSES	INDEPENDENT CLOSES	TESTS IN FINAL SUITE	BLOCKING FINDINGS

PER-CASE RECORD

One source of truth

The tracker holds the status, the three audit results, the commit and the acceptance checks. A case is not done because it looks done.

VISUAL RECORD

States, not just screens

Each visual review includes the relevant empty, loading, error, dark and 200% state — not only the ideal first frame.

RELEASE RECORD

Evidence that closes

Analyzer, full test suite, release web build and a clean tree are checked after the last fix, before the case is committed.

Why three lenses: a change can meet its acceptance text and still look wrong, or look right and break an adjacent flow. The three gates are deliberately redundant; the case closes only when they agree.

ONE PRODUCT, FIVE TABS

The system after v2

No new tab. The hierarchy got deeper, not wider.

The shell stays deliberately small. Depth now lives inside each tab: category detail, account security, request status, profile sections and onboarding review.

For You	Browse	Chats	Requests	Profile
Decision card · filters · profile preview	Root · category detail · child skills · search	Messages · chat room · Pals quick access	Incoming · sent · match · decline	Summary · Pals · edit · preview · settings


SHARED PRIMITIVES INTRODUCED OR STANDARDISED

FilterBottomSheet	Home · Chats · Requests · Matches	**AppSkeleton**	all data-heavy routes
friendly_error	connection vs validation vs server	**ProfileUpdateLink**	one 44px settings route
RequestMatchSheet	accept → say hello	**PalsCount**	one accepted-connection source
ActivityPresentation	payload → route and copy	**Page titles**	one scale and back language

DESKTOP BEHAVIOR

At 1440×900 the app remains a centered 480px mobile shell on a muted surface. This is intentionally a focused product surface, not a desktop re-layout.

TABS	CASES	TESTS	BLOCKERS
5	14	72	0

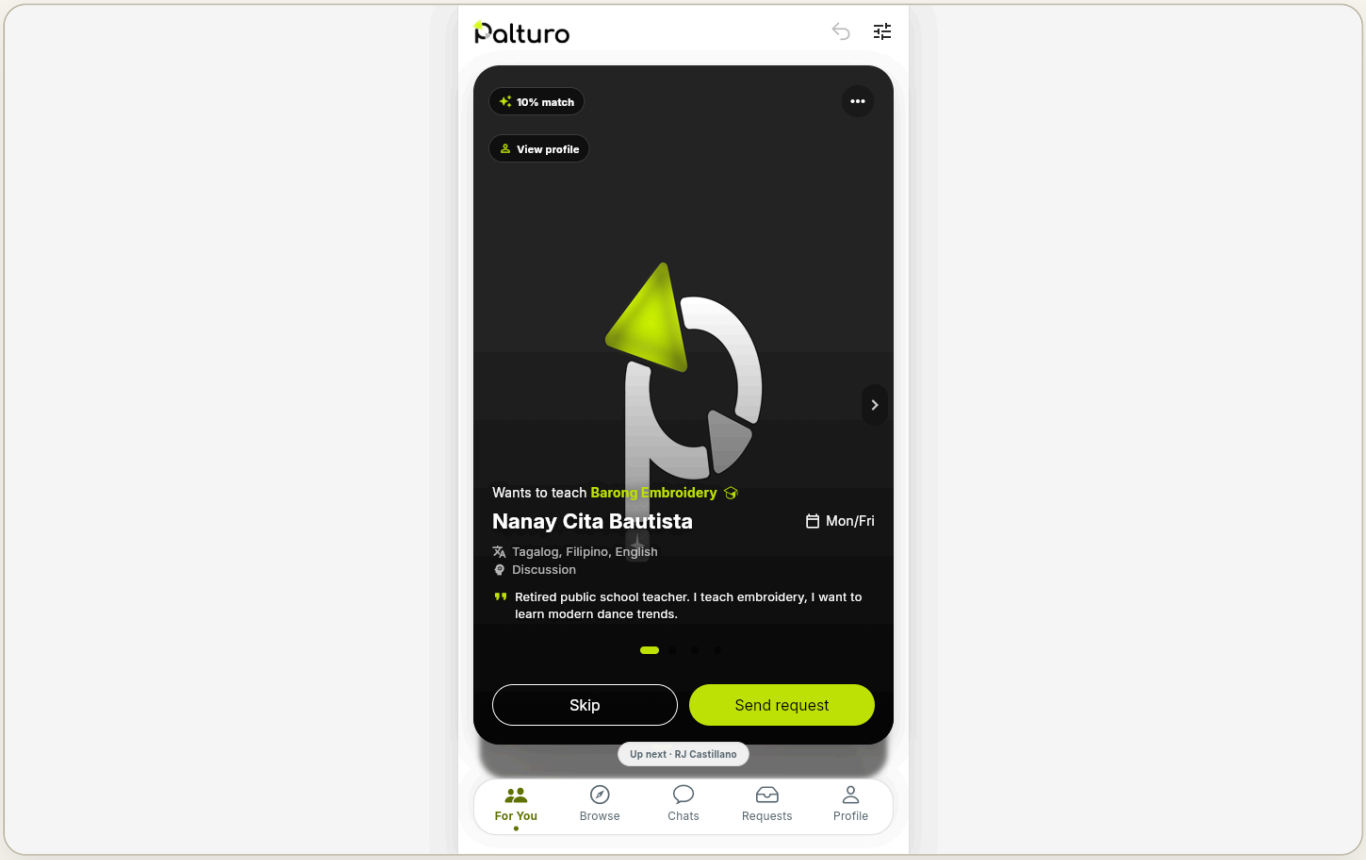

1440 × 900 shell
The centered column keeps the mobile decision card and floating nav intact.

CASE 01 · INFORMATION ARCHITECTURE

Settings & Account hierarchy

Commit **bd68b75** · DONE · 3 / 3 audits passed

FUNCTIONALITY PASS · QUALITY PASS · REGRESSION PASS · NO NEW TAB

THE PROBLEM

Settings mixed four mental models in one long column. Blocked Users sat unlabelled between preferences and account, account identity was absent, legal/privacy routes were missing, and Delete Account sat on the root beside routine settings.

TARGET EXPERIENCE


A user can understand the Settings root in one scan, see their identity, and find advanced account, privacy, support and legal actions one level deeper.

WHAT SHIPPED


1. **Rebuilt the root** Preferences, Account & Security, Support and Legal & About now have visible group headings and one destination per row.
2. **Added identity and account depth** A dedicated Account & Security page carries avatar, name, email, security, blocked users, privacy and the danger zone.
3. **Moved destructive actions** Delete Account left the root for the dedicated Delete Account flow. Log Out moved into Account & Security above the danger zone.
4. **Connected support and legal** Privacy and legal destinations now reuse the existing legal content; the root keeps the five-tab shell unchanged.

ACCEPTANCE CRITERIA


- ✓ Four visible Settings groups
- ✓ Account identity visible on the root
- ✓ Blocked Users outside Preferences
- ✓ Legal and Support reachable
- ✓ Delete Account absent from root
- ✓ Log Out inside Account & Security
- ✓ Every row has one clear destination
- ✓ No new tab added

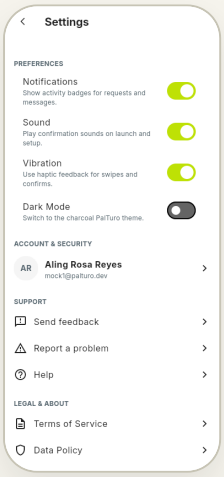

Settings root
Four groups, identity row, no destructive action.

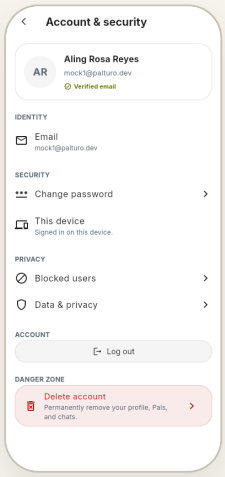

Account & Security
Identity, security, privacy and danger zone.

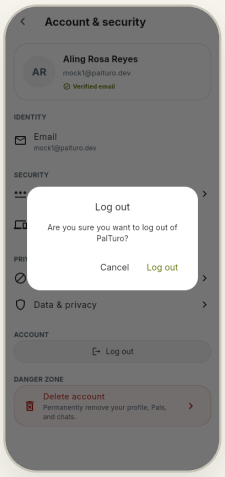

Session control
Log Out lives with account security, not preferences.

Files and contracts
lib/screen/settings.dart · lib/screen/account/account_settings_page.dart · lib/screen/account/privacy_page.dart · lib/screen/action_dialogs.dart

Case close
Functional · Quality · Regression

CASE 02 · NAVIGATION DEPTH

Browse depth and taxonomy

Commit **f06b544** · DONE · 3 / 3 audits passed

● FUNCTIONALITY PASS ● QUALITY PASS ● REGRESSION PASS ● NO NEW TAB

02

THE PROBLEM

Browse was a flat grid of root categories. Tapping a category jumped straight to a single-card deck, ignoring the taxonomy's child skills, counts and role context. There was no in-category search and no memory of the role used to enter.

TARGET EXPERIENCE


Root → category detail → people. A user can see what is inside a category before meeting people, narrow the category, and keep the role context they chose.

WHAT SHIPPED


1. **Introduced category detail** A new category route shows description, child skills, role context, count and a people list before the deck.
2. **Made counts role-aware** Learner and mentor counts are derived from the selected role and the visible, approved taxonomy nodes.
3. **Added in-category search** Search narrows people without leaving the category; empty, loading and error states preserve context.
4. **Persisted the role** The selected role survives entry into category detail and back, with no dead-end category cards.

ACCEPTANCE CRITERIA


- ✓ Category opens detail, not deck
- ✓ Child skills render when present
- ✓ Counts visible and role-aware
- ✓ Search inside a category
- ✓ Role persists across entry
- ✓ Loading, empty and error states
- ✓ No duplicate root cards or dead ends

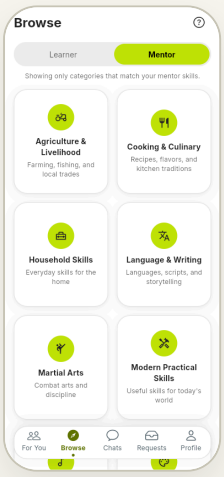

Browse root
Role context and visible category set.

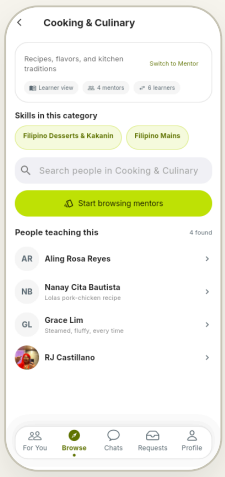

Category detail
Child skills, counts, people and browse action.

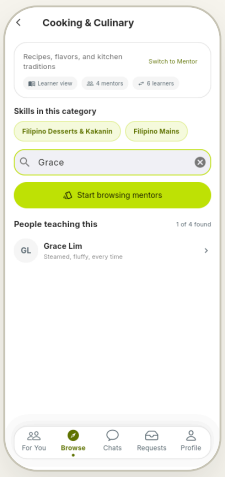

Search in category
People can be narrowed without losing the category.

Files and contracts
lib/screen/explore_page.dart · lib/screen/explore_category_page.dart · lib/screen/explore_expand.dart · lib/services/match_api.dart · supabase/migrations/20261025000200_browse_skill_context.sql

Case close
Functional · Quality · Regression

CASE 03 · DECISION CONTEXT

Category card context

Commit **7784152** · DONE · 3 / 3 audits passed

- FUNCTIONALITY PASS
- QUALITY PASS
- REGRESSION PASS
- NO NEW TAB

THE PROBLEM

The category deck was thinner than For You. It showed name, avatar and note only, so schedule, language, learning style and category skill context were missing. Negative placeholders and a fake 0% match made the card less trustworthy.

TARGET EXPERIENCE

A category card is context-rich but honest: show the category skill and profile facts; if compatibility is not calculated in Browse, do not pretend to have a score.

WHAT SHIPPED


1. **Extended the browse contract** The browse RPC now returns availability, languages, learning styles, role and the category skill name with each person.
2. **Rendered real decision context** Category cards show the skill being taught or learned, schedule, language and learning style, plus a profile action.
3. **Removed negative placeholders** No “No learning styles set” copy and no fake 0% compatibility score in Browse.
4. **Kept layout stable** The card holds its hierarchy at 360, 390 and 1440 and uses the same action language as For You.

ACCEPTANCE CRITERIA

- ✓ Profile access from category cards
- ✓ No negative placeholders
- ✓ Schedule, language and style when available
- ✓ No fake 0% match
- ✓ Stable at 360 / 390 / 1440
- ✓ Same interaction language as For You



Category deck card
Skill, schedule, language and style on one card.

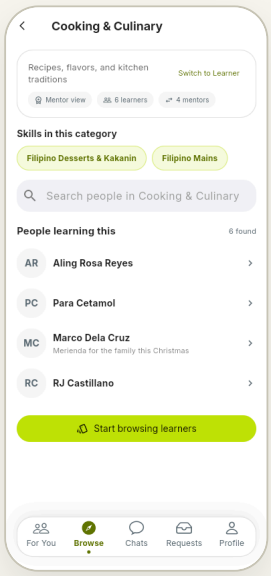

Category context
The same category before the deck: counts, child skills and role switch.

Files and contracts
lib/screen/card/person_card.dart · lib/screen/explore_expand.dart · lib/services/match_api.dart · supabase/migrations/20261025000200_browse_skill_context.sql

Case close
Functional · Quality · Regression

CASE 04 · PROFILE EDITING

Edit Profile structure and role safety

Commit **903634f** · DONE · 3 / 3 audits passed

FUNCTIONALITY PASS · QUALITY PASS · REGRESSION PASS · NO NEW TAB

THE PROBLEM

Edit Profile was one undifferentiated scroll containing photos, bio, preferences, role, skills, notes and attachments. Changing role could silently delete hidden skills, empty photo slots were white in dark mode, the discard dialog said “OK”, and Showcase was promised without a destination.

TARGET EXPERIENCE


A user can scan sections, understand what each group changes, and switch role without losing data accidentally.

WHAT SHIPPED


1. **Sectioned the editor** Photos, About you, Role, Skills and Showcase now have visible labels and a stable top bar.
2. **Made role changes non-destructive** Role changes hide skills instead of deleting them; the explainer says so explicitly and supports Learner, Mentor and Both.
3. **Gave Showcase a destination** “Manage teaching showcase” connects the promise to the existing proof-attachment flow; a public preview is available.
4. **Polished the edges** Themed empty photo slots, “Discard” / “Keep editing”, Save disabled when clean, and stable 360/390/1440 layouts.

ACCEPTANCE CRITERIA

- ✓ Sections: Photos, About, Role, Skills, Showcase
- ✓ Main photo labelled
- ✓ Role change preserves hidden skills
- ✓ Empty photo slots use theme surfaces
- ✓ Discard dialog uses Discard / Keep editing
- ✓ Save disabled when clean
- ✓ Showcase has a real destination
- ✓ Public preview available

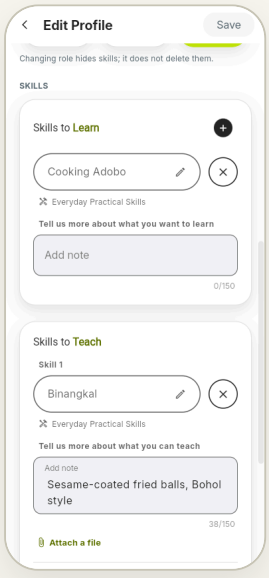

Role and skills
Non-destructive role explanation and skill preservation.

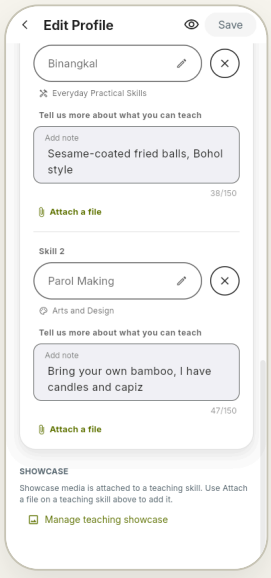

Skills and Showcase
Showcase is attached to a teaching skill, not a promise.

Files and contracts
lib/screen/profile_edit.dart · lib/onboarding/widgets/role_card_group.dart · lib/screen/card/skills_card.dart · lib/widgets/top_labeled_field.dart · test/profile_edit_test.dart

Case close
Functional · Quality · Regression

CASE 05 · THEME CONTRAST

Dark-mode edges

Commit **1f773df** · DONE · 3 / 3 audits passed

- FUNCTIONALITY PASS
- QUALITY PASS
- REGRESSION PASS
- NO NEW TAB

THE PROBLEM

Two dark-mode surfaces failed: onboarding's inactive pagination dots were charcoal on charcoal, and Edit Profile's empty photo slots were hard-coded white. Both looked like broken states rather than intentional surfaces.

TARGET EXPERIENCE


Both surfaces use the same semantic surface, muted and accent roles as the rest of the dark theme.

WHAT SHIPPED

1. **Fixed pagination dots** Inactive dots now use the semantic muted-text role and remain visible at 390 and 360.
2. **Themed photo slots** Empty photo slots use the dark surface and border tokens; light mode stays unchanged.
3. **Added contrast coverage** Theme contrast tests cover non-text UI at ≥3:1 and text at ≥4.5:1.
4. **Removed raw placeholders** No raw white or charcoal placeholders remain on these dark surfaces.

ACCEPTANCE CRITERIA

- ✓ Inactive dots visible in dark at 390 and 360
- ✓ Empty photo slots use dark surface
- ✓ Light mode unchanged
- ✓ Contrast ≥3:1 non-text and ≥4.5:1 text
- ✓ No raw white/charcoal placeholders in dark

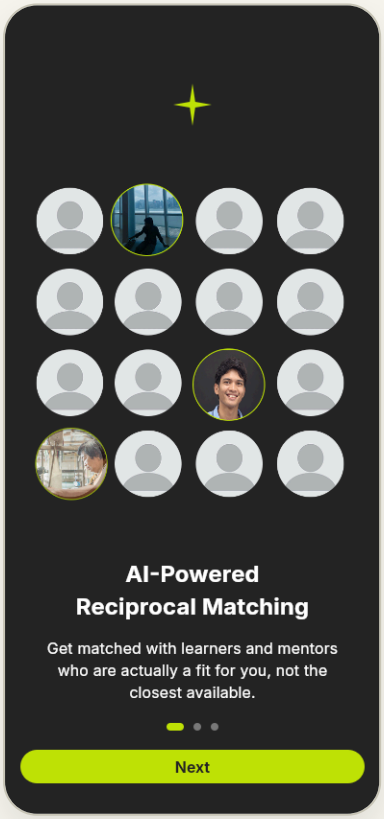

Onboarding, dark
Inactive dots are visible against the charcoal surface.

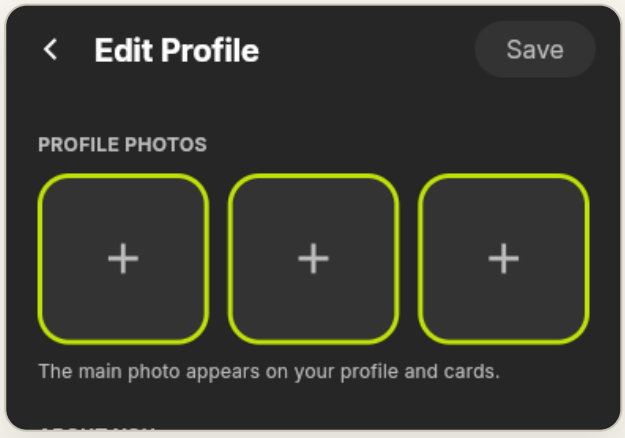


Photo slots, dark
Themed empty slots replace hard-coded white.

Files and contracts
lib/onboarding_intro.dart · test/onboarding_dark_test.dart · test/profile_edit_test.dart · test/theme_contrast_test.dart

Case close
Functional · Quality · Regression

CASE 06 · NOTIFICATIONS

Activity destination

Commit **c4acdb6** · DONE · 3 / 3 audits passed

FUNCTIONALITY PASS · QUALITY PASS · REGRESSION PASS · NO NEW TAB

THE PROBLEM

Activity ignored the notification payload. Rows did not name the person or skill, had no per-item action, and the badge was marked read before the list successfully loaded. Deleted requests and chats could become dead ends.

TARGET EXPERIENCE


Activity is a usable inbox: specific, actionable and honest about read state.

WHAT SHIPPED


1. **Resolved notification context** A presentation helper turns actor, skill, request and chat payloads into specific copy with a safe generic fallback.
2. **Made rows actionable** Each row routes to the request, chat or Activity detail that its payload describes, with a friendly fallback when the destination is gone.
3. **Added per-item read** A SECURITY DEFINER RPC marks one notification read. A failed load no longer clears unread state.
4. **Covered the states** Skeletons, empty and error states are present in light and dark, with explicit read behaviour.

ACCEPTANCE CRITERIA

- ✓ Rows name actor and context
- ✓ Rows route correctly
- ✓ Failed load keeps unread state
- ✓ Per-item or explicit read
- ✓ Loading, empty and error states
- ✓ No dead-end deleted request/chat

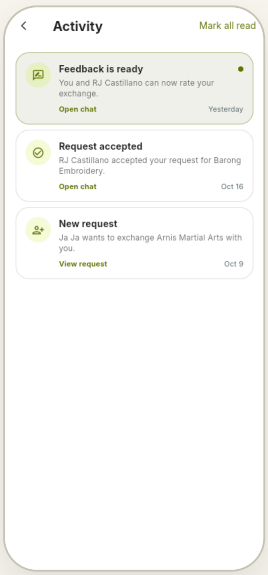

Activity, light
Actor, skill and destination in every row.

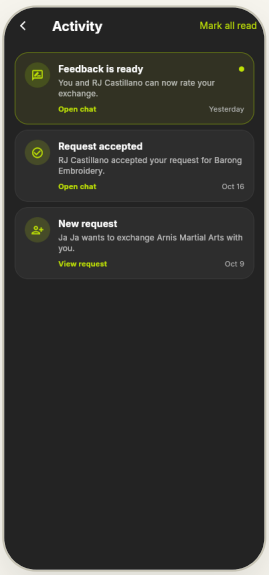

Activity, dark
The same hierarchy and read state in dark mode.

Files and contracts
lib/screen/activity_presentation.dart · lib/screen/notifications_page.dart · lib/screen/request_page.dart · lib/services/match_api.dart · supabase/migrations/20261026000100_mark_notification_read.sql

Case close
Functional · Quality · Regression

CASE 07 · MESSAGING STATE

Chat state model

Commit **28ec5ba** · DONE · 3 / 3 audits passed

FUNCTIONALITY PASS · QUALITY PASS · REGRESSION PASS · NO NEW TAB

THE PROBLEM

Chat looked warm, but its state model was thin. Unread was coupled to notification preference, sends had no optimistic state, failures could not be retried, the feedback banner took permanent space, and the Pals strip repeated the message list.

TARGET EXPERIENCE


Unread is data. Badge visibility is a preference. Sending is immediate and recoverable.

WHAT SHIPPED


1. **Separated unread from preference** Unread is derived from message data; turning notifications off no longer changes the unread filter or badge semantics.
2. **Made sending optimistic** A message bubble appears immediately, with pending and failed states; failed messages retry without duplicating the send.
3. **Contained feedback** The feedback prompt is a dismissible one-time strip rather than a permanent block above a new chat.
4. **Clarified Pals vs Messages** The quick-access Pals strip is visually distinct from message threads; realtime stream and read-on-open behaviour remain intact.

ACCEPTANCE CRITERIA

- ✓ Notification preference does not change unread
- ✓ Send shows immediate bubble
- ✓ Failed messages retry
- ✓ Mute/archive/mark unread deferred explicitly
- ✓ Feedback does not crowd new chat
- ✓ Pals strip differs from Messages
- ✓ Realtime stream and send preserved

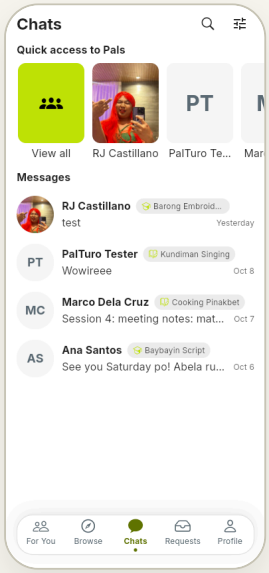

Chats
Messages and the Pals strip have distinct jobs.

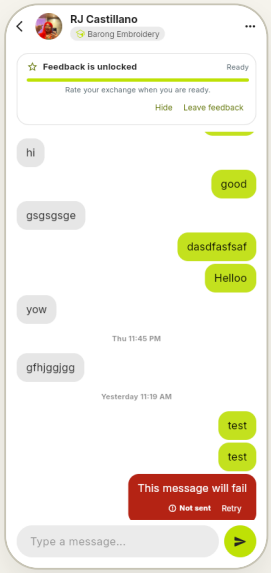

Failed send
Immediate bubble, failed state and retry affordance.

Files and contracts
lib/screen/chats_room.dart · lib/screen/chats_page.dart · lib/screen/chat_pending_message.dart · lib/screen/utils/chat_unread.dart · test/chat_pending_message_test.dart · test/chat_unread_test.dart

Case close
Functional · Quality · Regression

CASE 08 · CONNECTION SOURCE

Pals integrity

Commit **a961935** · DONE · 3 / 3 audits passed

- FUNCTIONALITY PASS
- QUALITY PASS
- REGRESSION PASS
- NO NEW TAB

THE PROBLEM

Pals counts were loaded once and could go stale after unmatch or block. Chats, Pals and Profile used different sources. The singular grammar was wrong and the alphabet index targets were too small.

TARGET EXPERIENCE


One accepted-connection source; every surface agrees.

WHAT SHIPPED


1. **Unified the source** Chats, Pals and Profile now read one accepted-connection source, with a shared count helper and consistent refresh.
2. **Propagated block and unmatch** The live block RPC removes an accepted connection server-side, so all three surfaces converge instead of preserving a ghost Pal.
3. **Fixed grammar and targets** “1 pal” is correct; the alphabet index has a larger target and a screen-reader-friendly label at 360.
4. **Added real empty states** Empty and filtered-empty states include actions instead of a blank list.

ACCEPTANCE CRITERIA


- ✓ Profile count updates after unmatch/block
- ✓ Count and list agree across surfaces
- ✓ “1 pal” is correct
- ✓ Alphabet usable at 360 with screen reader
- ✓ Empty and filtered-empty states have actions




Pals
Accepted-connection list and count.



Pals at 360
Alphabet and row targets hold at the compact width.



Filtered empty
A clear next action instead of a blank result.



Profile count
The same source reflected in Profile.

Files and contracts
lib/screen/matches.dart · lib/screen/profile_page.dart · lib/services/chat_state_service.dart · lib/screen/utils/pals_count.dart · supabase/migrations/20261026000200_block_removes_accepted.sql · test/pals_count_test.dart

Case close
Functional · Quality · Regression

CASE 09 · SOCIAL PAYOFF

Requests after accept

Commit **36c8e3b** · DONE · 3 / 3 audits passed

● FUNCTIONALITY PASS ● QUALITY PASS ● REGRESSION PASS ● NO NEW TAB

THE PROBLEM

Accepting a request removed it without a clear “now Pals” moment. Decline had no confirmation, Sent had no filters or accepted history, and copy said “Like back” for an action labelled Accept.

TARGET EXPERIENCE


Acceptance feels like a match. Sent is a usable status list. Decline is deliberate.

WHAT SHIPPED


1. **Added a match moment** Accept opens a confirmation sheet naming the new Pal and offering “Say hello”; the request is removed only after success.
2. **Made decline deliberate** Decline asks for confirmation and keeps the request intact if the user backs out.
3. **Made Sent usable** Status and date filters separate pending, accepted, declined and history without losing the list context.
4. **Aligned copy with action** “Like back” is gone; accept, decline and sent labels match what the controls actually do.

ACCEPTANCE CRITERIA


- ✓ Accept shows match confirmation with Say hello
- ✓ Request removed only after success
- ✓ Decline confirmed or undoable
- ✓ Sent has status/date filters
- ✓ Accepted history visible or explicitly excluded
- ✓ Copy matches action




Incoming
Request context and the accept/decline choice.



Sent
Status and date filters over the sent list.



Match moment
Acceptance names the new Pal and offers Say hello.



Decline
A deliberate confirmation before the request is removed.

Files and contracts
lib/screen/request_page.dart · lib/screen/request_match_sheet.dart · lib/screen/card/request_card.dart · lib/screen/utils/filter_bottom_sheet.dart · test/request_match_sheet_test.dart

Case close
Functional · Quality · Regression

CASE 10 · PROGRESS SAFETY

Onboarding durability

Commit **d3d8bdb** · DONE · 3 / 3 audits passed

FUNCTIONALITY PASS · QUALITY PASS · REGRESSION PASS · NO NEW TAB

THE PROBLEM

Onboarding had a strong visual sequence but no draft persistence, step labels, review screen or clear skip consequence. Role and chip selections were not announced, and inactive dark pagination dots were invisible.

TARGET EXPERIENCE


A user can leave and return without losing progress, understand where they are, and review before the profile is saved.

WHAT SHIPPED


1. **Persisted the draft** Onboarding answers survive app restart and restore into the correct step.
2. **Added orientation** Step labels and a current/total indicator make the sequence legible without counting dots.
3. **Added review and skip** A review screen summarises the profile before save; skip explains the consequence and asks before discarding.
4. **Completed the semantics** Role and chips announce selection, dark dots are visible, and Profile offers Continue setup without changing the save path.

ACCEPTANCE CRITERIA


- ✓ Draft survives app restart
- ✓ Step labels exist
- ✓ Review screen exists
- ✓ Skip explains consequences
- ✓ Role and chips announce selection
- ✓ Dark dots visible
- ✓ Existing save path unchanged




Role
Learner, Mentor and Both are labelled and selectable.



Review
A summary before the profile is saved.



Skip
The consequence is stated before leaving.



Continue setup
A return path from Profile without changing save.

Files and contracts
lib/onboarding/onboarding_controller.dart · lib/onboarding/onboarding_flow.dart · lib/onboarding/screens/onboarding_review_screen.dart · lib/onboarding/widgets/chip_selector.dart · lib/screen/profile_page.dart

Case close
Functional · Quality · Regression

CASE 11 · LABEL TRUTH

Copy and routing clarity

Commit **0a170d7** · DONE · 3 / 3 audits passed

FUNCTIONALITY PASS · QUALITY PASS · REGRESSION PASS · NO NEW TAB

THE PROBLEM

Several visible controls did not match their destination or meaning: an “All” role filter that only returned one role, a text-only Settings link, inconsistent request labels, “Like back” for Accept, and a support line with no route.

TARGET EXPERIENCE


Every label describes the action it performs, and every empty-state link reaches the destination it names.

WHAT SHIPPED


1. **Made the role filter truthful** “All roles” now merges learner and mentor decks, with role-specific labels where the filter is narrower.
2. **Connected the empty state** The incomplete-profile link is a 44px, single-purpose route to Settings.
3. **Standardised the verbs** “Send request” is consistent across decks; “Like back” is removed; singular/plural count copy is fixed.
4. **Added the support route** Delete-account support copy opens a real Support page; discard dialogs use explicit action labels.

ACCEPTANCE CRITERIA


- ✓ No “All” unless it returns all roles
- ✓ Empty-state link reaches its destination
- ✓ Add/Connect/Send request consistent
- ✓ “Like back” removed
- ✓ Count grammar fixed
- ✓ Discard dialog explicit
- ✓ Delete support copy has a real route




For You
One consistent request action across card decks.



All roles
The label now returns the full role set.



Support
The support route named by delete-account copy.



Delete account
Support copy points to a real destination.

Files and contracts
lib/screen/home_page.dart · lib/screen/utils/filter_bottom_sheet.dart · lib/widgets/profile_update_link.dart · lib/screen/account/support_page.dart · lib/screen/account/delete_account_page.dart

Case close
Functional · Quality · Regression

CASE 12 · SURFACE PARITY

System consistency

Commit **617b4b1** · DONE · 3 / 3 audits passed

FUNCTIONALITY PASS · QUALITY PASS · REGRESSION PASS · NO NEW TAB

THE PROBLEM

Most routes were coherent, but Matches, Blocked Users, Notifications, ChatRoom and AuthGate still used centred spinners while the main tabs used skeletons. Subpage titles had three scales, Matches had a bespoke filter sheet, and error copy blamed the connection for every failure.

TARGET EXPERIENCE


Data-heavy routes share one loading language, one title scale, one filter component and honest error copy.

WHAT SHIPPED


1. **Unified loading** Data-heavy routes now use skeletons, with no layout jump when content arrives.
2. **Unified chrome** Subpage titles share one scale and back controls keep consistent glyphs and 44px targets.
3. **Shared the filter** Matches now uses the same FilterBottomSheet as Home, Chats and Requests.
4. **Made errors honest** A friendly-error helper distinguishes connection, validation and server failures; dialogs use the shared style.

ACCEPTANCE CRITERIA

- ✓ Data-heavy routes use skeletons
- ✓ Subpage titles share one scale
- ✓ Matches uses the shared filter
- ✓ Errors distinguish connection/validation/server
- ✓ Back buttons are 44px and consistent
- ✓ No layout jump on load

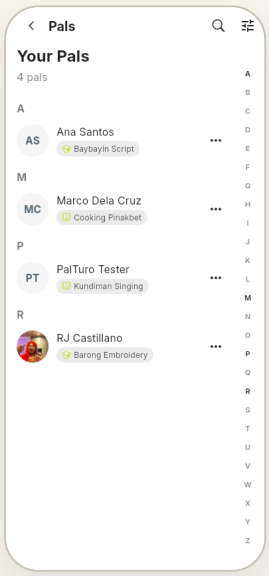

Shared chrome
Pals uses the same title and back language as the rest of the shell.

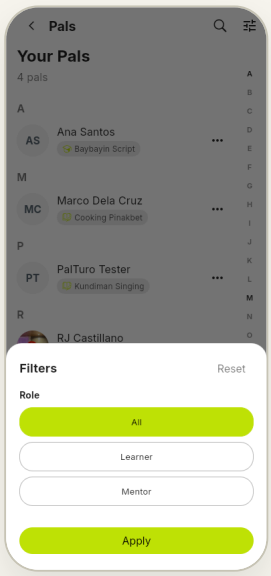

Shared filter
The shared FilterBottomSheet replaces the bespoke Matches sheet.

Files and contracts
lib/screen/matches.dart · lib/widgets/app_skeleton.dart · lib/utils/friendly_error.dart · lib/screen/notifications_page.dart · lib/screen/block_list.dart · test/friendly_error_test.dart · test/system_consistency_test.dart

Case close
Functional · Quality · Regression

CASE 13 · REVERSIBILITY

Feedback survey navigation

Commit **3dbd18a** · DONE · 3 / 3 audits passed

FUNCTIONALITY PASS · QUALITY PASS · REGRESSION PASS · NO NEW TAB

13

THE PROBLEM

The 11-statement survey plus comment step only moved forward. Users could not revise an answer or prefer not to answer, and closing the dialog lost all progress with no warning.

TARGET EXPERIENCE


A user can move back, skip a statement honestly, and leave only after a deliberate discard.

WHAT SHIPPED


1. **Made the survey reversible** Back preserves previous answers; current step and total are always visible; Prefer not to answer is an explicit choice.
2. **Protected progress** Closing asks “Discard feedback?” and stays open on Keep writing; the barrier is not dismissible.
3. **Made it keyboard-safe** Scroll padding and a focus-aware comment field keep actions above the keyboard; iOS and Android both support Back.
4. **Kept the payload stable** Submit still writes one payload regardless of navigation.

ACCEPTANCE CRITERIA


- ✓ Back works and preserves answers
- ✓ Current step and total shown
- ✓ Cancel confirms loss
- ✓ Submit writes one payload
- ✓ iOS and Android support Back
- ✓ Keyboard does not hide actions

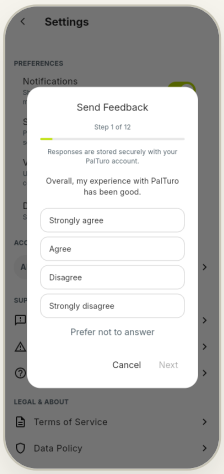

Survey, step 1
Current step, total and an explicit opt-out.

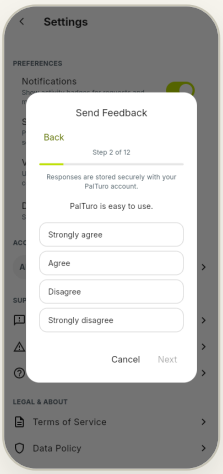

Survey, step 2
Back preserves the previous answer.

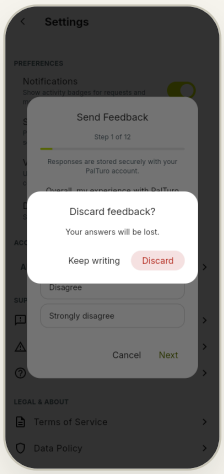

Discard guard
Leaving requires a deliberate discard.

Files and contracts
lib/screen/settings.dart · lib/screen/action_dialogs.dart · test/settings_survey_test.dart

Case close
Functional · Quality · Regression

CASE 14 · ACCESS & SCALE

Auth and accessibility polish

Commit **41f5e98** · DONE · 3 / 3 audits passed

FUNCTIONALITY PASS · QUALITY PASS · REGRESSION PASS · NO NEW TAB

THE PROBLEM

Auth flows worked, but small targets and semantics remained: login had no inline validation before the service call, Forgot Password was text-only, legal links were 12pt spans, onboarding Back was 18px, role/chips did not announce selection, and 200% text was untested behind the floating nav.

TARGET EXPERIENCE


Auth and onboarding are as accessible as the main shell, and core surfaces survive 200% text without hiding actions.

WHAT SHIPPED

1. **Validated before the network** Login shows inline errors, supports autofill hints and gives Forgot Password a 44px target.
2. **Enlarged legal and back targets** Registration legal links and onboarding Back controls are 44px and semantic.
3. **Announced selection** Role cards and chips expose selected state; navigation labels remain complete in semantics.
4. **Protected 200% text** Cards, Settings, chat header, edit and navigation were tested at 200%; labels scale or the nav grows rather than disappearing, and content clears the floating nav.

ACCEPTANCE CRITERIA

- ✓ Empty login shows inline validation
- ✓ Forgot link is 44px
- ✓ Legal links are 44px
- ✓ Onboarding Back target 44px
- ✓ Role and chips announce selected
- ✓ 200% passes card/settings/chat/edit
- ✓ No content hidden behind nav

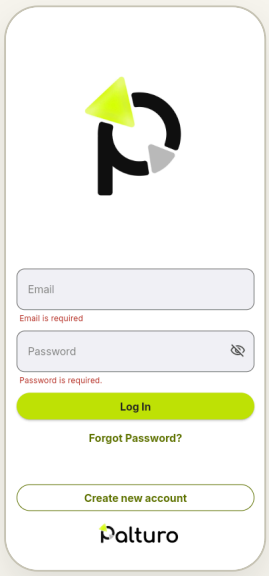

Login validation
Inline errors appear before the service call.



Registration
Legal links are real 44px controls.

Files and contracts
lib/authentication/login.dart · lib/authentication/register.dart · lib/screen/navigation_bar.dart · lib/screen/card/person_card.dart · test/auth_accessibility_test.dart · test/onboarding_semantics_test.dart

Case close
Functional · Quality · Regression

CROSS-CUTTING VERIFICATION

Access is part of the definition of done.

Not a final pass.
A constraint on every case.

The v2 work raised the floor for touch, semantics and scale: 44px controls, explicit selected state, complete labels and 200% text checks on the surfaces users touch most.

44px	200%	3:1	4.5:1
MINIMUM CORE TARGET	TEXT COVERAGE	NON-TEXT CONTRAST	TEXT CONTRAST

SURFACE	ACCESSIBILITY CHANGE	EVIDENCE
Auth	Inline validation before the service call; autofill hints; 44px Forgot and legal links.	PASS
Onboarding	Selected state on role cards and chips; 44px Back; dark dots; full labels in semantics.	PASS
Cards	Actions survive 200% text; semantics do not depend on colour alone; no clipped labels.	PASS
Chat	Header, composer and retry remain reachable at 200%; menu target enlarged to 44px.	PASS
Settings	Rows remain tappable; section headings exposed; destructive action visually separated.	PASS
Navigation	Nav grows rather than dropping labels; 200% content clears the floating bar.	PASS

WHAT WAS ACTUALLY FIXED

- Text-only Settings and Forgot Password controls became full row/button targets.
- Registration legal spans became semantic 44px links.
- Role and chip selection is announced, not inferred from colour.
- Nav labels stay complete in semantics when visual space is tight.

WHAT IS NOT CLAIMED

Automated semantics and 200% tests are not a substitute for a full VoiceOver/TalkBack walkthrough on physical devices. That manual device pass remains a recommended release activity; no blocking UI defect was found in the audited surfaces.

Large-text rule used in v2: preserve the full label in semantics, let the nav grow vertically, and never let content sit behind the floating bar. Where 200% would force destructive truncation, the control grows or the content scrolls instead of hiding the action.

CONTRACTS THAT MAKE THE UI TRUE

Three live migrations behind the interface.

Versioned in the repo.
Applied to the live project.

The v2 interface is not a client-only polish. Three server contracts close gaps that could otherwise make Browse, Activity or Pals lie to the user.

MIGRATION	WHY IT EXISTS	CONTRACT
`20261025000200 browse_skill_context.sql`	Browse cards need the same decision context as For You instead of rebuilding profile facts on the client.	**browse_skill_users()** adds availability, languages, learning styles and skill name.
`20261026000100 mark_notification_read.sql`	Notification tables are not writable by authenticated clients after the grant lockdown.	**mark_notification_read(id)** SECURITY DEFINER, scoped to the caller.
`20261026000200 block_removes_accepted.sql`	Blocking promises removal from Pals. Pending requests were already declined; accepted connections were not.	**block_user(target)** declines pending and deletes accepted.

INTEGRITY PATH

BLOCK → PENDING DECLINED →
ACCEPTED DELETED → ● ALL SURFACES REFRESH

This is the difference between a UI that hides a ghost Pal and a system that no longer has one. Chats, Pals and Profile read the same accepted-connection source.

SERVICE LAYER

match_api	browse context + notification read
chat_state_service	accepted-connection consistency
activity_presentation	payload → destination
pals_count	shared singular/plural result

Live state: all three migrations were applied to the live Supabase project during implementation and are committed under `supabase/migrations/`. Any environment promotion must run them through the normal migration process.

WHY SERVER-SIDE

Security boundaries stay server-side

Notification writes and block propagation run through scoped SECURITY DEFINER functions, not client-side table access.

WHY ONE SOURCE

No surface can invent a Pal

Accepted connections are removed once, at the database, so Chats, Pals and Profile cannot disagree after a block.

WHAT WAS VERIFIED

Contracts match the UI

The browse card contract supplies the fields the card renders; the activity read call changes one row at a time; block removes accepted history.

FINAL VERIFICATION

72 tests passing. Zero skipped.

Analyzer clean.
Release web build current.

72/72	0	0	26
TESTS	FAILURES	SKIPPED	TEST FILES

TEST INVENTORY

activity_presentation_test.dart	4	app_skeleton_test.dart	1
auth_accessibility_test.dart	6	chat_pending_message_test.dart	2
chat_time_formatter_test.dart	4	chat_unread_test.dart	2
friendly_error_test.dart	1	onboarding_dark_test.dart	2
onboarding_draft_test.dart	1	onboarding_review_test.dart	2
onboarding_semantics_test.dart	2	pals_count_test.dart	1
person_card_skeleton_test.dart	1	person_card_test.dart	6
profile_completion_test.dart	1	profile_edit_test.dart	5
profile_update_link_test.dart	1	request_date_test.dart	4
request_match_sheet_test.dart	1	responsive_shell_test.dart	3
settings_survey_test.dart	3	skills_readonly_test.dart	1
support_page_test.dart	1	system_consistency_test.dart	1
theme_contrast_test.dart	12	validators_test.dart	4

Includes pre-existing coverage; v2 added tests for the changed state, semantics and edge paths.

FINAL GATES

flutter analyze --no-pub	clean
flutter test --no-pub	72 / 72
flutter build web --release	current
git status	clean

COVERAGE SHAPE

Behavior tests are concentrated where the UI can silently lie: unread state, pending sends, accepted-connection counts, draft restore, inline auth validation, survey reversibility, friendly errors and contrast.

Gate: no case was closed on tests alone. Each also passed a functional, quality and regression audit against the running build.

STATE INTEGRITY

Unread · pending · drafts

Chat unread, optimistic sends, onboarding drafts and request acceptance each have a failure-path test.

SEMANTICS

Selected · labelled · sized

Auth, onboarding and navigation tests assert labels, selected state and 44px reachability.

RESILIENCE

Errors · skeletons · shell

Friendly errors, skeletons and the responsive shell are checked as system behavior, not screenshots.

CONTRAST

Dark edges measured

Twelve theme-contrast tests guard the surfaces that failed the dark-mode audit.

EXPLICIT BOUNDARIES

What remains open — and why it is not a blocker.

Documented, owned, outside the accepted scope.

ITEM	CURRENT STATE	SEVERITY	HANDLING
Mute / archive / mark unread	Explicitly deferred by Case 07; unread and retry are implemented.	Low	Product follow-up; no false affordance shipped.
Active-session enumeration	Account & Security presents the row; real device enumeration is not implemented.	Low	Keep the supported explanation; do not show fake counts.
Manual screen-reader QA	Semantics tests and 200% coverage pass; no physical VoiceOver/TalkBack walkthrough in this gate.	Medium	Run on device before public release.
Desktop re-layout	1440 remains a centered 480px shell, not a desktop information architecture.	Low	Intentional product decision; documented.
Live migration promotion	Three migrations are applied to the live project and versioned.	Medium	Promote through normal environment process; do not drift.
Manual device / provider edges	Auth email delivery and provider configuration are outside the UI audit.	Low	Operational checklist, not a UI defect.

DEFERRED, NOT HIDDEN

Chat power tools

Mute, archive and mark unread remain a future feature. Case 07 required them to exist or be explicitly deferred; the UI does not pretend they exist.

DELIBERATE CONSTRAINT

Mobile-first shell

The five-tab product stays a centered mobile surface on wide screens. A desktop layout would be a new design program, not polish.

RELEASE ACTIVITY

Device accessibility pass

Automated semantics are strong, but a physical screen-reader walkthrough is still the responsible final check.

Release hold: none. The items above are either explicitly deferred, operational, or a recommended manual QA step — not an unresolved finding inside any of the 14 accepted cases.

01

Ship the audited build

Promote the three migrations, publish the current web build and keep the five-tab shell unchanged.

02

Run device accessibility

Complete one physical VoiceOver and TalkBack pass on auth, onboarding, cards and the floating nav.

03

Plan chat power tools

Mute, archive and mark unread stay explicitly deferred until the next chat state iteration.

FINAL POSITION

Accepted for release.

14 cases. 42 gates.
One clean tree.

14 / 14

cases complete and verified

Every v2 case has a functioning implementation, a quality pass, a regression pass, a commit, and a closed acceptance checklist. The release build is current and the working tree is clean.

BRANCH	**ui-features @ 93b1c10**
CASES	**14 / 14 PASS**
CHECKLIST	**101 / 101 complete**
TESTS	**72 / 72 passing**
ANALYZER	**clean**
WEB BUILD	**current**
BLOCKERS	**0**

WHAT ACCEPTANCE MEANS

- ✓ All acceptance criteria are met in the running build.
- ✓ Dark, empty, loading, error and 200% states were reviewed where applicable.
- ✓ Touch targets, semantics and copy match the shipped action.
- ✓ No dead ends, no false success, no new top-level tab.
- ✓ Blocking findings were fixed and re-audited; none remain.

The product now behaves as one system, not fourteen patches.

Acceptance is based on the case gates, the final automated suite, the release build and the evidence in this report. Deferred product work is listed on page 24.

PRODUCT / DESIGN ACCEPTANCE

ENGINEERING VERIFICATION · 26 OCTOBER 2026

TRACEABILITY

Commit ledger

One code commit per case, plus the final a11y and docs close.

CASE	COMMIT	MESSAGE
CASE 01	`bd68b75`	feat(settings): add dedicated account and security surface
CASE 02	`f06b544`	feat(browse): add category detail and taxonomy depth
CASE 03	`7784152`	feat(browse): enrich category cards and filter visibility
CASE 04	`903634f`	feat(profile): restructure editor and protect role skills
CASE 05	`1f773df`	fix(theme): make dark onboarding and photo edges legible
CASE 06	`c4acdb6`	feat(activity): make notifications actionable and per-item read
CASE 07	`28ec5ba`	feat(chat): add optimistic sending and unread data model
CASE 08	`a961935`	feat(pals): unify counts and harden block/alphabet states
CASE 09	`36c8e3b`	feat(requests): add match payoff and sent filters
CASE 10	`d3d8bdb`	feat(onboarding): persist drafts and add review step
CASE 11	`0a170d7`	fix(copy): align labels with destinations and add support route
CASE 12	`617b4b1`	refactor(ui): unify loading, errors, and subpage chrome
CASE 13	`3dbd18a`	feat(feedback): make survey reversible and keyboard-safe
CASE 14	`41f5e98`	fix(a11y): validate auth inline and protect 200% layouts
POST	`9504570`	fix(chat): enlarge overflow menu target
DOCS	`540b90a`	docs: close audit checklist and refresh verification
DOCS	`93b1c10`	docs: correct final verification date

BRANCH STATE

ui-features at `93b1c10`. Working tree clean. Release web build current.

DEPLOYMENT NOTE

The three migrations listed on page 22 are part of the same delivery, applied to the live Supabase project and tracked in source.

VISUAL EVIDENCE INDEX

Captured from the build

40 screenshots used across the case pages.

Screenshots are representative captures from the implementation build at 360, 390 or 1440. Demo profiles are fictional. Dark-mode captures are included where the case changes a dark surface; the 1440 capture documents the centered shell.

Case 01 · Settings root
`v2-settings-light-final.png`

Case 01 · Account & Security
`v2-account-light-final.png`

Case 01 · Session control
`v2-logout-final.png`

Case 02 · Browse root
`v2-browse-root-after-role-final.png`

Case 02 · Category detail
`v2-browse-category-final5-390.png`

Case 02 · Search in category
`v2-browse-search-final-390.png`

Case 03 · Category deck card
`v2-category-deck-final2-390.png`

Case 03 · Category context
`v2-browse-category-final2-mentor.png`

Case 04 · Role and skills
`v2-edit-role-light.png`

Case 04 · Skills and Showcase
`v2-edit-showcase-light.png`

Case 05 · Onboarding, dark
`v2-onboarding-dark-final2.png`

Case 05 · Photo slots, dark
`case05-photo-slots-dark.png`

Case 06 · Activity, light
`v2-activity-light-final.png`

Case 06 · Activity, dark
`v2-activity-dark-final.png`

Case 07 · Chats
`v2-chats-light.png`

Case 07 · Failed send
`v2-chat-light-failed.png`

Case 08 · Pals
`v2-pals-light-final.png`

Case 08 · Pals at 360
`v2-pals-360-final.png`

Case 08 · Filtered empty
`v2-pals-filtered-empty.png`

Case 08 · Profile count
`v2-profile-count-final.png`

Case 09 · Incoming
`v2-requests-incoming-final-light.png`

Case 09 · Sent
`v2-requests-sent-final-light.png`

Case 09 · Match moment
`v2-request-match-final-light.png`

Case 09 · Decline
`v2-request-decline-final-light.png`

Case 10 · Role
`v2-onboarding-role-both-final-light.png`

Case 10 · Review
`v2-onboarding-review-final-light.png`

Case 10 · Skip
`v2-onboarding-skip-final-final-light.png`

Case 10 · Continue setup
`v2-profile-continue-setup.png`

Case 11 · For You
`v2-for-you-final2.png`

Case 11 · All roles
`v2-for-you-filter-final2.png`

Case 11 · Support
`v2-support-page-light.png`

Case 11 · Delete account
`v2-delete-support-light.png`

Case 12 · Shared chrome
`v2-pals-consistent.png`

Case 12 · Shared filter
`v2-pals-shared-filter.png`

Case 13 · Survey, step 1
`v2-survey-optout-step1.png`

Case 13 · Survey, step 2
`v2-survey-current-step2.png`

Case 13 · Discard guard
`v2-survey-current-cancel.png`

Case 14 · Login validation
`v2-login-errors.png`

Case 14 · Registration
`v2-register-legal.png`

Case 06 · 1440 shell
`v2-shell-1440-final.png`

Traceability: the acceptance checklist and per-case audit notes live in `UI-AUDIT-V2-ACTIONS.md`; the commit ledger on page 26 maps each case to its code change.

WHERE THE WORK LIVES

File map

Primary source surfaces behind the 14 cases.

AREA	FILES
Settings & account	`settings.dart` · `account/account_settings_page.dart` · `account/privacy_page.dart` · `account/delete_account_page.dart` · `account/support_page.dart`
Browse	`explore_page.dart` · `explore_category_page.dart` · `explore_expand.dart` · `card/person_card.dart` · `services/match_api.dart`
Profile & onboarding	`profile_page.dart` · `profile_edit.dart` · `card/skills_card.dart` · `onboarding/onboarding_flow.dart` · `onboarding controller` · `onboarding review_screen.dart`
Activity & chat	`notifications_page.dart` · `activity_presentation.dart` · `chats_page.dart` · `chats_room.dart` · `chat_pending_message.dart` · `chat_unread.dart`
Pals & requests	`matches.dart` · `profile_page.dart` · `request_page.dart` · `request_match_sheet.dart` · `card/request_card.dart` · `utils/filter_bottom_sheet.dart`
System & auth	`navigation_bar.dart` · `app_skeleton.dart` · `friendly_error.dart` · `authentication/login.dart` · `authentication/register.dart`
Data contracts	`browse_skill_context.sql` · `mark_notification_read.sql` · `block_removes_accepted.sql`

TEST SURFACE

26 files in `test/`; 72 tests. The suite covers behavior, semantics, contrast, responsive shell and the v2 edge paths.

DOCUMENT SURFACE

`UI-AUDIT-V2-ACTIONS.md` is the source of truth for case status, audits and acceptance. This report is the presentation layer over that record.

PRIMARY USER PATHS INTRODUCED OR REPAIRED

SURFACE	PATH	OUTCOME
Settings	Settings → Account & Security → Privacy / Delete / Support	one destination per row
Browse	Browse root → Category detail → Search / Child skill / Deck	context before people
Requests	Requests → Incoming / Sent → Match or Decline	deliberate social payoff
Profile	Profile → Edit → Role / Skills / Showcase / Preview	non-destructive editing
Chats	Chats → Pals quick access / Thread → Retry failed send	recoverable messaging state

Palturo

END OF REPORT

One system.
Fourteen closes.

UI & Feature Audit v2 · Implementation & Verification

ui-features @ 93b1c10 · 26 October 2026