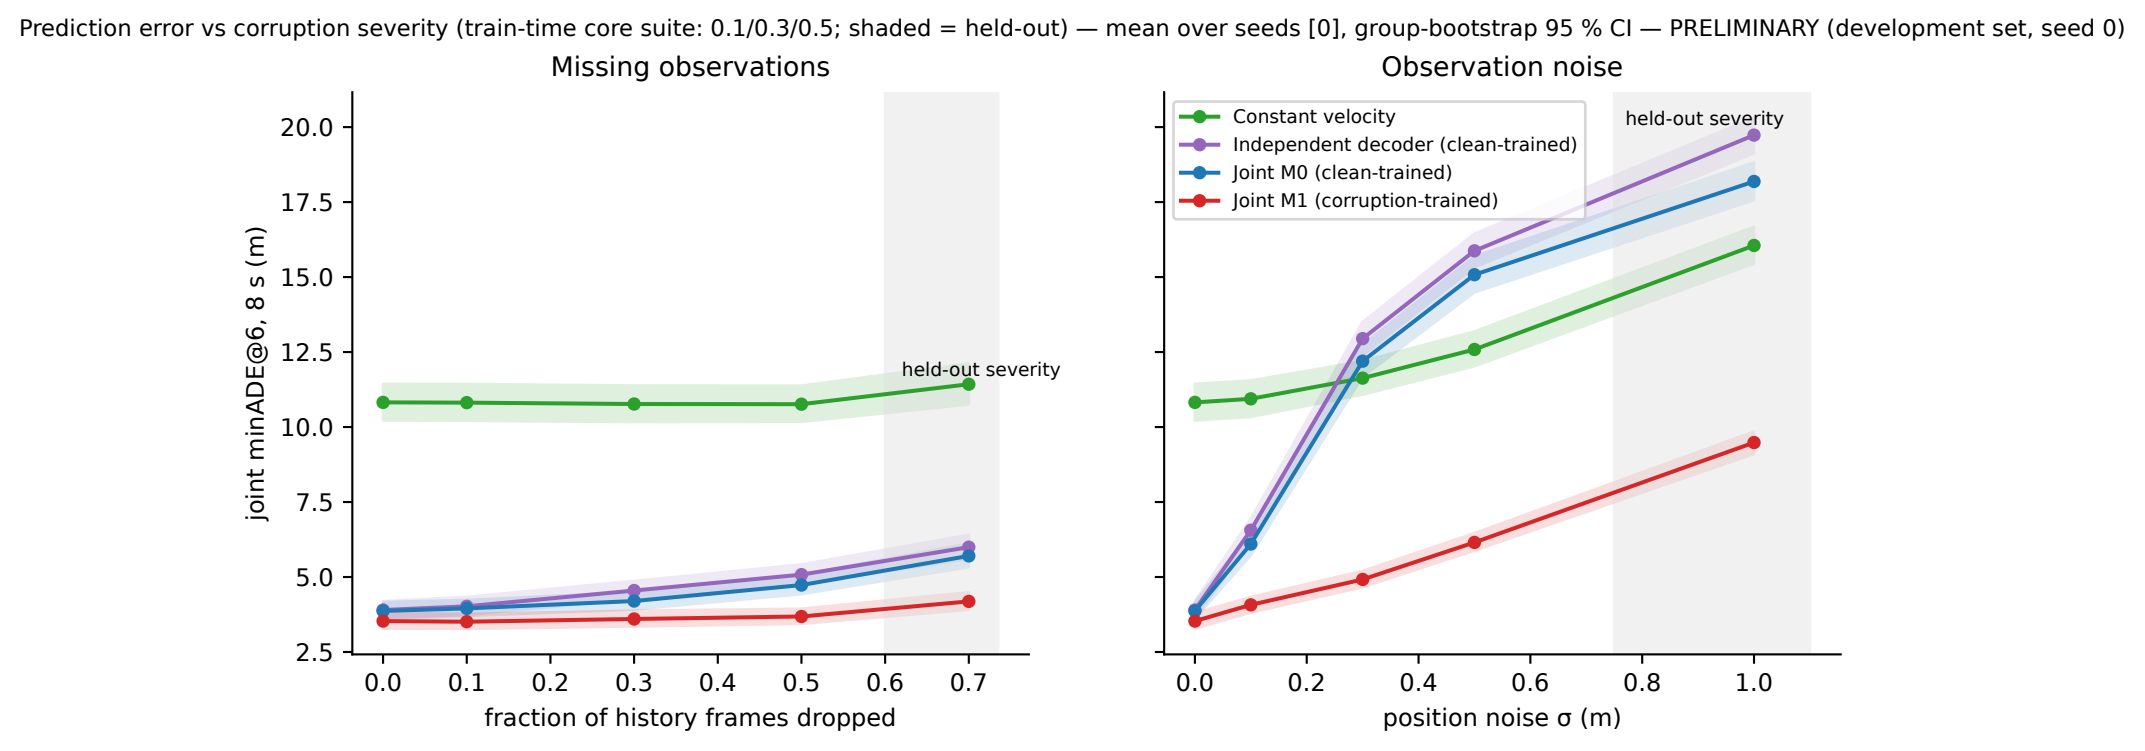
Prediction error vs corruption severity (train-time core suite: 0.1/0.3/0.5; shaded = held-out) — mean over seeds [0], group-bootstrap 95 % CI — PRELIMINARY (development set, seed 0)
Missing observations
Observation noise
joint minADE@6, 8 s (m)
fraction of history frames dropped
position noise σ (m)
held-out severity
held-out severity
Constant velocity
Independent decoder (clean-trained)
Joint M0 (clean-trained)
Joint M1 (corruption-trained)
20.0
17.5
15.0
12.5
10.0
7.5
5.0
2.5
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.0
0.2
0.4
0.6
0.8
1.0