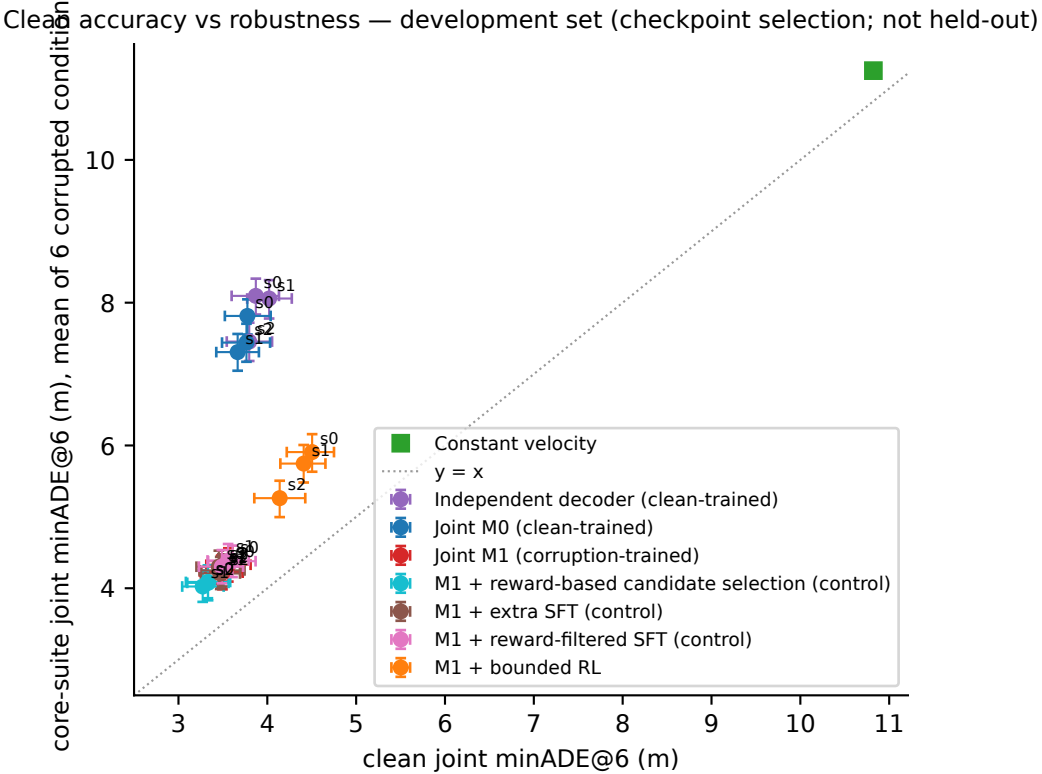
Clean accuracy vs robustness — development set (checkpoint selection; not held-out)
core-suite joint minADE@6 (m), mean of 6 corrupted conditions
clean joint minADE@6 (m)
3
4
5
6
7
8
9
10
11
4
6
8
10
Constant velocity
y = x
Independent decoder (clean-trained)
Joint M0 (clean-trained)
Joint M1 (corruption-trained)
M1 + reward-based candidate selection (control)
M1 + extra SFT (control)
M1 + reward-filtered SFT (control)
M1 + bounded RL
s0
s1
s2