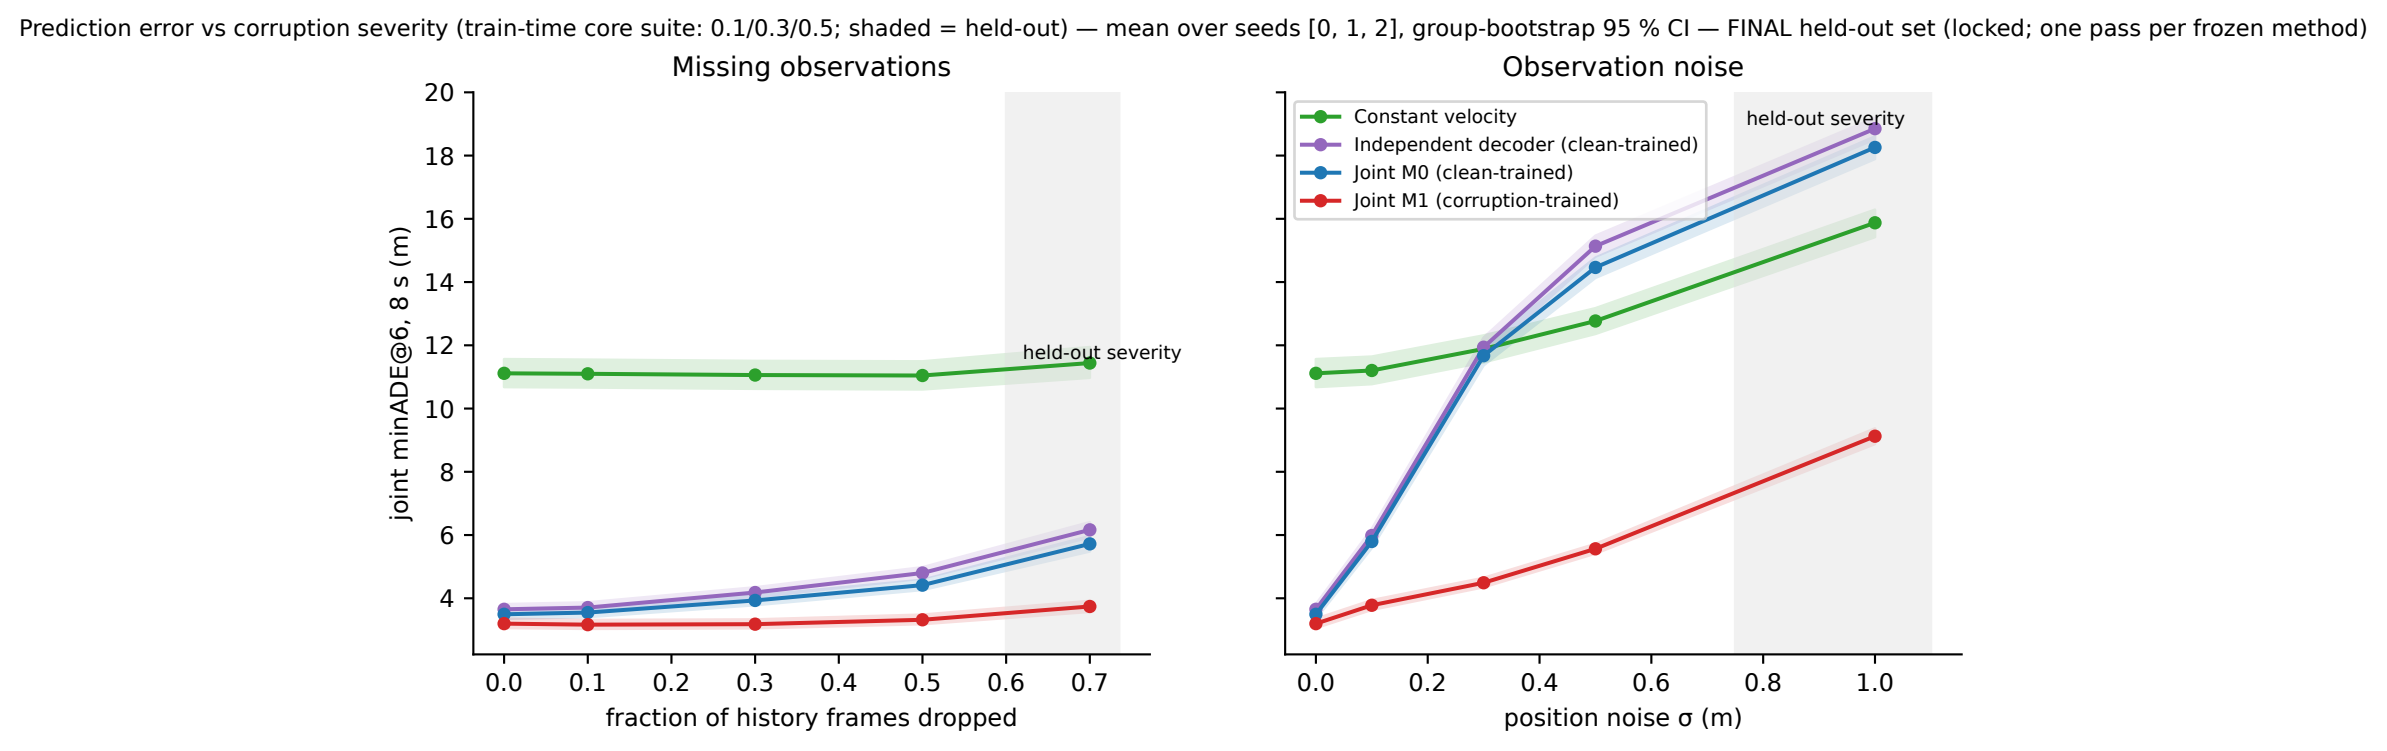
Prediction error vs corruption severity (train-time core suite: 0.1/0.3/0.5; shaded = held-out) — mean over seeds [0, 1, 2], group-bootstrap 95 % CI — FINAL held-out set (locked; one pass per frozen method)
Missing observations
Observation noise
joint minADE@6, 8 s (m)
fraction of history frames dropped
position noise σ (m)
held-out severity
held-out severity
Constant velocity
Independent decoder (clean-trained)
Joint M0 (clean-trained)
Joint M1 (corruption-trained)
20
18
16
14
12
10
8
6
4
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.0
0.2
0.4
0.6
0.8
1.0