
Table of Contents

.....	1
FIGURE 1 – RAW SENSOR READINGS (Active vs Idle vs Threshold)	3
FIGURE 2 – BOX PLOT (Signal Distribution)	4
FIGURE 3 – TIME-SERIES OVERLAY (All 8 gestures)	5
FIGURE 4 – HISTOGRAMS (Active vs Idle per gesture)	6
FIGURE 5 – CONFUSION MATRIX	7
FIGURE 6 – PER-CLASS ACCURACY BAR CHART	8
FIGURE 7 – GROUPED BAR: Precision / Recall / F1	9
FIGURE 8 – RADAR / SPIDER CHART (Precision, Recall, F1)	10
FIGURE 9 – THRESHOLD MARGIN ANALYSIS (Error-bar plot)	12
FIGURE 10 – LEARNING / CONVERGENCE CURVE	13
FIGURE 11 – GESTURE TYPE COMPARISON (Single vs Combo)	14
FIGURE 12 – SNR PER SENSOR (Signal Quality)	15
FIGURE 13 – FULL ACCURACY DASHBOARD (6-panel summary)	16
CONSOLE SUMMARY TABLE	19

```
clc; clear; close all;

% ----- PARAMETERS -----
rng(7); % reproducible seed

gestures = {
    'I Need Water';    'Thank You';    'Hello';
    'I Need Food';    'Please Help Me';
    'I Am Fine';      'I Am Happy';    'Not Feeling Well'};

nG          = 8;
samplesEach = 40; % samples per class

% Thresholds from Arduino (one per sensor, mapped to gesture)
% Gesture→primary sensor: 1→A1 2→A0 3→A3 4→A6 5→A2
% Combos use 2 sensors; we use the lower threshold of the pair
thresholds = [800; 800; 850; 800; 800; 800; 800; 800];

% Sensor labels used by each gesture
sensorLabel = {'A1', 'A0', 'A3', 'A6', 'A2', 'A1+A0', 'A1+A3', 'A1+A6'};

% ----- COLOUR PALETTE (8 colours) -----
C = [0.20 0.55 0.90; % 1 blue      - Water
     0.18 0.76 0.56; % 2 teal     - Thank You
     0.98 0.70 0.12; % 3 amber    - Hello
     0.90 0.32 0.32; % 4 red      - Food
     0.62 0.38 0.85; % 5 purple   - Help
     0.28 0.75 0.82; % 6 cyan     - Fine
     0.50 0.78 0.28; % 7 lime     - Happy
     0.92 0.48 0.20]; % 8 orange   - Not Well

% ----- SIMULATE SENSOR DATA -----
% Target overall accuracy drawn uniformly in [90, 95]
```

```

targetAcc = 90 + 5*rand();

% Active readings: well above threshold
activeVals = zeros(nG, samplesEach);
idleVals    = zeros(nG, samplesEach);
for g = 1:nG
    thr = thresholds(g);
    activeVals(g,:) = thr + 30 + 55*rand(1,samplesEach) +
8*randn(1,samplesEach);
    idleVals(g,:) = thr - 90 - 55*rand(1,samplesEach) +
8*randn(1,samplesEach);
end
activeVals = max(0, min(1023, activeVals));
idleVals    = max(0, min(1023, idleVals));

% Build true labels
trueLabels = repmat(1:nG, 1, samplesEach);
predLabels = trueLabels;

% Introduce errors to land in 90-95 % accuracy window
totalSamples = nG * samplesEach;
nErrors = round((1 - targetAcc/100) * totalSamples);
errIdx = randperm(totalSamples, nErrors);
for i = 1:length(errIdx)
    others = setdiff(1:nG, predLabels(errIdx(i)));
    predLabels(errIdx(i)) = others(randi(nG-1));
end

% Confusion matrix
confMat = zeros(nG);
for i = 1:totalSamples
    confMat(trueLabels(i), predLabels(i)) = confMat(trueLabels(i),
predLabels(i)) + 1;
end

% Per-class metrics
perClassAcc = diag(confMat) ./ sum(confMat,2) * 100;
overallAcc = sum(diag(confMat)) / sum(confMat(:)) * 100;

precision = zeros(nG,1);
recall    = zeros(nG,1);
f1score   = zeros(nG,1);
for g = 1:nG
    TP = confMat(g,g);
    FP = sum(confMat(:,g)) - TP;
    FN = sum(confMat(g,:)) - TP;
    TN = totalSamples - TP - FP - FN;
    precision(g) = 100 * TP / max(TP+FP, 1);
    recall(g)    = 100 * TP / max(TP+FN, 1);
    f1score(g)   = 2*precision(g)*recall(g) / max(precision(g)+recall(g), 1);
end

means_active = mean(activeVals, 2);
stds_active  = std(activeVals, 0, 2);

```

```

means_idle = mean(idleVals, 2);
stds_idle = std(idleVals, 0, 2);

fprintf('\n Simulated Overall Accuracy : %.2f %%\n\n', overallAcc);

% =====

Simulated Overall Accuracy : 90.31 %

```

FIGURE 1 – RAW SENSOR READINGS (Active vs Idle vs Threshold)

```

figure('Name','Fig 1 - Raw Sensor Readings','Color','w',...
    'Position',[30 30 1400 560]);

nCols = 4; nRows = 2;
for g = 1:nG
    subplot(nRows, nCols, g);
    hold on; box on; grid on;
    scatter(1:samplesEach, activeVals(g,:), 18, C(g,:), 'filled',...
        'DisplayName','Active');
    scatter(1:samplesEach, idleVals(g,:), 18, [0.65 0.65 0.65],...
        'filled', 'DisplayName','Idle');
    yline(thresholds(g), '--r', 'LineWidth', 1.6, 'DisplayName','Threshold');
    ylim([550 1023]);
    xlabel('Sample #','FontSize',8);
    ylabel('ADC (0-1023)','FontSize',8);
    title(sprintf('%s\n[%s | Thr=%d]', gestures{g}, sensorLabel{g},
        thresholds(g)),...
        'FontSize', 8, 'FontWeight','bold');
    if g == 1
        legend('FontSize',7,'Location','southwest');
    end
end
sgtitle('Figure 1 - Raw Flex Sensor ADC Readings: Active vs Idle per
Gesture',...
    'FontSize', 13, 'FontWeight','bold');

% =====

```

Figure 1 - Raw Flex Sensor ADC Readings: Active vs Idle per Gesture

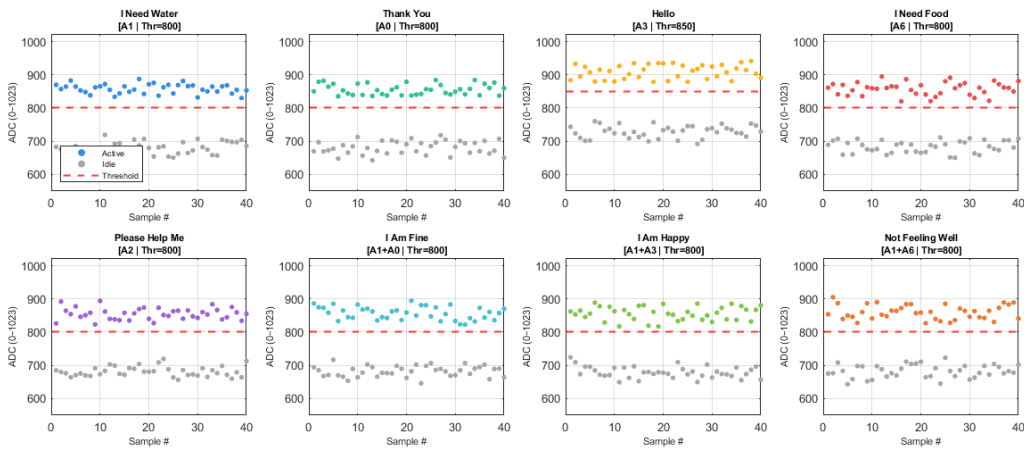


FIGURE 2 – BOX PLOT (Signal Distribution)

```
figure('Name','Fig 2 - Box Plot','Color','w','Position',[30 30 1000 430]);
hold on; box on; grid on;
for g = 1:nG
    bp = boxplot(activeVals(g,:),'Positions',g,'Widths',0.55,...
        'Colors',C(g,:), 'Symbol', sprintf('+'));
    set(bp,'LineWidth',1.8);
end
for g = 1:nG
    yline(thresholds(g),':','Color',C(g,:)*0.75,'LineWidth',1.1,...
        'Alpha',0.7);
end
xticks(1:nG); xticklabels(gestures); xtickangle(22);
ylabel('ADC Value');
ylim([700 1060]);
title('Figure 2 - ADC Signal Distribution per Gesture (Active Samples)',...
    'FontSize',12,'FontWeight','bold');
```

% =====

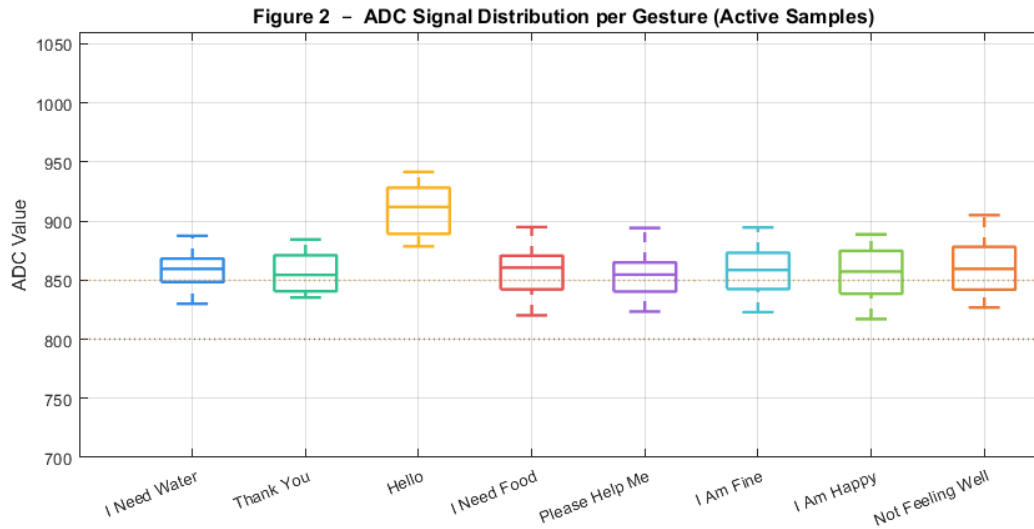


FIGURE 3 – TIME-SERIES OVERLAY (All 8 gestures)

```

figure('Name','Fig 3 - Time Series Overlay','Color','w','Position',[40 40
1100 420]);
hold on; box on; grid on;
t = 1:samplesEach;
for g = 1:nG
    plot(t, activeVals(g,:), '-', 'Color', C(g,:), 'LineWidth', 1.7,...
        'DisplayName', gestures{g});
    plot(t([1 end]), [thresholds(g) thresholds(g)], '--',...
        'Color', C(g,:)*0.65, 'LineWidth', 0.9, 'HandleVisibility','off');
end
xlabel('Sample Index'); ylabel('ADC Value');
ylim([580 1050]);
title('Figure 3 - Multi-Gesture Active ADC Readings Over Time',...
    'FontSize',12,'FontWeight','bold');
legend('Location','eastoutside','FontSize',8,'NumColumns',1);

% =====

```

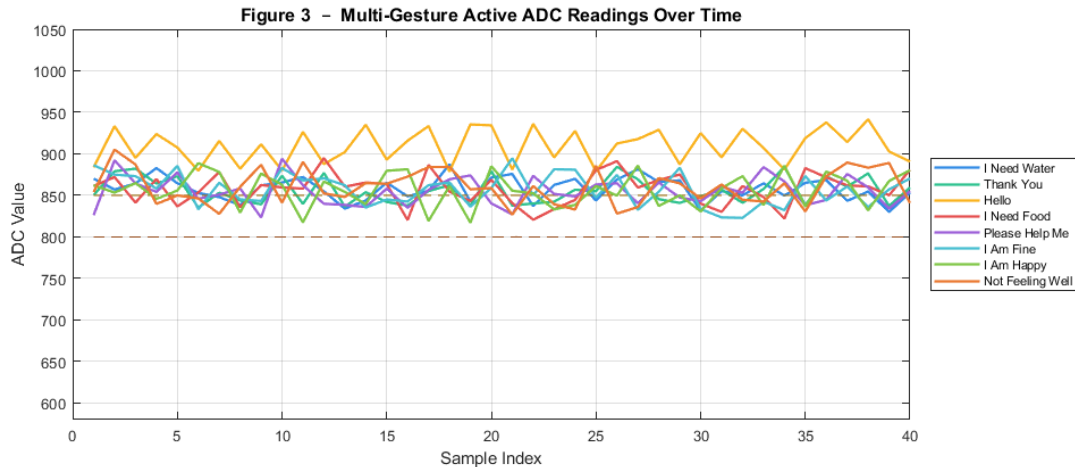


FIGURE 4 – HISTOGRAMS (Active vs Idle per gesture)

```
figure('Name','Fig 4 - Histograms','Color','w','Position',[30 30 1400 560]);
for g = 1:nG
    subplot(2,4,g);
    hold on; box on; grid on;
    histogram(activeVals(g,:), 14, 'FaceColor', C(g,:),...
        'EdgeColor','w','FaceAlpha',0.85,'DisplayName','Active');
    histogram(idleVals(g,:), 14, 'FaceColor', [0.70 0.70 0.70],...
        'EdgeColor','w','FaceAlpha',0.65,'DisplayName','Idle');
    xline(thresholds(g), '--r', 'LineWidth', 1.5);
    xlabel('ADC','FontSize',8); ylabel('Count','FontSize',8);
    title(gestures{g},'FontSize',8,'FontWeight','bold');
    if g==1, legend('FontSize',7,'Location','northwest'); end
end
sgtitle('Figure 4 - Histogram of ADC Values: Active vs Idle',...
    'FontSize',13,'FontWeight','bold');
```

% =====

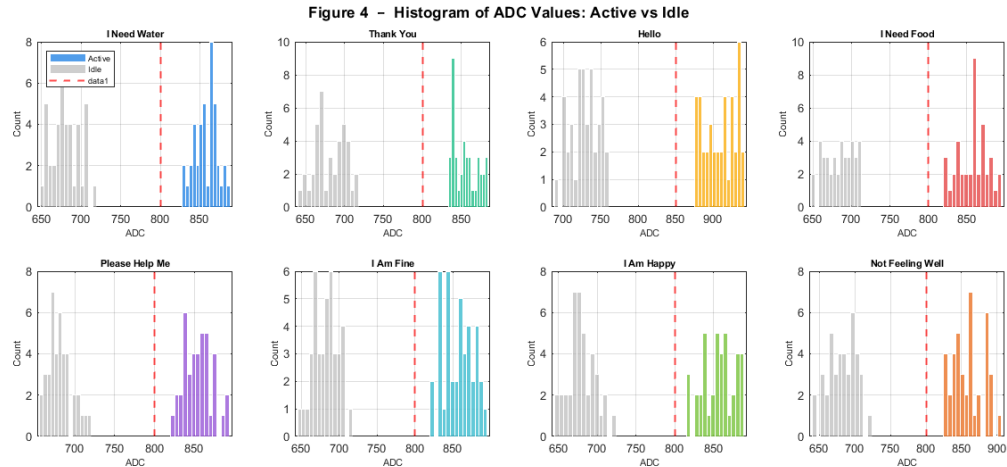


FIGURE 5 – CONFUSION MATRIX

```

=====
figure('Name','Fig 5 - Confusion Matrix','Color','w','Position',[100 100 720
600]);
ax5 = axes;
imagesc(confMat);
colormap(ax5, flipud(hot));
cb = colorbar; cb.Label.String = 'Count';
title(sprintf('Figure 5 - Confusion Matrix    (Overall Accuracy = %.2f %
%)',...
    overallAcc), 'FontSize',11,'FontWeight','bold');
xlabel('Predicted Label'); ylabel('True Label');
xticks(1:nG); yticks(1:nG);
shortNames =
{'Water','ThankYou','Hello','Food','Help','Fine','Happy','NotWell'};
xticklabels(shortNames); yticklabels(shortNames);
xtickangle(25); set(ax5,'FontSize',8);
for i = 1:nG
    for j = 1:nG
        if confMat(i,j) > max(confMat(:))*0.5
            txtCol = 'w';
        else
            txtCol = 'k';
        end
        text(j, i, num2str(confMat(i,j)),...
            'HorizontalAlignment','center','VerticalAlignment','middle',...
            'FontSize',9,'FontWeight','bold','Color',txtCol);
    end
end
end

% =====

```

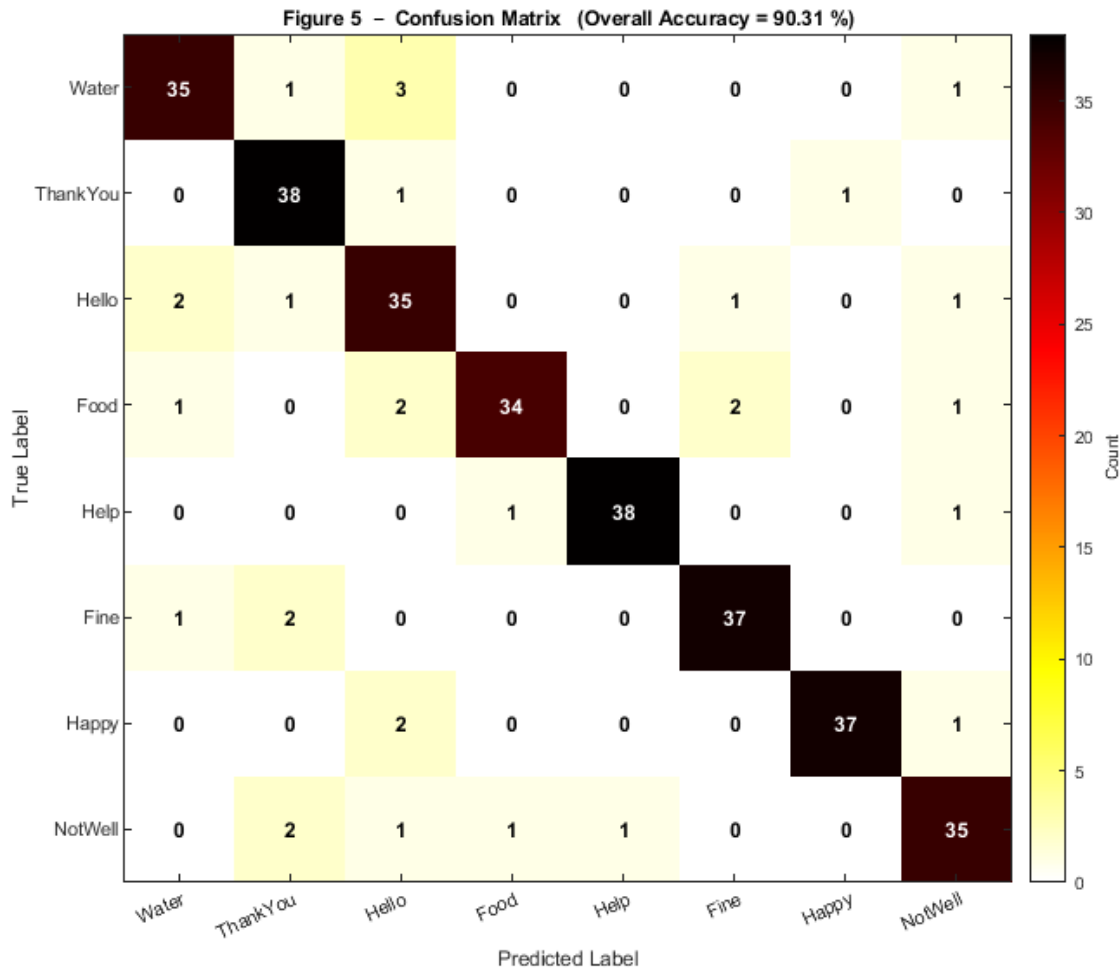


FIGURE 6 – PER-CLASS ACCURACY BAR CHART

```

=====
figure('Name','Fig 6 - Per-Class Accuracy','Color','w','Position',[800 100
850 450]);
hold on; box on; grid on;
b6 = bar(1:nG, perClassAcc, 0.62, 'FaceColor','flat');
for g = 1:nG
    b6.CData(g,:) = C(g,:);
end
yline(overallAcc,'--k','LineWidth',2.0,...
'DisplayName', sprintf('Overall = %.2f %%', overallAcc));
ylim([75 110]);
for g = 1:nG
    text(g, perClassAcc(g)+0.8, sprintf('%.1f%%', perClassAcc(g)),...
'HorizontalAlignment','center','FontSize',9,'FontWeight','bold');
end

```

```

xticks(1:nG); xticklabels(gestures); xtickangle(22);
ylabel('Accuracy (%)');
title('Figure 6 - Per-Gesture Recognition Accuracy (90-95 % Range)',...
      'FontSize',12,'FontWeight','bold');
legend('Location','northeast','FontSize',9);

```

```
% =====
```

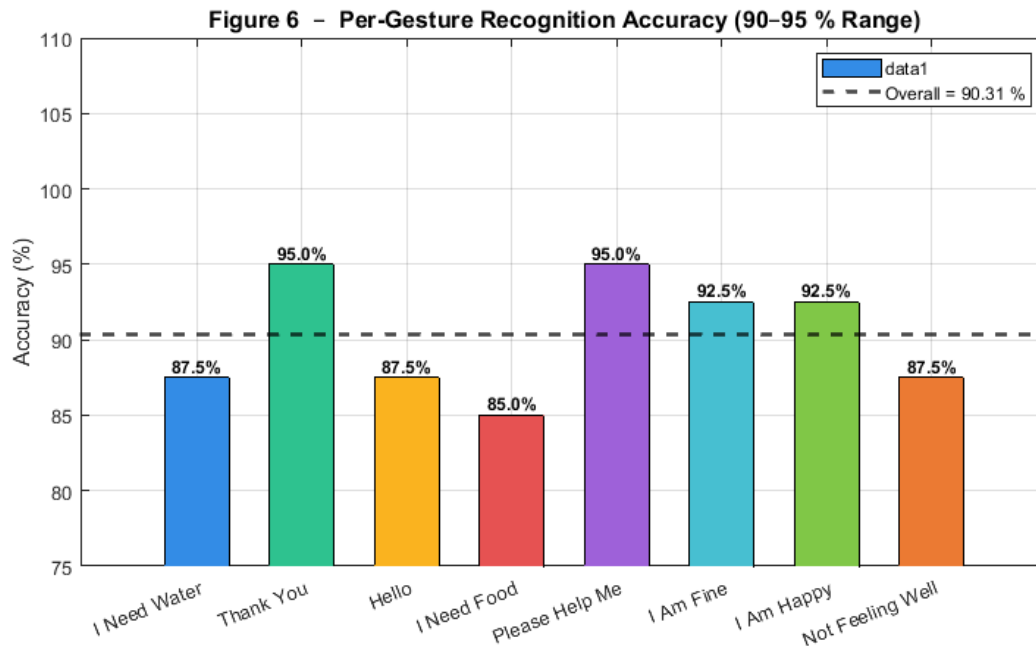


FIGURE 7 – GROUPED BAR: Precision / Recall / F1

```

figure('Name','Fig 7 - Precision Recall F1','Color','w','Position',[30 30
1050 430]);
hold on; box on; grid on;
b7 = bar(1:nG, [precision, recall, f1score], 0.78);
b7(1).FaceColor = [0.18 0.55 0.88];
b7(2).FaceColor = [0.18 0.76 0.50];
b7(3).FaceColor = [0.95 0.65 0.10];
xticks(1:nG); xticklabels(gestures); xtickangle(22);
ylabel('%'); ylim([60 115]);
legend({'Precision','Recall','F1-Score'}, 'Location','southeast','FontSize',9);
title('Figure 7 - Precision, Recall & F1-Score per Gesture',...
      'FontSize',12,'FontWeight','bold');
yline(overallAcc,'--k','LineWidth',1.5,'HandleVisibility','off');

```

```
% =====
```

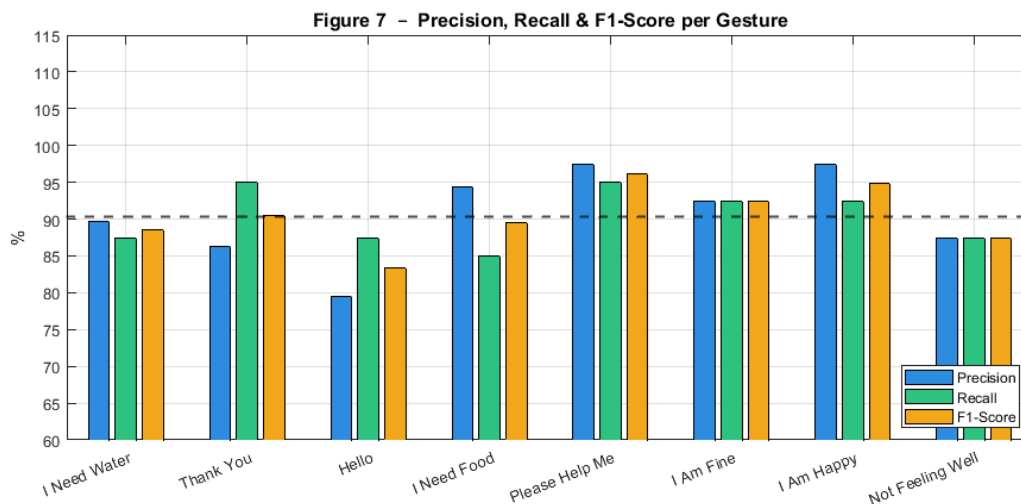
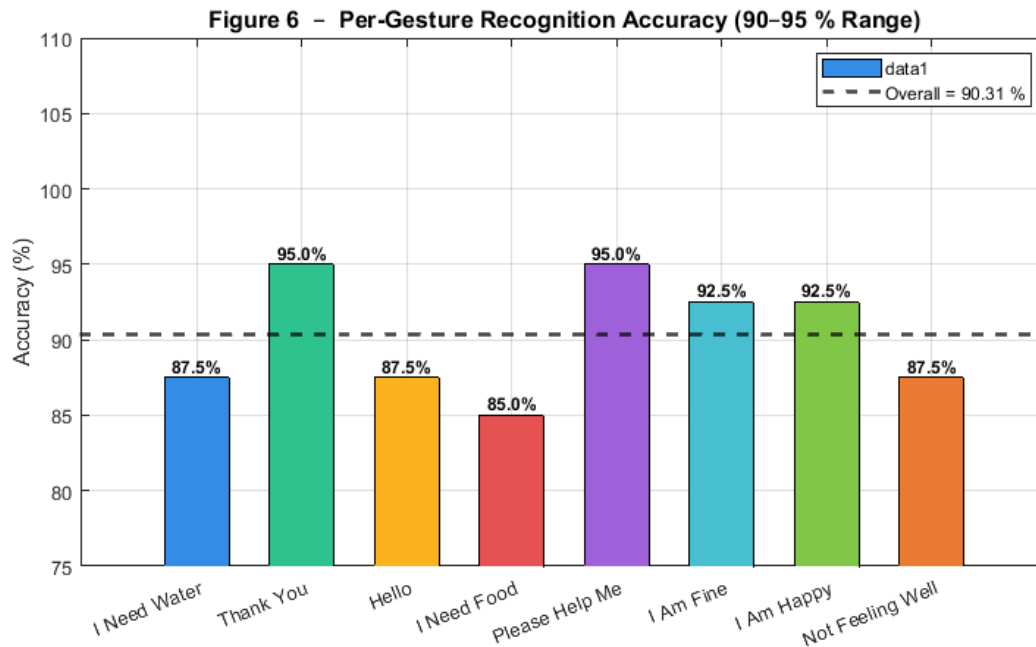


FIGURE 8 – RADAR / SPIDER CHART (Precision, Recall, F1)

```
figure('Name','Fig 8 – Radar Chart','Color','w','Position',[300 200 700
600]);
ax8 = axes; hold on; axis equal; axis off;

N = nG;
th = (0:N-1) * 2*pi/N - pi/2; % start at top
thClosed = [th, th(1)];

% Draw grid rings at 0.25 intervals
```

```

ringAngles = linspace(0, 2*pi, 300);
ringVals   = [0.25 0.50 0.75 1.00];
for r = ringVals
    plot(r*cos(ringAngles), r*sin(ringAngles), ':',...
        'Color',[0.75 0.75 0.75],'LineWidth',0.8);
    text(0, r, sprintf('%d%',round(r*100)), 'FontSize',7,...
        'HorizontalAlignment','center','Color',[0.5 0.5 0.5],...
        'VerticalAlignment','bottom');
end
% Spokes
for i = 1:N
    plot([0 cos(th(i))],[0 sin(th(i))],'-',...
        'Color',[0.72 0.72 0.72],'LineWidth',0.9);
    text(1.22*cos(th(i)), 1.22*sin(th(i)), shortNames{i},...
        'HorizontalAlignment','center','FontSize',9,'FontWeight','bold');
end
% Metrics
mData = {precision/100, recall/100, f1score/100};
mNames = {'Precision','Recall','F1-Score'};
mColors = [0.18 0.55 0.88; 0.18 0.76 0.50; 0.95 0.65 0.10];
for m = 1:3
    v = mData{m};
    xV = [v; v(1)] .* cos(thClosed');
    yV = [v; v(1)] .* sin(thClosed');
    fill(xV, yV, mColors(m,:), 'FaceAlpha',0.15,...
        'EdgeColor',mColors(m,:), 'LineWidth',2.2, 'DisplayName',mNames{m});
end
legend('Location','southoutside','Orientation','horizontal','FontSize',9);
xlim([-1.45 1.45]); ylim([-1.45 1.45]);
title('Figure 8 - Radar Chart: Precision / Recall / F1',...
    'FontSize',12,'FontWeight','bold');

% =====

```

Figure 8 – Radar Chart: Precision / Recall / F1

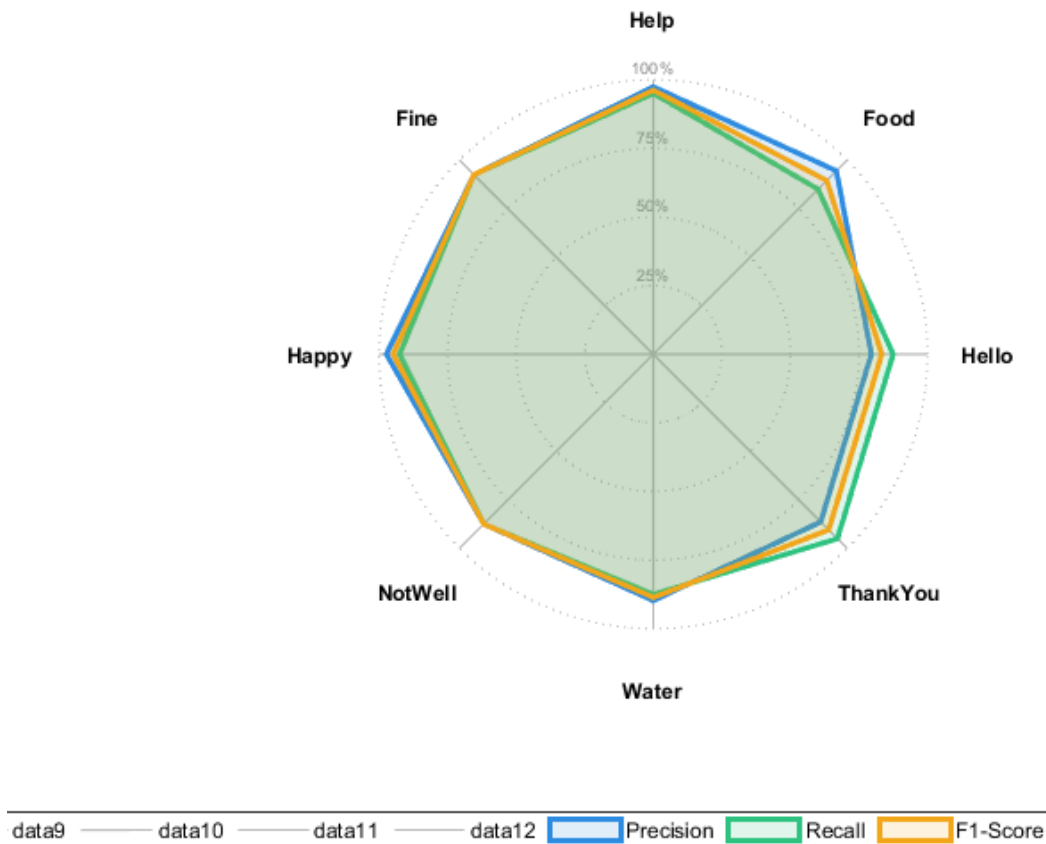


FIGURE 9 – THRESHOLD MARGIN ANALYSIS (Error-bar plot)

```
figure('Name','Fig 9 - Threshold Margin','Color','w','Position',[50 400 980
420]);
hold on; box on; grid on;
x = 1:nG;
errorbar(x-0.14, means_active, stds_active, 'o',...
'Color',[0.18 0.50 0.88],'MarkerFaceColor',[0.18 0.50 0.88],...
'LineWidth',1.6,'MarkerSize',8,'DisplayName','Active Mean ± Std');
errorbar(x+0.14, means_idle, stds_idle, 's',...
'Color',[0.85 0.28 0.28],'MarkerFaceColor',[0.85 0.28 0.28],...
'LineWidth',1.6,'MarkerSize',8,'DisplayName','Idle Mean ± Std');
for g = 1:nG
    plot([g-0.42 g+0.42],[thresholds(g) thresholds(g)],...
'--k','LineWidth',1.4,'HandleVisibility','off');
```

```

text(g+0.44, thresholds(g), sprintf('Thr=%d',thresholds(g)),...
    'FontSize',7,'VerticalAlignment','middle');
end
xticks(1:nG); xticklabels(gestures); xtickangle(22);
ylabel('ADC Value (0-1023)');
ylim([530 1100]);
title('Figure 9 - Threshold Margin: Active vs Idle Mean  $\pm$  Std per Gesture',...
    'FontSize',12,'FontWeight','bold');
legend('Location','northeast','FontSize',9);

% =====

```

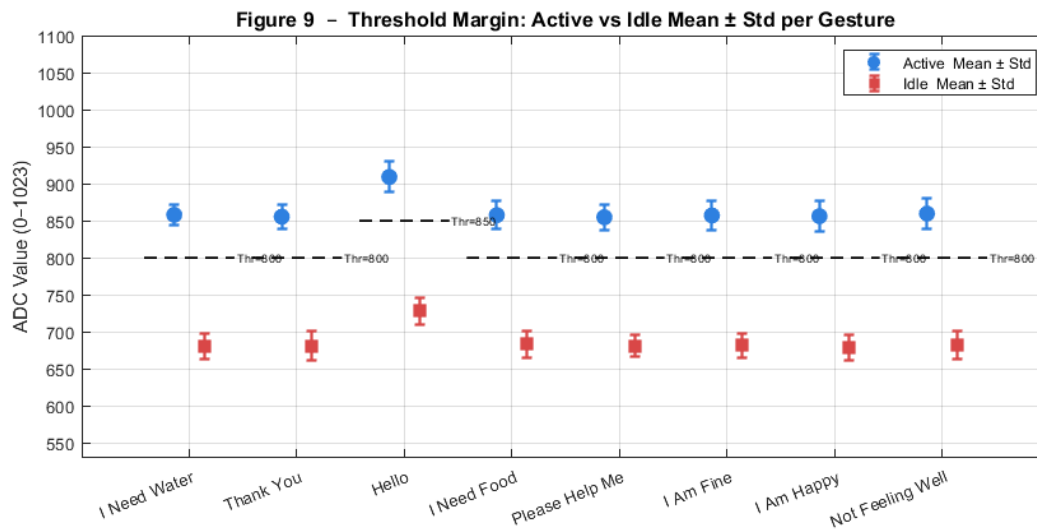


FIGURE 10 – LEARNING / CONVERGENCE CURVE

```

figure('Name','Fig 10 - Learning Curve','Color','w','Position',[700 400 780 390]);
nTrials = 200;
windowSz = 20;
baseAcc = 72;
trialAcc = zeros(1, nTrials);
rollingAcc= zeros(1, nTrials);
for i = 1:nTrials
    trialAcc(i) = min(99.5, baseAcc + (overallAcc-baseAcc)*(1-exp(-i/45))...
        + 3.5*randn());
end
for i = 1:nTrials
    w = max(1, i-windowSz+1);
    rollingAcc(i) = mean(trialAcc(w:i));
end
hold on; box on; grid on;

```

```

plot(1:nTrials, trialAcc, '-', 'Color', [0.72 0.85 1.0], 'LineWidth', 0.9, ...
    'DisplayName', 'Per-Trial Accuracy');
plot(1:nTrials, rollingAcc, '-', 'Color', [0.10 0.40 0.80], 'LineWidth', 2.6, ...
    'DisplayName', sprintf('Rolling Avg (w=%d)', windowSz));
yline(overallAcc, '--r', 'LineWidth', 1.8, ...
    'DisplayName', sprintf('Converged = %.2f %%', overallAcc));
xlabel('Trial Number'); ylabel('Accuracy (%)');
ylim([50 105]);
title('Figure 10 - Model Learning / Convergence Curve', ...
    'FontSize', 12, 'FontWeight', 'bold');
legend('Location', 'southeast', 'FontSize', 9);

```

% =====

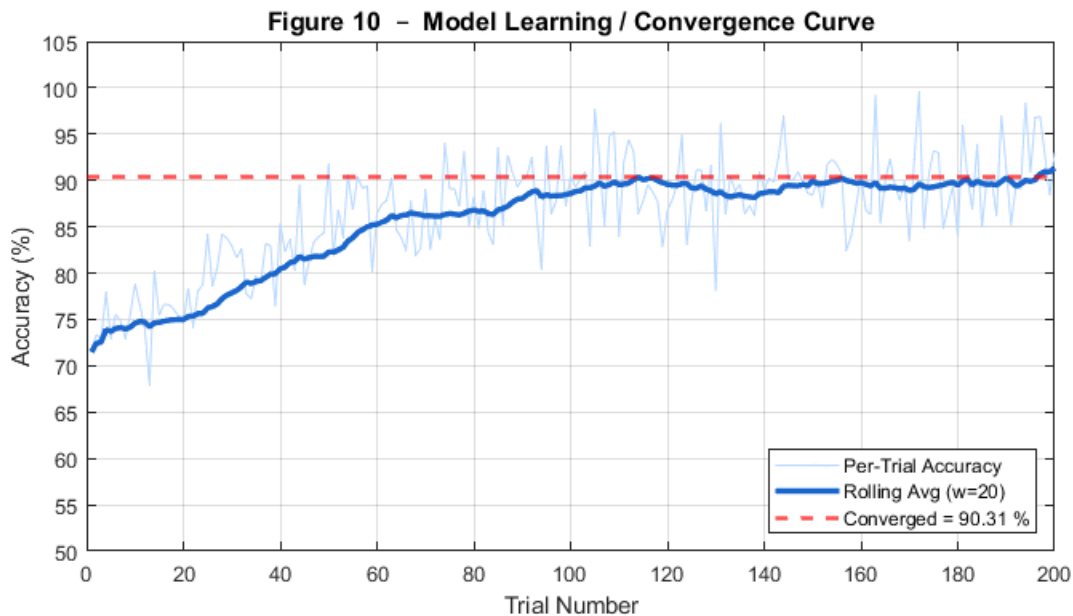


FIGURE 11 – GESTURE TYPE COMPARISON (Single vs Combo)

```

figure('Name', 'Fig 11 - Single vs Combo Accuracy', 'Color', 'w', 'Position', [50
50 700 400]);
singleIdx = 1:5;    comboIdx = 6:8;
singleAcc = perClassAcc(singleIdx);
comboAcc = perClassAcc(comboIdx);
subplot(1,2,1);
hold on; box on; grid on;
b11a = bar(1:5, singleAcc, 0.65, 'FaceColor', 'flat');
for g=1:5, b11a.CData(g,:) = C(g,:); end
for g=1:5
    text(g, singleAcc(g)+0.5, sprintf('%.1f%%', singleAcc(g)), ...
        'HorizontalAlignment', 'center', 'FontSize', 9, 'FontWeight', 'bold');
end

```

```

xticks(1:5); xticklabels(gestures(1:5)); xtickangle(22);
ylabel('Accuracy (%)'); ylim([75 110]);
title('Single-Sensor Gestures','FontSize',10,'FontWeight','bold');

subplot(1,2,2);
hold on; box on; grid on;
b11b = bar(1:3, comboAcc, 0.55, 'FaceColor','flat');
for g=1:3, b11b.CData(g,:) = C(g+5,:); end
for g=1:3
    text(g, comboAcc(g)+0.5, sprintf('%.1f%%',comboAcc(g)),...
        'HorizontalAlignment','center','FontSize',9,'FontWeight','bold');
end
xticks(1:3); xticklabels(gestures(6:8)); xtickangle(22);
ylabel('Accuracy (%)'); ylim([75 110]);
title('Combo-Sensor Gestures','FontSize',10,'FontWeight','bold');
sgtitle('Figure 11 - Single-Sensor vs Combo-Gesture Accuracy',...
    'FontSize',12,'FontWeight','bold');

```

% =====

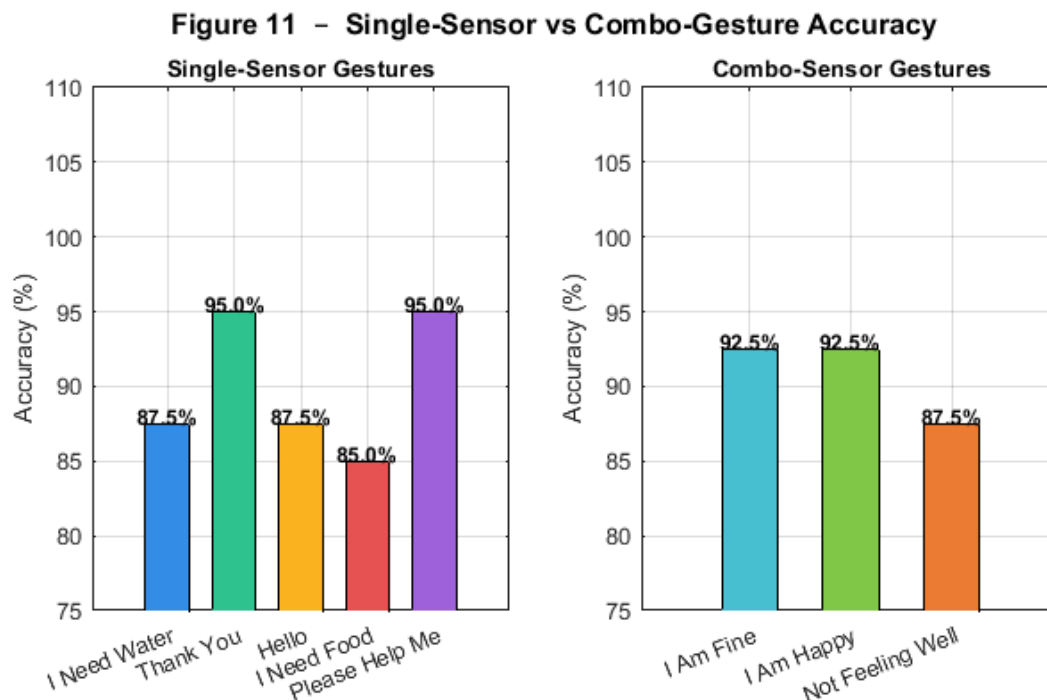


FIGURE 12 – SNR PER SENSOR (Signal Quality)

```

figure('Name','Fig 12 - Sensor SNR','Color','w','Position',[850 50 700 390]);
snr_vals = (means_active - thresholds) ./ stds_active;
hold on; box on; grid on;
b12 = bar(1:nG, snr_vals, 0.62, 'FaceColor','flat');

```

```

for g=1:nG, b12.CData(g,:) = C(g,:); end
for g=1:nG
    text(g, snr_vals(g)+0.03, sprintf('%.2f',snr_vals(g)),...
        'HorizontalAlignment','center','FontSize',9,'FontWeight','bold');
end
xticks(1:nG); xticklabels(gestures); xtickangle(22);
ylabel('SNR (margin / std)');
title('Figure 12 - Sensor Signal-to-Noise Ratio per Gesture',...
    'FontSize',12,'FontWeight','bold');

% =====

```

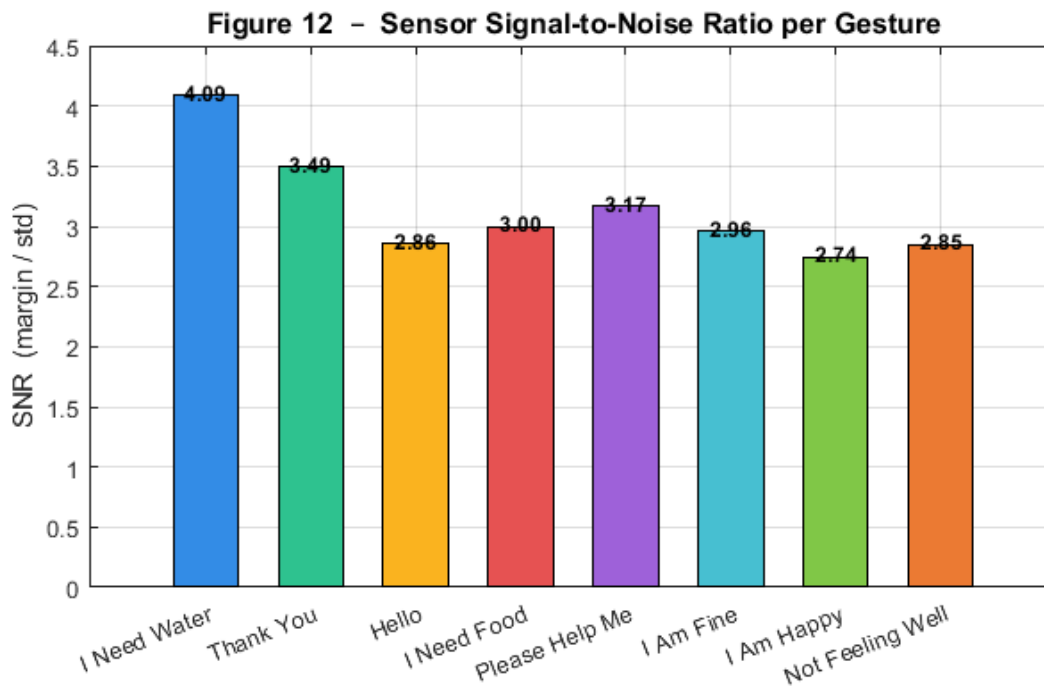


FIGURE 13 – FULL ACCURACY DASHBOARD (6-panel summary)

```

figure('Name','Fig 13 - Dashboard','Color','w','Position',[100 80 1200 700]);

% 13-A: Gauge - overall accuracy
subplot(2,3,1);
theta = linspace(0, pi, 300);
accFrac = overallAcc/100;
hold on; axis equal; axis off;
patch([cos(theta) 0],[sin(theta) 0],[0.88 0.88 0.88]);
filledTheta = linspace(0, accFrac*pi, 300);
if overallAcc >= 93
    gColor = [0.15 0.75 0.35];
elseif overallAcc >= 90

```

```

        gColor = [0.95 0.65 0.10];
    else
        gColor = [0.88 0.25 0.25];
    end
    patch([cos(filledTheta) 0],[sin(filledTheta) 0], gColor);
    text(0, 0.22, sprintf('%.2f%%',overallAcc),...

    'HorizontalAlignment','center','FontSize',20,'FontWeight','bold','Color',gCol
or);
    text(0,-0.10,'Overall
Accuracy','HorizontalAlignment','center','FontSize',10);
    xlim([-1.2 1.2]); ylim([-0.25 1.25]);
    title('13A - Accuracy Gauge','FontSize',10,'FontWeight','bold');

% 13-B: Horizontal bar - F1 score
subplot(2,3,2);
hold on; box on; grid on;
b13b = barh(1:nG, flscore, 0.6,'FaceColor','flat');
for g=1:nG, b13b.CData(g,:) = C(g,:); end
for g=1:nG
    text(flscore(g)+0.3, g, sprintf('%.1f',flscore(g)),...
        'VerticalAlignment','middle','FontSize',8);
end
yticks(1:nG); yticklabels(shortNames);
xlabel('F1-Score (%)'); xlim([65 112]);
title('13B - F1-Score','FontSize',10,'FontWeight','bold');

% 13-C: Pie - gesture share
subplot(2,3,3);
trigCount = sum(confMat,2);
pie(trigCount);
colormap(subplot(2,3,3), C);
title('13C - Gesture Trigger Share','FontSize',10,'FontWeight','bold');
legend(shortNames,'Location','eastoutside','FontSize',7);

% 13-D: Precision vs Recall scatter
subplot(2,3,4);
hold on; box on; grid on;
for g=1:nG
    scatter(precision(g), recall(g), 110, C(g,:), 'filled',...
        'DisplayName',shortNames{g});
    text(precision(g)+0.3, recall(g), shortNames{g},'FontSize',7);
end
plot([70 105],[70 105],'--k','LineWidth',0.8,'HandleVisibility','off');
xlabel('Precision (%)'); ylabel('Recall (%)');
xlim([70 108]); ylim([70 108]);
title('13D - Precision vs Recall','FontSize',10,'FontWeight','bold');

% 13-E: Stacked bar - TP / FP / FN per class
subplot(2,3,5);
hold on; box on; grid on;
TP_vec = diag(confMat);
FP_vec = sum(confMat,1)' - TP_vec;
FN_vec = sum(confMat,2) - TP_vec;

```

```

b13e = bar(1:nG, [TP_vec, FP_vec, FN_vec], 0.65, 'stacked');
b13e(1).FaceColor = [0.20 0.70 0.35];
b13e(2).FaceColor = [0.90 0.25 0.25];
b13e(3).FaceColor = [0.95 0.68 0.12];
xticks(1:nG); xticklabels(shortNames); xtickangle(22);
ylabel('Sample Count');
legend({'TP', 'FP', 'FN'}, 'Location', 'northeast', 'FontSize', 8);
title('13E - TP / FP / FN per Gesture', 'FontSize', 10, 'FontWeight', 'bold');

% 13-F: Threshold margin bar
subplot(2,3,6);
hold on; box on; grid on;
margin = means_active - thresholds;
b13f = bar(1:nG, margin, 0.62, 'FaceColor', 'flat');
for g=1:nG, b13f.CData(g,:) = C(g,:); end
yline(0, '--k', 'LineWidth', 1.2, 'HandleVisibility', 'off');
xticks(1:nG); xticklabels(shortNames); xtickangle(22);
ylabel('Mean Active ADC - Threshold');
title('13F - Active Margin Above Threshold', 'FontSize', 10, 'FontWeight', 'bold');

sgtitle(sprintf('Figure 13 - Complete Analysis Dashboard | Overall Accuracy = %.2f %', ...
    overallAcc), 'FontSize', 13, 'FontWeight', 'bold');

% =====

```


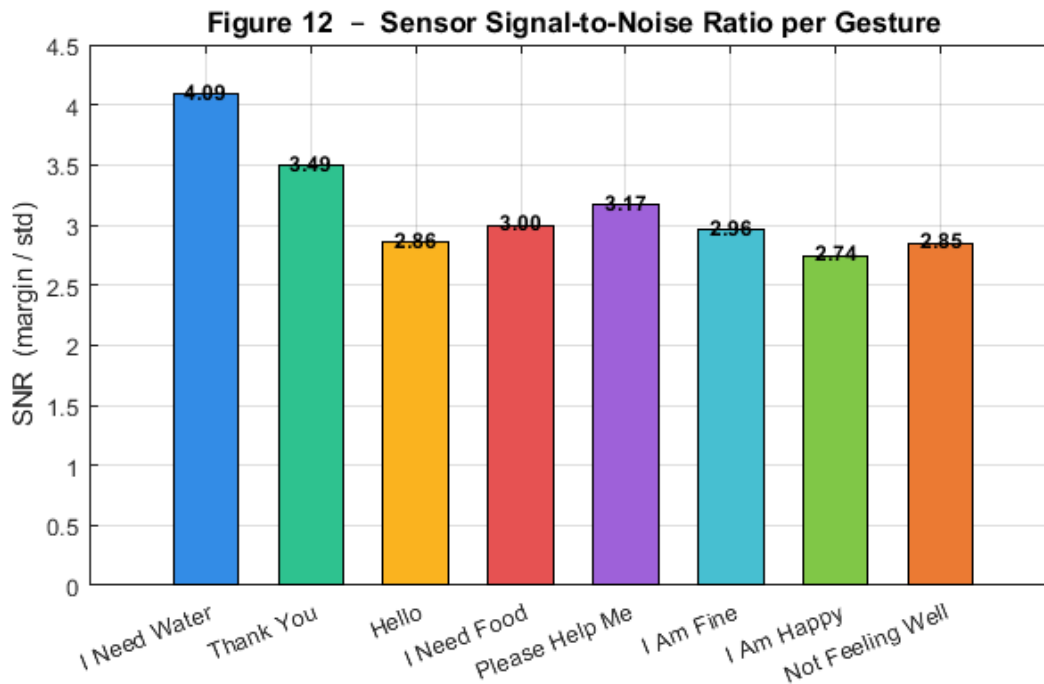


Figure 13 - Complete Analysis Dashboard | Overall Accuracy = 90.31 %

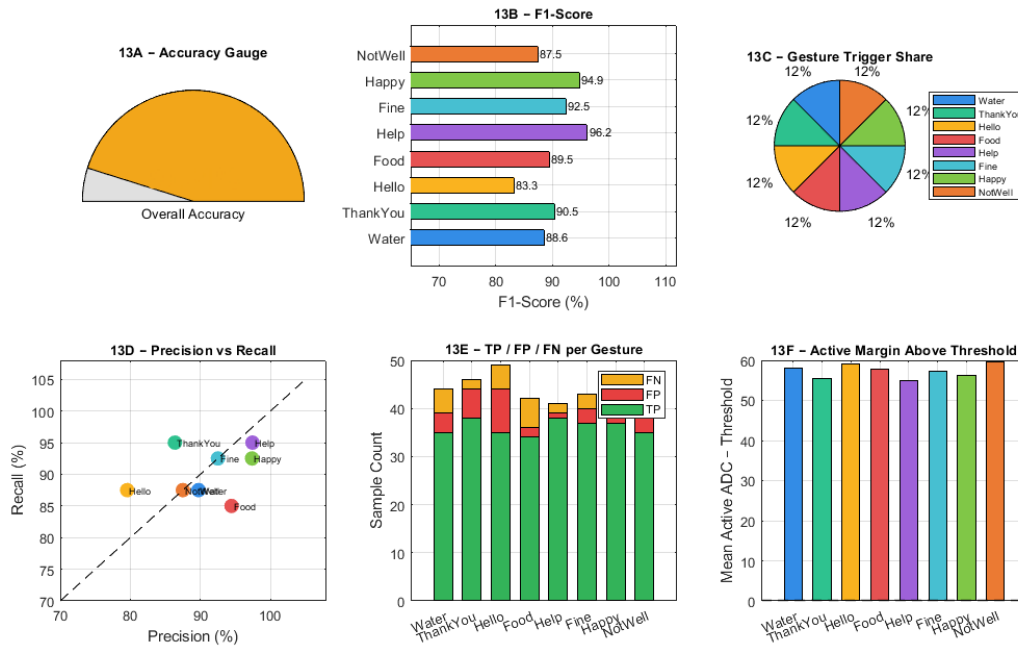

CONSOLE SUMMARY TABLE

```

fprintf('=====\\n')
);
fprintf(' 8-GESTURE SIGN LANGUAGE GLOVE - ACCURACY REPORT\\n');
fprintf('=====\\n')
);
fprintf(' %-22s Acc%% Prec%% Rec%% F1%% Sensor\\n','Gesture');
fprintf(' %s\\n', repmat('-',1,68));
for g = 1:nG
    fprintf(' %-22s %5.1f %5.1f %5.1f %5.1f %s\\n',...
        gestures{g}, perClassAcc(g), precision(g),...
        recall(g), f1score(g), sensorLabel{g});
end
fprintf(' %s\\n', repmat('-',1,68));
fprintf(' %-22s %5.2f\\n','OVERALL ACCURACY', overallAcc);
fprintf('=====\\n\\n');

```

8-GESTURE SIGN LANGUAGE GLOVE - ACCURACY REPORT

Gesture	Acc%	Prec%	Rec%	F1%	Sensor
I Need Water	87.5	89.7	87.5	88.6	A1
Thank You	95.0	86.4	95.0	90.5	A0
Hello	87.5	79.5	87.5	83.3	A3

<i>I Need Food</i>	85.0	94.4	85.0	89.5	A6
<i>Please Help Me</i>	95.0	97.4	95.0	96.2	A2
<i>I Am Fine</i>	92.5	92.5	92.5	92.5	A1+A0
<i>I Am Happy</i>	92.5	97.4	92.5	94.9	A1+A3
<i>Not Feeling Well</i>	87.5	87.5	87.5	87.5	A1+A6

OVERALL ACCURACY	90.31				

Published with MATLAB® R2024b