V8 point predictions and secondary error context

Primary-family memberships shown; shared formulas retain their program memberships. Equal x/y scales start at zero.

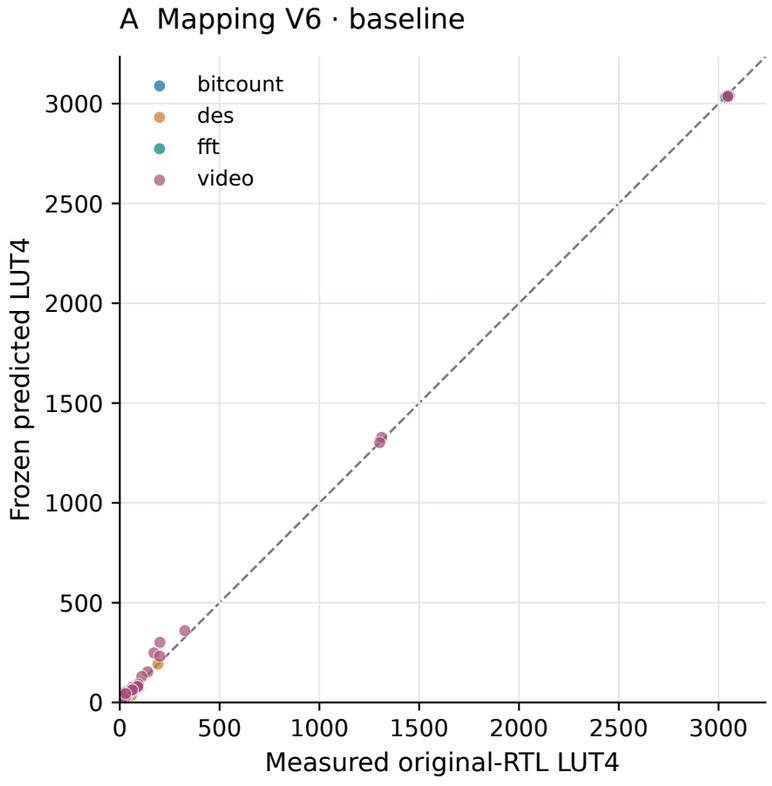

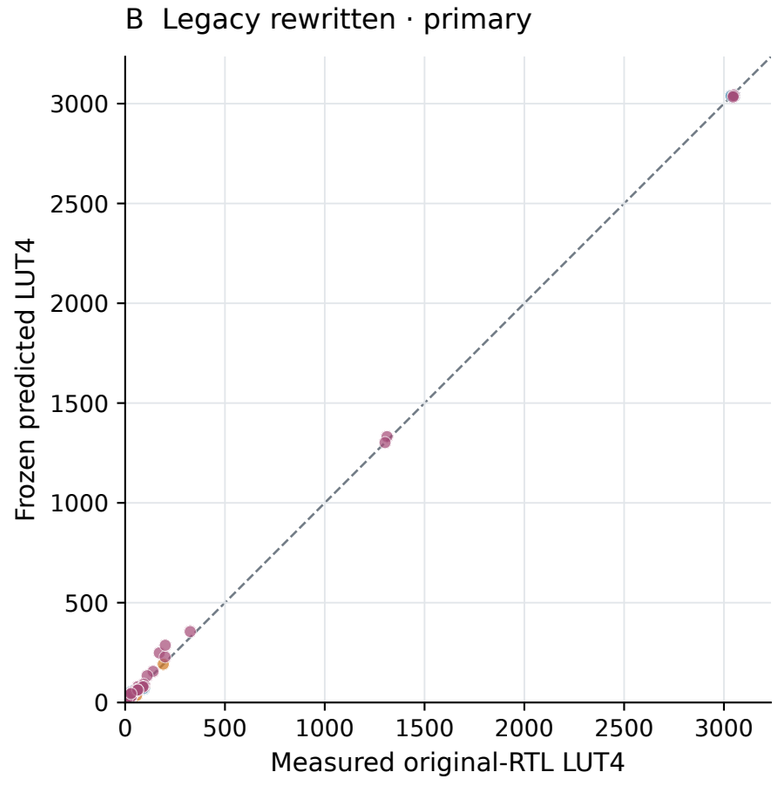

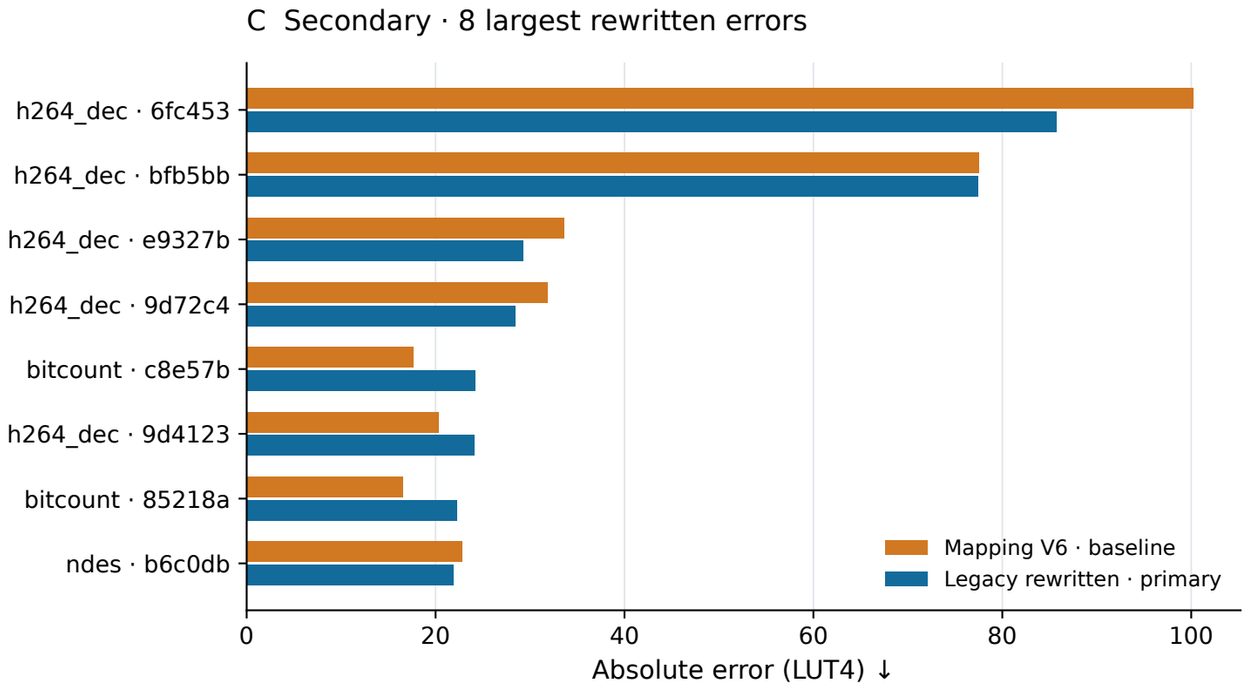

D Secondary novelty · explicit denominators

Input-only class	All rows	Unique formulas	Primary rows	Primary families
All retained	152	146	150	4/4
Canonical seen	32	29	31	4/4
No declared identity match	119	116	118	4/4
Strict no declared match	34	33	34	3/4
Familiar under any test	118	113	116	4/4

Classes overlap; none removes primary rows. “Strict” means no match under any declared test; it is not a claim of semantic novelty.
Full formulas, errors and range diagnostics are in figure-data.json.

Four primary source families; descriptive fixed-cohort results, no population confidence intervals. Benefit and regret use an overlap-safe retired-instruction-count proxy; no CPU speedup claim.
Scatter panels show both models in the primary contrast. Worst-error and novelty panels are consumed-test diagnostics; no retuning or new success endpoint.