Sensitivity and familiarity diagnostics

All five omissions retained; leave-one-family-out values are sensitivity diagnostics, not a confidence interval.

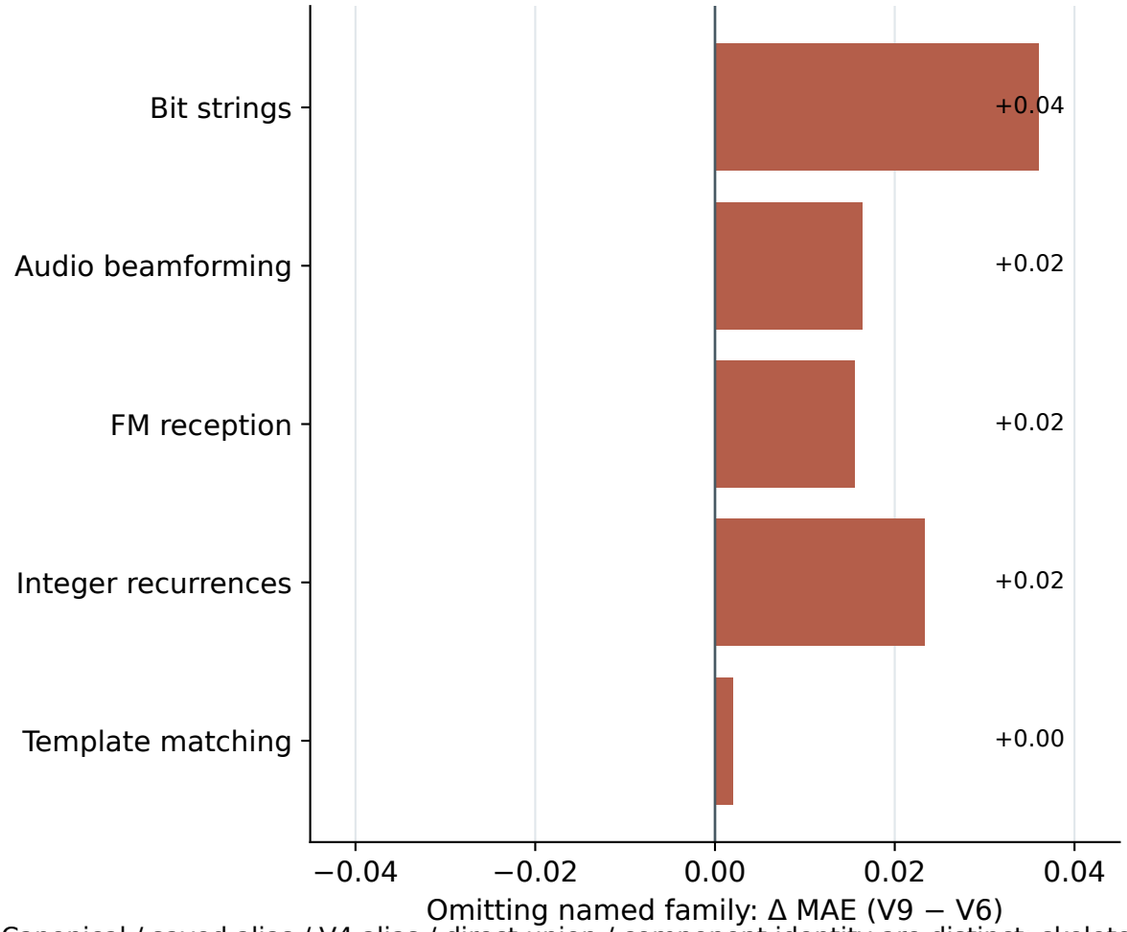

Familiarity · diagnostic counts only

Reference	Channel	Seen rows	Unseen rows	Seen unique
Pre-reservation	canonical	310	211	147
Pre-reservation	saved alias	311	210	148
Pre-reservation	V4 alias	315	206	152
Pre-reservation	direct	315	206	152
Pre-reservation	component	315	206	152
V6 training	canonical	229	292	105
V6 training	direct	233	288	109
V6 training	component	233	288	109
V9 training	canonical	229	292	105
V9 training	direct	233	288	109
V9 training	component	233	288	109

Canonical / saved alias / V4 alias / direct union / component identity are distinct; skeleton matches are never identity.
Both familiarity strata and their counts/errors (empty = unavailable) are retained at full precision in figure-data.json.

Shared formulas, helpers and source ancestry prevent treating memberships or omission results as independent replications.