V9: paid residual correction on consumed application data

Primary · 3 queries/family: frozen 3.345005 → local 3.279960 LUT4 MAE (-0.065045; 1.94% lower).

All three adapters use identical unqueried cases within each budget. Surviving cases change across budgets.

A Primary paired family differences · budget 3

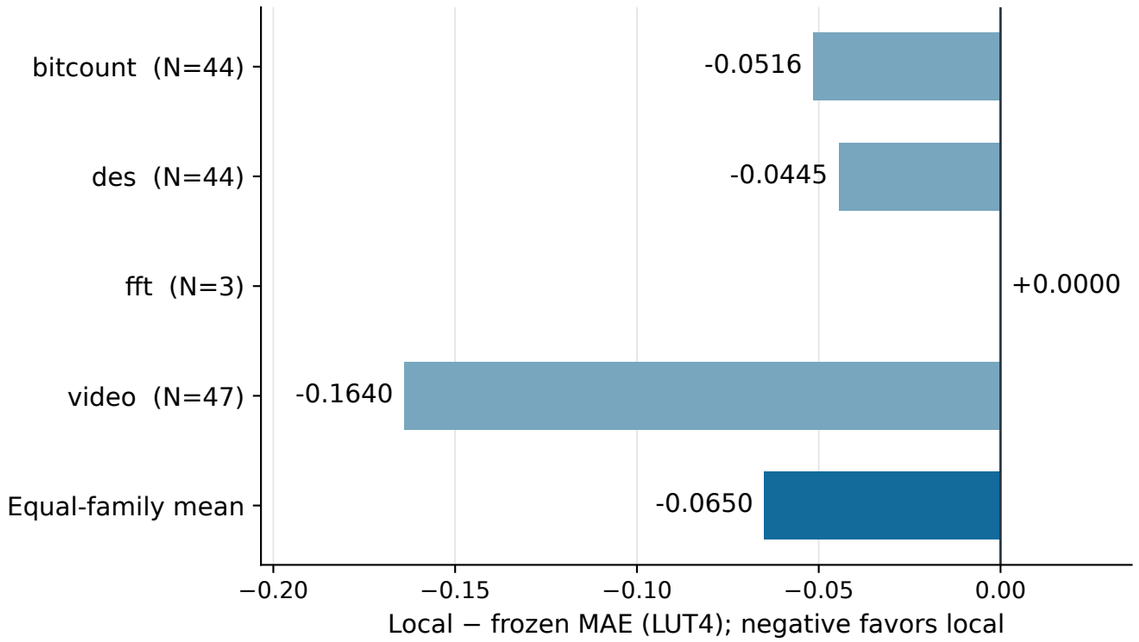

B All adapters and budgets · changing cases

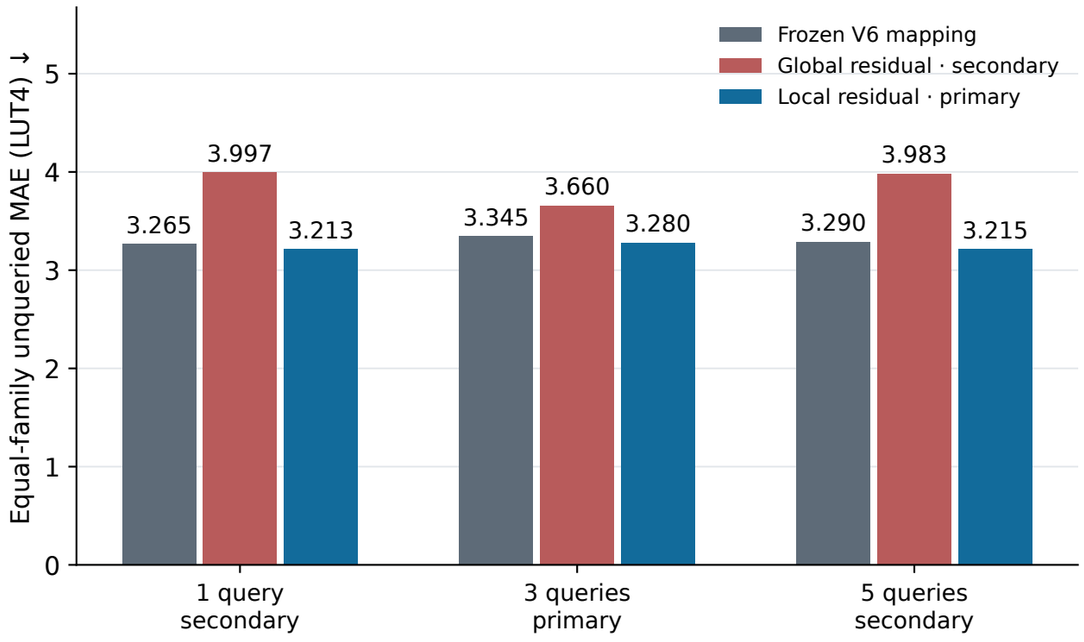

C Exact unqueried denominators · identity groups control exclusion, not weighting

Family	Budget 1 · N (positive / zero)	Budget 3 · N (positive / zero)	Budget 5 · N (positive / zero)
bitcount	46 (27 / 19)	44 (25 / 19)	42 (23 / 19)
des	46 (34 / 12)	44 (32 / 12)	42 (30 / 12)
fft	5 (2 / 3)	3 (0 / 3)	1 (0 / 1)
isqrt · secondary	1 (0 / 1)	exhausted · score undefined	exhausted · score undefined
video	49 (42 / 7)	47 (40 / 7)	45 (38 / 7)

Consumed-V8 development only · four source families · no population confidence intervals. FFT has only 3 zero targets at budget 3 and 1 at budget 5.
The query policy is frozen: this study tests correction of remaining points, not improved instruction selection or CPU performance.