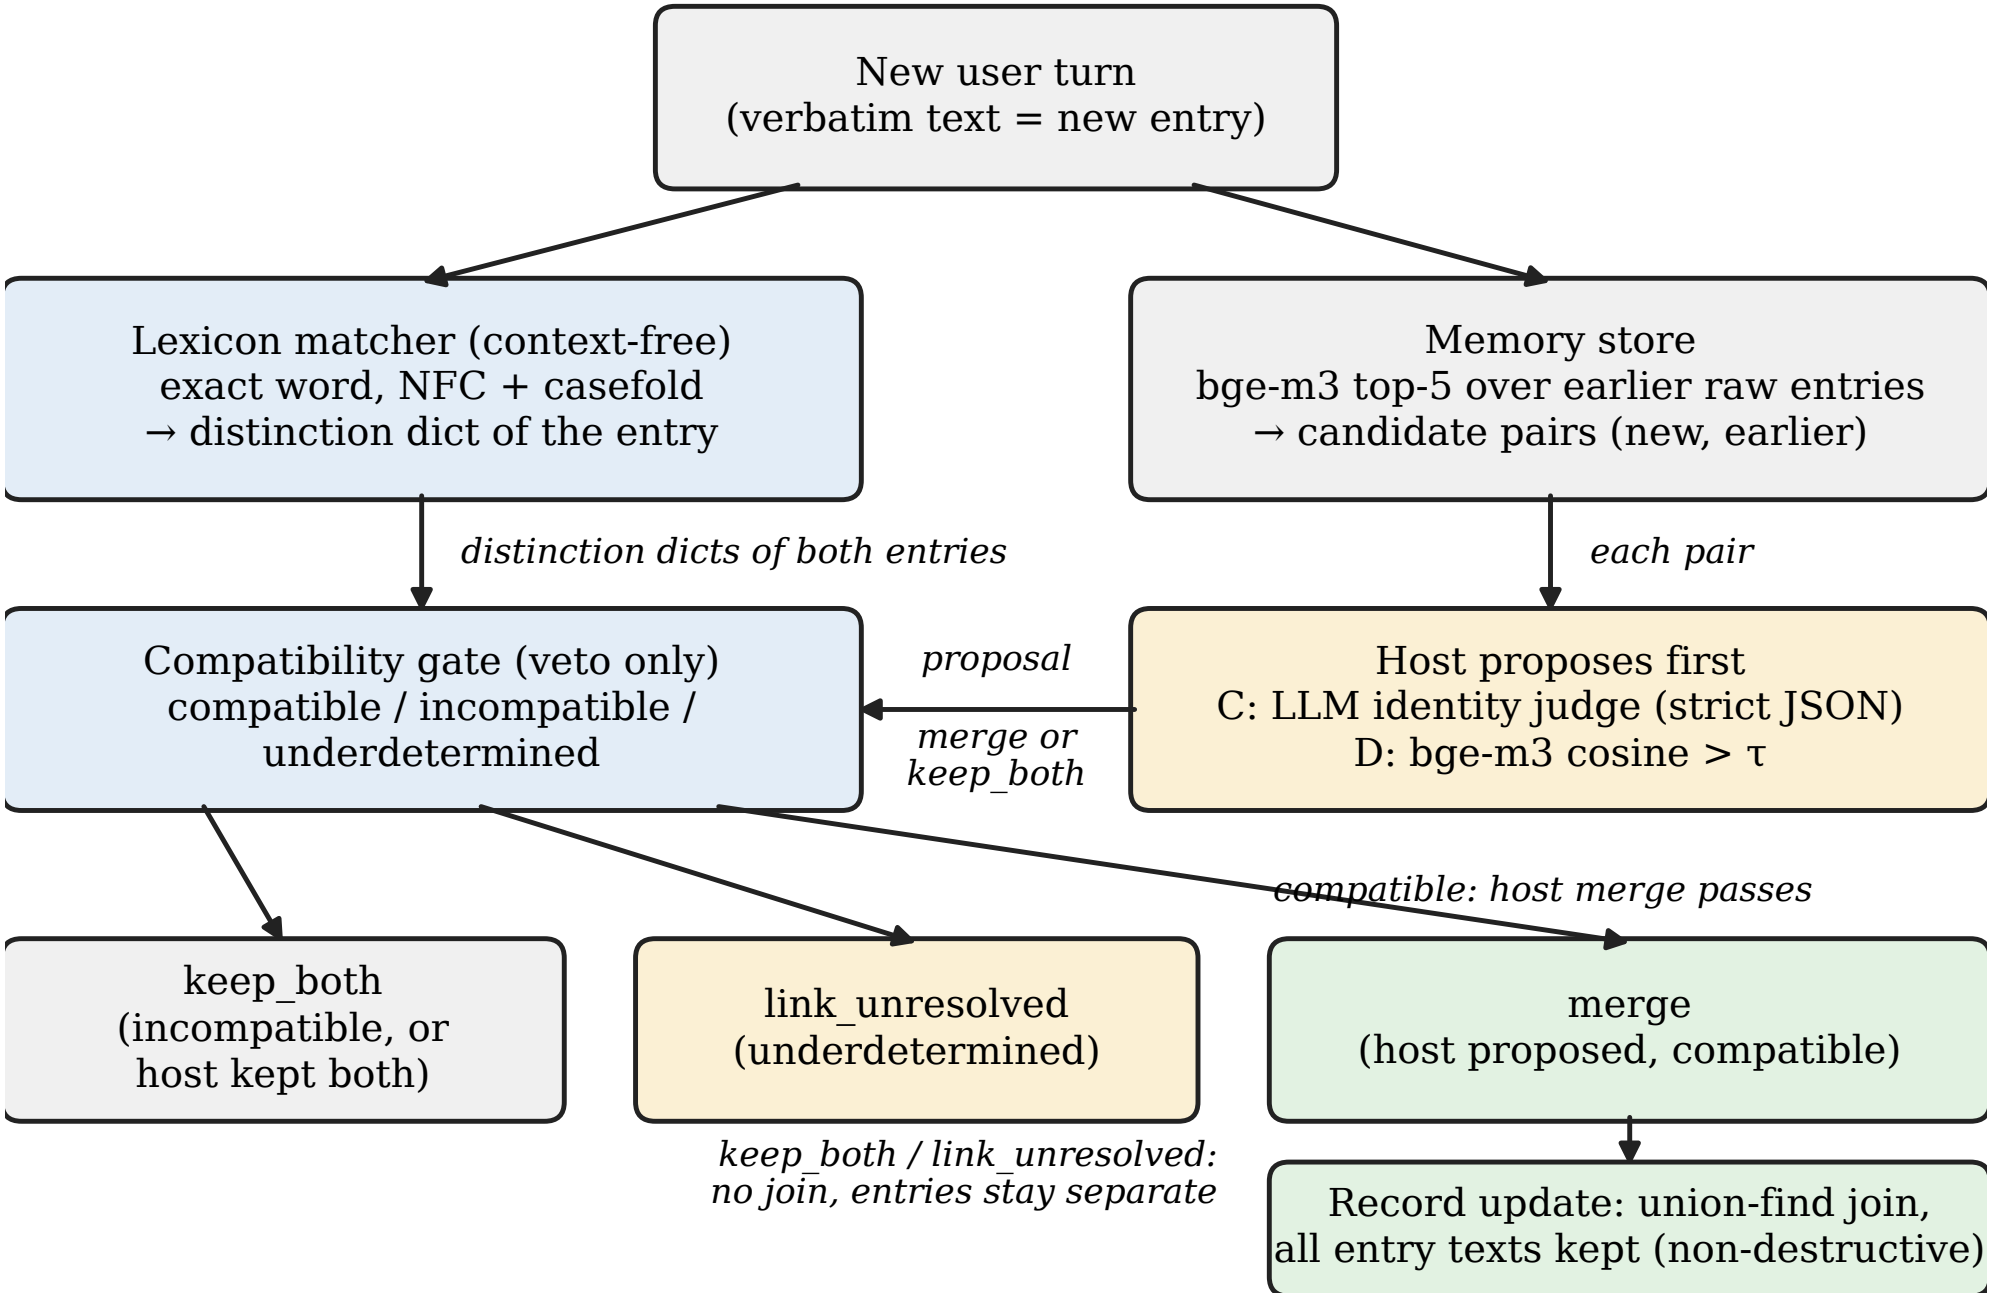
New user turn
(verbatim text = new entry)
Lexicon matcher (context-free)
exact word, NFC + casefold
→ distinction dict of the entry
Memory store
bge-m3 top-5 over earlier raw entries
→ candidate pairs (new, earlier)
distinction dicts of both entries
each pair
Compatibility gate (veto only)
compatible / incompatible /
underdetermined
proposal
merge or
keep_both
Host proposes first
C: LLM identity judge (strict JSON)
D: bge-m3 cosine > τ
compatible: host merge passes
keep_both
(incompatible, or
host kept both)
link_unresolved
(underdetermined)
merge
(host proposed, compatible)
keep_both / link_unresolved:
no join, entries stay separate
Record update: union-find join,
all entry texts kept (non-destructive)