

PV239 – 02 Design

Goals

- Get to know available layouts
- Create a layout with some controls
- Get to know available navigation options
- Styles
- Localization

Controls


ActivityIndicator	BoxView	Button	DatePicker	Editor
Entry	Image	Label	TimePicker	Slider
OpenGLView	Picker	ProgressBar	SearchBar	Stepper
WebView	TableView	ListView	TextCell	EntryCell
ImageCell	SwitchCell	ViewCell	Map	...

Layouts

Grid



StackLayout

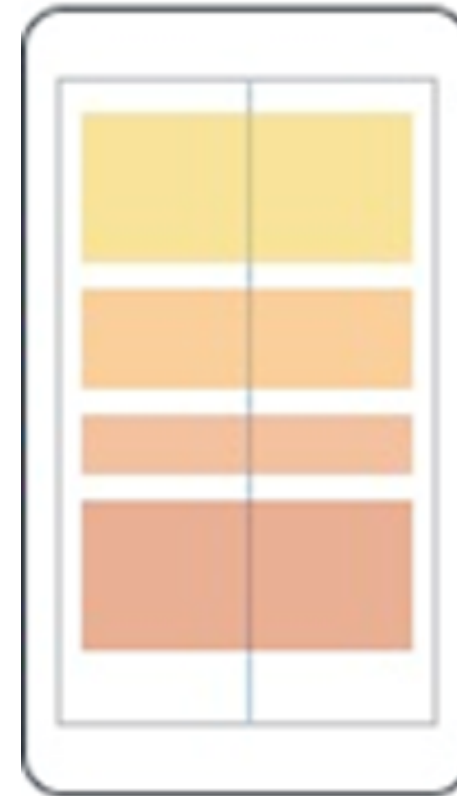

Grid


- Table-style layout
- RowDefinitions, ColumnDefinitions
 - Width / Height = 150 | * | Auto
- Grid.Row, Grid.Column – placement of control in the Grid
- Grid.RowSpan, Grid.ColumnSpan – control can span over multiple “cells”
- HorizontalSpacing, VerticalSpacing – empty space between “cells”

Layouts - StackLayout

VerticalStackLayout



HorizontalStackLayout

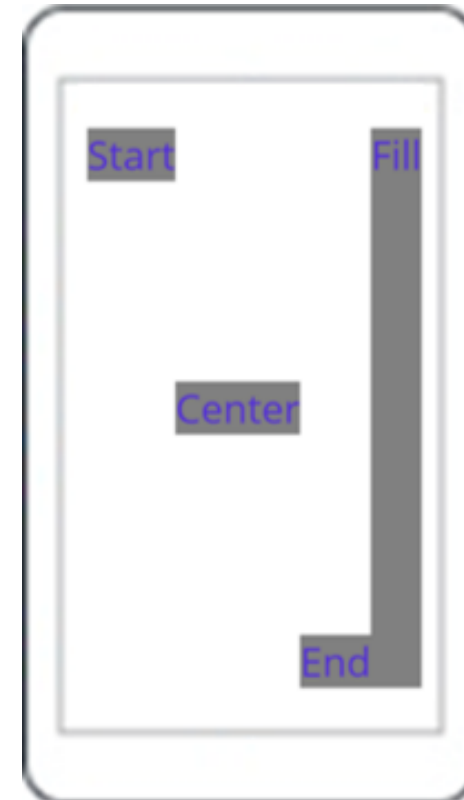


StackLayout...

- HorizontalStackLayout, VerticalStackLayout
 - Individual layouts for single direction
 - Separate LayoutManagers with Measure methods
 - Recommended
- StackLayout
 - Wraps HorizontalStackLayout and VerticalStackLayout
 - Has Orientation
 - Useful for adaptive layouts

Layouts

AbsoluteLayout

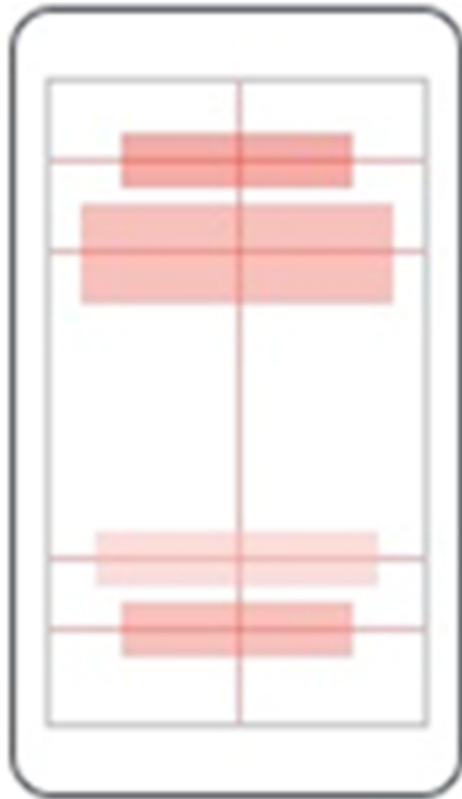

FlexLayout



Layouts demo




Shell

- Application layout
- Navigation using URIs
- Hierarchical navigation
- Easy passing of parameters between pages
 - String parameters or strongly typed objects
 - Works even in backwards navigation “..`?success=true`”


Shell - Flyout

- Header
- Items
- Footer
- Support for text, icons or custom templates

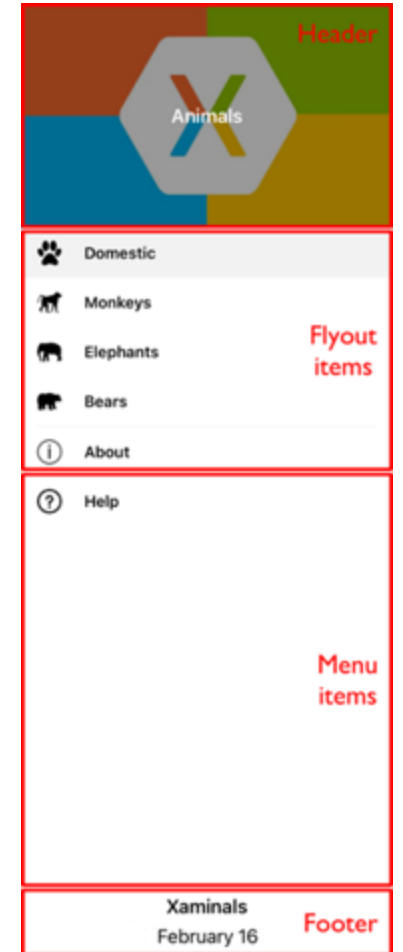


Shell - tabs

- 2 levels of hierarchy
 - Bottom tabs
 - Top tabs
- Support for text, icons, custom templates

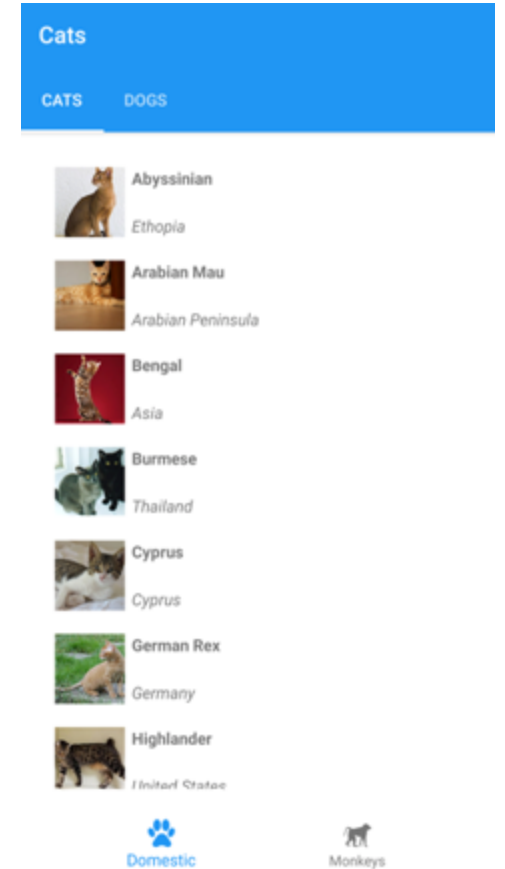

Shell - MenuBar

- MenuItem
- MenuFlyoutItem
- MenuFlyoutSubItem
- Support for text, icons

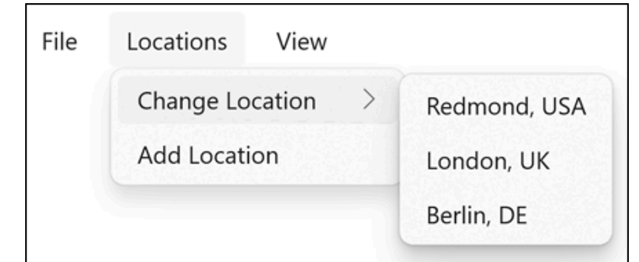

NavigationPage

- NavigationPage
- PushAsync
- PopAsync

Pages

ContentPage



TabbedPage



FlyoutPage



Navigation

DEMO

Resources

- Each element contains a collection of **Resources**
- Resources can define any content
- Referencing using **x:Key**
- Access with **{StaticResource Key}**
- Can be defined in separate files - **merged dictionaries**
- Hierarchical application
 - Can be overridden on any level

Styles

- Setting style for a control
- **TargetType** – specifies which element type it should be applied to
- **x:Key** – key of style, can be omitted – in that case it will be automatically applied to all controls of the type
- Collection of **Setter** objects
 - **Property**
 - **Value**
- **BasedOn** – base style that this style extends – optional

Styles

DEMO

Localization

- .resx files
- Separate files for separate views
- Don't use resources in multiple places

Localization

DEMO

Goals

- Get to know available layouts
- Create a layout with some controls
- Get to know available navigation options
- Styles
- Localization