



Assignment 1 - no dfgdfb fgghgn

Computer Engineering (Savitribai Phule Pune University)



Scan to open on Studocu

Problem Statement:

You work for XYZ Corporation. Your corporation wants to launch a new web-based application. The development team has prepared the code but it is not tested yet. The development team needs the system admins to build a web server to test the code but the system admins are not available

Tasks To Be Performed:

1. Web tier: Launch an instance in a public subnet and that instance should allow HTTP and SSH from the internet.
2. Application tier: Launch an instance in a private subnet of the web tier and it should allow only SSH from the public subnet of Web Tier-3.
3. DB tier: Launch an RDS MYSQL instance in a private subnet and it should allow connection on port 3306 only from the private subnet of Application Tier-4.
4. Setup a Route 53 hosted zone and direct traffic to the EC2 instance

You have been also asked to propose a solution so that:

1. Development team can test their code without having to involve the system admins and can invest their time in testing the code rather than provisioning, configuring and updating the resources needed to test the code.
 2. Make sure when the development team deletes the stack, RDS DB instances should not be deleted.
-

.Solution :

1. Preparation of CloudFormation 'YAML' Template as per given requirements.
 - a. Web tier: Launch an instance in a public subnet and that instance should allow HTTP and SSH from the internet.

```

3
4 Resources:
5   VPC:
6     Type: AWS::EC2::VPC
7     Properties:
8       CidrBlock: 10.10.0.0/16
9       EnableDnsSupport: true
10      EnableDnsHostnames: true
11      InstanceTenancy: default
12      Tags:
13        - Key: Name
14          Value: CloudformationAssignment
15      InternetGateway:
16        Type: AWS::EC2::InternetGateway
17        Properties:
18          Tags:
19            - Key: Name
20              Value: InternetGateway
21      VPCGatewayAttachment:
22        Type: AWS::EC2::VPCGatewayAttachment
23        Properties:
24          VpcId: !Ref VPC
25          InternetGatewayId: !Ref InternetGateway
26
27      #Public Subnet
28      PubSubnetWebServer:
29        Type: AWS::EC2::Subnet
30        Properties:
31          AvailabilityZone: !Select [ 0, !GetAZs ]
32          VpcId: !Ref VPC
33          CidrBlock: 10.10.1.0/24
34          MapPublicIpOnLaunch: true
35          Tags:
36            - Key: Name
37              Value: PublicPubSubnetWebServer
38      PublicRouteTable:
39        Type: AWS::EC2::RouteTable
40        Properties:
41          VpcId: !Ref VPC
42          Tags:
43            - Key: Name
44              Value: RouteTablePublicSubnet
45      PublicInternetRoute:
46        Type: AWS::EC2::Route
47        DependsOn: VPCGatewayAttachment
48        Properties:
49          DestinationCidrBlock: 0.0.0.0/0
50          GatewayId: !Ref InternetGateway
51          RouteTableId: !Ref PublicRouteTable
52      PubSubnetWebServerRouteTableAssociation:
53        Type: AWS::EC2::SubnetRouteTableAssociation
54        Properties:
55          RouteTableId: !Ref PublicRouteTable
56          SubnetId: !Ref PubSubnetWebServer

```

- b. 2. Application tier: Launch an instance in a private subnet of the web tier and it should allow only SSH from the public subnet of Web Tier-3.

```

#Private Subnet
PriSubnetAppServer:
  Type: AWS::EC2::Subnet
  Properties:
    AvailabilityZone: !Select [ 1, !GetAZs ]
    VpcId: !Ref VPC
    CidrBlock: 10.10.2.0/24
    MapPublicIpOnLaunch: false
    Tags:
      - Key: Name
        Value: PrivatePubSubnetWebServersassessment

# A NAT Gateway:
NATGateway:
  Type: AWS::EC2::NatGateway
  Properties:
    AllocationId: !GetAtt ElasticIPAddress.AllocationId
    SubnetId: !Ref PubSubnetWebServer
    Tags:
      - Key: Name
        Value: NatGatewayAssessment
ElasticIPAddress:
  Type: AWS::EC2::EIP
  Properties:
    Domain: VPC

RouteTablePrivate:
  Type: AWS::EC2::RouteTable
  Properties:
    VpcId: !Ref VPC
    Tags:
      - Key: Name
        Value: RouteTablePrivateSubnet
NATRoute:
  DependsOn: NATGateway
  Type: AWS::EC2::Route
  Properties:
    RouteTableId: !Ref RouteTablePrivate
    DestinationCidrBlock: 0.0.0.0/0
    NatGatewayId: !Ref NATGateway

PriSubnetAppServerRouteTableAssociationPrivate:
  Type: AWS::EC2::SubnetRouteTableAssociation
  Properties:
    RouteTableId: !Ref RouteTablePrivate
    SubnetId: !Ref PriSubnetAppServer

InstanceSecurityGroup:
  Type: AWS::EC2::SecurityGroup
  Properties:
    GroupName: "Internet Group"
    GroupDescription: "SSH and web traffic in, all traffic out."
    VpcId: !Ref VPC
    SecurityGroupIngress:
      - IpProtocol: tcp
        FromPort: '22'
        ToPort: '22'
        CidrIp: 0.0.0.0/0
      - IpProtocol: tcp
        FromPort: '80'
        ToPort: '80'
        CidrIp: 0.0.0.0/0

```

- c. DB tier: Launch an RDS MYSQL instance in a private subnet and it should allow connection on port 3306 only from the private subnet of Application Tier-4.

```

    CidrIp: 0.0.0.0/0

InstanceSecurityGroupDataBase:
  Type: "AWS::EC2::SecurityGroup"
  Properties:
    GroupDescription: "Database instances security group"
    VpcId: !Ref VPC
    SecurityGroupIngress:
      - IpProtocol: tcp
        CidrIp: 10.10.2.0/24
        FromPort: 3306
        ToPort: 3306
    SecurityGroupEgress:
      - IpProtocol: -1
        CidrIp: 0.0.0.0/0

RDSDBSubnetGroup:
  Type: "AWS::RDS::DBSubnetGroup"
  Properties:
    DBSubnetGroupDescription: "Subnet Group for MySQL database"
    DBSubnetGroupName: !Sub "${AWS::Region}-aws-database-subnet-group14"
    SubnetIds:
      - !Ref PubSubnetWebServer
      - !Ref PriSubnetAppServer
    Tags:
      - Key: Name
        Value: DBSubnetGroup

RDSDBInstance:
  Type: AWS::RDS::DBInstance
  Properties:
    DBInstanceIdentifier: DBAssessment12
    AllocatedStorage: 20
    DBInstanceClass: db.t3.micro
    Engine: "MySQL"
    MasterUsername: !Ref MasterUsername
    MasterUserPassword: !Ref MasterUserPassword
    MultiAZ: false
    EngineVersion: 8.0.35
    AutoMinorVersionUpgrade: true
    PubliclyAccessible: false
    StorageType: gp2
    Port: 3306
    StorageEncrypted: false
    CopyTagsToSnapshot: true
    EnableIAMDatabaseAuthentication: false
    DeletionProtection: true
    DBSubnetGroupName: !Ref RDSDBSubnetGroup
    VPCSecurityGroups:
      - !Ref InstanceSecurityGroupDataBase
    MaxAllocatedStorage: 1000
    Tags:
      - Key: Name
        Value: DBAssessment
      - Key: createdBy
        Value: Amit Choudhari
      - Key: Project
        Value: AssessmentModule7
      - Key: Environment
        Value: Prod

PublicEC2Web:
  Type: "AWS::EC2::Instance"

```

- d. 4. Setup a Route 53 hosted zone and direct traffic to the EC2 instance

```

PublicEC2Web:
  Type: 'AWS::EC2::Instance'
  Properties:
    SubnetId: !Ref PubSubnetWebServer
    ImageId: !Ref AMI
    InstanceType: !Ref InstanceTypeParameter
    KeyName: !Ref Key
    SecurityGroupIds:
      - Ref: InstanceSecurityGroup
    Tags:
      - Key: Name
        Value: PublicEC2Web

PrivateEC2App:
  Type: 'AWS::EC2::Instance'
  Properties:
    SubnetId: !Ref PriSubnetAppServer
    ImageId: !Ref AMI
    InstanceType: !Ref InstanceTypeParameter
    KeyName: !Ref Key
    SecurityGroupIds:
      - Ref: InstanceSecurityGroupPrivate
    Tags:
      - Key: Name
        Value: PrivateEC2App

HostedZone:
  Type: AWS::Route53::HostedZone
  Properties:
    HostedZoneConfig:
      Comment: ''
      Name: ar9aenterprises.in

MyDNSRecord:
  Type: AWS::Route53::RecordSet
  Properties:
    HostedZoneId: !Ref HostedZone
    Name: www.ar9aenterprises.in.
    Type: A
    TTL: 300
    ResourceRecords:
      - !GetAtt PublicEC2Web.PublicIp

```

2. Step 1: Search for CloudFormation and click on Create stack

CloudFormation > Stacks > Create stack

Step 1: Create stack

Create stack

Prerequisite - Prepare template

Prepare template
Every stack is based on a template. A template is a JSON or YAML file that contains configuration information about the AWS resources you want to include in the stack.

☒ Choose an existing template
Upload or choose an existing template

☐ Use a sample template
Choose from our sample template library

☐ Build from Application Composer
Create a template using a visual builder

Specify template
A template is a JSON or YAML file that describes your stack's resources and properties.

Template source
Selecting a template generates an Amazon S3 URL, where it will be stored.

☐ Amazon S3 URL
Provide an Amazon S3 URL to your template

☒ Upload a template file
Upload your template directly to the console

☐ Sync from S3 - new
Sync a template from your S3 repository

Upload a template file

Assignment_CLOUDFORMATION_LUP.yml

2024 or later, formatted file

S3 URL: https://s3-ap-south-1.amazonaws.com/ff-templates-1efqpfkai-ap-south-1/2024-05-28/0842303670x2z-Assignment_CLOUDFORMATION_LUP.yml

CloudFormation > Stacks > Create stack

Step 2: Specify stack details

Specify stack details

Provide a stack name

Stack name

Stack name must be 1 to 128 characters, start with a letter, and only contain alphanumeric characters. Character count: 21/128

Parameters
Parameters are defined in your template and allow you to input custom values when you create or update a stack.

AMI
The Amazon AMI to use.

InstanceTypeParameter
Error instance size. Default is t3.micro.

Key
Select from existing keys.

MasterUserPassword
The password for the database.

MasterUsername
The username for the database.

CloudFormation > Stacks > Create stack

Step 3: Configure stack options

Configure stack options

Tags - optional
Tags (key-value pairs) are used to apply metadata to AWS resources, which can help in organizing, identifying, and categorizing those resources. You can add up to 10 unique tags for each stack.

No tags associated with the stack.

You can add 50 more tags.

Permissions - optional
Specify an existing AWS Identity and Access Management (IAM) service role that CloudFormation can assume.

IAM role - optional
Choose the AWS role for CloudFormation to use for all operations performed on the stack.

Stack failure options

Behavior on provisioning failure
Specify the roll-back behavior for a stack failure. [Learn more](#)

☒ Roll back all stack resources
Roll back the stack to the last known stable state.


☐ Preserve successfully provisioned resources
Preserve the state of successfully provisioned resources, while rolling back failed resources to the last known stable state. Resources without a last known stable state will be deleted upon the next stack operation.

Delete newly created resources during a rollback
Specify whether resources that were created during a failed operation should be deleted regardless of their deletion policy. [Learn more](#)

☒ Use deletion policy
Resoure or discards created resources according to their attached deletion policy.

☐ Delete all newly created resources
Deletes created resources during a rollback regardless of their attached deletion policy.

Advanced options
You can set additional options for your stack, like notification options and a stack policy. [Learn more](#)

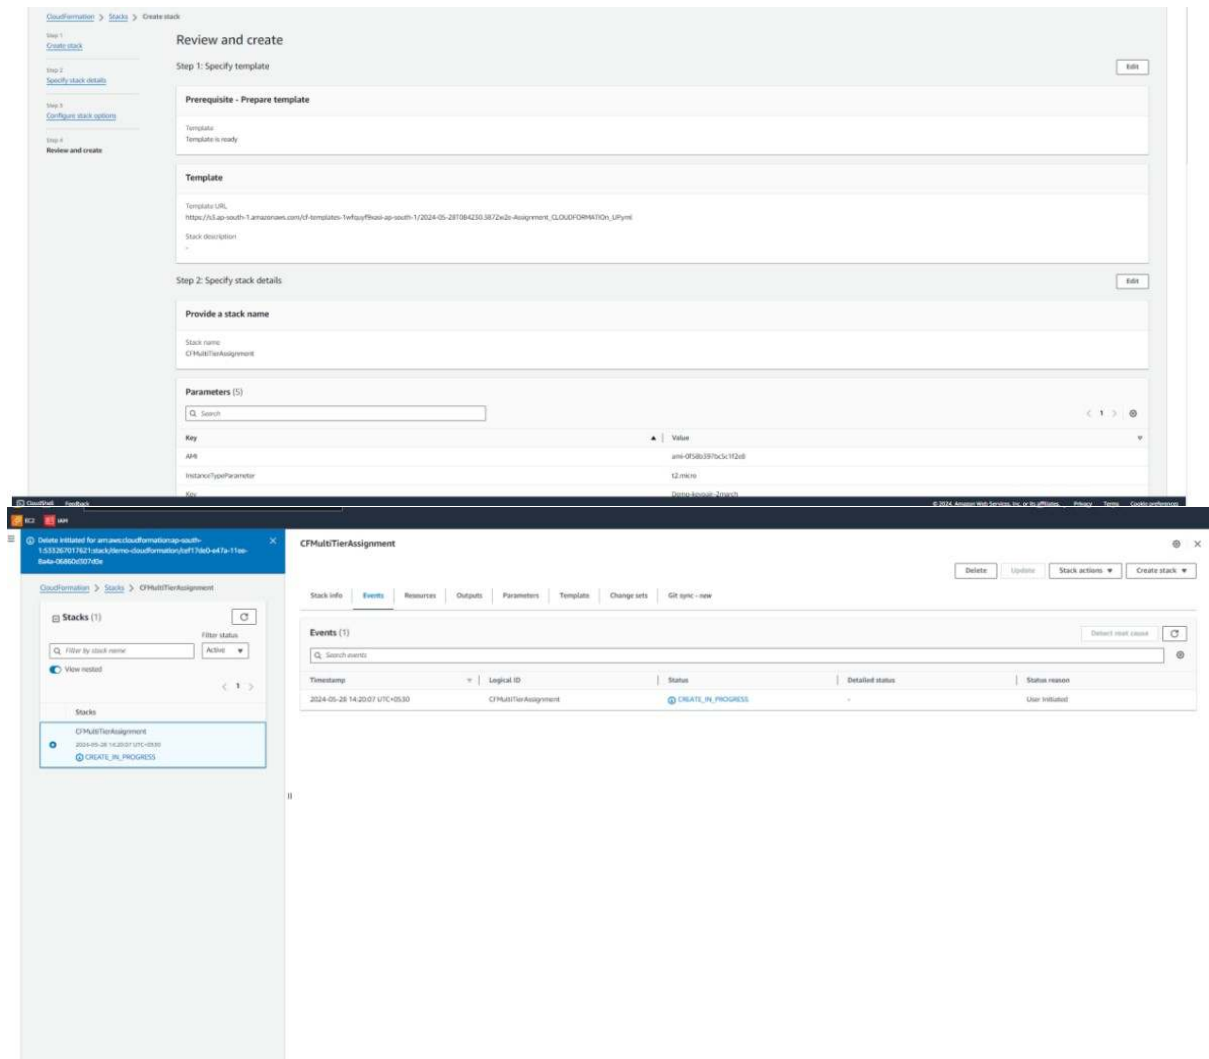

Stack execution failed to create the RDSDB instance due to available version missing

The screenshot displays the AWS CloudFormation console for the stack **CFMultiTierAssignment** in the **us-east-1** region. The stack is currently in the **UPDATE_IN_PROGRESS** state. The **Events** tab is active, showing a list of events from 2024-05-28 14:22:09 to 14:20:30 UTC+05:30. The events include the creation and update of various resources such as **NATRoute**, **NATGateway**, **MyDBInstance**, **PublicEC2Subnet**, **PrivateEC2Subnet**, **PublicInternetRoute**, **PrivateInternetRoute**, **RouteTablePrivate**, **RouteTablePublic**, **RDSDBInstance**, and **RDSDBSubnetGroup**. The stack is located in the **us-east-1** region. The **Parameters** tab is also visible, showing parameters like **AMI**, **InstanceType**, **Key**, **MasterUsername**, and **MasterUserPassword**.

a. Instance Validations

1.

The screenshot displays the AWS Management Console interface, specifically the EC2 console. The top section shows a list of EC2 instances. The selected instance, 'i-009743cad218301f8', is a PublicEC2Web instance. The details pane on the right shows the instance's configuration, including its state (Running), public IP address (13.201.16.157), and private IP address (10.10.1.178). The instance is running on an m5.xlarge instance type in the us-east-1 region.

Below the instance details, the 'VPC dashboard' is visible, showing a list of VPCs. The selected VPC, 'vpc-0a41366798987956', is a CloudFormation-assigned VPC. The details pane for this VPC shows its configuration, including its state (Available), DHCP options set (default), and DNS settings (Enabled).

The 'Route tables' section shows a list of route tables. The selected route table, 'rtb-051e9718144049d61', is associated with the VPC 'vpc-0a41366798987956'. The details pane for this route table shows its configuration, including its state (Active) and the routes it contains.

The 'Routes' section shows a list of routes. The selected route, '0.0.0.0/0', is associated with the route table 'rtb-051e9718144049d61'. The details pane for this route shows its configuration, including its state (Active) and the target (local).

Route 53

Dashboard

Hosted zones

Health checks

Profiles

New

IP-based routing

CIDR collections

Traffic flow

Traffic policies

Policy records

Domains

Registered domains

Requests

Resolver

VPCs

Inbound endpoints

Outbound endpoints

Rules

Query logging

Outposts

DNS Firewall

Application Recovery Controller

Route 53 > Hosted zones > ar9aenterprises.in

Public ar9aenterprises.in info

Delete zone Test record Configure query logging

Hosted zone details

Edit hosted zone

Records (3)

Records (3) info

Automatic mode is the current search behavior optimized for best filter results. To change modes go to settings.

Filter records by property or value

Type Routing pol... Alias

Record name Type Routin... Differ... Alias Value/Route traffic to

ar9aenterprises.in	NS	Simple	-	No	ns-369.awsdns-46.com. ns-1700.awsdns-20.co.uk. ns-565.awsdns-06.net. ns-1323.awsdns-37.org.
ar9aenterprises.in	SOA	Simple	-	No	ns-369.awsdns-46.com. awsdns-hostmaster.amazon.com. 1 72
www.ar9aenterprises.in	A	Simple	-	No	13.201.16.157

Consider creating a Blue/Green Deployment to minimize downtime during upgrades. You may want to consider using Amazon RDS Blue/Green Deployments and minimize your downtime during upgrades. A Blue/Green Deployment provides a staging environment for changes to production databases. [DSR User Guide](#) [Amazon User Guide](#)

Databases (3)

Filter by database

Group resources Modify Actions Restore from S3 Create database

ID identifier	Status	Role	Engine	Region & AZ	Size	Recommendations	CPU	Current activity	Maintenance	VPC	Multi-AZ
auradb-assignment	Available	Regional cluster	Aurora MySQL	ap-south-1	8 instances	1 Informational			none	-	-
auradb-assignment-instance-1	Available	Writer instance	Aurora MySQL	ap-south-1a	db.13.medium		12.21%	5 Selects/Sec	available	vpc-d4413d67/ducksdbf	3 Zones
auradb-assignment-instance-1-ap-south-1a	Available	Reader instance	Aurora MySQL	ap-south-1a	db.13.medium		10.78%	2 Selects/Sec	available	vpc-d4413d67/ducksdbf	3 Zones
auradb-2	Available	Reader instance	Aurora MySQL	ap-south-1a	db.13.medium	1 Informational	11.01%	2 Selects/Sec	available	vpc-d4413d67/ducksdbf	3 Zones
dbinstance-1	Available	Instance	MySQL Community	ap-south-1a	db.13.micro		2.90%	0 Connections	none	vpc-d4413d67/ducksdbf	No

CloudWatch Feedback

VPC dashboard

KCC Global View

Filter by VPC

Select a VPC

Virtual private cloud

Your VPCs

Subnets

Route tables

Internet gateways

Egress-only Internet gateways

DHCP option sets

Elastic IPs

Managed prefix lists

Endpoints

Endpoint services

NAT gateways

Peering connections

Security

Network ACLs

Security groups

DNS Firewall

Rule groups

Domain lists

Network Firewall

Firewalls

Firewall policies

Network Firewall rule groups

TLS inspection configurations

Network Firewall

Route tables (1/4) info

Filter resources by attribute or tag

Name	Route table ID	Explicit subnet assoc...	Edge associations	Main	VPC	Owner ID
RouteTablePrivateSubnet	rtb-01349771a4d05d61	subnet-d0f742a2/rtb-01349771a4d05d61	-	No	vpc-d4413d67/ducksdbf	533267017621
-	rtb-01349771a4d05d61	-	-	Yes	vpc-d4413d67/ducksdbf	533267017621
RouteTablePublicSubnet	rtb-0a51f7a7292eb104	subnet-d46179a9/rtb-0a51f7a7292eb104	-	No	vpc-d4413d67/ducksdbf	533267017621
-	rtb-0a51f7a7292eb104	-	-	Yes	vpc-d4413d67/ducksdbf	533267017621

rtb-0a51f7a7292eb104 / RouteTablePublicSubnet

Details Routes Subnet associations Edge associations Route propagation Tags

Filter routes

Destination	Target	Status	Propagated
0.0.0.0/0	vpc-d4413d67/ducksdbf	Active	No
10.10.0.0/16	local	Active	No

Login to public web server

```
ubuntu@ubuntu:~$ cat /etc/os-release
NAME="Ubuntu"
VERSION="24.04 LTS (GNU/Linux 4.8.0-1008-aws amd64)"
* Documentation:  https://help.ubuntu.com
* Management:    https://landscape.canonical.com
* Support:       https://ubuntu.com/pro

System information as of Tue May 28 09:44:36 UTC 2024

System load:  0.08          Processes:    104
Usage of /:   23.1% of 6.7GB   Users logged in:  0
Memory usage: 19%           IPv4 address for enx0: 10.10.1.178
Swap usage:   0%

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

The list of available updates is more than a week old.
To check for new updates run: sudo apt update

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

ubuntu@ip-10-10-1-178:~$
```

```
ubuntu@ubuntu:~$ cat /etc/os-release
NAME="Ubuntu"
VERSION="24.04 LTS (GNU/Linux 4.8.0-1008-aws amd64)"
* Documentation:  https://help.ubuntu.com
* Management:    https://landscape.canonical.com
* Support:       https://ubuntu.com/pro

System information as of Tue May 28 10:13:06 UTC 2024

System load:  0.08          Processes:    107
Usage of /:   23.5% of 6.7GB   Users logged in:  0
Memory usage: 19%           IPv4 address for enx0: 10.10.1.178
Swap usage:   0%

Expanded Security Maintenance for Applications is not enabled.


0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

The list of available updates is more than a week old.
To check for new updates run: sudo apt update

Last login: Tue May 28 09:44:36 2024 from 13.233.177.3
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

ubuntu@ip-10-10-1-178:~$ ping 10.10.2.113
PING 10.10.2.113 (10.10.2.113): 56(84) bytes of data.
64 bytes from 10.10.2.113: icmp_seq=1 ttl=64 time=1.04 ms
64 bytes from 10.10.2.113: icmp_seq=2 ttl=64 time=1.03 ms
64 bytes from 10.10.2.113: icmp_seq=3 ttl=64 time=1.08 ms
64 bytes from 10.10.2.113: icmp_seq=4 ttl=64 time=1.08 ms
64 bytes from 10.10.2.113: icmp_seq=5 ttl=64 time=1.12 ms
|
```

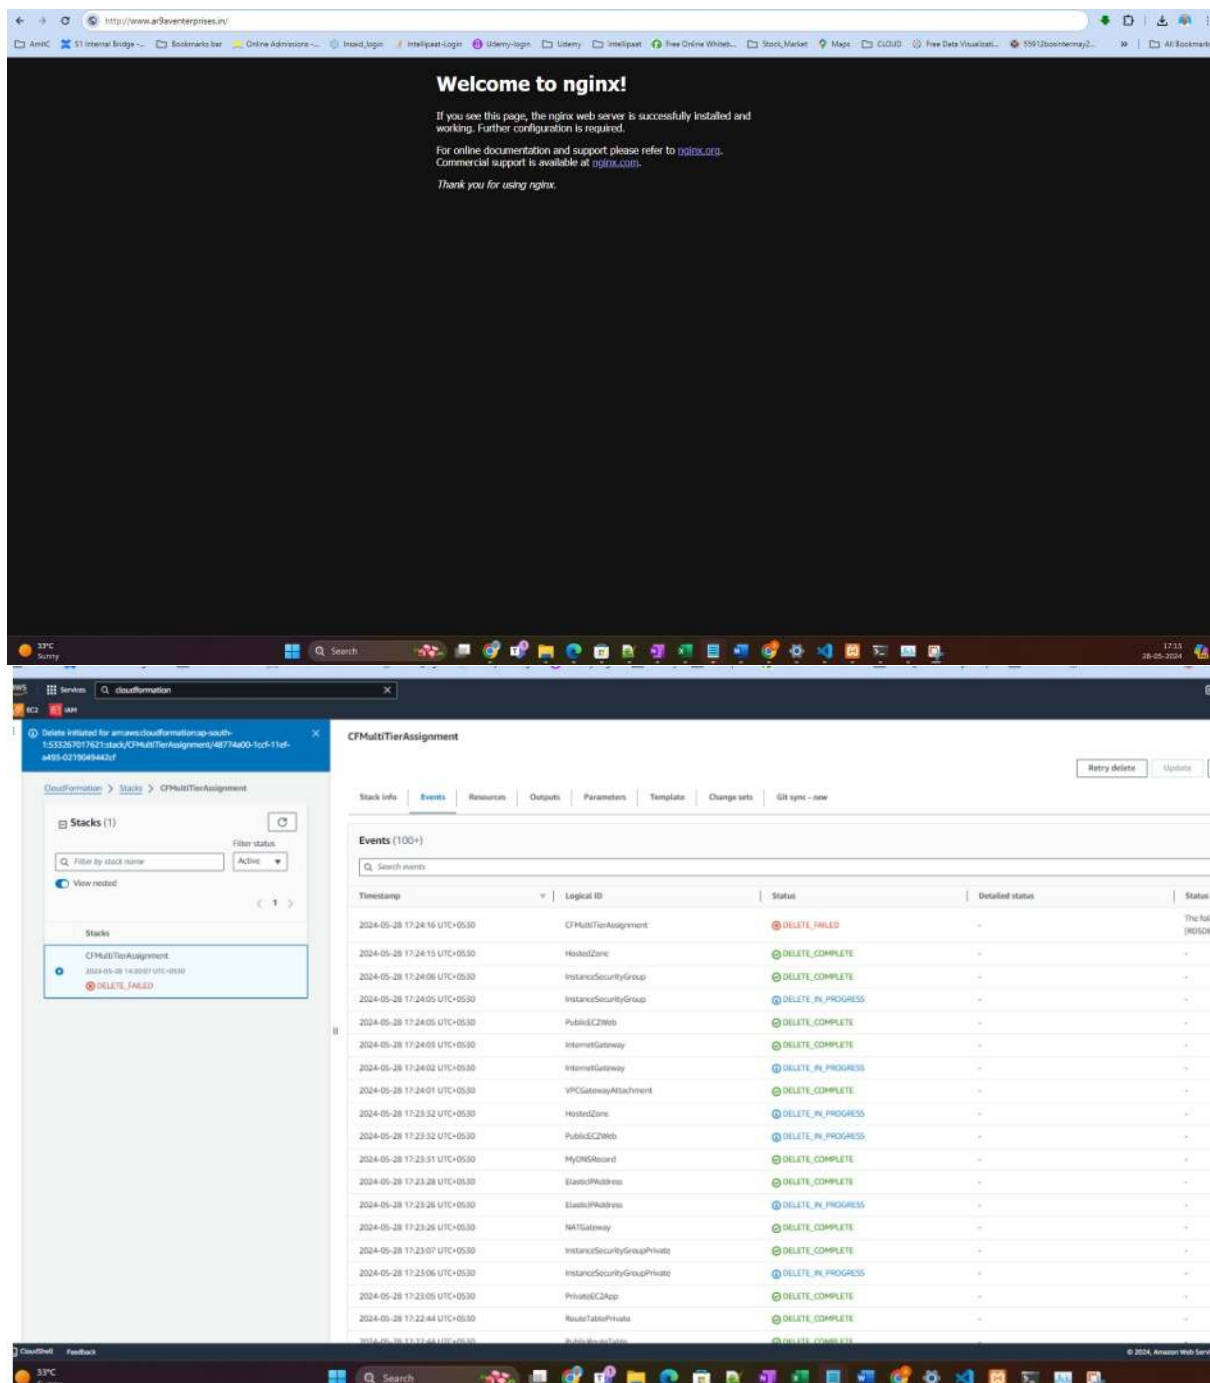CloudFormation > Stacks > CFMultiTierAssignment

Stacks (1)

Filter by stack name: Active

View nested

Stacks

- CFMultiTierAssignment
2024-05-28 17:22:43 UTC+05:30
DELETE_IN_PROGRESS

Events (100+)

Timestamp	Logical ID	Status	Detailed status	Status reason
2024-05-28 17:23:07 UTC+05:30	InstanceSecurityGroupPrivate	DELETE_COMPLETE	-	-
2024-05-28 17:23:06 UTC+05:30	InstanceSecurityGroupPrivate	DELETE_IN_PROGRESS	-	-
2024-05-28 17:23:05 UTC+05:30	PrivateEC2App	DELETE_COMPLETE	-	-
2024-05-28 17:22:44 UTC+05:30	RouteTablePrivate	DELETE_COMPLETE	-	-
2024-05-28 17:22:44 UTC+05:30	PublicRouteTable	DELETE_COMPLETE	-	-
2024-05-28 17:22:43 UTC+05:30	RouteTablePrivate	DELETE_IN_PROGRESS	-	-
2024-05-28 17:22:43 UTC+05:30	PublicRouteTable	DELETE_IN_PROGRESS	-	-
2024-05-28 17:22:43 UTC+05:30	PrivateSubnetServerRouteTableAssociationPrivate	DELETE_COMPLETE	-	-
2024-05-28 17:22:43 UTC+05:30	PublicSubnetWebServerRouteTableAssociation	DELETE_COMPLETE	-	-
2024-05-28 17:22:28 UTC+05:30	VPCGatewayAttachment	DELETE_IN_PROGRESS	-	-
2024-05-28 17:22:28 UTC+05:30	PublicInternetRoute	DELETE_COMPLETE	-	-
2024-05-28 17:22:28 UTC+05:30	NATGateway	DELETE_IN_PROGRESS	-	-
2024-05-28 17:22:28 UTC+05:30	RDSDBInstance	DELETE_FAILED	-	Response "rds" returned message: "Cannot delete instance db-1jagp0r: cannot delete instance: instance is in use".
2024-05-28 17:22:27 UTC+05:30	NATRoute	DELETE_COMPLETE	-	-
2024-05-28 17:22:27 UTC+05:30	PublicInternetRoute	DELETE_IN_PROGRESS	-	-
2024-05-28 17:22:27 UTC+05:30	RDSDBInstance	DELETE_IN_PROGRESS	-	-
2024-05-28 17:22:27 UTC+05:30	PrivateSubnetServerRouteTableAssociationPrivate	DELETE_IN_PROGRESS	-	-
2024-05-28 17:22:27 UTC+05:30	MyMGRecord	DELETE_IN_PROGRESS	-	-
2024-05-28 17:22:27 UTC+05:30	PublicSubnetWebServerRouteTableAssociation	DELETE_IN_PROGRESS	-	-

CFMultiTierAssignment

Stack info | Events | Resources | Outputs | Parameters | Template | Change sets | Git sync - new

Events (100+)

Timestamp	Logical ID	Status	Detailed status	Status reason
2024-05-28 17:24:16 UTC+05:30	CFMultiTierAssignment	DELETE_FAILED	-	The following resource(s) failed to delete [RDSDBInstance].
2024-05-28 17:24:15 UTC+05:30	HostedZone	DELETE_COMPLETE	-	-
2024-05-28 17:24:06 UTC+05:30	InstanceSecurityGroup	DELETE_COMPLETE	-	-
2024-05-28 17:24:05 UTC+05:30	InstanceSecurityGroup	DELETE_IN_PROGRESS	-	-
2024-05-28 17:24:05 UTC+05:30	PublicEC2Web	DELETE_COMPLETE	-	-
2024-05-28 17:24:03 UTC+05:30	InternetGateway	DELETE_COMPLETE	-	-
2024-05-28 17:24:02 UTC+05:30	InternetGateway	DELETE_IN_PROGRESS	-	-
2024-05-28 17:24:01 UTC+05:30	VPCGatewayAttachment	DELETE_COMPLETE	-	-
2024-05-28 17:23:52 UTC+05:30	HostedZone	DELETE_IN_PROGRESS	-	-
2024-05-28 17:23:52 UTC+05:30	PublicEC2Web	DELETE_IN_PROGRESS	-	-
2024-05-28 17:23:31 UTC+05:30	MyMGRecord	DELETE_COMPLETE	-	-
2024-05-28 17:23:28 UTC+05:30	ElasticIPAddress	DELETE_COMPLETE	-	-
2024-05-28 17:23:26 UTC+05:30	ElasticIPAddress	DELETE_IN_PROGRESS	-	-
2024-05-28 17:23:26 UTC+05:30	NATGateway	DELETE_COMPLETE	-	-
2024-05-28 17:23:07 UTC+05:30	InstanceSecurityGroupPrivate	DELETE_COMPLETE	-	-
2024-05-28 17:23:06 UTC+05:30	InstanceSecurityGroupPrivate	DELETE_IN_PROGRESS	-	-
2024-05-28 17:23:05 UTC+05:30	PrivateEC2App	DELETE_COMPLETE	-	-
2024-05-28 17:22:44 UTC+05:30	RouteTablePrivate	DELETE_COMPLETE	-	-
2024-05-28 17:22:44 UTC+05:30	RouteTablePrivate	DELETE_IN_PROGRESS	-	-