
Homework 2

Question1:

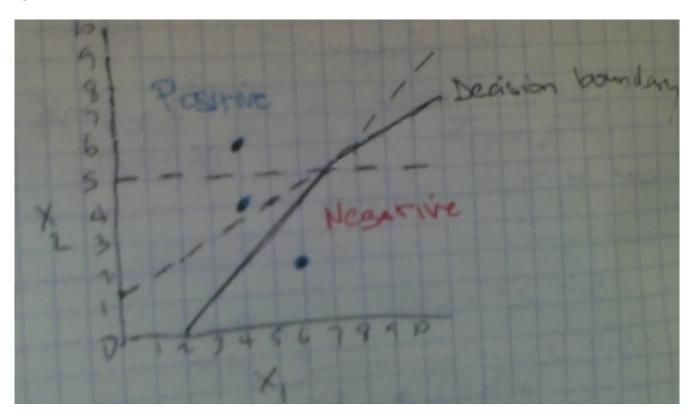


Question2:

Question 2:					instance: x(q)=(7,10)
	distance	best distance	best node	priority queue	
		infinity		(f,O)	
pop f	7.07106781186548	7.07106781186548	f	(h,0) (c,1)	
pop h	7.07106781186548	7.07106781186548	f	(i,0) (c,1) (g,5)	
рор і	3	3	i	(c,1) (j,3) (g,5)	
рор с	2	2	С	(j,3) (g,5)	
рор ј	return c				


Question 3:

All weights are 3, hidden use bias are both -5, and output unit bias is -2

Note: see conjunction_proof.py to see my work (I show the math there)

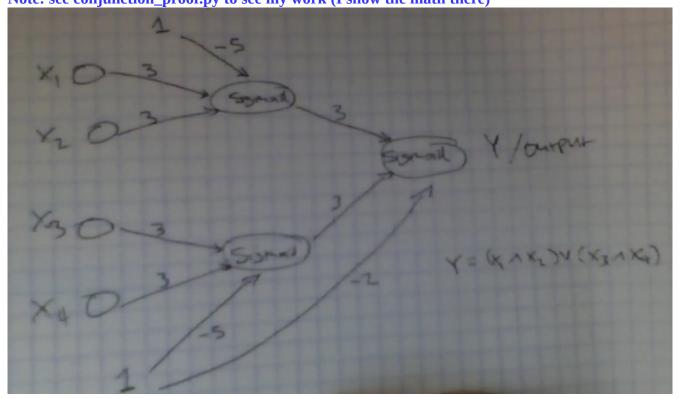

Question 4

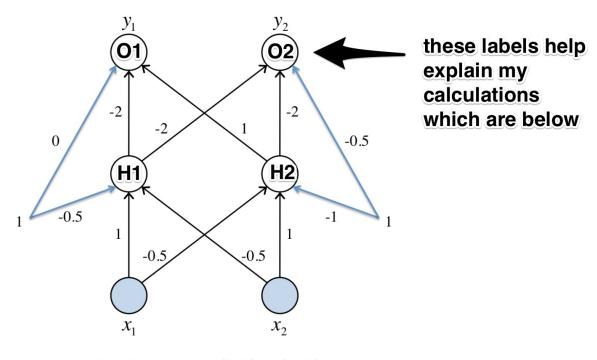

training instance: x = [0, 1] y = [1, 0]

Question 4 continued:
Note: if you want to see more of my work, look at backpropagation_calc.py

Question 4:	
calculate hidden outputs	explanation:
h1:0.26894142137	h1 = hidden unit (in front of x1)
h2:0.5	h2 = hidden unit (in front of x2)
calculate outputs	o2 = output of unit y2
o1:0.490530421778	
o2:0.115282490258	
calculate output unit errors	
o1_delta:0.127321708935	
o2_delta:-0.0117579422053	
calculate hidden unit errors	
h1_delta:-0.0454424311787	
h2_delta:0.0377093983364	
calculate weight changes	
weight_delta_o1_h1: 0.003424	
weight_delta_o1_h2: 0.006366	
weight_delta_bias_o1: 0.012732	
weight_delta_o2_h1: -0.000316	
weight_delta_o2_h2: -0.000588	
weight_delta_bias_o2: -0.001176	
weight_delta_h1_x1: -0.000000	
weight_delta_h1_x2: -0.004544	
weight_delta_bias_h1: -0.004544	
weight_delta_h2_x1: 0.000000	
weight_delta_h2_x2: 0.003771	
weight_delta_bias_h2: 0.003771	

Question 5 Training Set Accuracy Training Set Accuracy 90.00% Number Epochs 80.00% Average Accuracy 51.78% 70.00% 10 71.05% 60.00% 100 78.23% 50.00% 1000 81.64% 40.00% 30.00% 20.00% 10.00% 0.00% 10 100 1000 **Epochs** Average Accuracy **Test Set Accuracy** 80.00% **Test Set Accuracy** 79.00% Average Accuracy Number Epochs 76.90% 78.00% 10 78.68% 77.00% 100 76.00% 75.22% 74.19% 1000 75.00% 74.00% 73.00% 72.00% 71.00%

10

Epochs

Average Accuracy

100

1000

