Cool macrofauna title

Jason Berger[1*], Nina Farah[1*], Juliette Kiffer[2*], Nelle Konczak[1*]

Abstract
Enter here our amazing abstract!

Keywords
soil macrofauna, Paracou, Amazon forest, ecology

[1]FTH 2026 student Université de Guyane, UMR EcoFoG, Campus agronomique, Kourou, French Guiana, France, 97310
[2]FTH 2026 student AgroParisTech, UMR EcoFoG, Campus agronomique, Kourou, French Guiana, France, 97310
***Corresponding Author**: jasonberger2002@gmail.com
***Corresponding Author**: ninafarah@free.fr
***Corresponding Author**: jujukiffer95@gmail.com
***Corresponding Author**: konczaknelle@gmail.com

Table of contents

1 Introduction **1**
1.1 Context 1 . . . 1
1.2 Context 2 . . . 1
2 Material and Methods **1**
2.1 Study Site . . . 1
2.2 Sampling and Identification . . . 1
2.3 Statistical analysis . . . 1
Explorative Analysis ▪ Analysis of Abundances (Generalized Linear Mixed Models) ▪ Analysis of Community Composition (PERMANOVA)
3 Results **1**
3.1 General . . . 1
3.2 GLMM . . . 1
Global Abundance ▪ Bioengineer Abundances
3.3 PERMANOVA . . . 1
4 Discussion **2**
5 Conclusion **2**
6 layout stuff, remove after **2**
6.1 Figures . . . 2
6.2 Tables . . . 2
6.3 Lists . . . 2
6.4 Math . . . 2
6.5 Cross-references . . . 4
6.6 Bibliography . . . 4
6.7 Forcing line breaks . . . 4
6.8 Languages . . . 4
6.9 Text color . . . 4
7 Caveats **4**
References **5**

1. Introduction

1.1 Context 1

text

1.2 Context 2

text

2. Material and Methods

2.1 Study Site

Refer to Figure 1 for texts



Figure 1. Enter our map here.

text

2.2 Sampling and Identification

text

2.3 Statistical analysis

text

Explorative Analysis

text

Analysis of Abundances (Generalized Linear Mixed Models)

text

Analysis of Community Composition (PERMANOVA)

text

3. Results

3.1 General

and refer to Table 1 for table

3.2 GLMM

Global Abundance

text

Bioengineer Abundances

text

Table 1. Table with densities here (mean etc?)

Sepal length	Sepal width	Petal length	Petal width	Species
5.1	3.5	1.4	0.2	setosa
4.9	3.0	1.4	0.2	setosa
4.7	3.2	1.3	0.2	setosa
4.6	3.1	1.5	0.2	setosa
5.0	3.6	1.4	0.2	setosa
5.4	3.9	1.7	0.4	setosa

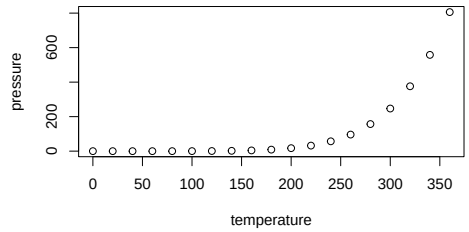


Figure 2. Our first plot for general results here

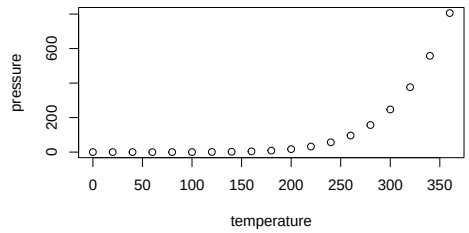


Figure 3. Our PCA figure

Table 2. Global abundance pairwise comparison between layers for model total_count ~ soil_type + layer + (1 | monolith_ID) with family nb2 and log-link

Comparison	Abundance ratio	z-ratio	Adjusted p-value
L - 10	0.13	-9.12	<0.0001***
L - 20	0.83	-0.78	0.714
10 - 20	6.18	8.34	<0.0001***

Significance levels: * p < 0.05; ** p < 0.01; *** p < 0.001

Table 3. Table for all the PERMANOVA results?

Sepal length	Sepal width	Petal length	Petal width	Species
5.1	3.5	1.4	0.2	setosa
4.9	3.0	1.4	0.2	setosa
4.7	3.2	1.3	0.2	setosa
4.6	3.1	1.5	0.2	setosa
5.0	3.6	1.4	0.2	setosa
5.4	3.9	1.7	0.4	setosa

Table 4. Table created by R in a data frame.

Sepal length	Sepal width	Petal length	Petal width	Species
5.1	3.5	1.4	0.2	setosa
4.9	3.0	1.4	0.2	setosa
4.7	3.2	1.3	0.2	setosa
4.6	3.1	1.5	0.2	setosa
5.0	3.6	1.4	0.2	setosa
5.4	3.9	1.7	0.4	setosa

3.3 PERMANOVA

text

4. Discussion

text

5. Conclusion

text

6. layout stuff, remove after

6.1 Figures

Figures can be created by R code (Figure 5) in a division whose name starts with `#fig-`. Cross-references are made with the command `@label`, e.g.: `@fig-pressure`.

In PDF, a figure can use the full width of the page by adding the options `fig-env="figure*"` to the header of the division.

Images stored in a file are integrated into a piece of code by the `include_graphics()` function, see Figure 6.

Systematically place these files in the `images` folder for the automation of GitHub pages.

6.2 Tables

The horizontal `-` and vertical separators `|` allow you to draw a table according to Markdown syntax, but this is not the best method in R.

Tables can also be produced by R code. The content of the table is in a dataframe. The `gt()` function from package *gt* formats it. Refer to the documentation of the package for details about formatting the output.

By default, the tables is contained in its column.

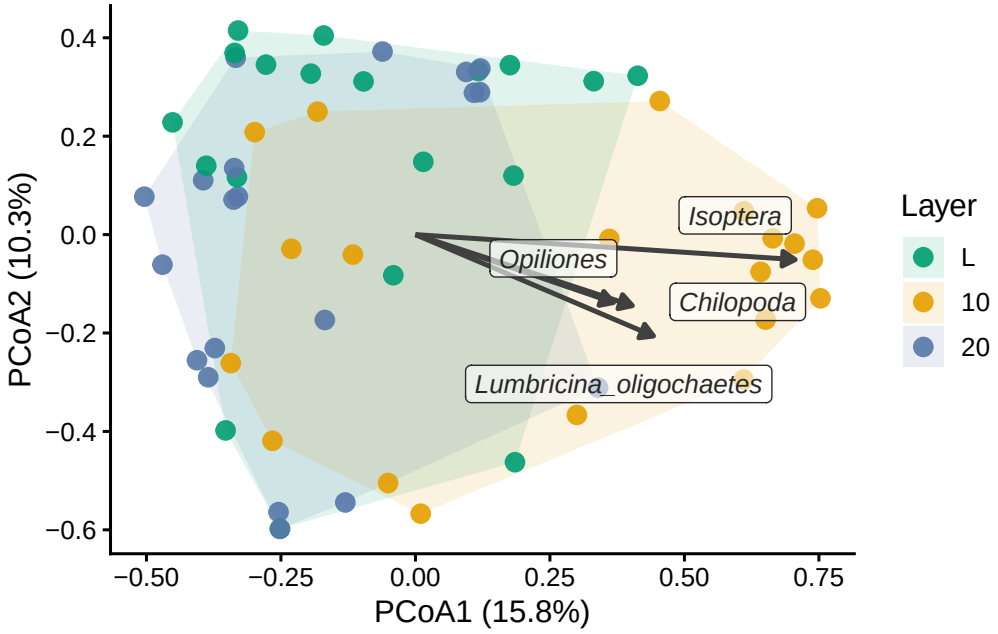


Figure 4. Bray-Curtis PERMANOVA for layers here

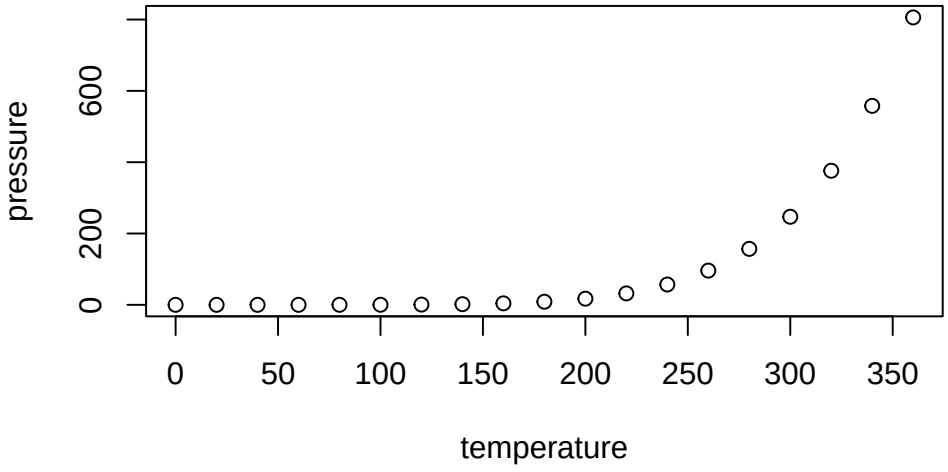


Figure 5. Comparison of motorway and city driving ranges for 38 car models.



Figure 6. This is a logo.

A full-width table is Table 5. It is obtained with the option `fig-env="table*"` in the header of the division.

Note that tables can't be shown on the first page of the PDF output of the Stylish Article template: they would conflict with the table of contents.

6.3 Lists

Lists are indicated by `*`, `+` and `-` (three hierarchical levels) or numbers `1.`, `i.` and `A.` (numbered lists). Indentation of lists indicates their level: `*`, `+` and `-` may be replaced by `-` at all levels, but four spaces are needed to nest a list into another.

- First element of a list
  - sub-list
- Second element
- Continuation of the list

Leave an empty line before and after the list, but not between its items.

6.4 Math

Equations in LaTeX format can be inserted inline, like $A = \pi r^2$ or isolated like

$$e^{i\pi} = -1.$$

They can be numbered, see Equation 1, after adding them a label:

$$A = \pi r^2. \tag{1}$$

6.5 Cross-references

Figures and tables have a label declared in their division `tbl-xxx` or `fig-yyy`, starting with `fig-` or `tbl-`.

For equations, the label is added manually by the code `{#eq-xxx}` after the end of the equation.

Sections can be tagged by ending their title with `{#sec-yyy}`.

In all cases, the call to the reference is made by `@`.

6.6 Bibliography

Bibliographic references included in the `.bib` file declared in the document header can be called by `[@CitationKey]`, in parentheses (Xie et al. 2018), or without square brackets, in the text, as Xie (2016).

The bibliographic style can be specified, by adding the line

```
csl: file_name.csl
```

in the document header and copying the *.csl* style file to the project folder. More than a thousand styles are available[1] and their URL can be used instead of copying the file, e.g.:

```
csl: https://www.zotero.org/styles/xxx
```

6.7 Forcing line breaks

Hyphenation is handled automatically in LaTeX. If a word is not hyphenated correctly, add its hyphenation in the preamble of the file with the command `hyphenation` (words are separated by spaces, hyphenation locations are represented by dashes).

If LaTeX can't find a solution for the line break, for example because some code is too long a non-breaking block, add the LaTeX command `\break` to the line break location. Do not leave a space before the command. The HTML document ignores LaTeX commands.

6.8 Languages

Languages are declared in the document header.

The main language of the document (`lang`) changes the name of some elements, such as the table of contents. The change of language in the document (one of `otherlangs`) is managed in LaTeX (but not fully in HTML).

For a single word, to ensure correct hyphenation in LaTeX, use the following command, ignored un HTML:

```
\foreignlanguage{italian}{ciao}
```

For a paragraph, to also ensure correct quotes and punctuation spacing, use

```
::: {lang=fr}
"Bonjour": en français!
:::
```

to obtain:

« Bonjour » : en français !

[1] https://github.com/citation-style-language/styles

Table 5. Large table with maths, on two columns in PDF.

Treatment	Timber	Thinning	Fuelwood	%AGB lost
Control				0
T1	DBH $\geq$ 50 cm, commercial species, $\approx$ 10 trees/ha			[12% – 33%]
T2	DBH $\geq$ 50 cm, commercial species, $\approx$ 10 trees/ha	DBH $\geq$ 40 cm, non-valuable species, $\approx$ 30 trees/ha		[33% – 56%]
T3	DBH $\geq$ 50 cm, commercial species, $\approx$ 10 trees/ha	DBH $\geq$ 50 cm, non-valuable species, $\approx$ 15 trees/ha	40 cm $\leq$ DBH $\leq$ 50 cm, non-valuable species, $\approx$ 15 trees/ha	[35% – 56%]

The current language has an effect only in LaTeX output: a space is added before double punctuation in French, the size of spaces is larger at the beginning of sentences in English, etc.

6.9 Text color

This template includes the "color-text" filter for Quarto. It makes colored text possible using the `[content]{color=<name>}` syntax. This is a red example. Defined colors are blue, green and red. To add more colors, they must be defined in the document header in `format:`, `stylisharticle-pdf:`, `header-includes:` . This is the code for "grey":

```
\definecolor{grey}{RGB}{191, 191, 191}
```

They must also be included in a `.css` file declared in `format:`, `stylisharticle-html:`

```
css: colors.css
```

In this css, colors are declared by

```
.color-grey {color: rgb(191, 191, 191);}
```

7. Caveats

Quarto does not yet support all features of R Markdown. Unsolved issues are listed here, as of version 1.9:

- The `column` options in code chunks or `{.column-xxx}` div's can't be used in this template. They interfere with the two-column LaTeX layout. The template relies on other techniques to print full-width figures and tables.

References

Xie, Yihui. 2016. *Bookdown: Authoring Books and Technical Documents with R Markdown*. Chapman; Hall/CRC. https://github.com/rstudio/bookdown.

Xie, Yihui, J. J. Allaire, and Garrett Grolemund. 2018. *R Markdown: The Definitive Guide*. Chapman; Hall/CRC. https://bookdown.org/yihui/rmarkdown.