

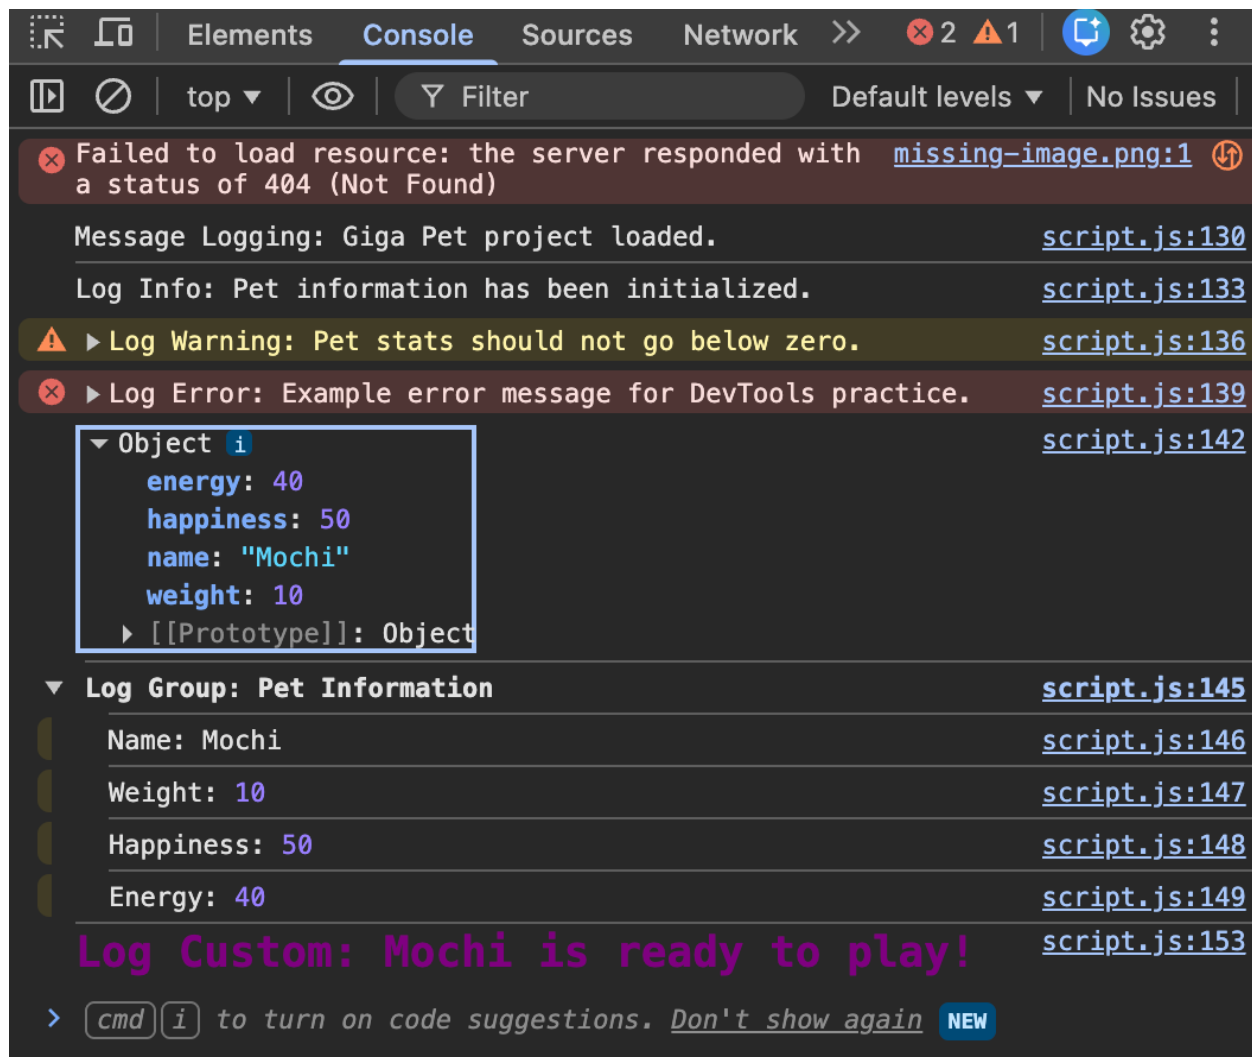


Figure 1: Chrome DevTools Console displaying message logging, informational messages, warnings, errors, grouped logs, custom styled logs, browser messages, and a 404 network error.

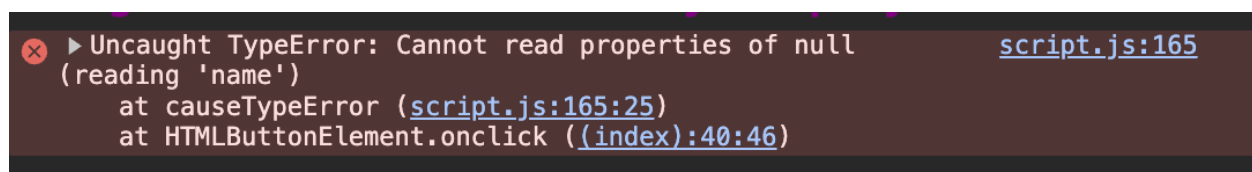


Figure 2: Chrome DevTools Console displaying an intentionally generated TypeError caused by attempting to access a property from a null variable.



Figure 3: Chrome DevTools Console displaying a browser performance violation warning caused by a delayed click handler.

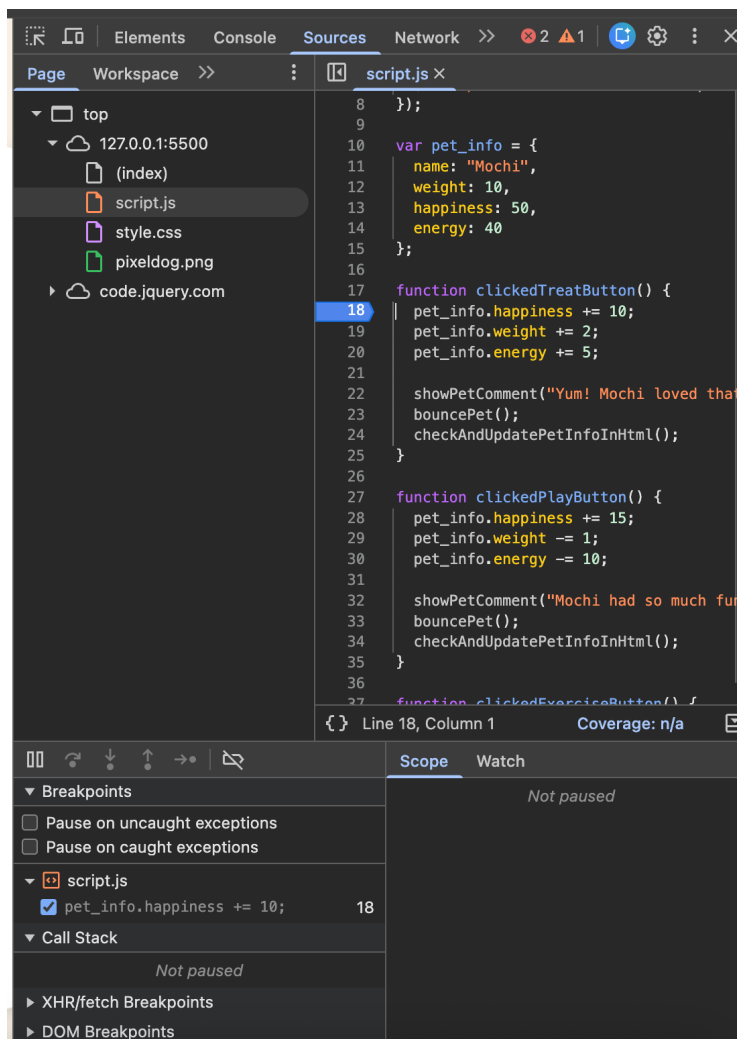


Figure 4: Chrome DevTools Sources panel showing the script.js file and a line-of-code breakpoint placed inside the clickedTreatButton() function.

ElementsConsoleSourcesNetwork>>21

PageWorkspace>>script.js x

top127.0.0.1:5500(index)script.jsstyle.csspixeldog.pngcode.jquery.com

```
8    });
9
10   var pet_info = {
11       name: "Mochi",
12       weight: 10,
13       happiness: 50,
14       energy: 40
15   };
16
17   function clickedTreatButton() {
18       pet_info.happiness += 10;
19       pet_info.weight += 2;
20       pet_info.energy += 5;
21
22       showPetComment("Yum! Mochi loved that t
23       bouncePet();
24       checkAndUpdatePetInfoInHtml();
25   }
26
27   function clickedPlayButton() {
28       pet_info.happiness += 15;
29       pet_info.weight -= 1;
30       pet_info.energy -= 10;
31
32       showPetComment("Mochi had so much fun p
33       bouncePet();
34       checkAndUpdatePetInfoInHtml();
35   }
36
37   function clickedExerciseButton() {
```

{ }Line 18, Column 3Coverage: n/a

Paused on breakpoint

Breakpoints

☐ Pause on uncaught exceptions

☐ Pause on caught exceptions

script.js

☒ pet_info.happiness += 10;18

Call Stack

clickedTreatButtonscript.js:18

ScopeWatch

Local

this: button.treat-button

GlobalWindow

Figure 5: JavaScript execution paused on a breakpoint with the Scope pane displaying local and global variables during debugging.

ElementsConsoleSourcesNetwork>>21

PageWorkspace>>script.js x

top127.0.0.1:5500(index)script.jsstyle.csspixeldog.pngcode.jquery.com

```
8    });
9
10   var pet_info = {
11       name: "Mochi",
12       weight: 10,
13       happiness: 50,
14       energy: 40
15   };
16
17   function clickedTreatButton() {
18       pet_info.happiness += 10;
19       pet_info.weight += 2;
20       pet_info.energy += 5;
21
22       showPetComment("Yum! Mochi loved that t
23       bouncePet();
24       checkAndUpdatePetInfoInHtml();
25   }
26
27   function clickedPlayButton() {
28       pet_info.happiness += 15;
29       pet_info.weight -= 1;
30       pet_info.energy -= 10;
31
32       showPetComment("Mochi had so much fun p
33       bouncePet();
34       checkAndUpdatePetInfoInHtml();
35   }
36
37   function clickedExerciseButton() {
```

{ } Line 18, Column 3Coverage: n/a

Paused on breakpoint

Breakpoints

☐ Pause on uncaught exceptions

☐ Pause on caught exceptions

script.js

☒ pet_info.happiness += 10;18

Call Stack

clickedTreatButtonscript.js:18

ScopeWatch

+ ↺

pet_info.happiness: 50

Figure 6: Watch Expressions panel monitoring the value of `pet_info.happiness` while execution is paused on a breakpoint.

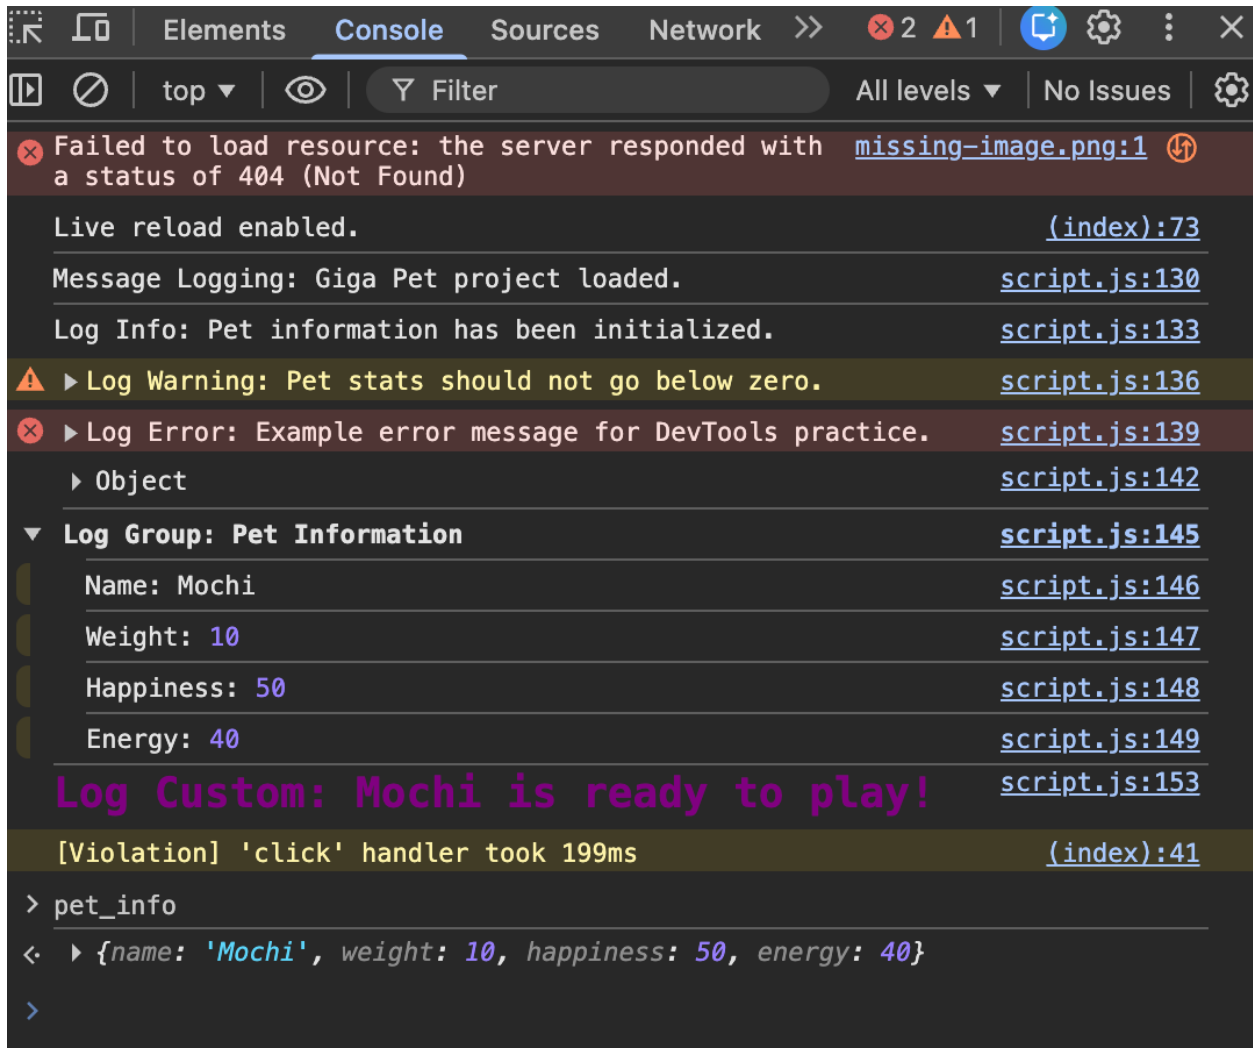


Figure 7: Chrome DevTools Console inspecting the `pet_info` object while JavaScript execution is paused during debugging.