


# Domain Controller

At the top of the domain layer, (1) add a front-end facade object that receives system operation messages from the interface layer, and (2) consider a naming convention such as...

1. the overall system or root object
  - RentalSystem, Game
2. the device (if embedded software)
  - Phone, Printer
3. the use case name (plus “Handler”)
  - ManageNetworkAddressesHandler

# Hexagonal Architecture

Domain  
Controller

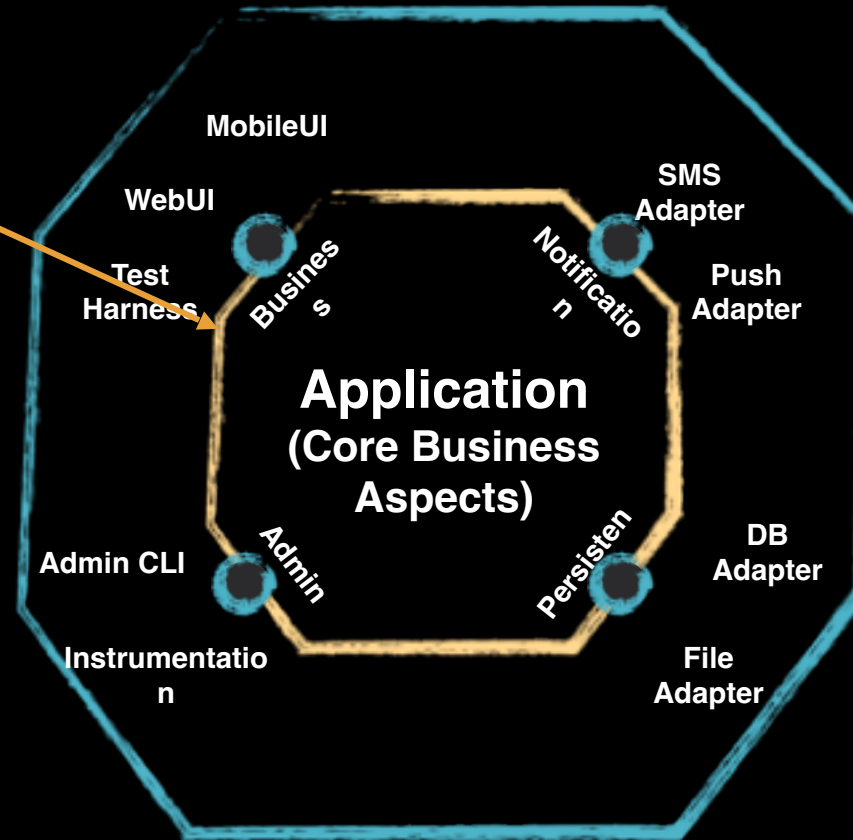

Ports into your business logic encapsulate and decouple.

System operations are exposed through this API.

Awesome side effect -  
Your system is built  
API-first!

Alistair  
Cockburn