

Module 2: Log in to Linux Client

Exercise 1: Logging in to Linux Client

In this exercise, you identify the user identifier (UID), primary group identifier (GID), and auxiliary group identifiers in a Linux client. Later, you create a UNIX group and user based on a local UNIX user.

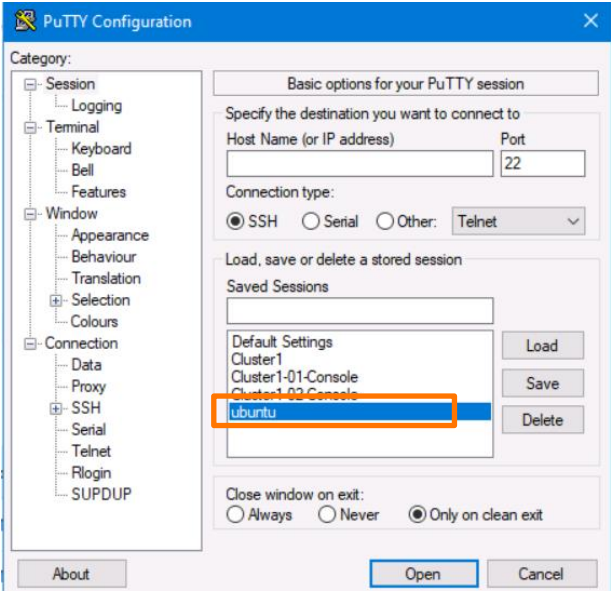
Objectives

This exercise focuses on enabling you to do the following:

- Identify the UID, GID, and auxiliary group identifiers in a Linux client
- Create a UNIX group and user

Task 1: Identify UID, GID, and Auxiliary GIDs in Linux Client

In this task, you identify the UID, primary GID, and auxiliary GIDs in the Linux Client.

Step	Action
1-1	Open a new PuTTY session and double-click ubuntu in the Saved Sessions list. 
1-2	At the login prompt, enter root .
1-3	When you are prompted for the root password, enter Netapp1 ! .
1-4	Verify that you see the command prompt ~# .
1-5	In the command prompt, run the id command to check the UID, GID, and auxiliary GIDs. <pre>root@ubuntu:~# id</pre>

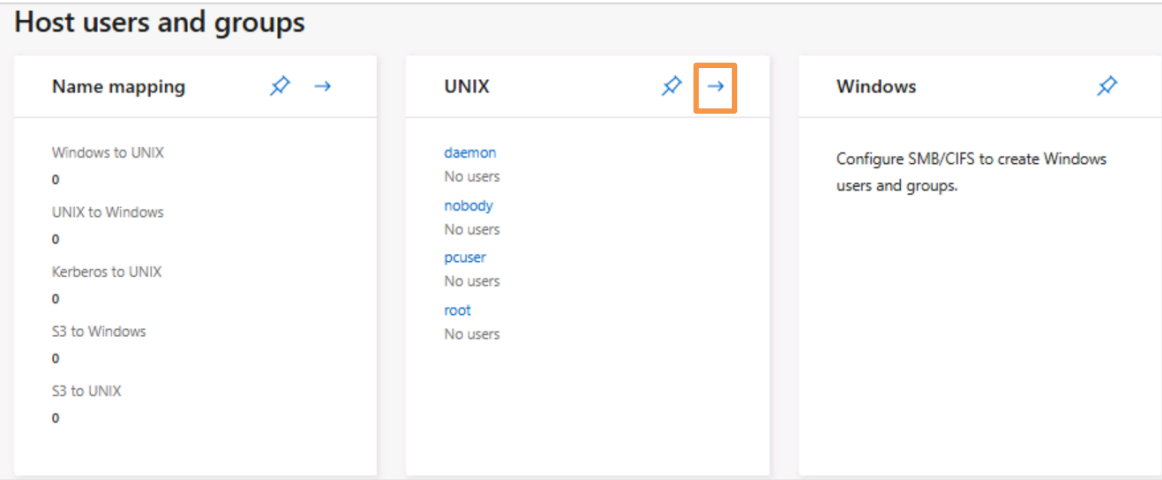
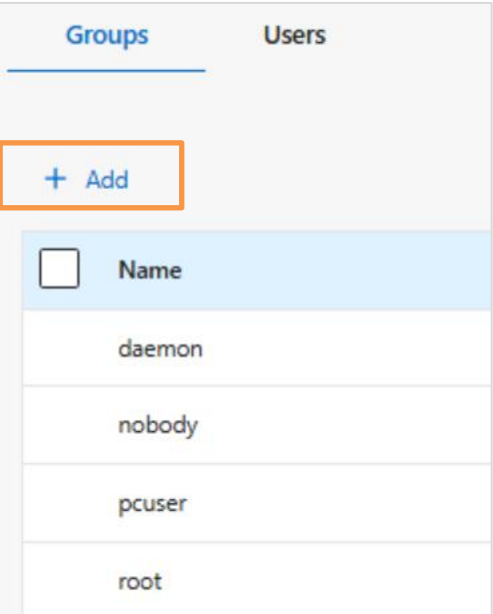
Step	Action
1-6	Observe the following: - The “uid” is 0 for the root user. - The primary “gid” is 0. “groups” show the list of all groups that root user belongs to. (Here, the root user only belongs to the primary group and does not have any auxiliary groups.) <pre>root@ubuntu:~# id uid=0(root) gid=0(root) groups=0(root)</pre>

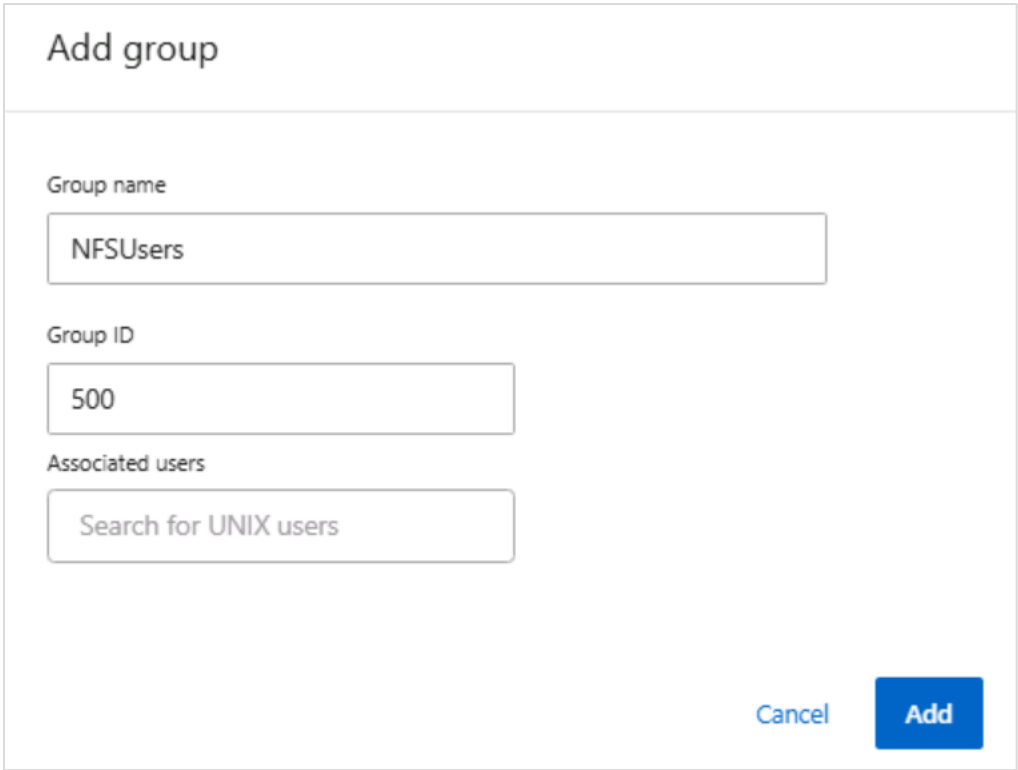
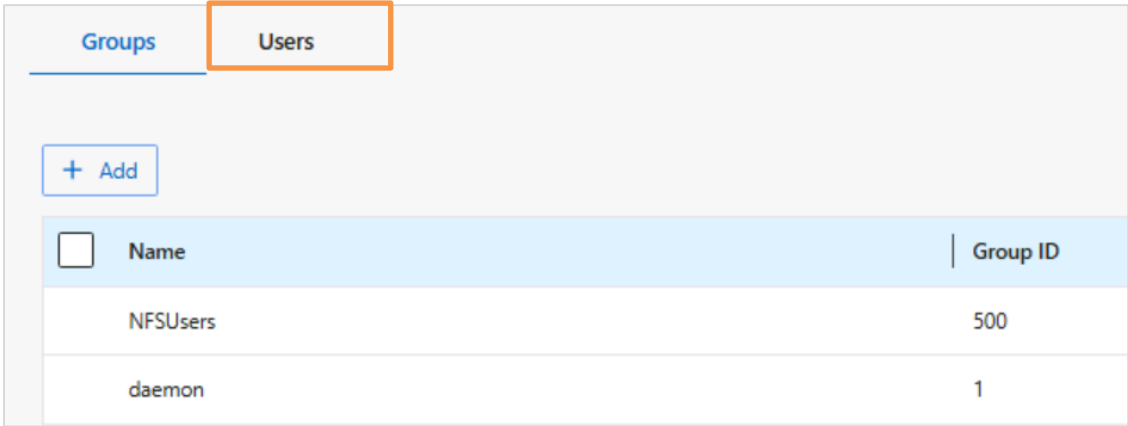
Task 2: Create a UNIX Group and User

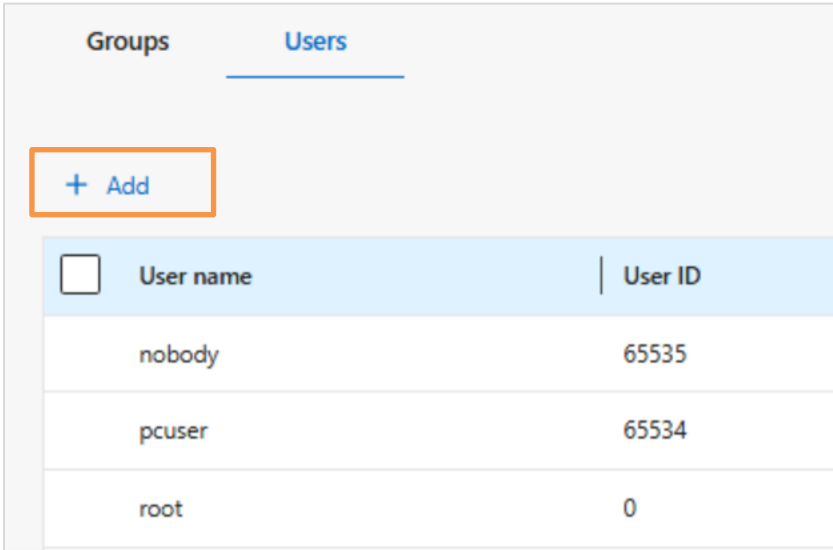
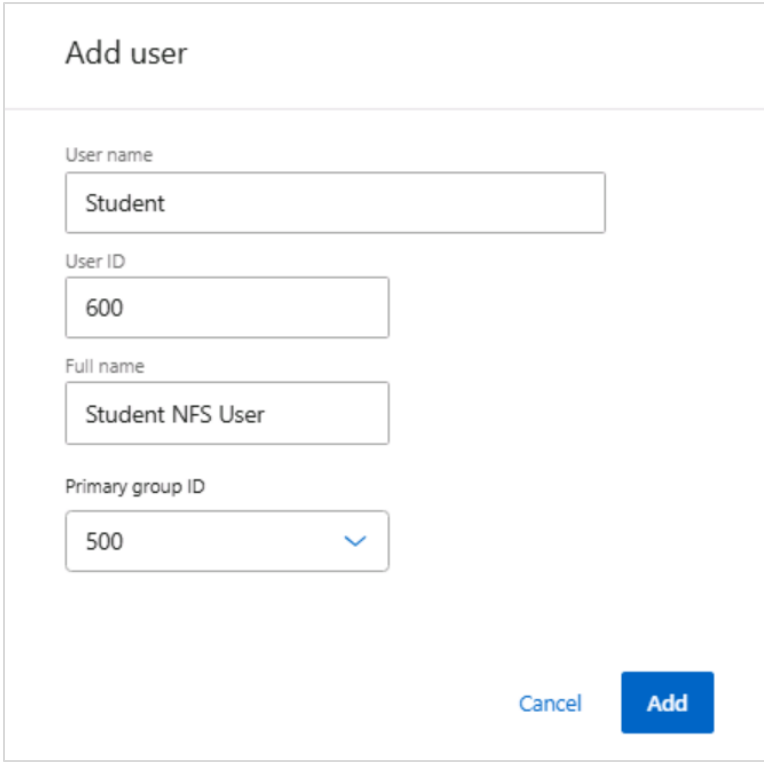
In this task, you create a UNIX group and user, based on a local UNIX user.

Step	Action
2-1	At the command prompt, enter the following command to create an account called “student” that has a UID of 600: <pre>adduser --uid 600 student</pre> <pre># adduser --uid 600 student</pre>

Step	Action
2-2	Perform the following steps: - Enter the new password as Netapp1! . - Press the Enter key to apply default values. - Type y to confirm that the information is correct. <pre># adduser --uid 600 student Adding user `student' ... Adding new group `student' (600) ... Adding new user `student' (600) with group `student' ... Creating home directory `/home/student' ... Copying files from `/etc/skel' ... New password: Retype new password: passwd: password updated successfully Changing the user information for student Enter the new value, or press ENTER for the default Full Name []: Room Number []: Work Phone []: Home Phone []: Other []: Is the information correct? [Y/n] y</pre>
2-3	Type the following command to check the UID and GID of the newly created user. <pre>root@ubuntu:~# id student uid=600(student) gid=600(student) groups=600(student)</pre>
2-4	Open NetApp ONTAP System Manager .

Step	Action
2-5	On the SVMNFS1 Settings tab, scroll down to the Host users and groups section, and click the arrow that corresponds to UNIX. 
2-6	Select the Groups tab and then click + Add to add a group. 

Step	Action						
2-7	In the Add group dialog box, specify the following details: - Group name: NFSUsers - Group ID: 500 						
2-8	Click Add .						
2-9	Select the Users tab.  <table border="1"> <thead> <tr> <th>Name</th><th>Group ID</th></tr> </thead> <tbody> <tr> <td>NFSUsers</td><td>500</td></tr> <tr> <td>daemon</td><td>1</td></tr> </tbody> </table>	Name	Group ID	NFSUsers	500	daemon	1
Name	Group ID						
NFSUsers	500						
daemon	1						

Step	Action								
2-10	Click + Add to add a user.  <table border="1"> <thead> <tr> <th>User name</th><th>User ID</th></tr> </thead> <tbody> <tr> <td>nobody</td><td>65535</td></tr> <tr> <td>pcuser</td><td>65534</td></tr> <tr> <td>root</td><td>0</td></tr> </tbody> </table>	User name	User ID	nobody	65535	pcuser	65534	root	0
User name	User ID								
nobody	65535								
pcuser	65534								
root	0								
2-11	In the Add user dialog box, specify the following details: • User name: student • User ID: 600 • Full name: Student NFS User • Primary group ID: 500 								
2-12	Click Add .								

Step

Action

2-13

Verify that the new user “student” is created and added to the group.

Groups

Users

+ Add

☐	User name	User ID	Full name	Primary group ID	Primary group name
	Student	600	Student NFS User	500	NFSUsers
	nobody	65535		65535	nobody
	pcuser	65534		65534	pcuser
	root	0		1	daemon

End of exercise