

1 Example manuscript demonstrating the use of the papaja template

2 Frederik Aust¹

3 ¹ University of Cologne

4 Author note

5 **papaja** has currently not been submitted to CRAN; a development version is available
6 at <https://github.com/crsh/papaja>.

7 Correspondence concerning this article should be addressed to Frederik Aust,
8 Department Psychology, University of Cologne, Herbert-Lewin-Str. 2, 50931 Köln, Germany.
9 E-mail: frederik.aust@uni-koeln.de

Abstract

This example manuscript demonstrates how to use RStudio and RMarkdown to produce an APA conform manuscript. Using pandoc your RMarkdown can be converted to PDF or Word documents.

Keywords: APA, knitr, R, RMarkdown, papaja

Word count: Too lazy to count

Example manuscript demonstrating the use of the papaja template

What is papaja?

As you may have heard, recently, interest in reproducible research has been growing. Reproducible data analysis is an easy to implement and important aspect of the strive towards reproducibility. For *R* users, RMarkdown has been suggested as one possible framework for reproducible analyses. **papaja** is a R-package in the making including a RMarkdown template that can be used with RStudio (or without) to produce complete manuscripts (PDF and Word documents), which conform to the American Psychological Association (APA) manuscript guidelines (6th Edition). To do so, papaja uses the L^AT_EX document class **apa6** and a **.docx**-reference file. The supplied R-functions are ment to facilitate the reporting of statistics in accordance with APA guidelines.

Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents (among others). In the following I will assume you have hopped onto the band wagon and know how to use RMarkdown to conduct and comment your analyses. If this is not the case, I recommend you get to grips with [RMarkdown](#) first. I use [RStudio](#) (which makes use of [pandoc](#)) to create my documents, but the general process should work using any other R-editor.

How do I use papaja?

Once you have installed **papaja** and all other [required software](#) you can select the APA template when creating a new Markdown file through the menus in RStudio. When you click RStudio's *Knit* button, **papaja**, **rmarkdown**, and **knitr** together create an APA conform manuscript that includes both your text and the output of any embedded R code chunks within the manuscript. Don't worry about the first chunk of R code at the beginning of the document. It sets the stage for the creation of your document.

```
require("papaja")
apa_prepare_doc() # Prepare document for rendering
```

42 Printing R output

43 Any output from R is included as you usually would using RMarkdown. By default the
44 R code will not be displayed in the final documents. If you wish to show off your code you
45 need to set `echo = TRUE` in the chunk options.

```
summary(cars)
```

```
46  speed          dist
47  Min. : 4.0 Min. : 2.00
48  1st Qu.:12.0 1st Qu.: 26.00
49  Median :15.0 Median : 36.00
50  Mean :15.4 Mean : 42.98
51  3rd Qu.:19.0 3rd Qu.: 56.00
52  Max. :25.0 Max. :120.00
```

53 But, surely, this is not what you want your submission to look like. I think we can do
54 better.

55 **Print tables.** For prettier tables, I suggest you have a look at `apa_table()`. Of
56 course, e.g, the popular `xtable` or `tables` packages can also be used to create tables when
57 knitting PDF documents. Unfortunately, `xtable()` captions are [set to the left page margin](#).
58 More importantly, these packages cannot be used when you want to create Microsoft Word
59 documents because they rely on L^AT_EX for typesetting. `apa_table()` creates tables that
60 conform to APA guidelines and are correctly rendered in PDF and Word documents. But
61 don't fool yourself. Table formatting is somewhat limited in Word documents due to missing
62 functionality in pandoc (e.g., it is not possible to have cells span across multiple columns).

Table 1

A summary table of the cars dataset.

Descriptives	\multicolumn{1}{c}{speed}	\multicolumn{1}{c}{dist}
Mean	15.4	42.98
SD	5.29	25.77
Min	4	2
Max	25	120

Note. This table was created using `apa_table()`

63 As required by the APA guidelines, tables are pushed to the final pages of the
64 manuscript when creating a PDF. Again, this is not the case in Word documents due to
65 limited pandoc functionality. To place figures and tables in your text instead, set the
66 `figsintext` parameter in the document header to `yes` or `true` as I have done in this
67 document.

```
my_table <- apply(cars, 2, function(x) round(
  c(Mean = mean(x), SD = sd(x), Min = min(x), Max = max(x)), 2)
)

apa_table(
  my_table
  , align = c("l", "r", "r")
  , caption = "A summary table of the cars dataset."
  , note = "This table was created using apa\\_table()"
  , added_colnames = "Descriptives"
)
```

68 The bottom line is, Word documents will be less polished than PDF. The resulting

documents should suffice to enable collaboration with Wordy colleagues and prepare a journal submission.

Plots. You can also embed plots, for example:

```
plot(cars)
```

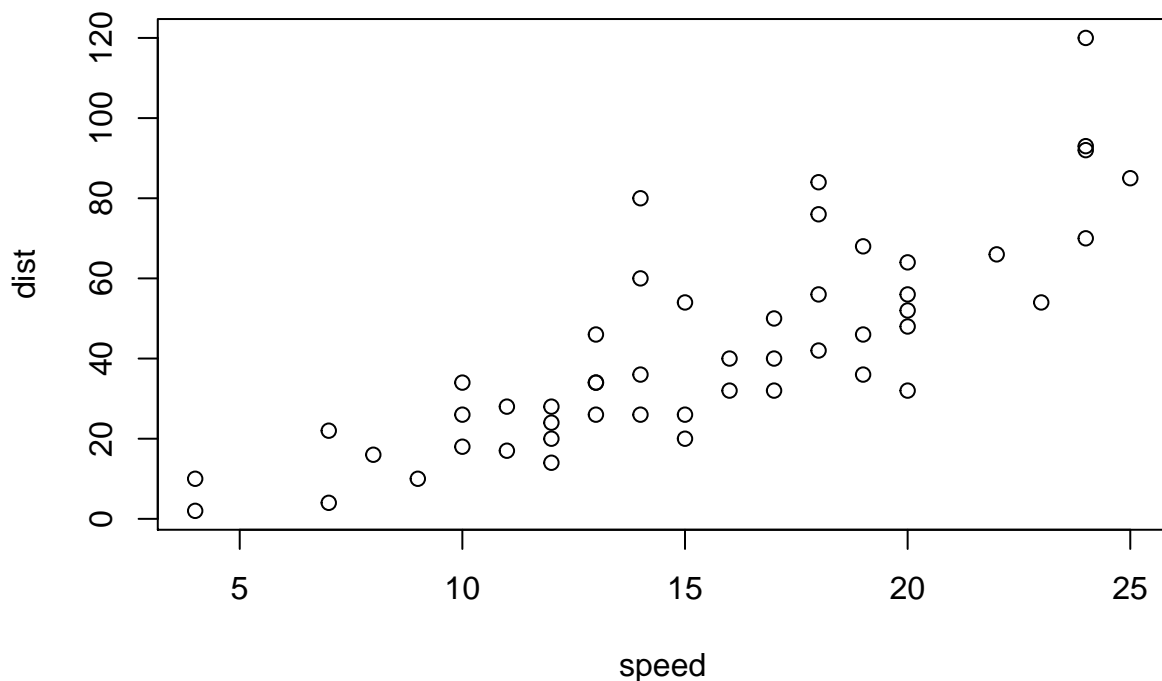


Figure 1. Exmple figure created by in-document R code.

Again, as required by the APA guidelines, figures are pushed to the final pages of the document unless you set `figsintext` to `yes`.

Report statistical analyses. `apa_print()` will help you report the results of your statistical analyses. The function will format your input to produce readily reportable text.

```
my_regression <- lm(dist ~ speed, cars)
my_results <- apa_print(my_regression)
```

In this case speed is a significant predictor of the distance taken to stop, $b = 3.93$, 95% CI [3.10, 4.77], $t(48) = 9.46$, $p < .001$. The regression explains $R^2 = .65$, 90% CI [0.51, 0.73] variance, which is of course statistically significant, $F(1, 48) = 89.57$, $p < .001$.

Table 2

Regression table

Term	<i>b</i>	95% CI	<i>t</i>	<i>df</i>	<i>p</i>
Intercept	-17.58	[-31.17, -3.99]	-2.60	48	.012
Speed	3.93	[3.10, 4.77]	9.46	48	< .001

Note. This is a table generated by `apa_print()` and `apa_table()`.

79 The previous paragraph was produced by the following text:

In this case speed is a significant predictor of the distance taken to stop, ``r my_results$full$speed``. The regression explains ``r my_resultsestmodelfitr2`` variance, which is of course statistically significant, ``r my_results$stat$modelfitr2``.

80 What's even more fun: You can easily create a complete regression table using by
81 passing `my_results$table` to `apa_table()`.

```
apa_table(
  my_results$table
  , align = c("l", "r", "c", "r", "r", "r")
  , escape = FALSE
  , row_names = FALSE
  , caption = "Regression table"
  , note = "This is a table generated by apa\\_print() and apa\\_table()."
)
```

Citations

You can insert citations like this:

[e.g., @bauer_2014; @bem_2011] → (e.g., Baumer, Cetinkaya-Rundel, Bray, Loi, & Horton, 2014; Bem, 2011).

Citing without parentheses is, of course, also possible:

@bauer_2014 → Baumer et al. (2014).

We have made citing R particularly easy:

```
my_citation <- cite_r(file = "r-references.bib")
```

`my_citation` now contains the following text that you can use in your document: R (3.2.1, R Core Team, 2015) and the R-package *papaja* (0.1.0.9054, Aust & Barth, 2015)

The citation style is set in the header of this document with the `cs1` parameter. The relevant references will, of course, be added to the documents references automatically. In order for citations to work, you need to supply a .bib-file to the `bibliography` parameter in the document header. See the [RMarkdown documentation](#) and [Citation Style Language](#) for further details.

Document options

This text is set as manuscript. If you want a thesis-like document you can change the `class` in the document header from `man` to `doc`. You can also preview a polished journal typesetting by changing the `class` to `jou`. Refer to the `apa6` document class [documentation](#) for further class options, such as paper size or draft watermarks.

When creating PDF documents, line numbering can be activated by setting the `lineno` argument in the header of this document to `true`. This option has no effect on Word documents.

Last words

That's all I have. Enjoy writing your manuscript. If you have any trouble or ideas for improvements, open an [issue](#) on GitHub or make a pull request with the fix. ;)

References

- Aust, F., & Barth, M. (2015). *papaja: Create APA manuscripts with RMarkdown*.
- Baumer, B., Cetinkaya-Rundel, M., Bray, A., Loi, L., & Horton, N. J. (2014). R Markdown: Integrating A Reproducible Analysis Tool into Introductory Statistics. *ArXiv E-Prints*. Retrieved from <http://adsabs.harvard.edu/abs/2014arXiv1402.1894B>
- Bem, D. J. (2011). Feeling the future: experimental evidence for anomalous retroactive influences on cognition and affect. *Journal of Personality and Social Psychology*, *100*(3), 407—425. doi:[10.1037/a0021524](https://doi.org/10.1037/a0021524)
- R Core Team. (2015). *R: A Language and Environment for Statistical Computing*. Vienna, Austria: R Foundation for Statistical Computing. Retrieved from <http://www.R-project.org/>