

Introduction to Python Programming

Mauricio Verano Merino, November 6, 2024

Practical Sessions


Inspection Assignment 1

Grades Midterm

Assignment 2

Exercise 6 (tests)



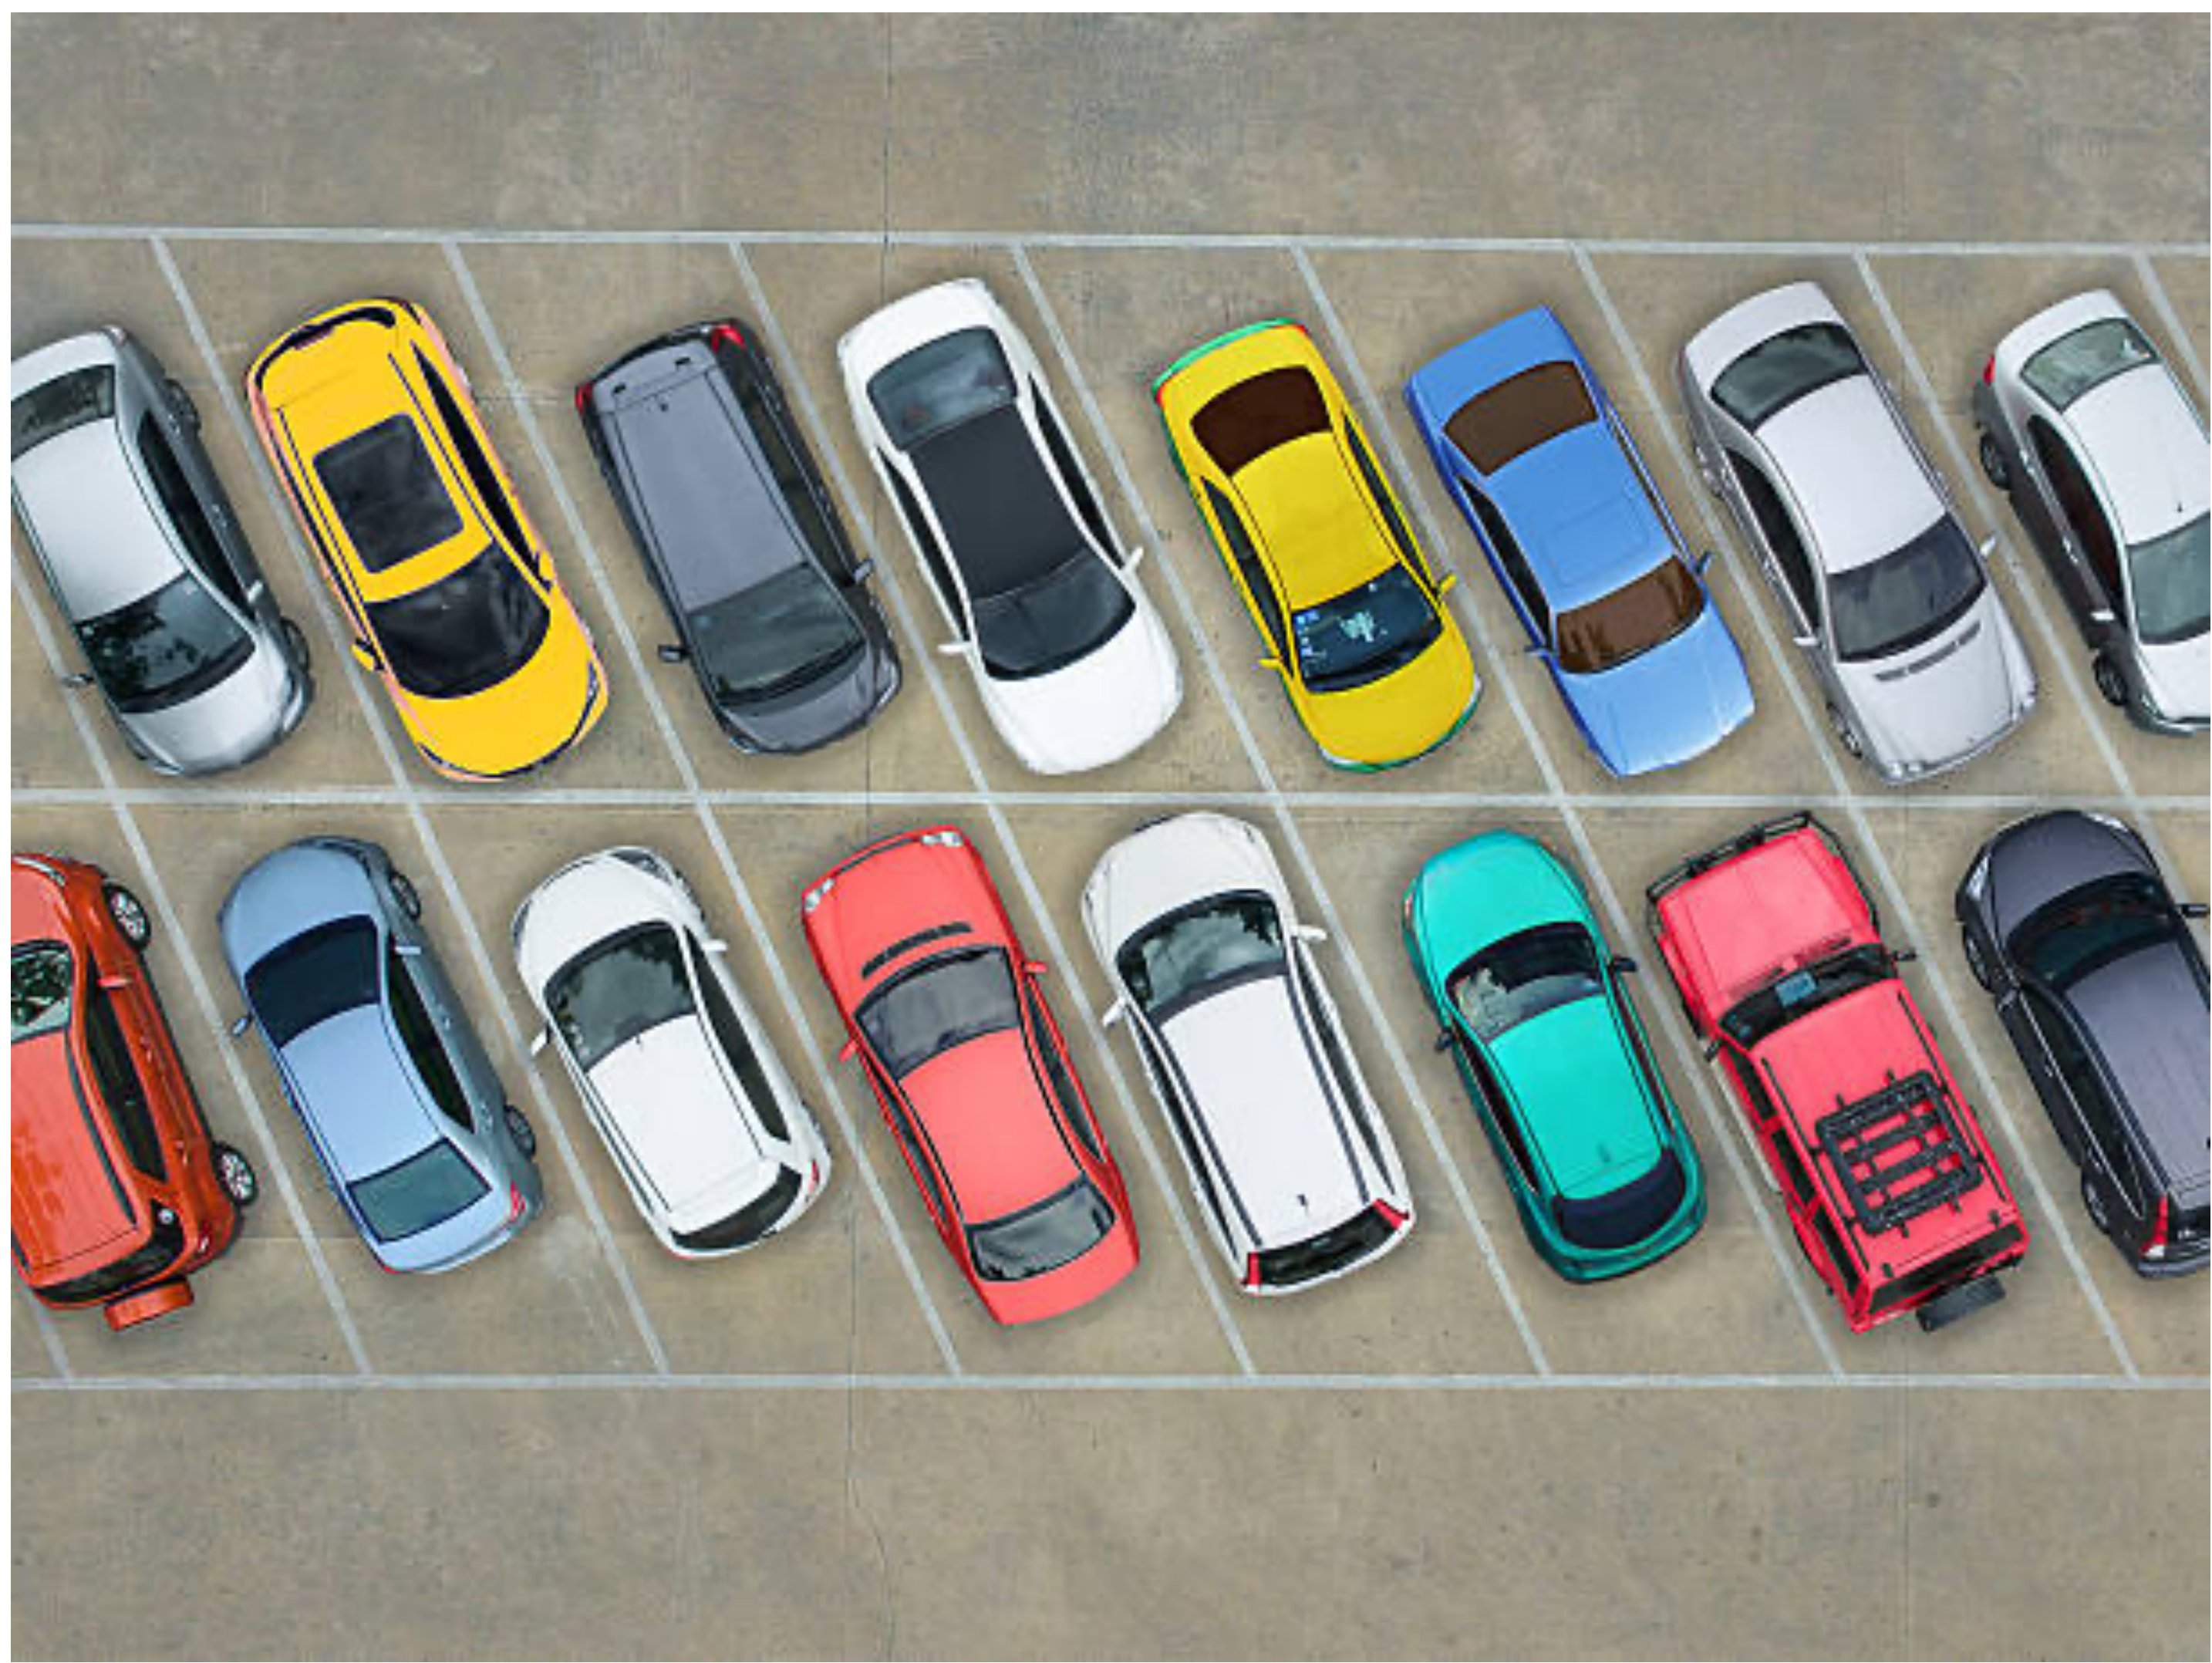

Social media channel



Cookie jar

Suppose that you'd like to implement a cookie jar in which to store cookies. In a file called `jar.py`, implement a `class` called `Jar` with these methods:

- `__init__` should initialize a cookie jar with the given `capacity`, which represents the maximum number of cookies that can fit in the cookie jar. If `capacity` is not a non-negative `int`, though, `__init__` should instead raise a `ValueError`.
- `__str__` should return a `str` with n 🍪, where n is the number of cookies in the cookie jar. For instance, if there are 3 cookies in the cookie jar, then `str` should return `"🍪🍪🍪"`
- `deposit` should add `n` cookies to the cookie jar. If adding that many would exceed the cookie jar's capacity, though, `deposit` should instead raise a `ValueError`.
- `withdraw` should remove `n` cookies from the cookie jar. Nom nom nom. If there aren't that many cookies in the cookie jar, though, `withdraw` should instead raise a `ValueError`.
- `capacity` should return the cookie jar's capacity.
- `size` should return the number of cookies actually in the cookie jar, initially `0`.

