

SIMATS ENGINEERING ASSESSMENT TOOL 1 – ENUMERATION ANALYSIS

**COURSE CODE: ITA14
COURSE NAME: ETHICAL HACKING**

CO3: Analyse network services using port scanning, ping sweeps, and enumeration techniques across different operating systems to identify vulnerabilities.

TECHNICAL ENUMERATION ANALYSIS REPORT
Nmap-Based Network Service Enumeration and Security Analysis

Student Name: G. Jaswanth Krishna
Register No.: (192472366)

1. Question1–scanme.nmap.org

The assessment requires host discovery, TCP port scanning, service-version detection, OS fingerprinting and default script scanning, followed by business-purpose, attack-surface, threat and risk analysis.

Aim

To perform authorized Nmap enumeration of scanme.nmap.org, identify exposed services, analyze the attack surface, assess risk, and recommend appropriate security controls.

Nmap Commands

```
nmap -sn scanme.nmap.org
```

```
nmap -sT scanme.nmap.org
```

```
nmap -sV scanme.nmap.org
```

```
sudo nmap -O scanme.nmap.org
```

```
nmap -sC scanme.nmap.org
```

```
kali@kali:~$ nmap -sn scanme.nmap.org
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:04 -0400
Nmap scan report for scanme.nmap.org (45.33.32.156)
Host is up (0.002s latency).
Other addresses for scanme.nmap.org (not scanned): 2600:3c01::f83c:91ff:fe18:bb2f
Nmap done: 1 IP address (1 host up) scanned in 4.78 seconds

kali@kali:~$ nmap -sT scanme.nmap.org
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:05 -0400
Failed to resolve "scanme.nmap.org".
Warning: No targets were specified, so 0 hosts scanned.
Nmap done: 0 IP addresses (0 hosts up) scanned in 2.55 seconds

kali@kali:~$ nmap -sV scanme.nmap.org
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:05 -0400

kali@kali:~$ nmap -O scanme.nmap.org
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:06 -0400
Status: 0:00:01 elapsed; 0 hosts completed (0 up), 0 undergoing Host Discovery
Parallel DNS resolution of 1 host. Timing: About 0.00% done.
Stats: 0:00:02 elapsed; 0 hosts completed (0 up), 1 undergoing Ping Scan
Parallel OS resolution of 1 host. Timing: About 0.00% done.
Stats: 0:00:03 elapsed; 0 hosts completed (0 up), 1 undergoing Ping Scan
Parallel DNS resolution of 1 host. Timing: About 0.00% done.
Stats: 0:00:14 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan
SYN Stealth Scan Timing: About 9.83% done; ETC: 00:08 (0:01:32 remaining)

kali@kali:~$ sudo nmap -O scanme.nmap.org
[sudo] password for kali:
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:07 -0400
Nmap scan report for scanme.nmap.org (45.33.32.156)
Host is up (0.0028s latency).
Other addresses for scanme.nmap.org (not scanned): 2600:3c01::f83c:91ff:fe18:bb2f
```

```
kali@kali:~$ sudo nmap -sC scanme.nmap.org
[sudo] password for kali:
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:07 -0400
Nmap scan report for scanme.nmap.org (45.33.32.156)
Host is up (0.0028s latency).
Other addresses for scanme.nmap.org (not scanned): 2600:3c01::f83c:91ff:fe18:bb2f
Not shown: 626 filtered tcp ports (no response), 128 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    open  ssh
80/tcp    open  http
9229/tcp  open  ming-echo
11337/tcp open  Elite
Device type: VOIP adapter [bridge] [general purpose]
Running (NBT) SMBSSYNC: ATBT embedded (89%), Oracle VirtualBox (88%), Slirp (88%), QEMU (85%)
OS CPE: cpe:/o:oracle/virtualbox:qemu/admvm_guestprovisioning:qemu/qemu:qemu
Aggressive OS guesses: ATBT b0w2ip voice gateway (89%), Oracle VirtualBox Slirp NAT bridge (88%), QEMU user mode network gateway (85%)
No exact OS matches for host (test condition: non-idol).
OS detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 86.49 seconds

kali@kali:~$ nmap -sC scanme.nmap.org
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:10 -0400
Nmap scan report for scanme.nmap.org (45.33.32.156)
Host is up (0.002s latency).
Other addresses for scanme.nmap.org (not scanned): 2600:3c01::f83c:91ff:fe18:bb2f
Not shown: 913 filtered tcp ports (no response), 83 closed tcp ports (reset)
PORT      STATE SERVICE
22/tcp    open  ssh
| ssh-hostkey:
|   rsa256  ec:08:a0:1a:82:ff:cc:55:99:dc:67:2b:3a:97:6b:79 (DSA)
|   rsa256  29:3d:2f:45:02:1a:1b:5a:9d:0b:05:05:1a:c2:06:62 (RSA)
|   rsa256  06:07:0b:3a:37:5a:1c:4e:65:2f:56:1a:1a:1a:1a:1a (ECDSA)
|   rsa256  33:fa:91:04:00:e1:7b:3f:6d:05:a2:bb:f1:5a:41:56 (ED25519)
80/tcp    open  http
|_ http-title: Go ahead and ScanMe!
|_ http-favicon: Nmap Project
9229/tcp  open  ming-echo
11337/tcp open  Elite
Nmap done: 1 IP address (1 host up) scanned in 185.77 seconds

kali@kali:~$ sudo nmap -sC -sV -O scanme.nmap.org
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:12 -0400
Nmap scan report for scanme.nmap.org (45.33.32.156)
Host is up (0.002s latency).
```

```

kali@kali: ~
Session Actions Edit View Help
192.168.56.101/tcp open  Elite
Nmap done: 1 IP address (1 host up) scanned in 105.77 seconds

kali@kali:~$ sudo nmap -sS -sV -O -C scanme.nmap.org
Starting Nmap 7.99 ( https://nmap.org ) at 2020-08-08 00:12 -0400
Nmap scan report for scanme.nmap.org (45.33.32.156)
Host is up (0.81s latency).
Other addresses for scanme.nmap.org (not scanned): 2000:3c01::f03c:91ff:fe18:b2f
Not shown: 961 filtered tcp ports (no-response)
PORT      STATE SERVICE      VERSION
22/tcp    open  ssh          OpenSSH 6.6.1p1 Ubuntu 2ubuntu2.13 (Ubuntu Linux; protocol 2.0)
|_ ssh-hostkey:
|_ 1024 ac:00:a0:1a:82:ff:cc:55:99:dc:67:2b:34:97:6b:75 (DSA)
|_ 2048 20:3d:2d:44:62:2a:b0:5a:9d:b5:b3:05:1a:c2:a6:b2 (RSA)
|_ 256 96:02:b0:5e:07:34:1c:4e:a5:2f:56:4c:4a:24:b2:57 (ECDSA)
|_ 256 33:fa:91:0f:e0:e1:7b:1f:6d:05:a2:b0:f1:54:41:56 (ED25519)
23/tcp    closed telnet
25/tcp    closed smtp
80/tcp    open  http         Apache httpd 2.4.7 ((Ubuntu))
|_ http-title: Go ahead and ScanMe!
|_ http-server-header: Apache/2.4.7 (Ubuntu)
|_ http-favicon: Nmap Project
111/tcp   closed rpcbind
113/tcp   closed ident
135/tcp   closed mrapc
143/tcp   closed imap
256/tcp   closed fwi-securesh
295/tcp   closed pop3s
1010/tcp  closed surf
1720/tcp  closed h323q31
1386/tcp  closed mysql
5900/tcp  closed vnc
8888/tcp  closed sun-answerbook
9929/tcp  open  nping-echo   Nping echo
10012/tcp closed unknown
11337/tcp open  tcpwrapped
61532/tcp closed unknown
Device type: VoIP adapter[bridge]general purpose
Running (JUST GUESSING): ATOT embedded (90%), Oracle Virtualbox (88%), Slirp (88%), QEMU (86%)
OS CPE: cpe:/o:oracle:virtualbox cpe:/a:danny.gaspardovskii:slirp cpe:/a:qemu:qemu
Aggressive OS guesses: ATOT 600210 voice gateway (90%), Oracle Virtualbox Slirp NAT bridge (88%), QEMU user mode network gateway (86%)
No exact OS matches for host (test conditions non-ideal).
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 72.50 seconds

kali@kali:~$

```

Analysis

Openports identifyexternallyreachablenetworkentrypoints. Servicenamesandversionsprovideinformation that an authorized security tester can use to prioritize further validation. Authentication-related services may attract credential attacks, while identifiable versions can be checked against vendor advisories during a controlled assessment.

Recommendations

- Disableunnecessarypublicservices.
- Patchandsecurelyconfigurerequiredservices.
- Restrictadministrativeservicestotrustednetworks.
- Usestrongauthenticationand monitoring.
- Applyfirewallandnetwork-accesscontrols.

2. Question2–Metasploitable2

Theassessment identifies this address as Metasploitable2 in an isolated laboratory environment and asks for comprehensive enumeration, service analysis, risk categorization, and discussion of potential entry points.

Aim

To perform authorized Nmap enumeration of 192.168.56.101, identify exposed services, analyze the attack surface, assess risk, and recommend appropriate security controls.

Nmap Commands

```

nmap -sn 192.168.56.101

nmap 192.168.56.101

nmap -p- 192.168.56.101

nmap -sV 192.168.56.101

sudo nmap -O 192.168.56.101

```

nmap-sC192.168.56.101

sudo nmap-p--sV -O -sC192.168.56.101

```
kali@kali: ~  
Session Actions Edit View Help  
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel  
OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .  
Nmap done: 1 IP address (1 host up) scanned in 72.50 seconds  
  
[kali@kali]~$ nmap -sn 192.168.56.101  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:16 -0400  
Nmap scan report for 192.168.56.101  
Host is up (0.00039s latency).  
Nmap done: 1 IP address (1 host up) scanned in 2.52 seconds  
  
[kali@kali]~$ nmap 192.168.56.101  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:16 -0400  
Nmap scan report for 192.168.56.101  
Host is up (0.00091s latency).  
All 1000 scanned ports on 192.168.56.101 are in ignored states.  
Not shown: 1000 filtered tcp ports (no-response)  
Nmap done: 1 IP address (1 host up) scanned in 6.63 seconds  
  
[kali@kali]~$ nmap -p- 192.168.56.101  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:17 -0400  
Stats: 0:00:28 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan  
SYN Stealth Scan Timing: About 16.52% done; ETC: 00:20 (0:02:06 remaining)  
  
[kali@kali]~$ nmap -sV 192.168.56.101  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:19 -0400  
Nmap scan report for 192.168.56.101  
Host is up (0.00066s latency).  
All 1000 scanned ports on 192.168.56.101 are in ignored states.  
Not shown: 1000 filtered tcp ports (no-response)  
  
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .  
Nmap done: 1 IP address (1 host up) scanned in 0.64 seconds  
  
[kali@kali]~$ sudo nmap -O 192.168.56.101  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:20 -0400  
Nmap scan report for 192.168.56.101  
Host is up (0.0016s latency).  
All 1000 scanned ports on 192.168.56.101 are in ignored states.  
Not shown: 1000 filtered tcp ports (no-response)
```

```
Session / Terminal Emulator  
Use the commandline  
Stats: 0:00:00 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan  
SYN Stealth Scan Timing: About 16.52% done; ETC: 00:20 (0:02:06 remaining)  
  
[kali@kali]~$ nmap -sV 192.168.56.101  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:19 -0400  
Nmap scan report for 192.168.56.101  
Host is up (0.00066s latency).  
All 1000 scanned ports on 192.168.56.101 are in ignored states.  
Not shown: 1000 filtered tcp ports (no-response)  
  
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .  
Nmap done: 1 IP address (1 host up) scanned in 0.64 seconds  
  
[kali@kali]~$ sudo nmap -O 192.168.56.101  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:20 -0400  
Nmap scan report for 192.168.56.101  
Host is up (0.0016s latency).  
All 1000 scanned ports on 192.168.56.101 are in ignored states.  
Not shown: 1000 filtered tcp ports (no-response)  
Warning: OS scan results may be unreliable because we could not find at least 1 open and 1 closed port  
Aggressive OS guesses: AXIS 2100 Network Camera (92%), D-Link DP-300U, DP-G310, or Hamlet HP9810U print server (92%), HP Tru54 UNIX 5.1A (92%), Sanyo PLC-XU88 digital video projector (92%), TRENDnet TV-IP100 webcam (92%), Vantage HD710 OS satellite receiver (92%), Linux 2.6.8 (90%), Asus WL-500gP wireless broadband router (89%), Cisco 1812, 3640, or 3700 router (IOS 12.4) (89%), Cisco DOCSIS cable modem termination server (IOS 12.1) (89%)  
No exact OS matches for host (test conditions non-ideal).  
OS detection performed. Please report any incorrect results at https://nmap.org/submit/ .  
Nmap done: 1 IP address (1 host up) scanned in 8.91 seconds  
  
[kali@kali]~$ nmap -sC 192.168.56.101  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:20 -0400  
SYN Stealth Scan Timing: About 32.80% done; ETC: 00:20 (0:00:04 remaining)  
Nmap scan report for 192.168.56.101  
Host is up (0.0022s latency).  
All 1000 scanned ports on 192.168.56.101 are in ignored states.  
Not shown: 1000 filtered tcp ports (no-response)  
Nmap done: 1 IP address (1 host up) scanned in 11.78 seconds  
  
[kali@kali]~$ sudo nmap -p- -sV -O -sC 192.168.56.101  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:21 -0400  
Stats: 0:00:14 elapsed; 0 hosts completed (1 up), 1 undergoing SYN Stealth Scan  
SYN Stealth Scan Timing: About 6.04% done; ETC: 00:24 (0:02:49 remaining)  
  
[kali@kali]~$
```

Analysis

The discovered services should be grouped by exposure and functionality. High-risk services may include vulnerable or unnecessarily exposed services; medium-risk services may disclose useful information or require additional conditions; low-risk services are generally necessary and appropriately restricted. Enumeration guides a tester in prioritizing controlled vulnerability validation.

Recommendations

- Remove unnecessary services.
- Update vulnerable software where applicable.
- Disable insecure legacy protocols.

- Restrict management interfaces.
- Use host firewall controls and network segmentation.

3. Question3–Windows Workstation

The assessment requires identification of active ports, network services, file-sharing protocols, remote-management services and operating-system details, followed by a least-privilege and hardening analysis.

Aim

To perform authorized Nmap enumeration of 192.168.56.102, identify exposed services, analyze the attack surface, assess risk, and recommend appropriate security controls.

Nmap Commands

```
nmap -sn 192.168.56.102
```

```
nmap -p- 192.168.56.102
```

```
nmap -sV 192.168.56.102
```

```
sudo nmap -O 192.168.56.102
```

```
nmap -sC 192.168.56.102
```

```
nmap -sV --scripts smb-os-discovery, smb-protocols 192.168.56.102
```

```

kali@kali: ~
└─$ nmap -sn 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:23 -0400
Nmap scan report for 192.168.56.102
Host is up (0.00044s latency).
Nmap done: 1 IP address (1 host up) scanned in 2.54 seconds

kali@kali: ~
└─$ nmap 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:23 -0400
Nmap scan report for 192.168.56.102
Host is up (0.00051s latency).
All 1000 scanned ports on 192.168.56.102 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Nmap done: 1 IP address (1 host up) scanned in 6.63 seconds

kali@kali: ~
└─$ nmap 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:24 -0400
Nmap scan report for 192.168.56.102
Host is up (0.00051s latency).
All 1000 scanned ports on 192.168.56.102 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Nmap done: 1 IP address (1 host up) scanned in 6.67 seconds

kali@kali: ~
└─$ nmap -sV 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:24 -0400
Nmap scan report for 192.168.56.102
Host is up (0.0028s latency).
All 1000 scanned ports on 192.168.56.102 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 6.80 seconds

kali@kali: ~
└─$ sudo nmap -O 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:25 -0400
Nmap scan report for 192.168.56.102
Host is up (0.00088s latency).
All 1000 scanned ports on 192.168.56.102 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Warning: OSscan results may be unreliable because we could not find at least 1 open and 1 closed port
Aggressive OS guesses: AXIS 2100 Network Camera (92%), D-Link DP-3000, DP-G310, or Hamlet MPS8100 print server (92%), HP True64 UNIX 5.1A (92%), Sanyo PLC-XU80 digital video projector (92%), TRENDnet TV-IP100 webcam (92%), Vantage HD710
OS satellite receiver (92%), Linux 2.6.8 (90%), Asus WL-500gP wireless broadband router (89%), Cisco 1812, 3640, or 3700 router (10s 12.4) (89%), Cisco DOCSIS cable modem termination server (10s 12.1) (89%)
No exact OS matches for host (test conditions non-ideal).
OS detection performed. Please report any incorrect results at https://nmap.org/submit/ .

```

```
kali@kali: ~$ nmap -sT 192.168.56.102
Nmap scan report for 192.168.56.102
Host is up (0.0028s latency).
All 1000 scanned ports on 192.168.56.102 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 6.00 seconds

kali@kali: ~$ sudo nmap -sT 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2020-08-08 00:25 -0400
Nmap scan report for 192.168.56.102
Host is up (0.00058s latency).
All 1000 scanned ports on 192.168.56.102 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Warning: OSScan results may be unreliable because we could not find at least 1 open and 1 closed port
Aggressive OS guesses: AXIS 2100 Network Camera (92%), D-Link DP-300U, DP-G310, or Hamlet HP50810U print server (92%), HP Tru64 UNIX 5.1A (92%), Sanyo PLC-XUM8 digital video projector (92%), TRENDnet TV-IP180 webcam (92%), Vantage HD718
BS satellite receiver (92%), Linux 2.6.8 (90%), Asus WL-500gP wireless broadband router (89%), Cisco 1812, 3640, or 3700 router (IOS 12.4) (89%), Cisco DOCSIS cable modem termination server (IOS 12.1) (89%)
No exact OS matches for host (test conditions non-ideal).

OS detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 8.87 seconds

kali@kali: ~$ nmap -sC 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2020-08-08 00:25 -0400
Nmap scan report for 192.168.56.102
Host is up (0.00064s latency).
All 1000 scanned ports on 192.168.56.102 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)

Nmap done: 1 IP address (1 host up) scanned in 11.79 seconds

kali@kali: ~$ nmap -sV --script smb-os-discovery,smb-protocols 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2020-08-08 00:26 -0400
Nmap scan report for 192.168.56.102
Host is up (0.00098s latency).
All 1000 scanned ports on 192.168.56.102 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 6.83 seconds

kali@kali: ~$ sudo nmap -sV -O -sC 192.168.56.102
Starting Nmap 7.99 ( https://nmap.org ) at 2020-08-08 00:27 -0400

kali@kali: ~$
```

Analysis

Leastprivilege requires only necessary services to be exposed. File-sharing, remote-management, web or other network services should be checked against the workstation's intended role. Excessive exposure may support reconnaissance, credential attacks or lateral-movement opportunities in an authorized security test.

Recommendations

- Disable unnecessary network services.
- Restrict file sharing to required hosts/users.
- Disable insecure legacy protocols.
- Restrict remote administration.
- Apply security updates and host firewall rules.
- Segment sensitive resources from ordinary workstations.

4. Question 4—OWASP JuiceShop Server

The assessment requires host discovery, port scanning, service/version detection, OS fingerprinting and web-service identification, followed by analysis of web exposure and supporting services.

Aim

To perform authorized Nmap enumeration of 192.168.56.103, identify exposed services, analyze the attack surface, assess risk, and recommend appropriate security controls.

Nmap Commands

```
nmap -sT 192.168.56.103
```


```
nmap -p- 192.168.56.103
```

```
nmap -sV 192.168.56.103
```

```
sudo nmap -O 192.168.56.103
```

```
nmap -sC 192.168.56.103
```

nmap-sv--scripthttp-title,http-headers192.168.56.103

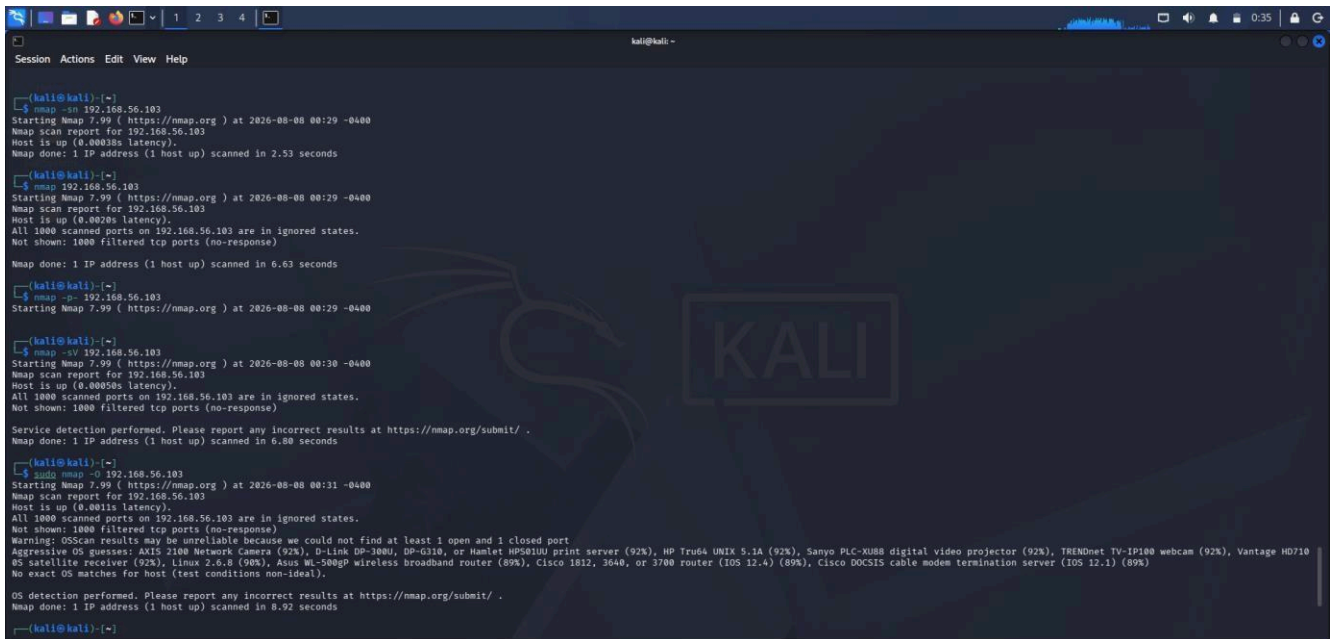

```
(kali@kali)~$ nmap -sn 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:29 -0400
Nmap scan report for 192.168.56.103
Host is up (0.00038s latency).
Nmap done: 1 IP address (1 host up) scanned in 2.53 seconds


(kali@kali)~$ nmap 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:29 -0400
Nmap scan report for 192.168.56.103
Host is up (0.0020s latency).
All 1000 scanned ports on 192.168.56.103 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Nmap done: 1 IP address (1 host up) scanned in 6.63 seconds

(kali@kali)~$ nmap -p- 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:29 -0400

(kali@kali)~$ nmap -sV 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:30 -0400
Nmap scan report for 192.168.56.103
Host is up (0.00058s latency).
All 1000 scanned ports on 192.168.56.103 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 6.80 seconds

(kali@kali)~$ nmap -O 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:31 -0400
Nmap scan report for 192.168.56.103
Host is up (0.0011s latency).
All 1000 scanned ports on 192.168.56.103 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Warning: OSScan results may be unreliable because we could not find at least 1 open and 1 closed port
Aggressive OS guesses: AXIS 2100 Network Camera (92%), HP Tru64 UNIX 5.1A (92%), Sanyo PLC-XU88 digital video projector (92%), TRENDnet TV-IP100 webcam (92%), Vantage HD710 OS satellite receiver (92%), Linux 2.6.8 (90%), Asus WL-500bg wireless broadband router (89%), Cisco 1812, 3640, or 3700 router (IOS 12.4) (89%), Cisco DCS315 cable modem termination server (IOS 12.1) (89%)
No exact OS matches for host (test conditions non-ideal).
OS detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 8.92 seconds

(kali@kali)~$
```

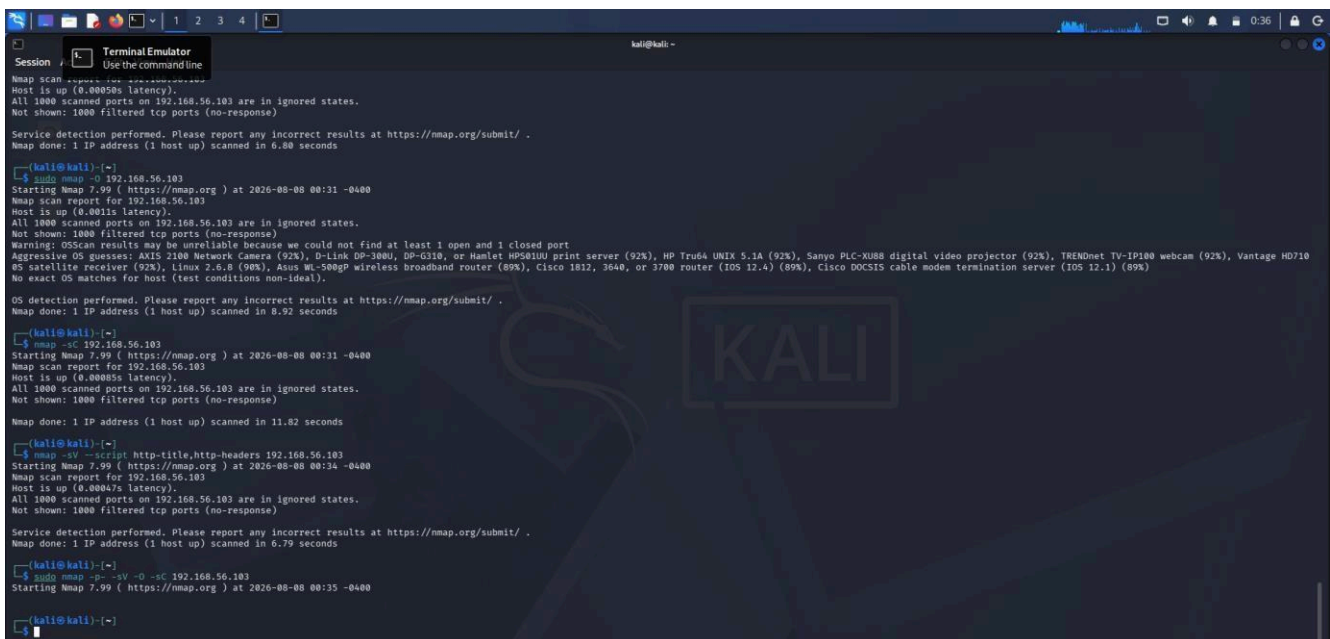

```
(kali@kali)~$ nmap -sn 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:29 -0400
Nmap scan report for 192.168.56.103
Host is up (0.00038s latency).
Nmap done: 1 IP address (1 host up) scanned in 2.53 seconds

(kali@kali)~$ nmap 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:29 -0400
Nmap scan report for 192.168.56.103
Host is up (0.0020s latency).
All 1000 scanned ports on 192.168.56.103 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Nmap done: 1 IP address (1 host up) scanned in 6.63 seconds

(kali@kali)~$ nmap -p- 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:29 -0400

(kali@kali)~$ nmap -sV 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:30 -0400
Nmap scan report for 192.168.56.103
Host is up (0.00058s latency).
All 1000 scanned ports on 192.168.56.103 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 6.80 seconds

(kali@kali)~$ nmap -O 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:31 -0400
Nmap scan report for 192.168.56.103
Host is up (0.0011s latency).
All 1000 scanned ports on 192.168.56.103 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Warning: OSScan results may be unreliable because we could not find at least 1 open and 1 closed port
Aggressive OS guesses: AXIS 2100 Network Camera (92%), HP Tru64 UNIX 5.1A (92%), Sanyo PLC-XU88 digital video projector (92%), TRENDnet TV-IP100 webcam (92%), Vantage HD710 OS satellite receiver (92%), Linux 2.6.8 (90%), Asus WL-500bg wireless broadband router (89%), Cisco 1812, 3640, or 3700 router (IOS 12.4) (89%), Cisco DCS315 cable modem termination server (IOS 12.1) (89%)
No exact OS matches for host (test conditions non-ideal).
OS detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 8.92 seconds

(kali@kali)~$ nmap -sC 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:31 -0400
Nmap scan report for 192.168.56.103
Host is up (0.00055s latency).
All 1000 scanned ports on 192.168.56.103 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Nmap done: 1 IP address (1 host up) scanned in 11.82 seconds

(kali@kali)~$ nmap -sV --script http-title,http-headers 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:34 -0400
Nmap scan report for 192.168.56.103
Host is up (0.00047s latency).
All 1000 scanned ports on 192.168.56.103 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 6.79 seconds

(kali@kali)~$ nmap -p- -sV -O -sC 192.168.56.103
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:35 -0400

(kali@kali)~$
```

Analysis

Web-service enumeration can reveal application-facing ports, server software, response information and supporting services. This information helps an authorized tester identify areas for later vulnerability assessment. Administrative interfaces and unnecessary supporting services should receive particular attention because they can enlarge the application's attack surface.

Recommendations

- Expose only required web services.
- Restrict administrative interfaces.
- Keep the web server and supporting software updated.
- Use secure transport and authentication controls.

- Apply network segmentation and monitoring.

5. Question 5–Network Gateway

The assessment requires comprehensive enumeration of the laboratory gateway, including exposed management interfaces and services such as SSH, Telnet, SNMP, HTTP and HTTPS.

Aim

To perform authorized Nmap enumeration of 192.168.56.1, identify exposed services, analyze the attack surface, assess risk, and recommend appropriate security controls.

Nmap Commands

```
nmap -sn 192.168.56.1
```

```
nmap -p- 192.168.56.1
```

```
nmap -sV 192.168.56.1
```

```
sudo nmap -O 192.168.56.1 nmap
```

```
-sC 192.168.56.1
```

```
nmap -sV --script=banner 192.168.56.1
```

```

kali@kali: ~
Session Actions Edit View Help

kali@kali:~$ nmap -sn 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:36 -0400
Nmap scan report for 192.168.56.1
Host is up (0.0022s latency).
Nmap done: 1 IP address (1 host up) scanned in 2.52 seconds

kali@kali:~$ nmap -p- 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:36 -0400
Nmap scan report for 192.168.56.1
Host is up (0.0014s latency).
Not shown: 997 filtered tcp ports (no-response)
PORT      STATE SERVICE
135/tcp    open  msrpc
139/tcp    open  netbios-ssn
445/tcp    open  microsoft-ds
Nmap done: 1 IP address (1 host up) scanned in 7.59 seconds

kali@kali:~$ nmap -sV 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:37 -0400
Nmap scan report for 192.168.56.1
Host is up (0.0014s latency).
Not shown: 997 filtered tcp ports (no-response)
PORT      STATE SERVICE      VERSION
135/tcp    open  msrpc        Microsoft Windows RPC
139/tcp    open  netbios-ssn  Microsoft Windows netbios-ssn
445/tcp    open  microsoft-ds?
Service Info: OS: Windows; CPE: cpe:/o:microsoft:windows
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 13.79 seconds

kali@kali:~$ sudo nmap -O 192.168.56.1
sudo: nmap: command not found

kali@kali:~$ sudo nmap -O 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:38 -0400
Nmap scan report for 192.168.56.1
Host is up (0.00099s latency).
Not shown: 997 filtered tcp ports (no-response)

```

```
Session [X] Terminal Emulator
Use the command line

Running (cpe:/o:linux:linux_kernel:4.15.0-93-generic (93%), Oracle VirtualBox (92%), Slirp (92%), QEMU (90%))
OS CPE: cpe:/o:oracle:virtualbox cpe:/a:danny_gasparovskii:slirp cpe:/a:qemu:qemu
Aggressive OS guesses: AT&T BGM210 voice gateway (93%), Oracle VirtualBox Slirp NAT bridge (92%), QEMU user mode network gateway (90%)
No exact OS matches for host (test conditions non-ideal).

OS detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 11.49 seconds

kali@kali:~$ nmap -sC 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:38 -0400
Nmap scan report for 192.168.56.1
Host is up (0.0014s latency).
Not shown: 997 filtered tcp ports (no-response)
PORT      STATE SERVICE
135/tcp    open  msrpc
139/tcp    open  netbios-ssn
445/tcp    open  microsoft-ds

Host script results:
|_ smb2-time:
|   date: 2026-08-08T04:39:00
|_ start_date: N/A
|_ smb2-security-mode:
|   3.1.1:
|_ Message signing enabled but not required
Nmap done: 1 IP address (1 host up) scanned in 21.94 seconds

kali@kali:~$ nmap -sV --script banner 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:39 -0400
Nmap scan report for 192.168.56.1
Host is up (0.0015s latency).
Not shown: 997 filtered tcp ports (no-response)
PORT      STATE SERVICE      VERSION
135/tcp    open  msrpc        Microsoft Windows RPC
139/tcp    open  netbios-ssn  Microsoft Windows netbios-ssn
445/tcp    open  microsoft-ds?
Service Info: OS: Windows; CPE: cpe:/o:microsoft:windows

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 28.71 seconds

kali@kali:~$ sudo nmap -p- -sV -O -c 192.168.56.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-08 00:40 -0400

kali@kali:~$
```

Analysis

Management interfaces can significantly increase the attack surface of a gateway. SSH should be restricted and strongly authenticated; Telnet should normally be disabled because it is a legacy insecure management protocol; SNMP should be restricted and securely configured; HTTP management should be avoided where secure HTTPS is available; and HTTPS administration should be protected with strong authentication and secure configuration.

Recommendations

- Disable Telnet when not required.
- Restrict SSH to trusted management systems.
- Secure and restrict SNMP.
- Prefer HTTPS for web administration.
- Apply ACLs/firewall restrictions.
- Update gateway firmware.
- Monitor administrative access.

9. Overall Risk Assessment

Risk ratings must be finalized using the actual Nmap observations. The following framework can be applied consistently across all five targets.

Risk	Typical Interpretation	Recommended Priority
High	Unnecessary or vulnerable exposed service, sensitive management interface, or significant attack-surface concern	Immediate remediation or strict isolation
Medium	Useful information exposure or service that requires additional conditions for abuse	Prioritize hardening and monitoring
Low	Necessary service with limited exposure and appropriate controls	Maintain secure configuration and monitor

10. Consolidated Security Recommendations

- Maintain an approved inventory of network services and their business purpose.
- Disable services that are not required for the system's intended role.
- Restrict management services to dedicated trusted administration networks.
- Patch operating systems, application servers and network devices regularly.
- Use strong authentication and least-privilege access.
- Disable insecure legacy protocols where possible.
- Apply host and network firewall rules.
- Use network segmentation to reduce lateral movement opportunities.
- Monitor logs and authentication events for suspicious activity.
- Perform periodic authorized enumeration and vulnerability assessments.

11. Conclusion

Nmap enumeration provides a practical method for identifying reachable hosts, open ports, network services, software versions and operating-system characteristics. Across the five assessment scenarios, the collected information forms the foundation for attack-surface analysis and risk-based security hardening.

The most important principle is that an exposed service should have a justified business or technical purpose and should be securely configured. Enumeration results should therefore be converted into actionable controls such as service reduction, patching, access restriction, segmentation, secure authentication and monitoring.

The final submissions should include the student's actual Nmap screenshots and observed results in the evidence sections. This ensures that the report represents the real laboratory execution rather than assumed or fabricated scan output.