




Paired DKPS discards unpaired responses; PKPS keeps them via query similarity

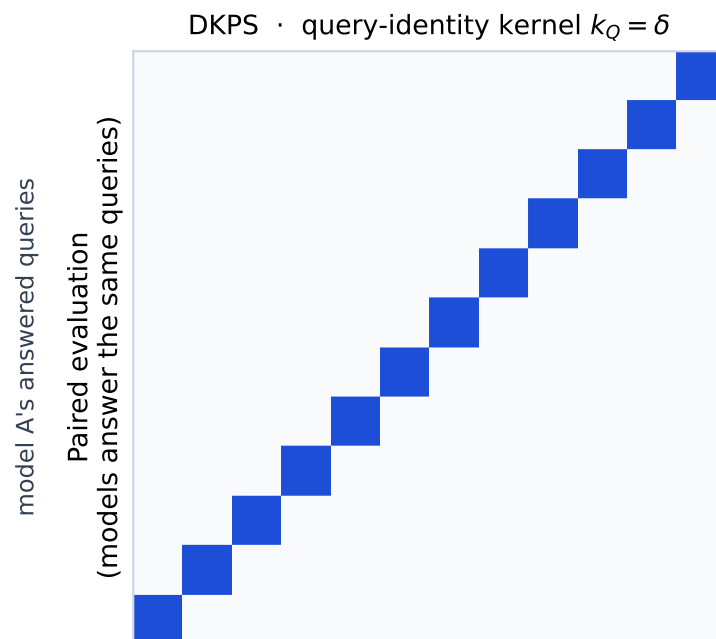

12 of 12 queries shared · comparison supported

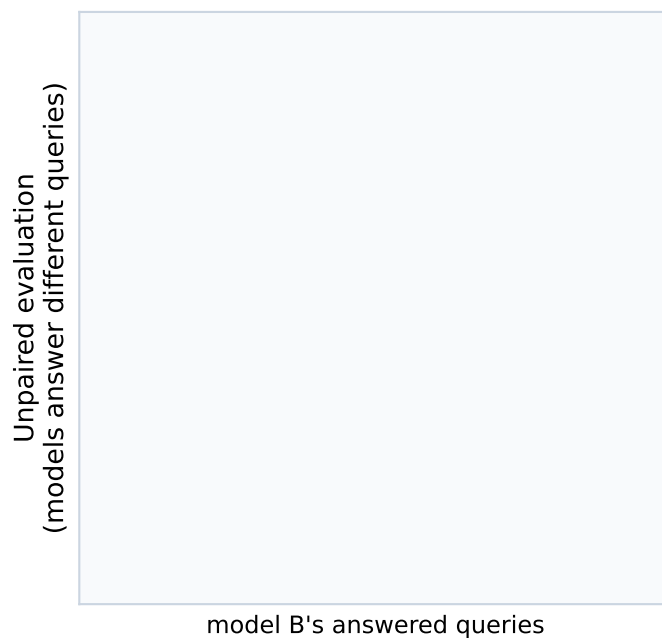

0 of 12 queries shared · no comparison possible

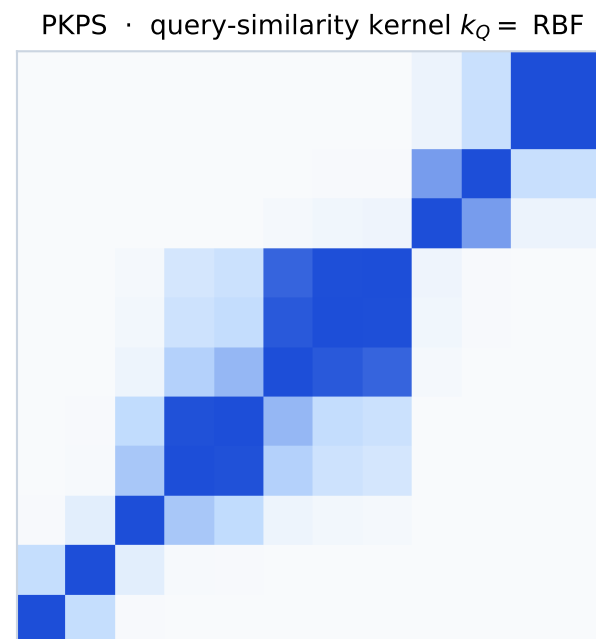

all 12×12 response pairs contribute



all 12×12 response pairs contribute, bridged by similarity

Each cell = one (model-A response, model-B response) pair, shaded by the query-kernel weight it contributes to the model affinity A_{AB} .
When evaluations are unpaired the identity kernel has no diagonal left and the comparison collapses (red); the RBF kernel still bridges responses to similar queries (green).