

GroAurum

Project Status and Architecture Snapshot

Factual repository inspection | 2026-08-18 | Read-only

Audience

This document is written so another engineer or AI assistant can finish the Admin application and validate the shared backend before investing further in the other three apps.

Rules used while writing

- No application source, schema, migrations, seeds, env files, or deployment config were modified.
- No live hosted database was queried for this document.
- Requirements not found in the repository are labelled: Not found / not established in repository.
- Status tags: [COMPLETE] [PARTIAL] [NOT STARTED] [UNKNOWN] [WORKING] [BROKEN]
- Older docs (README, MIGRATION_INDEX.md, 2026-07-18 admin ERP audit) are cited when they contradict current code.

How to use this PDF

- Start with section 17 (executive summary) and section 15 (Admin-first roadmap).
- Use section 3 and 12 for Admin completeness vs screens.
- Use section 4 for table names, FKs, and soft-delete rules. Do not rename tables.
- Do not start Customer / Sales / Delivery feature work until Admin + backend contracts are stable (section 16).

Table of contents

- 1. Project overview
- 2. Four applications
- 3. Admin application - deep audit
- 4. Database audit
- 5. Current database / hosted state
- 6. API / backend audit
- 7. Frontend audit
- 8. Project structure
- 9. Environment / configuration
- 10. Current user flows
- 11. Known errors / problems
- 12. Admin completeness matrix
- 13. Testing status
- 14. Dependencies between applications
- 15. What should be done next (Admin-first roadmap)
- 16. Do not build the other three apps yet
- 17. Final executive summary

1. Project overview

What GroAurum is intended to do

Repository sources: README.md, docs/architecture/phase-1-domain.md, supabase/seed/sprint4_seed.sql, packages/shared-types/src/territory.ts, docs/GroAurum-Sprint4.0-Business-Scope-Migration.pdf.

GroAurum is a B2B wholesale ordering and distribution platform. Staff (admin, salesman, delivery) and linked retail shops (customers) operate against one PostgreSQL database with RLS.

Problem the system solves

Replace ad-hoc wholesale restock (phone/WhatsApp) with: a SKU catalogue with prices and inventory; shop (retailer) accounts and invitations; orders with immutable line snapshots; payments separate from order status; delivery routes and COD; sales conversion / invoice register; audit logs.

What the product is supposed to become

Four clients on one backend: Admin ERP, Customer (Expo) app, Salesman field PWA, Delivery field PWA. Domain model in packages/shared-types. Persistence in supabase/migrations. Adapters in packages/api (admin) and packages/api-client (field apps).

Intended users

- Admin / operations staff: roles super_admin, operations_manager, warehouse_manager, sales_manager, delivery_manager, read_only (packages/auth/src/roles.ts).
- Salesmen: field retailer creation, visits, assisted orders.
- Delivery executives: routes, stops, COD.
- Retail customers: shop-linked ordering from the Expo app.

Intended business workflow

Catalogue + prices + stock
 -> Shop / invitation / auth link
 -> Order (customer self-serve or salesman-assisted)
 -> Payment (COD or online intent; DELIVERED requires PAID)
 -> Delivery route / stops
 -> Optional convert order to sale (invoice register)

Contradictions inside the repository (do not invent a single story)

Source	Geography	Catalogue	Notes
README.md	Gurugram launch; Fatehpur Beri ops	B2B dry-fruit wholesale	Stale vs Sprint 4.0 code/seed
sprint4_seed.sql	South Delhi; warehouse Okhla / 110020	Dry Fruits + Atta, Rice, Sugar, Spices, FMCG	Local seed
DEFAULT_SERVICE_TERRITORY	South Delhi / New Delhi / Delhi	N/A (PIN fallback)	packages/shared-types/src/territory.ts; PINs 110017,110019,110020,110024,110048,110062 (no 110074)
phase-1-domain.md	Gurugram PIN cluster as initial rule type	PACKED/BULK, CARTON/KG examples	Phase 1 types era

Not found / not established in repository: a single canonical commercial SLA, credit terms, GST invoice legal template, or confirmed production warehouse address_line. README mentions Fatehpur Beri; local seed uses Okhla Industrial Area Phase 1.

2. Four applications

Locations: apps/admin-web, apps/customer, apps/sales-pwa, apps/delivery-pwa. Root scripts: pnpm dev:admin, pnpm dev:customer, pnpm dev:sales, pnpm dev:delivery.

2.1 Admin ERP (@groaurum/admin-web)

- Purpose: Operational console for wholesale ops (package.json description).
- Users: Admin ERP roles (not salesman / delivery_executive / retail_customer).
- Location: apps/admin-web | Vite 6 + React 19 + React Router 7 + TanStack Query.
- Status: [PARTIAL] Large live UI; several modules stubbed; service-areas route is PlaceholderPage.
- Auth: @groaurum/auth; VITE_AUTH_PROVIDER mock|supabase; ProtectedAdminRoute audience=admin_erp.
- Data: VITE_DATA_ADAPTER mock (fixtures, no writes) | supabase (LiveAdminApi + CrudServices).
- Routes: /login, /, /orders, /orders/:orderId, /sales, /customers, /customers/:customerId, /products, /products/:productId, /categories, /pricing, /pricing/:skuld, /inventory, /inventory/:skuld, /salesmen, /salesmen/:salesmanId, /delivery, /delivery/:routeId, /service-areas (placeholder), /reports, /settings.
- APIs: Direct PostgREST via LiveAdminApi; CrudServices Zod+repos; RPCs admin_advance_order_to, admin_assign_order_delivery, admin_mark_payment_received, update_order_status_admin.
- Completed: Dashboard reads; category CRUD; product/SKU create-edit-archive (supabase); order detail workflow RPCs; login/logout/session.

- Partial: Pricing list actions; inventory list actions; customer invitations/docs; sales read-only; delivery detail; salesmen create unused; reports charts; settings writes.
- Not started: Dedicated Service Areas CRUD page (nav exists).
- Depends on: shared DB, @groaurum/api, @groaurum/auth, @groaurum/validation, @groaurum/ui.

2.2 Customer (@groaurum/customer)

- Purpose: Retail shop restock app (Expo ~57, Expo Router).
- Users: Linked shop customers.
- Location: apps/customer.
- Status: [PARTIAL] Live catalogue/order path exists; defaults to mock in app.json extra.customerDataAdapter.
- Auth: NOT @groaurum/auth. Uses @groaurum/api-client CustomerSessionProvider (email/password, phone OTP, accept_shop_invitation).
- Screens: app/index, location (mock), (tabs) home/catalogue/restock/orders, category/[id], product/[id], cart, checkout (redirects to cart), order/[id], account.
- RPCs: accept_shop_invitation, place_customer_order. create_online_payment_intent exists in api-client but is not called by the customer app.
- Complete: auth gate (supabase), catalogue, COD place order, order list/timeline, realtime invalidation.
- Partial: restock (depends on history), account, promotions strip.
- Not started: live Razorpay checkout from the app.
- Depends on: shop_auth_links, catalogue, inventory_balances SELECT (Sprint 4.0 migration), place_customer_order.

2.3 Salesman PWA (@groaurum/sales-pwa)

- Purpose: Field sales - retailers, visits, assisted orders.
- Users: salesman role. Location: apps/sales-pwa. Vite/React. Port documented as 5174.
- Status: [PARTIAL] Live RPCs exist; VITE_DATA_ADAPTER default in code is mock.
- Routes: /login, /, /customers, /customers/new, /customers/:shopId, /orders/new, /visits, /performance.
- RPCs: salesman_create_retailer, salesman_create_invitation, place_assisted_order.
- Complete: login, dashboard KPIs, create retailer/invite, assisted order, visits, performance (when live).
- Partial: customer OTP confirmation (SMS not wired; placeholder message).
- Depends on: Admin-created catalogue/stock/service areas; shops; invitations.

2.4 Delivery PWA (@groaurum/delivery-pwa)

- Purpose: Execute assigned routes and COD.
- Users: delivery_executive. Location: apps/delivery-pwa. Port documented as 5175.
- Status: [PARTIAL] Route/COD RPCs exist; proof capture is placeholder checkboxes.
- Routes: /login, /, /routes, /routes/:routeId, /routes/:routeId/stops/:stopId, /cod.
- RPCs: delivery_start_route, delivery_mark_stop_in_progress, delivery_complete_stop, delivery_fail_stop, delivery_collect_cod, delivery_complete_route.
- Depends on: Admin assigning routes (admin_assign_order_delivery / delivery_routes).

3. Admin application - deep audit

Primary paths: apps/admin-web/src/App.tsx, auth/, data/live/LiveAdminApi.ts, data/mutations.ts, pages/, packages/api, packages/auth.

Authentication

- Login: pages/LoginPage.tsx email/password -> signIn. Prefill VITE_AUTH_DEV_EMAIL / VITE_AUTH_DEV_PASSWORD. Does not auto-sign-in in supabase mode.
- Logout: session provider from @groaurum/auth (SessionProvider in AdminAuthProviders.tsx).
- Session: restore on load when VITE_AUTH_PROVIDER=supabase; mock auto-sign-in when mock.
- Provider: createAdminAuthProvider.ts -> createAuthProvider; NavigationGuard currentAudience=admin_erp.
- Roles: packages/auth/src/roles.ts (listed in section 2).
- Permissions: packages/auth/src/permissions.ts named permissions plus MODULE_ALLOWED_ROLES.
- Protected routes: ProtectedAdminRoute; AdminModuleGuard per module; forbidden UI AuthFoundationViews.Forbidden.
- settings module: super_admin only. service_areas module: super_admin, operations_manager, read_only.
- Admin vs other apps: salesman/delivery_executive/retail_customer are not Admin ERP audiences.

Dashboard

- Page: pages/DashboardPage.tsx. Query: useDashboardSnapshotQuery.
- Live: LiveAdminApi.dashboardSnapshot() aggregates orders, shops, inventory_balances, payments, delivery_routes, sales_visits, order_events, payment_events, inventory_movements, products, sku_prices, skus, profiles.
- UI: ExecutiveKpiCards, OperationsAtGlance, AttentionRequired, DailyFocusCard, QuickActions, RecentBusinessActivity, SalesTeamPerformance, RecentOrders, LowStockCard.
- Real vs placeholder: KPI numbers are live in supabase mode. Quick actions in some dashboard widgets historically no-op; verify DashboardPage before assuming navigation. Mock mode uses dashboard-fixtures.ts.
- Realtime: orders/inventory/delivery invalidate dashboard keys only (AdminDataProviders.tsx).
- Status: [PARTIAL] (read console complete; not a write console).

Service Areas

- Nav path /service-areas is PlaceholderPage title 'Service Areas' description 'Coverage and eligibility'. Status: [NOT STARTED] as a module page.
- Read-only list exists under Settings -> ServiceAreasSection.tsx from settingsSnapshot() querying service_areas.
- PIN-code management UI: [NOT STARTED]. Rules live in serviceability_rules (JSON config.pinCodes). No Admin CRUD page found.
- Add/edit/disable in Settings marked Mutation deferred.

Warehouses / operational_locations

- UI: Settings -> WarehousesSection.tsx. Live read from operational_locations via settingsSnapshot().
- CRUD writes: [NOT STARTED] (actions stubbed Mutation deferred).
- Inventory relationship: inventory_balances.operational_location_id RESTRICT. Inventory pages show location labels.
- No dedicated /warehouses route. Address fields exist on the table (address_line, city, state, pin_code, lat/lng). No FK from warehouse to service_area in schema.

Categories

- Page: pages/categories/CategoriesListPage.tsx. Create/activate/deactivate/soft-delete wired via mutations -> CrudServices.
- Tables: categories; product counts from products.
- Soft-delete: deleted_at + is_active. Unique name is lower(btrim(name)) on ALL rows including soft-deleted (categories_name_unique) - cannot recreate same name without renaming the old row.
- Status: [COMPLETE] for list CRUD in supabase mode. No nested taxonomy. No realtime.

Products

- List + detail: ProductListPage, ProductDetailPage. ProductFormModal create/edit. Publish checklist. Tabs: overview, SKUs, price history, inventory, images.
- SKU CRUD: ProductSkusTab uses create/update/soft-delete mutations.
- Images: ProductImagesTab documents upload as not wired yet. [PARTIAL]
- Tables: products, categories, skus, sku_prices, inventory_balances, product_images, profiles.
- Status: [PARTIAL]

SKUs

- Managed under product detail, not a top-level nav item. skuList() exists on LiveAdminApi.
- Selling unit is a text field (validation package unlocks multiple units). Pricing via sku_prices append-only. Inventory via inventory_balances unique (sku_id, location).
- Status: [PARTIAL] (UI on product; no standalone SKU module).

Inventory

- List + detail: InventoryListPage, InventoryDetailPage. Detail adjust: useUpdateInventoryMutation (on-hand).
- Tabs include movements and reservations (read from inventory_movements, stock_reservations).
- List quick actions: No backend mutations in v1.
- No multi-warehouse transfer UI. Status: [PARTIAL]

Shops / retailers (Admin label: Customers)

- Canonical table is shops. Compat view public.customers -> shops. Routes /customers.
- List create customer + reassign salesman wired. Invitation send is tab-switch stub. Documents/activation largely read-only.
- Create uses hardcoded SEED_SALESMAN a100...002 in list quick action (code).
- Addresses: customer_addresses (shop_id, not customer_id). Soft-delete deleted_at, no is_active on addresses.
- Status: [PARTIAL]

Orders

- List + detail with action panel. Live RPCs: confirm, pack, payment received, convert to sale, assign delivery, invoice printed.
- Hooks defined but unused in pages: useUpdateOrderStatusMutation, useConfirmOrderDeliveryMutation, useMarkOrderOutForDeliveryMutation.
- orders has no deleted_at. order_lines snapshots immutable after confirm (DB trigger).
- Status: [PARTIAL] (strong detail workflow; list is read/filter).

Payments

- No dedicated /payments route. Payment status appears on order detail / customer payments tab.
- Tables: payments, payment_events. Mark received: RPC admin_mark_payment_received.
- Online: Edge razorpay-create-order / razorpay-webhook; Admin payment config section is partial/placeholder gateway label.
- Status: [PARTIAL]

Delivery

- List + detail. List can create/update routes (seed IDs used in some mutations). Detail mutations deferred; mark delivered/skip on DeliveryOrdersTab stubbed.
- Tables: delivery_routes, route_stops, delivery_attempts, operational_locations, profiles.
- Status: [PARTIAL]

Sales

- Route /sales, SalesListPage, SalesRegister. Read-only. Data: ordersSnapshot().salesRows. Guarded as orders module.
- Tables: sales, sale_items, sales_payments filled by convertOrderToSale.
- Reports page is separate and mostly placeholder charts.
- Status: [PARTIAL]

Settings

- Tabs: company, warehouses, service areas, delivery slots, payments, notifications, taxes, user roles, preferences.
- Live writes: useUpsertSettingMutation on update_company quick action only.
- Delivery slots hardcoded in LiveAdminApi.settingsSnapshot(). notifications/taxes/roles empty arrays in live API.
- settings.setting_key company is jsonb; Sprint 9 trigger trg_audit_settings_change writes audit_logs on UPDATE.
- Status: [PARTIAL]

Admin known TODOs in code

- Product image upload not wired (ProductImagesTab).
- Reports charts placeholder: true in LiveAdminApi.reportsSnapshot.
- Export stubs on ReportsPage.
- Service Areas PlaceholderPage.
- Settings warehouse/service-area mutations deferred.
- useCreateSalesmanMutation unused.

The 2026-07-18 docs/admin-erp-implementation-audit.md is STALE on Products (it says no create/SKU UI; current code has ProductFormModal and ProductSkusTab).

4. Database audit

Technology: PostgreSQL via Supabase (supabase/config.toml project_id groaurum-b2b-local). 34 migration files under supabase/migrations/. CLI supabase ^2.30.4. Engine on linked hosted project was reported as Postgres 17 in CLI project list (not re-verified here).

Migration structure

- Phase 2 core: 20260715100000 through 20260715101500 (extensions, enums, profiles, territory, shops, catalogue, inventory, orders, payments, delivery, audit, invariants, RLS, grants).
- Sprint 4: soft_delete, product_images, customer_addresses, settings/reports, compat views, READ_ONLY role, RLS extensions.
- Sprint 5.1-9.1: admin writes, customer RPCs, salesman visits/RPCs, delivery RPCs, production services, cron/trusted GUC.
- Sprint 3.3-3.4: sales, sale_items, sales_payments, admin workflow RPCs.
- Sprint 4.0: 20260816120000_sprint40_customer_inventory_read.sql customer SELECT on inventory_balances.
- MIGRATION_INDEX.md is STALE (stops at 0030; missing 3.3, 3.4, 4.0).

Seed / fixtures

- supabase/seed/sprint4_seed.sql - core demo catalogue, shops, orders, settings.
- sprint6_customer_seed.sql - customer user, shop_auth_links, PIN rule.
- sprint7_salesman_seed.sql - sales_visits, contacts.
- sprint8_delivery_seed.sql - delivery user, route, COD payments.
- Apply via pnpm db:seed:sprint4 (scripts/seed-sprint4.mjs) targeting LOCAL docker only.
- supabase/fixtures/phase3_dev_fixtures.sql - not wired as seed.sql.

Never run pnpm db:reset or sprint4 seed against hosted. Seed upserts auth.users.

TABLE | PURPOSE | RELATIONSHIPS | SOFT DELETE? | USED BY ADMIN?

TABLE	PURPOSE	IMPORTANT REL	SOFT DELETE?	ADMIN?
profiles	Staff 1:1 auth.users	auth.users CASCADE	deleted_at + is_active	Yes
service_areas	Territory identity	rules RESTRICT	deleted_at + is_active	Read (settings); page missing
serviceability_rules	PIN/admin/polygon config	service_area RESTRICT	is_active only	No dedicated UI
operational_locations	Warehouse / ops base	inventory RESTRICT	deleted_at + is_active	Read (settings)
shops	Retailer / customer entity	area SET NULL; salesman SET NULL; orders RESTRICT	deleted_at + is_active	Yes /customers
shop_contacts	Shop people	shop CASCADE	No	Yes (detail)
shop_invitations	Invite tokens	shop CASCADE	No	Partial
shop_auth_links	Customer login link	shop/user CASCADE	No	Indirect
shop_salesman_assignments	Assignment history	shop CASCADE	No	Indirect
categories	Catalogue grouping	products RESTRICT	deleted_at + is_active	Yes
products	Sellable product	category RESTRICT	deleted_at + is_active	Yes
skus	Orderable unit	product RESTRICT	deleted_at + is_active	Yes (product tab)
sku_prices	Append-only prices	sku RESTRICT	No (effective_to)	Yes /pricing
product_images	Product media	product CASCADE	deleted_at	Partial
inventory_balances	On-hand/reserved/available	sku+location RESTRICT	No	Yes
inventory_movements	Append-only ledger	sku+location RESTRICT	No	Read on detail
stock_reservations	Order holds	order CASCADE	No	Read
orders	Order header	shop RESTRICT; sale SET NULL	No	Yes
order_lines	Immutable snapshots	order CASCADE; sku RESTRICT	No	Yes
order_events	Status history	order CASCADE	No	Yes
order_confirmation_challenges	Assisted OTP placeholder	order CASCADE	No	Indirect
payments	Payment aggregate	order RESTRICT	No	Yes (order)
payment_events	Payment ledger	payment CASCADE	No	Indirect
delivery_routes	Route header	area RESTRICT	deleted_at	Yes
route_stops	Stop per order	route CASCADE; order RESTRICT	No	Yes
delivery_attempts	Attempt log	stop CASCADE	No	Indirect
sales	Invoice register	order RESTRICT	No	Yes /sales
sale_items	Sale lines	sale CASCADE	No	Via convert
sales_payments	Sale vs payment	sale CASCADE	No	Via convert
sales_visits	Field visits	shop CASCADE	No	Salesmen tab
customer_addresses	Extra shop addresses	shop CASCADE	deleted_at	Yes
settings	Key/jsonb config	profile SET NULL	deleted_at	Yes
reports_snapshot	Analytics placeholder	profile SET NULL	deleted_at	Not used for charts
audit_logs	Append-only audit	UPDATE/DELETE prevented	No	No Admin UI found

notification_outbox	Notify queue	-	No	No
job_runs	Job history	-	No	No
application_logs	App logs	-	No	No

Views

- user_profiles -> profiles; customers -> shops; price_history -> sku_prices; order_items -> order_lines; inventory -> inventory_balances.
security_invoker = true.

Important triggers / RPCs

- Invariants: DELIVERED requires PAID; confirmed order_lines immutable; sku_prices append-only close; order/payment server fields.
- Admin RPCs: admin_advance_order_to, admin_assign_order_delivery, admin_mark_payment_received, update_order_status_admin.
- Customer: accept_shop_invitation, place_customer_order (trusted GUC in 9.1).
- Salesman: salesman_create_retailer, salesman_create_invitation, place_assisted_order.
- Delivery: delivery_* route/stop/COD RPCs.
- RLS FORCE on core business tables. Admin write policies in sprint51 + later sales admin_all.

5. Current database / hosted state

Repository-described state - live database not verified in this documentation pass.

A. Local seed (sprint4 + sprint6) - repository SQL

- Service area a200...001 name South Delhi; grocery + FMCG wholesale description.
- PIN rule in sprint6: 110017, 110019, 110020, 110024, 110048, 110062.
- Warehouse a300...001 South Delhi Warehouse 1, Okhla Phase 1, New Delhi, 110020.
- Categories a400...001..006: Dry Fruits, Atta/Flour, Rice, Sugar, Spices, FMCG.
- Products/SKUs/prices/inventory for 7 grocery SKUs; 5 shops in South Delhi PINs; company setting city New Delhi.
- Auth seed users: admin@, salesman1@, salesman2@, customer@, delivery1@ groaurum.local (passwords in seed - not repeated here).

B. README vs seed

- README still says Gurugram dry-fruit and Fatehpur Beri ops. Treat README as stale relative to Sprint 4.0 seed and DEFAULT_SERVICE_TERRITORY.

C. Hosted - not re-verified here

A prior working-session read-only inspection (linked CLI SELECTs, 2026-08-17) observed hosted still on Gurugram Central, PIN [122001], warehouse Gurugram Warehouse 1 / 122001, categories Almonds/Cashews/Raisins, 13 test shops, company city Gurugram. A data-patch SQL was drafted later (South Delhi PINs including 110074, Dry Fruits merge, test shop soft-delete, company city New Delhi). Execution status after the alias-bug fix is UNKNOWN in this snapshot - do not assume hosted equals local seed.

Do not execute hosted SQL from this PDF. Confirm live rows with read-only SELECTs before any write.

6. API / backend audit

There is no separate Express/Nest HTTP API. Clients use Supabase JS (PostgREST + RPC) with the user JWT. Edge Functions are Deno under supabase/functions/.

Access pattern

Browser/app + anon key + user JWT

- > PostgREST table CRUD (RLS)
- > Postgres functions (RPC)

Edge (service role / secrets):

- razorpay-create-order, razorpay-webhook,
- expire-reservations, expire-invitations, send-notification

Admin CrudServices methods (packages/api)

- create/update/softDelete: products, categories, skus.
- prices create/close; inventory adjust; customers create/update; delivery routes create/update; orders create; salesmen create; settings upsert.
- Zod schemas in packages/validation.

Admin LiveAdminApi RPCs / writes

CALL	PURPOSE	AUTH	TABLES/RPC	USED BY
PostgREST GET	View-models	Admin JWT + RLS	See LiveAdminApi methods	All list/detail pages
admin_advance_order_to	Order status	Admin	orders + events	OrderActionPanel
admin_assign_order_delivery	Assign route	Admin	routes/stops	OrderDeliveryAssign
admin_mark_payment_received	Payment	Admin	payments	Order actions
update_order_status_admin	Status (api ops)	Admin	orders	@groaurum/api
convertOrderToSale	Invoice register	Admin	sales, sale_items, sales_payments	Order actions

Field RPCs

RPC	APP	PURPOSE
accept_shop_invitation	customer	Link auth user to shop
place_customer_order	customer	Self-serve order + reserve
salesman_create_retailer	sales-pwa	Create shop
salesman_create_invitation	sales-pwa	Invite

place_assisted_order	sales-pwa	Field order
delivery_* (6 functions)	delivery-pwa	Route/stop/COD
create_online_payment_intent	edge	Razorpay intent
apply_payment_webhook_event	edge	Webhook apply

Gaps

- Missing Admin HTTP resource for serviceability_rules PIN CRUD.
- Missing Admin operational_locations write UI (repo exists only as read in settingsSnapshot).
- Mock APIs: each app has fixture/mock adapters; writes throw or no-op when adapter=mock.
- Hardcoded: Admin customer create seed salesman UUID; LiveAdminApi delivery slots; reports placeholder:true.
- Polygon serviceability: evaluate.ts returns not implemented.
- Authorization: RLS is the real gate; UI RoleGuard is a second layer. Settings super_admin-only in UI.
- Error handling: QueryStateGate on Admin pages; some mutations still comment-stubbed.

7. Frontend audit

Admin (focus)

- Framework: React 19, Vite 6, TypeScript ~5.8, react-router-dom 7.
- UI: @groaurum/ui (Button, Card, DataTable, PageHeader, tokens.css) plus many local CSS files under apps/admin-web/src/components.
- No MUI/Chakra/Ant found in admin-web package.json.
- Routing: App.tsx Routes + lazy().
- State: TanStack Query (staleTime 60s, retry 0, refetchOnWindowFocus false) + auth session context.
- Data fetching: repositories/hooks wrapping LiveAdminApi or mock sources.
- Forms: local component state; Zod at CrudServices boundary (not always duplicate in UI).
- Tables/modals: module CSS tables; ProductFormModal; SKU modal on ProductSkusTab.
- Loading/error/empty: QueryStateGate pattern on module pages.
- Responsive: Admin is a desktop ERP shell (AdminShell sidebar). Mobile-first not established for Admin.

Other apps

- Customer: Expo Router, React Native, local theme; mock vs supabase factory.
- Sales/Delivery PWAs: Vite + @groaurum/ui + @groaurum/auth.

Inconsistencies

- Customer does not use @groaurum/auth; the other three web apps do.
- Admin uses @groaurum/api + LiveAdminApi; field apps use @groaurum/api-client only.
- Shops are labelled Customers in Admin nav.
- Sales route reuses orders RBAC module.
- Mock vs supabase defaults: admin .env.example supabase; customer app.json mock; sales/delivery code default mock.

8. Project structure

```

blinkit-mvp/
  apps/
    admin-web/      Vite Admin ERP
    customer/       Expo customer app
    sales-pwa/      Salesman PWA
    delivery-pwa/    Delivery PWA
  packages/
    api/            Admin repositories + CrudServices
    api-client/     Supabase adapters + contracts
    auth/           RBAC + session/guards
    data/           Query keys, realtime bus, repos contracts
    ui/            Web design system
    shared-types/   Domain types + policies
    validation/     Zod CRUD schemas
    db-tests/       Local Postgres integration tests
    config/         ESLint + TSConfig
  supabase/
    migrations/     34 SQL migrations
    seed/           sprint4/6/7/8 seeds
    fixtures/       phase3_dev_fixtures.sql
    functions/      Edge functions
    config.toml
  docs/            Architecture + many historical PDFs
  scripts/         PDF generators, env helpers, db checks
  package.json     pnpm + turbo scripts
  README.md        STALE geography/catalogue vs Sprint 4.0

```

Important Admin files: `src/App.tsx`, `src/auth/*`, `src/data/live/LiveAdminApi.ts`, `src/data/mutations.ts`, `src/data/nav.ts`, `src/pages/*`, `packages/api/src/services/crud-services.ts`.

Important DB files: `supabase/migrations/*.sql`, `MIGRATION_INDEX.md` (stale), `seed/sprint4_seed.sql`.

9. Environment / configuration

Names only. Secret values omitted. If a local .env.local contains keys, treat as [SECRET PRESENT - VALUE OMITTED].

Root .env.example

```

- GROAURUM_APP_ENV,      GROAURUM_AUTH_PROVIDER,      GROAURUM_SUPABASE_URL      (commented),
  GROAURUM_SUPABASE_ANON_KEY (commented).

```

Admin apps/admin-web/.env.example

```

- VITE_APP_ENV, VITE_AUTH_PROVIDER, VITE_AUTH MOCK_ROLE, VITE_AUTH_DEV_EMAIL, VITE_AUTH_DEV_PASSWORD,
  VITE_DATA_ADAPTER, VITE_SUPABASE_URL, VITE_SUPABASE_ANON_KEY, VITE_ALLOWED_ORIGINS (commented).
- Comments list server-only names not to put in VITE*: CRON_SECRET, RAZORPAY_KEY_SECRET,
  RAZORPAY_WEBHOOK_SECRET, SMS/WHATSAPP/EMAIL/FCM keys.

```

Customer

```

- EXPO_PUBLIC_APP_ENV,      EXPO_PUBLIC_AUTH_PROVIDER,      EXPO_PUBLIC_CUSTOMER_DATA_ADAPTER,
  EXPO_PUBLIC_SUPABASE_URL, EXPO_PUBLIC_SUPABASE_ANON_KEY.

```

Sales / Delivery PWAs

```

- VITE_APP_ENV, VITE_AUTH_PROVIDER, VITE_AUTH MOCK_ROLE, VITE_AUTH_DEV_EMAIL, VITE_AUTH_DEV_PASSWORD,
  VITE_DATA_ADAPTER, VITE_SUPABASE_URL, VITE_SUPABASE_ANON_KEY.

```

DB tests .env.test.example

```

- GROAURUM_DB_TEST_ALLOWED, SUPABASE_DB_URL, SUPABASE_URL, SUPABASE_ANON_KEY (commented),
  SUPABASE_SERVICE_ROLE_KEY (commented).

```

Services connected (by design)

- Supabase Auth + Postgres + PostgREST + Realtime (when adapter=supabase).
- Edge: Razorpay, cron expire jobs, notification drain - require secrets in Supabase, not in frontend.
- Build: turbo typecheck/lint/test/build. Vite for web apps. Expo for customer.
- Deployment config for production hosting of the four apps: Not found / not established in repository (no .github/workflows).
- supabase/config.toml project_id = groaurum-b2b-local (local). Linked hosted ref may exist in supabase/.temp (gitignore-style local CLI state).

10. Current user flows

Status is for supabase adapter + migrated local DB unless noted. Mock mode is UI-only for writes.

FLOW	STATUS	EVIDENCE
Admin login / session / module guards	[WORKING]	LoginPage, ProtectedAdminRoute
Admin dashboard read KPIs	[WORKING]	dashboardSnapshot
Admin create/edit/archive category	[WORKING]	CategoriesListPage + CrudServices
Admin create/edit product + SKU	[WORKING]	ProductFormModal, ProductSkusTab
Admin product image upload	[NOT IMPLEMENTED]	ProductImagesTab not wired
Admin schedule/close SKU price	[WORKING]	PricingDetailPage mutations
Admin inventory on-hand adjust	[WORKING]	InventoryDetailPage
Admin create shop (customer)	[PARTIAL]	Hardcoded salesman UUID
Admin order confirm/pack/pay/assign/convert	[WORKING]	LiveAdminApi RPCs on detail
Admin service area PIN CRUD	[NOT IMPLEMENTED]	PlaceholderPage
Admin warehouse CRUD	[NOT IMPLEMENTED]	Settings stub
Admin reports charts	[NOT IMPLEMENTED]	placeholder: true
Customer live catalogue + COD order	[WORKING]	place_customer_order (if adapter supabase)
Customer Razorpay pay	[NOT IMPLEMENTED]	UI only
Salesman create retailer + assisted order	[WORKING]	RPCs when live
Salesman SMS OTP confirm	[PARTIAL]	placeholder, SMS not wired
Delivery route + COD RPCs	[WORKING]	when live
Delivery photo/signature proof	[PARTIAL]	boolean placeholders
End-to-end Admin->Customer->Delivery in one click	[UNKNOWN]	Requires live env; no E2E suite

11. Known errors / problems

P0 - system blocking (for production Admin)

- Hosted vs local catalogue/territory mismatch if hosted patch not applied - Admin would show Gurugram data while code defaults South Delhi. Verify live rows before ops. [UNKNOWN live]
- No CI workflows (.github/workflows missing) - regressions not gated.

P1 - major

- Service Areas module is a placeholder while PIN eligibility is a launch-critical rule table.
- Warehouse writes not in Admin; inventory is location-scoped.
- Reports analytics are placeholders; reports_snapshot seeded as placeholder.
- Product images upload not wired.
- README / MIGRATION_INDEX.md / July 18 Admin audit are stale and will mislead the next assistant.
- Mock adapter default on field apps vs supabase example on Admin - easy to demo the wrong layer.
- categories_name_unique includes soft-deleted names.
- orders.shop_id ON DELETE RESTRICT - shops with history cannot be physically deleted.

P2 - important

- SMS/WhatsApp/email/FCM not wired (env comments + salesman OTP placeholder).
- Razorpay path exists as Edge functions but customer app does not call create_online_payment_intent.
- Delivery proof is boolean placeholders, not storage blobs.
- Admin create-customer hardcoded salesman UUID.
- Realtime only for orders/inventory/delivery in Admin.
- useCreateSalesmanMutation unused; several order hooks unused.
- Polygon serviceability not implemented.
- Sprint 4.0 customer inventory SELECT may be pending on hosted if db push not done.

P3 - minor

- Pricing/inventory list comments still say mutations deferred while detail has them.
- Sales guarded as orders module.
- Compat views vs physical table names (customers vs shops) - use physical names in SQL.

Search notes

- Few literal TODO/FIXME in app TS. Gaps appear as 'placeholder', 'not wired', 'Mutation deferred', 'SMS delivery is not wired'.
- Architectural split: two data stacks (api vs api-client) plus LiveAdminApi view-models duplicating repository reads.

12. Admin completeness matrix

STATUS is overall. A screen can exist while API writes or validation are stubbed.

FEATURE	UI	API	DB	VALID	AUTH	ERRORS	STATUS
Login/session	Y	Supabase Auth	auth.users/profiles	Y	Y	Y	COMPLETE
Dashboard	Y	Live snapshot	many reads	N/A	Y	Gate	PARTIAL
Categories	Y	CrudServices	categories	Zod	Y	Gate	COMPLETE
Products	Y	CRUD	products	Zod	Y	Gate	PARTIAL
SKUs	On product	CRUD	skus	Zod	Y	Gate	PARTIAL
Product images	Tab	No upload	product_images	N	Y	Copy	PARTIAL
Pricing	Y	Detail yes	sku_prices	Zod	Y	Gate	PARTIAL
Inventory adjust	Detail	Y	balances	Zod	Y	Gate	PARTIAL
Inventory ledger UI	Tab	Read	movements	N/A	Y	Gate	PARTIAL
Customers/shops	Y	Create/update	shops	Zod	Y	Gate	PARTIAL
Shop addresses	Tab	Read+	customer_addresses	Partial	Y	Gate	PARTIAL
Orders list	Y	Read	orders	N/A	Y	Gate	PARTIAL
Order workflow	Detail	RPCs	orders/payments	RPC	Y	Panel	PARTIAL
Payments module	On order	RPC	payments	RPC	Y	Partial	PARTIAL
Delivery list	Y	Create route	delivery_routes	Zod	Y	Gate	PARTIAL
Delivery detail ops	Y	Stub	stops	N	Y	Deferred	PARTIAL
Sales register	Y	Read/convert	sales*	Convert	orders module	Gate	PARTIAL
Salesmen	Y	Create unused	profiles	Zod unused	Y	Partial	PARTIAL
Service areas page	Placeholder	N	service_areas	N	Y	Empty	NOT STARTED


PIN rules UI	N	N	serviceability_rules	N	N/A	N	NOT STARTED
Warehouse CRUD	Read settings	N	operational_locations	N	Y	Stub	PARTIAL
Settings company	Read+upsert	upsert	settings	Partial	super_admin	Partial	PARTIAL
Reports charts	Placeholder	KPI only	reports_snapshot_unused	N	Y	Placeholder	PARTIAL
Audit log UI	N	N	audit_logs	N	N	N	NOT STARTED

13. Testing status

- Unit: packages/shared-types policies, catalog; packages/validation Zod; packages/auth rbac; packages/api-client effective-price + serviceability evaluate; packages/api create-read-repository; customer product-b2b.test.ts.
- Integration: packages/db-tests (local Postgres only, GROAURUM_DB_TEST_ALLOWED). RLS for admin/customer/salesman/delivery; invariants (delivered-requires-paid, snapshots, prices, inventory movements, audit, zero-credit, empty catalogue); service-area; phase3 adapters; mobile-and-shop-link.
- E2E: none found (no Playwright/Cypress). Admin-web has no test script in package.json.
- CI: no GitHub Actions workflows found.
- Manual: docs/pilot/01-qa-checklist.md (175 cases) - process, not automated.

FEATURE	TEST EXISTS?	TYPE	STATUS
Order/payment transition policies	Yes	Unit	Present
SKU/catalogue helpers	Yes	Unit	Present
Zod CRUD schemas	Yes	Unit	Present
RBAC module roles	Yes	Unit	Present
Serviceability PIN evaluate	Yes	Unit	Present
RLS four roles	Yes	db-tests	Local only
Admin UI pages	No	-	Not found
Admin LiveAdminApi	No dedicated	-	Not found
Sales PWA UI	No	-	Not found
Delivery PWA UI	No	-	Not found
Customer screens	1 util test	Unit	Thin
Hosted data patch	No automated	-	Manual SQL only

14. Dependencies between applications

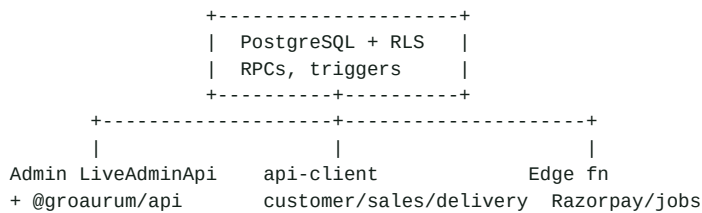

- Shared backend: one Supabase project. Shared database: all four apps.
- Auth: Supabase Auth users. Admin/sales/delivery use @groaurum/auth RBAC. Customer uses api-client session + shop_auth_links.
- Data ownership: Admin owns catalogue, prices, inventory adjustments, settings, order ops, route create. Salesman owns field shops/visits/assisted orders. Customer owns self-serve orders. Delivery owns route execution/COD. Do not dual-write the same workflow from two apps without RPCs.
- Potential conflicts: mock vs live mix; Admin soft-delete shops while orders remain; PIN rule vs shop delivery_pin_code; hosted patch vs local seed UUID map for FMCG (local a400...006 vs draft hosted a400...007).
- Contracts: packages/shared-types policies must stay aligned with DB triggers (especially DELIVERED requires PAID).

15. What should be done next (Admin-first)

Goal: make Admin production-ready enough to validate the backend, then keep Customer/Sales/Delivery secondary.

Do not treat this as a rewrite. Finish wiring, remove placeholders, align docs with South Delhi grocery scope already in seed/types.

PHASE 0 - Architecture / blockers

0.1 Verify hosted vs local data

- Why: Admin cannot be validated if hosted is still Gurugram dry-fruit while code assumes South Delhi grocery.
- Files: Read-only SQL; do not run unverified writes
- Tables: service_areas, operational_locations, categories, shops, settings
- API: None (SELECT only)
- Depends on: None | Priority: P0
- Done when: Printed live rows match an agreed target state

0.2 Stop using stale docs as truth

- Why: README, MIGRATION_INDEX, July 18 audit contradict current Admin product/SKU UI and Sprint 4.0 seed.
- Files: README.md, supabase/migrations/MIGRATION_INDEX.md (doc-only later)
- Tables: N/A
- API: N/A
- Depends on: 0.1 | Priority: P1
- Done when: Docs name South Delhi grocery and 34 migrations

0.3 Confirm adapter=supabase for Admin validation

- Why: Mock mode hides write gaps.
- Files: apps/admin-web/.env.local names only
- Tables: N/A
- API: VITE_DATA_ADAPTER
- Depends on: Local or hosted project | Priority: P0
- Done when: Admin writes hit Postgres

PHASE 1 - Admin authentication

1.1 Keep current JWT+RLS path

- Why: Auth foundation exists. Do not replace providers.
- Files: createAdminAuthProvider.ts, guards.tsx
- Tables: profiles
- API: Supabase Auth
- Depends on: None | Priority: P1
- Done when: Login, logout, forbidden module, read_only role still work

1.2 Prove role matrix on real pages

- Why: MODULE_ALLOWED_ROLES untested in UI.
- Files: packages/auth, AdminShell.tsx
- Tables: profiles.role
- API: N/A
- Depends on: 1.1 | Priority: P2
- Done when: Each admin role documented against nav items

PHASE 2 - Admin core management

2.1 Service Areas page (replace PlaceholderPage)

- Why: PIN eligibility is launch-critical and currently has no module UI.
- Files: App.tsx, new pages under pages/, Settings ServiceAreasSection
- Tables: service_areas, serviceability_rules
- API: New CrudServices or LiveAdminApi writes
- Depends on: Phase 0 data | Priority: P0
- Done when: Admin can view/edit area name and PIN list 110017-110062 (+ warehouse PIN if agreed) without SQL

2.2 Warehouse write UI

- Why: Inventory is per operational_locations; Settings only reads.
- Files: WarehousesSection.tsx, ops-repositories
- Tables: operational_locations
- API: Create/update (not physical delete if balances exist)
- Depends on: 2.1 optional | Priority: P0
- Done when: Admin can set name/city/state/pin without inventing address_line

PHASE 3 - Catalogue

3.1 Finish product images

- Why: Tab exists, upload not wired.
- Files: ProductImagesTab.tsx, product_images, storage UNKNOWN
- Tables: product_images
- API: Insert/soft-delete
- Depends on: Storage decision | Priority: P1
- Done when: Admin can attach at least one image per product or explicitly hide the tab

3.2 Align empty grocery categories

- Why: Seed has empty Atta/Rice/Sugar/Spices/FMCG; hosted patch may only create empty categories.
- Files: ProductListPage, CategoriesListPage
- Tables: categories, products, skus
- API: Existing CRUD
- Depends on: 0.1 | Priority: P1
- Done when: Ops can add real SKUs without seed replay

PHASE 4 - Warehouse / inventory

4.1 Movement ledger as source of truth in UI

- Why: Detail shows movements; list still 'deferred'.
- Files: InventoryListPage, InventoryDetailPage
- Tables: inventory_movements, inventory_balances
- API: Adjust path must insert movement if DB requires it - VERIFY trigger
- Depends on: 2.2 | Priority: P1
- Done when: Adjust creates visible movement; no silent balance-only drift

4.2 Reservation visibility for packing

- Why: stock_reservations exist for orders.
- Files: Inventory detail reservations tab
- Tables: stock_reservations
- API: Read
- Depends on: Orders | Priority: P2
- Done when: Pack flow shows reserved qty

PHASE 5 - Retailers / customers

5.1 Remove hardcoded salesman UUID on create

- Why: Create shop is not production-safe.
- Files: CustomersListPage.tsx
- Tables: shops
- API: createCustomer
- Depends on: Salesmen list | Priority: P1
- Done when: Operator picks salesman or none

5.2 Invitation send actually calls backend

- Why: send_invitation is a tab stub.
- Files: CustomerDetailPage, shop_invitations
- Tables: shop_invitations
- API: Existing or salesman_create_invitation pattern
- Depends on: 5.1 | Priority: P1
- Done when: Token created; SMS still may be out of band

5.3 Address create/edit with South Delhi PINs

- Why: customer_addresses tab exists.
- Files: CustomerAddressesTab.tsx
- Tables: customer_addresses, shops.delivery_*
- API: CRUD
- Depends on: 2.1 PIN list | Priority: P1
- Done when: PIN validated against serviceability_rules

PHASE 6 - Orders / payments

6.1 Wire or delete unused order hooks

- Why: Dead code hides which RPC is canonical.
- Files: mutations.ts, OrderActionPanel
- Tables: orders
- API: admin_advance_order_to

- Depends on: None | Priority: P2
- Done when: One status path documented

6.2 COD vs online explicit in Admin

- Why: Payment config placeholder; Razorpay is Edge-only.
- Files: PaymentConfigSection, order payment tab
- Tables: payments, settings
- API: admin_mark_payment_received
- Depends on: Business: COD-first | Priority: P1
- Done when: Ops can mark COD paid; online labelled not wired in Admin

PHASE 7 - Delivery

7.1 Un-stub delivery detail mutations

- Why: List can create routes; detail deferred.
- Files: DeliveryDetailPage, DeliveryOrdersTab
- Tables: delivery_routes, route_stops
- API: admin_assign_order_delivery + updates
- Depends on: Orders assign | Priority: P1
- Done when: Admin can assign stop and see status without PWA

PHASE 8 - Sales / reporting

8.1 Keep sales as register, do not fake charts

- Why: convertOrderToSale exists; reports_snapshot is placeholder.
- Files: SalesListPage, ReportsPage
- Tables: sales*, reports_snapshot
- API: convertOrderToSale
- Depends on: Paid/delivered policy | Priority: P2
- Done when: Invoice rows match converted orders; charts either live or removed from nav until live

PHASE 9 - Security / permissions

9.1 Audit log viewer (read-only)

- Why: audit_logs has no Admin UI.
- Files: new settings or reports tab
- Tables: audit_logs
- API: SELECT admin policy
- Depends on: Auth | Priority: P2
- Done when: Admin can see settings.updated and order status audits

9.2 Confirm no service-role in Vite bundles

- Why: Already documented; re-check build.
- Files: admin-web env, vite
- Tables: N/A
- API: anon only
- Depends on: None | Priority: P0
- Done when: Bundle grep has no service_role JWT

PHASE 10 - Testing

10.1 Admin happy-path db-tests or scripted verify

- Why: No Admin UI tests.
- Files: packages/db-tests or scripts/verify_*
- Tables: orders, shops, skus
- API: RPCs
- Depends on: Local supabase | Priority: P1
- Done when: One scripted path: category->product->sku->price->stock->shop->order

10.2 Do not add E2E for other apps first

- Why: Admin-first.
- Files: N/A
- Tables: N/A
- API: N/A
- Depends on: 10.1 | Priority: P3
- Done when: Documented deferral

PHASE 11 - Production readiness

11.1 Align geography copy in Admin fixtures/defaults

- Why: DEFAULT_SERVICE_TERRITORY is South Delhi; README is Gurugram.
- Files: business-defaults.ts, fixtures, README
- Tables: N/A
- API: N/A
- Depends on: 0.2 | Priority: P1
- Done when: No Gurugram/122001 in Admin create defaults

11.2 Hosted migration hygiene

- Why: db push vs data SQL vs never seed hosted.
- Files: docs only until approved
- Tables: all
- API: supabase db push (schema) separate from data SQL
- Depends on: 0.1 | Priority: P0
- Done when: Written runbook: schema push list + data SQL + rollback

11.3 Pilot kit is process-only

- Why: docs/pilot exists (QA 175). Use it after Admin writes work.
- Files: docs/pilot/*
- Tables: N/A
- API: N/A
- Depends on: Phases 2-7 | Priority: P2
- Done when: QA checklist executed against Admin live

16. Do not recommend building the other three apps yet

Customer, Sales PWA, and Delivery PWA already have substantial live RPC paths. That is not a reason to expand them now.

- If Admin cannot set PINs, warehouses, catalogue, and shop geography, field apps will fight hidden data.
- If Admin cannot complete order/payment/delivery assignment, PWA work will duplicate Admin gaps.
- Keep field apps in maintenance-only mode: bugs that block Admin validation may be fixed; new features wait.
- Do not add brands, subcategories, extra PIN invention, or table renames.

17. Final executive summary

A. What is already built

- Monorepo with four apps + shared packages + 34 Postgres migrations + RLS + trusted RPCs.
- Admin ERP shell with real login, module RBAC, and live list/detail for most ops entities.
- Category CRUD; product/SKU create-edit-archive; price close/create; inventory adjust; order workflow RPCs; sale conversion.
- Customer COD order RPC; salesman retailer/order RPCs; delivery route RPCs; Edge stubs for Razorpay and jobs.
- Domain policies tested; local db-tests for RLS and invariants.

B. What is partially built

- Admin settings, reports, delivery detail, salesmen, customers invitations, product images, payments UX.
- Customer online pay, restock, promotions.
- Salesman OTP SMS; delivery photo/signature.
- Realtime (subset of tables).

C. What is missing

- Admin Service Areas / PIN rule management page.
- Admin warehouse write UI.
- Admin audit log UI.
- Live report charts.
- CI; Admin/UI E2E tests.
- Production deploy manifests for the four frontends.
- Single source-of-truth geography in README.

D. Biggest technical risks

- Two worlds: local Sprint 4.0 South Delhi grocery seed vs possible hosted Gurugram dry-fruit until data SQL is confirmed.
- LiveAdminApi + CrudServices duplication - bugs in one path.
- Soft-delete unique names blocking category reuse.
- No CI.
- Service-role misuse if someone copies .env.local into Vite (process risk).

E. Biggest business-logic risks

- PIN rule vs shop delivery_pin_code: changing rules without shops makes every retailer unserviceable.
- DELIVERED requires PAID - COD collection must actually mark payment.
- Order line snapshots vs later catalogue edits - do not rewrite history.
- Test shops vs real customers - only soft-delete test data with an explicit list.
- Warehouse address_line still may be a Gurugram leftover if only city/PIN were updated.

F. Admin application readiness percentage

Cannot reliably determine from repository. Observable counts from section 12: 2 features rated COMPLETE (login, categories), 1 NOT STARTED page (service areas) plus PIN UI NOT STARTED, remainder PARTIAL. That is not a percentage of production readiness.

G. Backend readiness percentage

Cannot reliably determine from repository. Schema+RLS+RPCs for the four-app domain exist and are covered by local db-tests. Hosted apply-state of Sprint 3.3/3.4/4.0 migrations is UNKNOWN without supabase migration list against the live project.

H. Testing readiness percentage

Cannot reliably determine from repository. Strong local invariant/RLS tests; zero Admin page tests; zero CI; no E2E.

I. Recommended immediate next 10 tasks

1. Read-only verify hosted service_areas, PINs, warehouse, categories, shops, settings.
2. Run Admin with VITE_DATA_ADAPTER=supabase against the intended DB.
3. Replace /service-areas PlaceholderPage with PIN-capable UI.
4. Enable warehouse name/city/state/pin edits without inventing address_line.
5. Remove hardcoded salesman UUID from customer create.
6. Decide image upload vs hide tab.
7. Un-stub delivery detail assignment/status.
8. Document one order status RPC path; delete unused hooks.
9. Add a scripted Admin happy-path against local DB.
10. Update README + MIGRATION_INDEX so the next assistant is not trained on Gurugram-only dry fruit.

J. What should NOT be changed yet

- Do not rename shops, orders, inventory_balances, or other core tables.
- Do not redesign RLS or trusted RPC GUC pattern.
- Do not replay sprint4_seed.sql on hosted.
- Do not build brands/subcategories.
- Do not invent extra PINs beyond the established South Delhi list plus confirmed warehouse PIN.
- Do not start new Customer/Sales/Delivery feature sprints.
- Do not put service-role keys in VITE_/EXPO_PUBLIC_ variables.

DOCUMENT COMPLETE - REPOSITORY SNAPSHOT ONLY - NO PROJECT FILES WERE MODIFIED EXCEPT THIS PDF OUTPUT.