

CPSC 320 2018W2: Assignment 4

This assignment gives you practice at using recurrences to analyze algorithm runtimes. It also gives you practice at using recurrences as a means to design efficient algorithms, by inductively describing quantities that we'd like to compute.

Please follow the guidelines given in Assignment 1 for submission to Gradescope, and for group collaboration. Remember to provide short justifications for your answers. Submit by the deadline **Monday March 11, 2019 at 10PM**.

Use \LaTeX to prepare your answers. Easiest will be to use the .tex file provided. Please enclose each paragraph of your solution in `\soln{Your solution here...}`.

Your solution will then appear in dark blue, making it a lot easier for TAs to find the parts that you wrote.

1 Computer scientist makes \$0.38 a day – find out how!!!

A popular pastime of computer scientists (especially academics) is fantasizing about how to use our knowledge to get rich playing the stock market. The first advice one receives about playing with stocks is “buy low, sell high”. Easier said than done.

Suppose we have an array $S = [1..n]$ of integer values where $n \geq 1$ and $S[i]$ represents the price of a stock on date i . Given this historic price data, the stock market problem is to (retrospectively) find the best dates to buy and sell the stock so as to maximize profit. If i and j are the buying and selling dates (with $i \leq j$), then $[i, j]$ should be a contiguous interval with the highest jump in price, and $S[j] - S[i]$ is the profit. (You can buy and sell stock on the same date, with a profit of zero.)

Example: The $S[1..13] = [5, 10, 3, 4, 9, 21, 13, 1, 12, 20, 15, 17, 4]$ has a maximum jump of $20 - 1 = 19$ if purchased on date $i = 8$ and sold on date $j = 10$.

1. Describe a brute-force algorithm that identifies the best buy and sell dates, and the corresponding profit.

Algorithm Buy-low-Sell-high(S)

```
 $n = |S|$ 
 $maxProfit = -\infty$ 
 $buy = -1$ 
 $sell = -1$ 
for  $i = 1$  to  $n$ :
    for  $j = i$  to  $n$ :
         $profit = S[j] - S[i]$ 
        If  $profit > maxProfit$  :
             $maxProfit = profit$ 
             $buy = i$ 
             $sell = j$ 
Return ( $buy, sell$ )
```

2. What is the running time of your brute force algorithm?

The running time for this brute force algorithm would be $O(n^2)$. Because we have two nested for loops, which grow with n .

3. A divide-and-conquer approach for the stock market problem can consider three cases:

- (a) The best buy and sell dates are both at most $\lfloor n/2 \rfloor$.
- (b) The best buy and sell dates are both greater than $\lfloor n/2 \rfloor$.
- (c) The best buy date is at most $\lfloor n/2 \rfloor$ and the best sell date is greater than $\lfloor n/2 \rfloor$.

In order to determine the solution in case (c), what specific pieces of information do you need to know about the left half of the array, i.e., $S[1..\lfloor n/2 \rfloor]$, and the right half, $S[\lfloor n/2 \rfloor + 1..n]$?

For getting the solution on case (c) we would need to get the *argmin* value of $S[1..\lfloor n/2 \rfloor]$ for the best buy day and the *argmax* value of the $S[\lfloor n/2 \rfloor + 1..n]$ for the best sell day.

4. Write a recursive divide and conquer algorithm for the stock market problem. (It may be handy for the algorithm to return the information needed about subproblems, as documented in your answer from part 3, in addition to the buy date, sell date and profit.)

Algorithm BlSh(S , $start$, end)

$n = end - start$

If $n = 0$:

 return ($S[start]$, $start$, $start$, $start$, $start$)

Else

 // Get the profit of the left and right side

$profitL, buyL, sellL, minL, maxL = \text{BlSh}(S, start, start + \lfloor n/2 \rfloor)$

$profitR, buyR, sellR, minR, maxR = \text{BlSh}(S, start + \lfloor n/2 \rfloor + 1, end)$

 // Get the min and max value of $S[start....end]$

$amin = \text{argmin}(S, minL, minR)$

$amax = \text{argmax}(S, maxL, maxR)$

 // Calculate the profit based on the min, max values

$profit = S[maxR] - S[minL]$

 // Return the maximum profit, best buy day, best sell day, minimum price, maximum price

 If $profit > profitL \ \&\& \ profit > profitR$:

 return ($profit, minL, maxR, amin, amax$)

 Else if $profitL > profit \ \&\& \ profitL > profitR$:

 return ($profitL, buyL, sellL, amin, amax$)

 Else :

 return ($profitR, buyR, sellR, amin, amax$)

5. Give a recurrence relation for the runtime of your algorithm, and solve it to get a big- O bound on the running time.

$$\text{BlSh}(n) = \begin{cases} c_1, & \text{if } start = end \\ \text{BlSh}(n/2) + \text{BlSh}(n/2) + c_2, & \text{otherwise} \end{cases}$$


The recursion tree would be:

- Let $T'(n)$ be the running time of BetterQuickSelect. Write a recurrence for $T'(n)$. Use the facts that the pivot partitions a problem of size n into subproblems of size at most $7n/10$ and that the time to create list A' is $O(n)$.

$$T'(n) = \begin{cases} c, & \text{if } |A| = 1 \\ n + T'(n/5) + T'(7n/10), & \text{otherwise} \end{cases}$$

- Solve your recurrence of part 1 to show that BetterQuickSelect takes time $O(n)$ in the worst case.

The recursion tree would be:

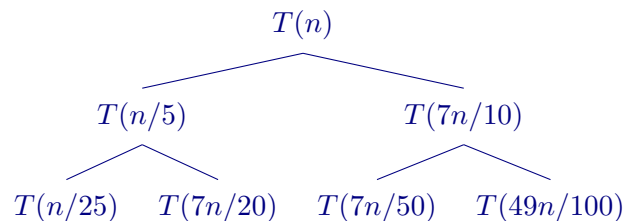

By analyzing the recursion tree we can notice that at the 2nd level we are spending $cn \frac{9}{10}$ time because each call is divided into two calls of sizes $\frac{n}{5}$, $\frac{7n}{10}$. This is a pattern that repeats on following i level with a running time of $cn \frac{9}{10}^i$. So the total cost, would be represented by the following sum $cn \sum_{i=0}^{\infty} \frac{9}{10}^i$, that can be solved by the geometric series, $cn \sum_{i=0}^{\infty} \frac{9}{10}^i = cn \frac{1}{1-\frac{9}{10}} = 10cn$, thus the total running time of BetterQuickSelect is $O(n)$.

3 More Expressions of 1's (Adapted from Jeff Erickson)

As in the tutorial of week 8, we can represent positive integers in terms of 1's, +, ×, and parentheses "(" and ")". For example, all of the following expressions represent the integer 14:

$$\begin{aligned} &1 + 1 + 1 + 1 + 1 + 1 + 1 + 1 + 1 + 1 + 1 + 1 + 1 + 1 + 1 + 1 \\ &((1 + 1) \times (1 + 1 + 1 + 1 + 1)) + ((1 + 1) \times (1 + 1)) \\ &(1 + 1) \times (1 + 1 + 1 + 1 + 1 + 1 + 1) \\ &(1 + 1) \times (((1 + 1 + 1) \times (1 + 1)) + 1) \end{aligned}$$

Given a positive integer n , we'd like to find the minimum number of 1's in such an expression. Let $M(n)$ denote this minimum. For example, the fourth expression above is such an expression for 14, and so $M(14) = 8$.

- Use the recurrence for $M(n)$ from the solutions to the tutorial of week 8, plus memoization, to develop an efficient recursive algorithm to compute $M(n)$.

Algorithm $M(n, \text{Soln})$

```

// Soln is the array with solutions, at the begining it is filled with n - 1s
Min = ∞
If n = 1 :
    return 1
If Soln[n]! = -1 :
```

```

    return Soln[n]
For i = 1 to n - 1 :
    Min = min(Min, M(n - i) + M(i))
    If (i + 1) < n/2 && (i + 1)|n :
        Min = min(Min, M(n/(i + 1)) + M(i + 1))
Soln[n] = Min
return Min


```

2. What is the running time of your memoized algorithm?

4 Max-Weight Independent Sets

Let $G = (V, E, w())$ be an undirected graph, with a weight $w(v)$ associated with each node $v \in V$. An *independent set* of G is a subset of nodes, none of which are connected by an edge of the graph. A *max-weight independent set* is an independent set such that the sum of the weights of the nodes in the set is as large as possible. Let $MIS(G)$ be the weight of a max-weight independent set for graph G . Finding max-weight independent sets and their corresponding weights can be done efficiently for simple types of graphs, although no efficient algorithm is known for general graphs. Here, you'll consider graphs that are paths.

For $0 \leq i \leq n$, let $P = ([1..n], E, w)$ be a weighted path, that is $E = \{(1, 2), (2, 3), \dots, (i, i + 1), \dots, (n - 1, n)\}$. For example, in the following path, the weights are the numbers drawn inside the nodes.



Let $MIS^+(P, i)$ be the max weight of an independent set of P involving only nodes from $[1..i]$ and including i . Similarly, let $MIS^-(P, i)$ be the max weight of an independent set involving only nodes from $[1..i - 1]$ (node i is excluded from the independent set). We can write $MIS^+(P, i)$ as:

$$MIS^+(P, i) = \begin{cases} 0, & \text{if } i = 0 \\ w(i) + MIS^-(P, (i - 1)), & \text{if } i \geq 1. \end{cases}$$

1. Write a recurrence for $MIS^-(P, i)$, $i \geq 0$:

$$MIS^-(P, i) = \begin{cases} \text{---}, & \text{if ---} \\ \max\{\text{---}, \text{---}\}, & \text{if ---} \end{cases}$$

2. We can express $MIS(P)$ as $\max\{MIS^+(P, n), MIS^-(P, n)\}$. Use this to write an algorithm that computes $MIS(P)$ in $O(n)$ time. Your algorithm should use memoization and recursion to compute both $MIS^+(P, n)$ and $MIS^-(P, n)$, and use these quantities to compute $MIS(P)$. (No justification is needed, just the algorithm.)
3. Using a recursion tree, explain why the running time of your algorithm of part 3 is $\Theta(n)$.

5 More Max-Weight Independent Sets

This problem concerns independent sets on "rail line" graphs. These undirected graphs have $2n$ nodes, labeled $[1, i]$, $[2, i]$, $1 \leq i \leq n$. A function $w()$ assigns a weight to each node. There are edges between $[1, i]$ and $[2, i]$ for each i , as well as edges between $[1, i]$ and $[1, i + 1]$ for $1 \leq i \leq n - 1$ and between $[2, i]$ and $[2, i + 1]$ for $1 \leq i \leq n - 1$, for a total of $2(n - 1) + n = 3n - 2$ edges.

Develop recurrences that could be used to efficiently compute $\text{MIS}(G)$ when the input G is a rail line graph. You can express $\text{MIS}(G)$ in terms of other quantities of your choosing that you can define, and then provide recurrences for these quantities. You do *not* need to describe an algorithm to compute $\text{MIS}(G)$.