HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Messages
- HTML Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

HTML Attribute Reference

❮ Previous Next ❯

HTML Attribute Reference

The table below lists all HTML attributes and what elements they can be used within:

Attribute	Belongs to	Description
accept	<input>	Specifies the types of files that the server accepts (only for type="file")
accept-charset	<form>	Specifies the character encodings that are to be used for the form submission

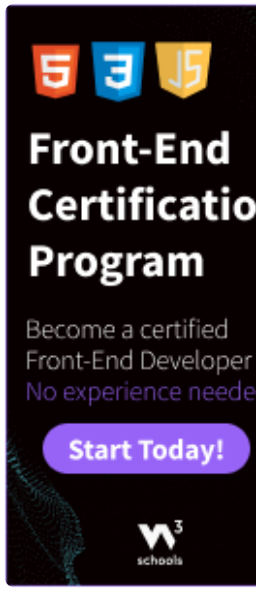

COLOR PICKER

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

		form-data when a form is submitted
align	Not supported in HTML 5.	Specifies the alignment according to surrounding elements. Use CSS instead
alt	<area>, <img>, <input>	Specifies an alternate text when the original element fails to display
async	<script>	Specifies that the script is executed asynchronously (only for external scripts)
autocomplete	<form>, <input>	Specifies whether the <form> or the <input> element should have autocomplete enabled
autofocus	<button>, <input>, <select>, <textarea>	Specifies that the element should automatically get focus when the page loads
autoplay	<audio>, <video>	Specifies that the audio/video will start playing as soon as it is ready
bgcolor	Not supported in HTML 5.	Specifies the background color of an element. Use CSS instead

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

charset	<meta>, <script>	Specifies the character encoding
checked	<input>	Specifies that an <input> element should be pre-selected when the page loads (for type="checkbox" or type="radio")
cite	<blockquote>, <del>, <ins>, <q>	Specifies a URL which explains the quote/deleted/inserted text
class	Global Attributes	Specifies one or more class names for an element (refers to a class in a style sheet)
color	Not supported in HTML 5.	Specifies the text color of an element. Use CSS instead
cols	<textarea>	Specifies the visible width of a text area
colspan	<td>, <th>	Specifies the number of columns a table cell should span
content	<meta>	Gives the value associated with the http-equiv or name attribute

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

		controls should be displayed (such as a play/pause button etc.)
coords	<area>	Specifies the coordinates of the area
data	<object>	Specifies the URL of the resource to be used by the object
data-*	Global Attributes	Used to store custom data private to the page or application
datetime	<del>, <ins>, <time>	Specifies the date and time
default	<track>	Specifies that the track is to be enabled if the user's preferences do not indicate that another track would be more appropriate
defer	<script>	Specifies that the script is executed when the page has finished parsing (only for external scripts)
dir	Global Attributes	Specifies the text direction for the content in an element

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

	<input>, <optgroup>, <option>, <select>, <textarea>	element/group of elements should be disabled
download	<a>, <area>	Specifies that the target will be downloaded when a user clicks on the hyperlink
draggable	Global Attributes	Specifies whether an element is draggable or not
enctype	<form>	Specifies how the form-data should be encoded when submitting it to the server (only for method="post")
enterkeyhint	Global Attributes	Specifies the text of the enter-key on a virtual keyboard
for	<label>, <output>	Specifies which form element(s) a label/calculation is bound to
form	<button>, <fieldset>, <input>, <label>, <meter>, <object>, <output>, <select>, <textarea>	Specifies the name of the form the element belongs to

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTTP Messages
- HTTP Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

		type="submit"
headers	<td>, <th>	Specifies one or more headers cells a cell is related to
height	<canvas>, <embed>, <iframe>, <img>, <input>, <object>, <video>	Specifies the height of the element
hidden	Global Attributes	Specifies that an element is not yet, or is no longer, relevant
high	<meter>	Specifies the range that is considered to be a high value
href	<a>, <area>, <base>, <link>	Specifies the URL of the page the link goes to
hreflang	<a>, <area>, <link>	Specifies the language of the linked document
http-equiv	<meta>	Provides an HTTP header for the information/value of the content attribute
id	Global Attributes	Specifies a unique id for an element

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

		keyboard
ismap	<img>	Specifies an image as a server-side image map
kind	<track>	Specifies the kind of text track
label	<track>, <option>, <optgroup>	Specifies the title of the text track
lang	Global Attributes	Specifies the language of the element's content
list	<input>	Refers to a <datalist> element that contains pre-defined options for an <input> element
loop	<audio>, <video>	Specifies that the audio/video will start over again, every time it is finished
low	<meter>	Specifies the range that is considered to be a low value
max	<input>, <meter>, <progress>	Specifies the maximum value

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Messages
- HTML Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

media	<a>, <area>, <link>, <source>, <style>	Specifies what media/device the linked document is optimized for
method	<form>	Specifies the HTTP method to use when sending form-data
min	<input>, <meter>	Specifies a minimum value
multiple	<input>, <select>	Specifies that a user can enter more than one value
muted	<video>, <audio>	Specifies that the audio output of the video should be muted
name	<button>, <fieldset>, <form>, <iframe>, <input>, <map>, <meta>, <object>, <output>, <param>, <select>, <textarea>	Specifies the name of the element
novalidate	<form>	Specifies that the form should not be validated when submitted
onabort	<audio>, <embed>, <img>, <object>, <video>	Script to be run on abort

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Messages
- HTML Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

		document is printed
onbeforeunload	<body>	Script to be run when the document is about to be unloaded
onblur	All visible elements.	Script to be run when the element loses focus
oncanplay	<audio>, <embed>, <object>, <video>	Script to be run when a file is ready to start playing (when it has buffered enough to begin)
oncanplaythrough	<audio>, <video>	Script to be run when a file can be played all the way to the end without pausing for buffering
onchange	All visible elements.	Script to be run when the value of the element is changed
onclick	All visible elements.	Script to be run when the element is being clicked
oncontextmenu	All visible elements.	Script to be run when a context menu is triggered
oncopy	All visible elements.	Script to be run when the content of the element is being

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

oncut	All visible elements.	Script to be run when the content of the element is being cut
ondblclick	All visible elements.	Script to be run when the element is being double-clicked
ondrag	All visible elements.	Script to be run when the element is being dragged
ondragend	All visible elements.	Script to be run at the end of a drag operation
ondragenter	All visible elements.	Script to be run when an element has been dragged to a valid drop target
ondragleave	All visible elements.	Script to be run when an element leaves a valid drop target
ondragover	All visible elements.	Script to be run when an element is being dragged over a valid drop target
ondragstart	All visible elements.	Script to be run at the start of a drag operation
ondrop	All visible elements.	Script to be run when dragged element is being dropped

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

		something bad happens and the file is suddenly unavailable (like unexpectedly disconnects)
onended	<audio>, <video>	Script to be run when the media has reach the end (a useful event for messages like "thanks for listening")
onerror	<audio>, <body>, <embed>, <img>, <object>, <script>, <style>, <video>	Script to be run when an error occurs
onfocus	All visible elements.	Script to be run when the element gets focus
onhashchange	<body>	Script to be run when there has been changes to the anchor part of the a URL
oninput	All visible elements.	Script to be run when the element gets user input
oninvalid	All visible elements.	Script to be run when the element is invalid
onkeydown	All visible elements.	Script to be run when a user is pressing a key

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Messages
- HTML Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

		releases a key
onload	<body>, <iframe>, <img>, <input>, <link>, <script>, <style>	Script to be run when the element is finished loading
onloadeddata	<audio>, <video>	Script to be run when media data is loaded
onloadedmetadata	<audio>, <video>	Script to be run when meta data (like dimensions and duration) are loaded
onloadstart	<audio>, <video>	Script to be run just as the file begins to load before anything is actually loaded
onmousedown	All visible elements.	Script to be run when a mouse button is pressed down on an element
onmousemove	All visible elements.	Script to be run as long as the mouse pointer is moving over an element
onmouseout	All visible elements.	Script to be run when a mouse pointer moves out of an element

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

		button is released over an element
onmousewheel	All visible elements.	Script to be run when a mouse wheel is being scrolled over an element
onoffline	<body>	Script to be run when the browser starts to work offline
ononline	<body>	Script to be run when the browser starts to work online
onpagehide	<body>	Script to be run when a user navigates away from a page
onpageshow	<body>	Script to be run when a user navigates to a page
onpaste	All visible elements.	Script to be run when the user pastes some content in an element
onpause	<audio>, <video>	Script to be run when the media is paused either by the user or programmatically
onplay	<audio>, <video>	Script to be run when the media has started playing

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Messages
- HTML Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

		window's history changes.
onprogress	<audio>, <video>	Script to be run when the browser is in the process of getting the media data
onratechange	<audio>, <video>	Script to be run each time the playback rate changes (like when a user switches to a slow motion or fast forward mode).
onreset	<form>	Script to be run when a reset button in a form is clicked.
onresize	<body>	Script to be run when the browser window is being resized.
onscroll	All visible elements.	Script to be run when an element's scrollbar is being scrolled
onsearch	<input>	Script to be run when the user writes something in a search field (for <input type="search">)
onseeked	<audio>, <video>	Script to be run when the seeking attribute is set to false

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

		seeking attribute is set to true indicating that seeking is active
onselect	All visible elements.	Script to be run when the element gets selected
onstalled	<audio>, <video>	Script to be run when the browser is unable to fetch the media data for whatever reason
onstorage	<body>	Script to be run when a Web Storage area is updated
onsubmit	<form>	Script to be run when a form is submitted
onsuspend	<audio>, <video>	Script to be run when fetching the media data is stopped before it is completely loaded for whatever reason
ontimeupdate	<audio>, <video>	Script to be run when the playing position has changed (like when the user fast forwards to a different point in the media)

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

onunload	<body>	Script to be run when a page has unloaded (or the browser window has been closed)
onvolumechange	<audio>, <video>	Script to be run each time the volume of a video/audio has been changed
onwaiting	<audio>, <video>	Script to be run when the media has paused but is expected to resume (like when the media pauses to buffer more data)
onwheel	All visible elements.	Script to be run when the mouse wheel rolls up or down over an element
open	<details>	Specifies that the details should be visible (open) to the user
optimum	<meter>	Specifies what value is the optimal value for the gauge
pattern	<input>	Specifies a regular expression that an <input> element's value is checked against

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Messages
- HTML Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

popover	Global Attributes	Specifies a popover element
popovertarget	<button>, <input>	Specifies which popover element to invoked
popovertargetaction	<button>, <input>	Specifies what happens to the popover element when the button is clicked
poster	<video>	Specifies an image to be shown while the video is downloading, or until the user hits the play button
preload	<audio>, <video>	Specifies if and how the author thinks the audio/video should be loaded when the page loads
readonly	<input>, <textarea>	Specifies that the element is read-only
rel	<a>, <area>, <form>, <link>	Specifies the relationship between the current document and the linked document
required	<input>, <select>, <textarea>	Specifies that the element must be filled out before submitting the form

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Messages
- HTML Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

		lines in a text area
rowspan	<td>, <th>	Specifies the number of rows a table cell should span
sandbox	<iframe>	Enables an extra set of restrictions for the content in an <iframe>
scope	<th>	Specifies whether a header cell is a header for a column, row, or group of columns or rows
selected	<option>	Specifies that an option should be pre-selected when the page loads
shape	<area>	Specifies the shape of the area
size	<input>, <select>	Specifies the width, in characters (for <input>) or specifies the number of visible options (for <select>)
sizes	<img>, <link>, <source>	Specifies the size of the linked resource
span	<col>, <colgroup>	Specifies the number of columns to span

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

src	<audio>, <embed>, <iframe>, <img>, <input>, <script>, <source>, <track>, <video>	Specifies the URL of the media file
srcdoc	<iframe>	Specifies the HTML content of the page to show in the <iframe>
srclang	<track>	Specifies the language of the track text data (required if kind="subtitles")
srcset	<img>, <source>	Specifies the URL of the image to use in different situations
start	<ol>	Specifies the start value of an ordered list
step	<input>	Specifies the legal number intervals for an input field
style	Global Attributes	Specifies an inline CSS style for an element
tabindex	Global Attributes	Specifies the tabbing order of an element

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

title	Global Attributes	Specifies extra information about an element
translate	Global Attributes	Specifies whether the content of an element should be translated or not
type	<a>, <button>, <embed>, <input>, <link>, <menu>, <object>, <script>, <source>, <style>	Specifies the type of element
usemap	<img>, <object>	Specifies an image as a client-side image map
value	<button>, <input>, <li>, <option>, <meter>, <progress>, <param>	Specifies the value of the element
width	<canvas>, <embed>, <iframe>, <img>, <input>, <object>, <video>	Specifies the width of the element
wrap	<textarea>	Specifies how the text in a text area is to be wrapped when submitted in a form

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

Track your progress - it's free!
Sign Up Log in

PLUS SPACES GET CERTIFIED FOR TEACHERS
FOR BUSINESS CONTACT US

Top Tutorials
HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial

Top References
HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples
HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate
HTML Messages
HTTP Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

FORUM ABOUT ACADEMY

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookie and privacy policy.

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTTP Messages
HTTP Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>