HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

HTML Audio/Video DOM Reference

Previous Next

HTML Audio and Video DOM Reference

The HTML5 DOM has methods, properties, and events for the `<audio>` and `<video>` elements.

HTML Audio/Video Methods

Method	Description
addTextTrack()	Adds a new text track to the audio/video

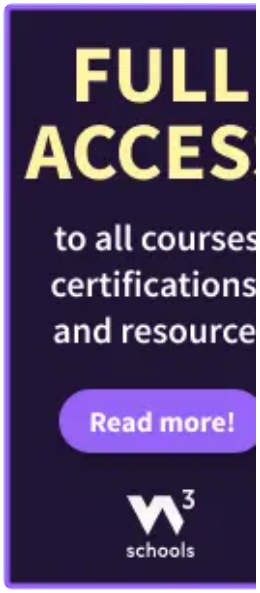

COLOR PICKER

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

play()	Starts playing the audio/video
pause()	Pauses the currently playing audio/video

HTML Audio/Video Properties

Property	Description
audioTracks	Returns an AudioTrackList object representing available audio tracks
autoplay	Sets or returns whether the audio/video should start playing as soon as it is loaded
buffered	Returns a TimeRanges object representing the buffered parts of the audio/video
controller	Returns the MediaController object representing the current media controller of the audio/video
controls	Sets or returns whether the audio/video should display controls (like play/pause etc.)
crossOrigin	Sets or returns the CORS settings of the audio/video
currentSrc	Returns the URL of the current audio/video

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

	by default
defaultPlaybackRate	Sets or returns the default speed of the audio/video playback
duration	Returns the length of the current audio/video (in seconds)
ended	Returns whether the playback of the audio/video has ended or not
error	Returns a MediaError object representing the error state of the audio/video
loop	Sets or returns whether the audio/video should start over again when finished
mediaGroup	Sets or returns the group the audio/video belongs to (used to link multiple audio/video elements)
muted	Sets or returns whether the audio/video is muted or not
networkState	Returns the current network state of the audio/video
paused	Returns whether the audio/video is paused or not
playbackRate	Sets or returns the speed of the audio/video playback
played	Returns a TimeRanges object representing the played parts of the audio/video

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Http Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

seekable	Returns a TimeRanges object representing the seekable parts of the audio/video
seeking	Returns whether the user is currently seeking in the audio/video
src	Sets or returns the current source of the audio/video element
startDate	Returns a Date object representing the current time offset
textTracks	Returns a TextTrackList object representing the available text tracks
videoTracks	Deprecated. Do not use it.
volume	Sets or returns the volume of the audio/video

HTML Audio/Video Events

Event	Description

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

canplaythrough	Fires when the browser can play through the audio/video without stopping for buffering
durationchange	Fires when the duration of the audio/video is changed
emptied	Fires when the current playlist is empty
ended	Fires when the current playlist is ended
error	Fires when an error occurred during the loading of an audio/video
loadeddata	Fires when the browser has loaded the current frame of the audio/video
loadedmetadata	Fires when the browser has loaded meta data for the audio/video
loadstart	Fires when the browser starts looking for the audio/video
pause	Fires when the audio/video has been paused
play	Fires when the audio/video has been started or is no longer paused
playing	Fires when the audio/video is playing after having been paused or stopped for buffering
progress	Fires when the browser is downloading the audio/video
ratechange	Fires when the playing speed of the audio/video is changed

	position in the audio/video
stalled	Fires when the browser is trying to get media data, but data is not available
suspend	Fires when the browser is intentionally not getting media data
timeupdate	Fires when the current playback position has changed
volumechange	Fires when the volume has been changed
waiting	Fires when the video stops because it needs to buffer the next frame

Previous Next

Track your progress - it's free! Sign Up Log in

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Country Codes
- HTTP Messages
- HTTP Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

schools PLUS SPACES GET CERTIFIED FOR TEACHERS

FOR BUSINESS CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
Angular Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTTP Messages
- HTTP Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookie and privacy policy.
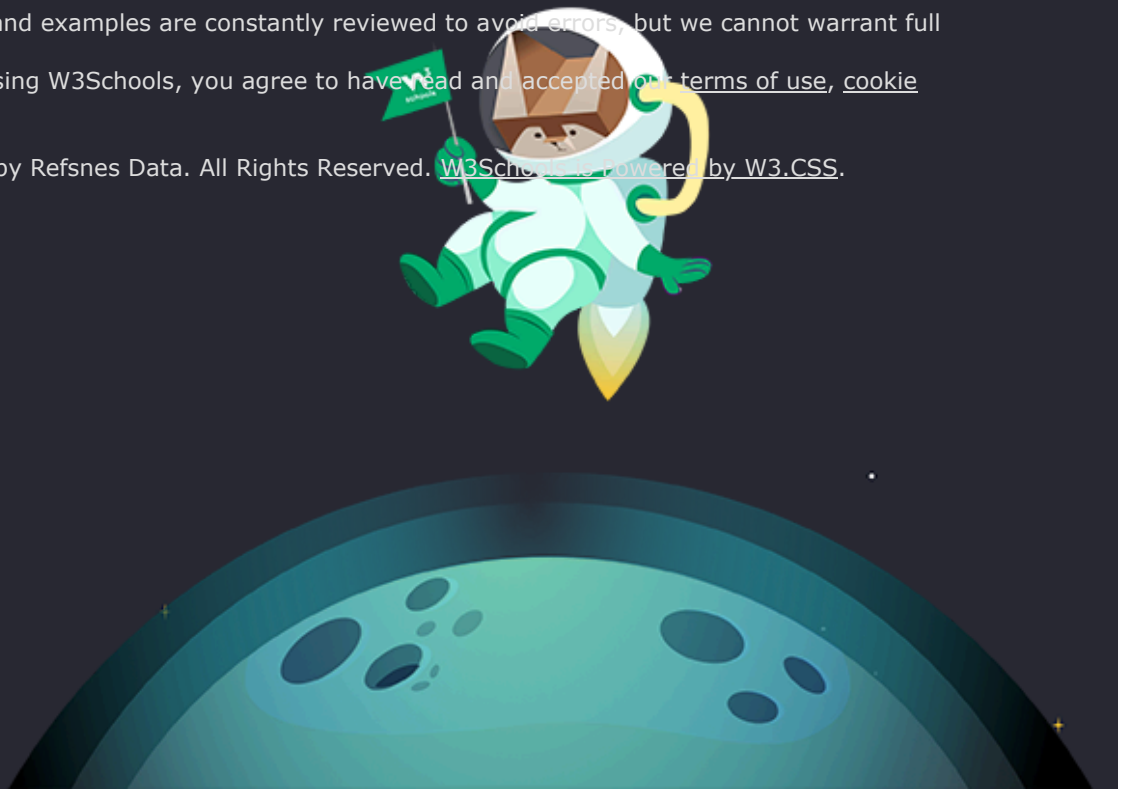
Copyright 1999-2024 by Refsnes Data. All Rights Reserved. W3Schools is powered by W3.CSS.