HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Messages
- HTML Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

HTML Event Attributes

❮ Previous Next ❯

Global Event Attributes

HTML has the ability to let events trigger actions in a browser, like starting a JavaScript when a user clicks on an element.

To learn more about programming events, please visit our JavaScript tutorial.

Below are the global event attributes that can be added to HTML elements to define event actions.

Window Event Attributes

Events triggered for the window object (applies to the <body> tag):

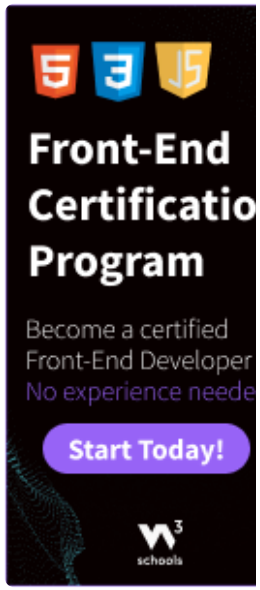

COLOR PICKER

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

onbeforeprint	*script*	Script to be run before the document is printed
onbeforeunload	*script*	Script to be run when the document is about to be unloaded
onerror	*script*	Script to be run when an error occurs
onhashchange	*script*	Script to be run when there has been changes to the anchor part of the a URL
onload	*script*	Fires after the page is finished loading
onmessage	*script*	Script to be run when the message is triggered
onoffline	*script*	Script to be run when the browser starts to work offline
ononline	*script*	Script to be run when the browser starts to work online
onpagehide	*script*	Script to be run when a user navigates away from a page
onpageshow	*script*	Script to be run when a user navigates to a page
onpopstate	*script*	Script to be run when the window's history changes
onresize	*script*	Fires when the browser window is resized

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Messages
- HTML Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

window has been closed)

Form Events

Events triggered by actions inside a HTML form (applies to almost all HTML elements, but is most used in form elements):

Attribute	Value	Description
onblur	*script*	Fires the moment that the element loses focus
onchange	*script*	Fires the moment when the value of the element is changed
oncontextmenu	*script*	Script to be run when a context menu is triggered
onfocus	*script*	Fires the moment when the element gets focus
oninput	*script*	Script to be run when an element gets user input
oninvalid	*script*	Script to be run when an element is invalid
onreset	*script*	Fires when the Reset button in a form is clicked

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Country Codes
- HTTP Messages
- HTTP Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

		element
onsubmit	*script*	Fires when a form is submitted

Keyboard Events

Attribute	Value	Description
onkeydown	*script*	Fires when a user is pressing a key
onkeypress	*script*	Fires when a user presses a key
onkeyup	*script*	Fires when a user releases a key

Mouse Events

Attribute	Value	Description
onclick	*script*	Fires on a mouse click on the element
ondblclick	*script*	Fires on a mouse double-click on the element
onmousedown	*script*	Fires when a mouse button is pressed down on an element

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Country Codes
- HTTP Messages
- HTTP Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

		element
onmouseover	*script*	Fires when the mouse pointer moves over an element
onmouseup	*script*	Fires when a mouse button is released over an element
onmousewheel	*script*	Deprecated. Use the onwheel attribute instead
onwheel	*script*	Fires when the mouse wheel rolls up or down over an element

Drag Events

Attribute	Value	Description
ondrag	*script*	Script to be run when an element is dragged
ondragend	*script*	Script to be run at the end of a drag operation
ondragenter	*script*	Script to be run when an element has been dragged to a valid drop target
ondragleave	*script*	Script to be run when an element leaves a valid drop target

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>

ondrop	*script*	Script to be run when dragged element is being dropped
onscroll	*script*	Script to be run when an element's scrollbar is being scrolled

Clipboard Events

Attribute	Value	Description
oncopy	*script*	Fires when the user copies the content of an element
oncut	*script*	Fires when the user cuts the content of an element
onpaste	*script*	Fires when the user pastes some content in an element

Media Events

Events triggered by medias like videos, images and audio (applies to all HTML elements, but is most common in media elements, like <audio>, <embed>, <img>, <object>, and <video>).

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

Attribute	Value	Description
onabort	*script*	Script to be run on abort
oncanplay	*script*	Script to be run when a file is ready to start playing (when it has buffered enough to begin)
oncanplaythrough	*script*	Script to be run when a file can be played all the way to the end without pausing for buffering
oncuechange	*script*	Script to be run when the cue changes in a <track> element
ondurationchange	*script*	Script to be run when the length of the media changes
onemptied	*script*	Script to be run when something bad happens and the file is suddenly unavailable (like unexpectedly disconnects)
onended	*script*	Script to be run when the media has reach the end (a useful event for messages like "thanks for listening")
onerror	*script*	Script to be run when an error occurs when the file is being loaded
onloadeddata	*script*	Script to be run when media data is loaded

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Country Codes
- HTTP Messages
- HTTP Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

		before anything is actually loaded
onpause	*script*	Script to be run when the media is paused either by the user or programmatically
onplay	*script*	Script to be run when the media is ready to start playing
onplaying	*script*	Script to be run when the media actually has started playing
onprogress	*script*	Script to be run when the browser is in the process of getting the media data
onratechange	*script*	Script to be run each time the playback rate changes (like when a user switches to a slow motion or fast forward mode)
onseeked	*script*	Script to be run when the seeking attribute is set to false indicating that seeking has ended
onseeking	*script*	Script to be run when the seeking attribute is set to true indicating that seeking is active
onstalled	*script*	Script to be run when the browser is unable to fetch the media data for whatever reason
onsuspend	*script*	Script to be run when fetching the media data is stopped before it is completely loaded for whatever reason

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTML Messages
- HTML Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

onvolumechange	*script*	Script to be run each time the volume is changed which (includes setting the volume to "mute")
onwaiting	*script*	Script to be run when the media has paused but is expected to resume (like when the media pauses to buffer more data)

Misc Events

Attribute	Value	Description
ontoggle	*script*	Fires when the user opens or closes the <details> element

❮ Previous Next ❯

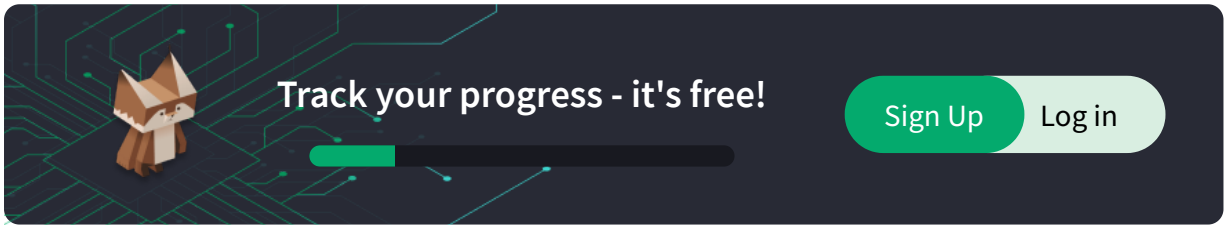

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

PLUS SPACES GET CERTIFIED FOR TEACHERS

FOR BUSINESS CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
Angular Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

FORUM ABOUT ACADEMY

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookie and privacy policy.
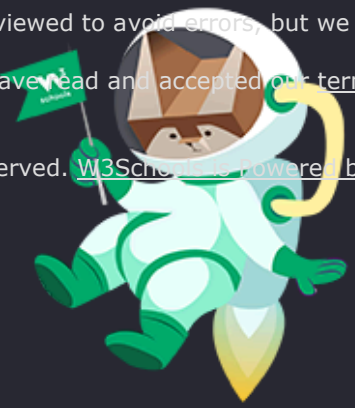
Copyright 1999-2024 by Refsnes Data. All Rights Reserved. W3Schools is powered by W3.CSS.