HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTTP Messages
- HTTP Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

HTML Global Attributes

❮ Previous Next ❯

HTML Global Attributes

The global attributes are attributes that can be used with all HTML elements.

Attribute	Description
accesskey	Specifies a shortcut key to activate/focus an element
class	Specifies one or more classnames for an element (refers to a class in a style sheet)
contenteditable	Specifies whether the content of an element is editable or not
data-*	Used to store custom data private to the page or application

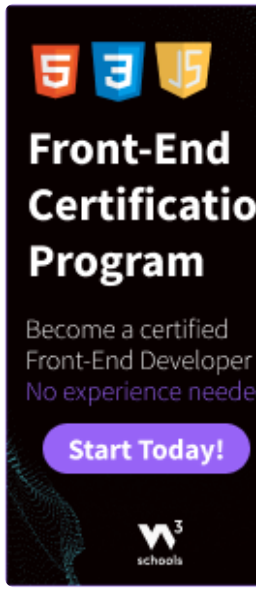

COLOR PICKER

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

enterkeyhint	Specifies the text of the enter-key on a virtual keybord
hidden	Specifies that an element is not yet, or is no longer, relevant
id	Specifies a unique id for an element
inert	Specifies that the browser should ignore this section
inputmode	Specifies the mode of a virtual keyboard
lang	Specifies the language of the element's content
popover	Specifies a popover element
spellcheck	Specifies whether the element is to have its spelling and grammar checked or not
style	Specifies an inline CSS style for an element
tabindex	Specifies the tabbing order of an element
title	Specifies extra information about an element
translate	Specifies whether the content of an element should be translated or not

❮ Previous Next ❯

HTML References

- HTML by Alphabet
- HTML by Category
- HTML Browser Support
- HTML Attributes
- HTML Global Attributes
- HTML Events
- HTML Colors
- HTML Canvas
- HTML Audio/Video
- HTML Character Sets
- HTML Doctypes
- HTML URL Encode
- HTML Language Codes
- HTML Country Codes
- HTTP Messages
- HTTP Methods
- PX to EM Converter
- Keyboard Shortcuts

HTML Tags

- <!-->
- <!DOCTYPE>
- <a>
- <abbr>

PLUS SPACES GET CERTIFIED FOR TEACHERS

FOR BUSINESS CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
Angular Reference
jQuery Reference

Top Examples

Get Certified

HTML References

HTML by Alphabet
HTML by Category
HTML Browser Support
HTML Attributes
HTML Global Attributes
HTML Events
HTML Colors
HTML Canvas
HTML Audio/Video
HTML Character Sets
HTML Doctypes
HTML URL Encode
HTML Language Codes
HTML Country Codes
HTML Messages
HTML Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>

W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT ACADEMY

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookie and privacy policy.

Copyright 1999-2024 by Refsnes Data. All Rights Reserved. W3Schools is powered by W3.CSS.