HTML URL Encode
HTML Language Codes
HTML Country Codes
HTTP Messages
HTTP Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>
<acronym>
<address>
<applet>
<area>
<article>
<aside>
<audio>
<b>
<base>
<basefont>
<bdi>
<bdo>

HTML <!DOCTYPE> Declaration

Previous Complete HTML Reference Next

Example

```
<!DOCTYPE html>
<html>
<head>
<title>Title of the document</title>
</head>

<body>
The content of the document......
</body>

</html>
```

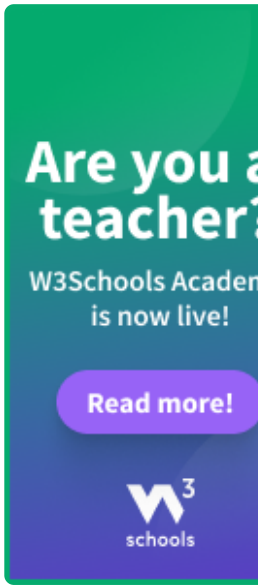

COLOR PICKER

HTML URL Encode
HTML Language Codes
HTML Country Codes
HTTP Messages
HTTP Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>
<acronym>
<address>
<applet>
<area>
<article>
<aside>
<audio>
<b>
<base>
<basefont>
<bdi>
<bdo>

Definition and Usage

All HTML documents must start with a `<!DOCTYPE>` declaration.

The declaration is not an HTML tag. It is an "information" to the browser about what document type to expect.

In HTML 5, the declaration is simple:

```
<!DOCTYPE html>
```

Browser Support

Element					
<!DOCTYPE>	Yes	Yes	Yes	Yes	Yes

Older HTML Documents

In older documents (HTML 4 or XHTML), the declaration is more complicated because the declaration must refer to a DTD (Document Type Definition).

HTML 4.01:

HTML URL Encode
HTML Language Codes
HTML Country Codes
HTTP Messages
HTTP Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>
<acronym>
<address>
<applet>
<area>
<article>
<aside>
<audio>
<b>
<base>
<basefont>
<bdi>
<bdo>

XHTML 1.1:

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.1//EN"
"http://www.w3.org/TR/xhtml11/DTD/xhtml11.dtd">
```

HTML Elements and Doctypes

Look at our table of all HTML elements, and what Doctype each element appears in.

Tips and Notes

Tip: The `<!DOCTYPE>` declaration is NOT case sensitive.

Examples

```
<!DOCTYPE html>
```

```
<!DocType html>
```

```
<!Doctype html>
```

HTML URL Encode
HTML Language Codes
HTML Country Codes
HTTP Messages
HTTP Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>
<acronym>
<address>
<applet>
<area>
<article>
<aside>
<audio>
<b>
<base>
<basefont>
<bdi>
<bdo>

Previous Complete HTML Reference Next

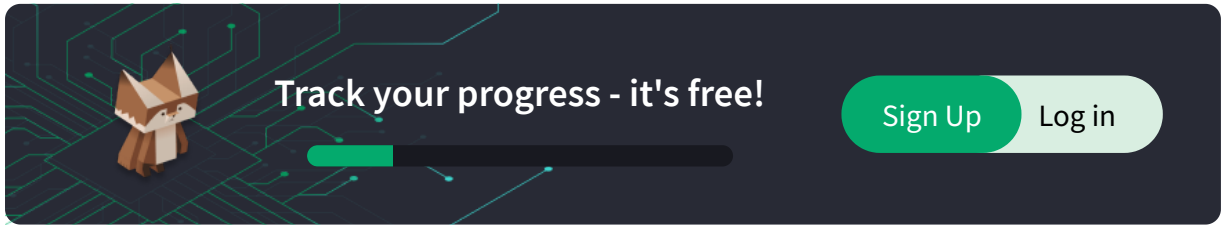

HTML URL Encode
HTML Language Codes
HTML Country Codes
HTTP Messages
HTTP Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>
<acronym>
<address>
<applet>
<area>
<article>
<aside>
<audio>
<b>
<base>
<basefont>
<bdi>
<bdo>

Java Tutorial
C++ Tutorial
jQuery Tutorial

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Java Reference
Angular Reference
jQuery Reference

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT ACADEMY

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness
of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookie and privacy policy.

HTML URL Encode
HTML Language Codes
HTML Country Codes
HTTP Messages
HTTP Methods
PX to EM Converter
Keyboard Shortcuts

HTML Tags

<!-->
<!DOCTYPE>
<a>
<abbr>
<acronym>
<address>
<applet>
<area>
<article>
<aside>
<audio>
<b>
<base>
<basefont>
<bdi>
<bdo>