


Project Title:Streamlining IT Procurement: Automating Standard Laptop Orders with Flow Designer

Phase 3. Project Design Phase

Logical Architecture Flowchart

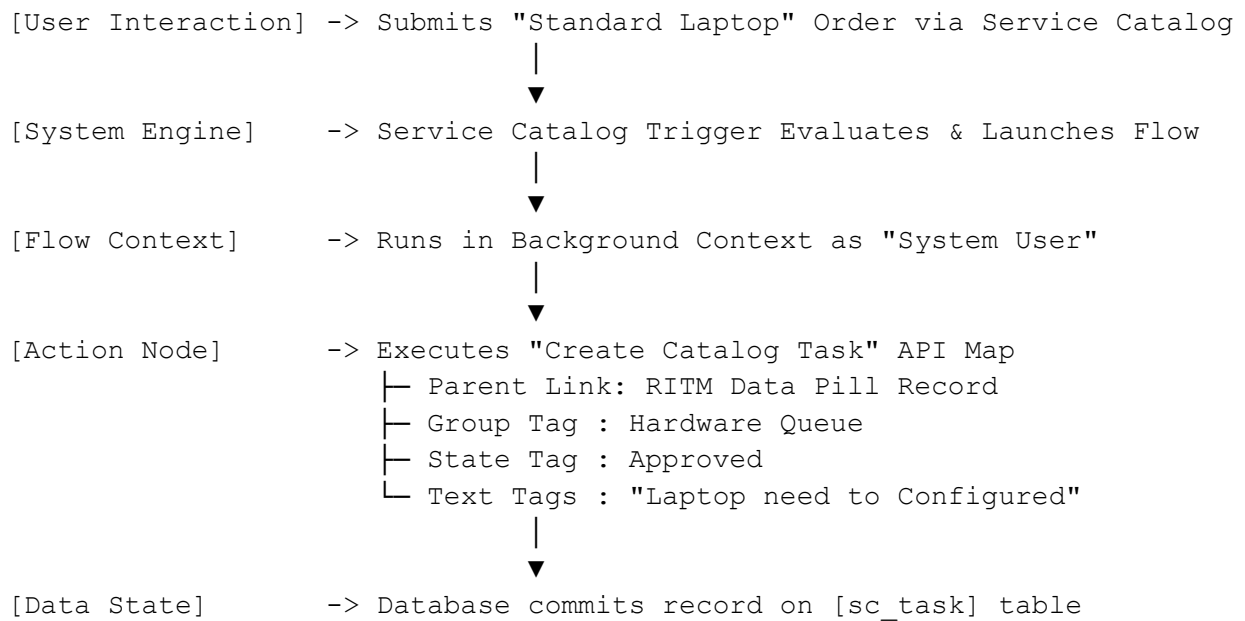


The screenshot shows a ServiceNow Catalog Task form for SCTASK0010001. The form is titled 'Catalog Task - SCTASK0010001' and includes a search bar and navigation links. The form fields are organized into two columns. The left column contains fields for 'Number' (SCTASK0010001), 'Assigned to', 'Configuration item', 'Active' (checked), 'Short description' (Laptop need to Configured), 'Description' (Laptop need to Configured), 'Work notes', and 'Activities: 1'. The right column contains fields for 'Approval' (Approved), 'Priority' (-- None --), 'State' (Open), 'Request item' (RITM0010003), 'Requested for' (System Administrator), and a 'Comments (Customer visible)' section with a 'Post' button. The 'Activities' section shows a record by 'System Administrator' with 'Impact: 3 - Low', 'Opened by: System Administrator', and 'State: Open'. The bottom of the screenshot shows a Windows taskbar with the date 29-09-2026 and time 19:21.


3.2 Data Schema Mapping Table

Source Element (Data Pill)	Target Table field	Hardcoded Value / Mapping
Trigger -> Requested Item Record	sc_task.request_item	Dynamic Record Sys_ID
N/A	sc_task.short_description	"Laptop need to Configured"
N/A	sc_task.description	"Laptop need to Configured"
N/A	sc_task.assignment_group	"Hardware"
N/A	sc_task.approval	"Approved"

Data Flow & Execution Blueprint

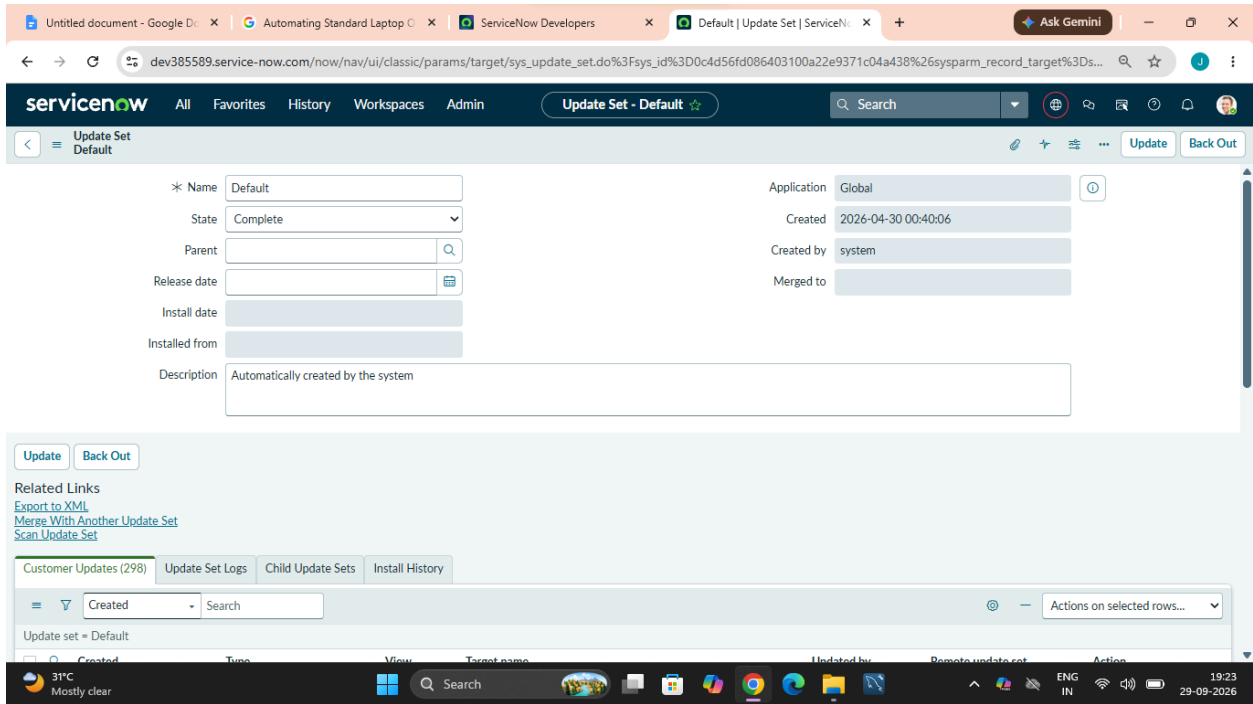

The diagram below illustrates the exact structural data architecture, tracing the execution path from the end-user request to backend table updates.

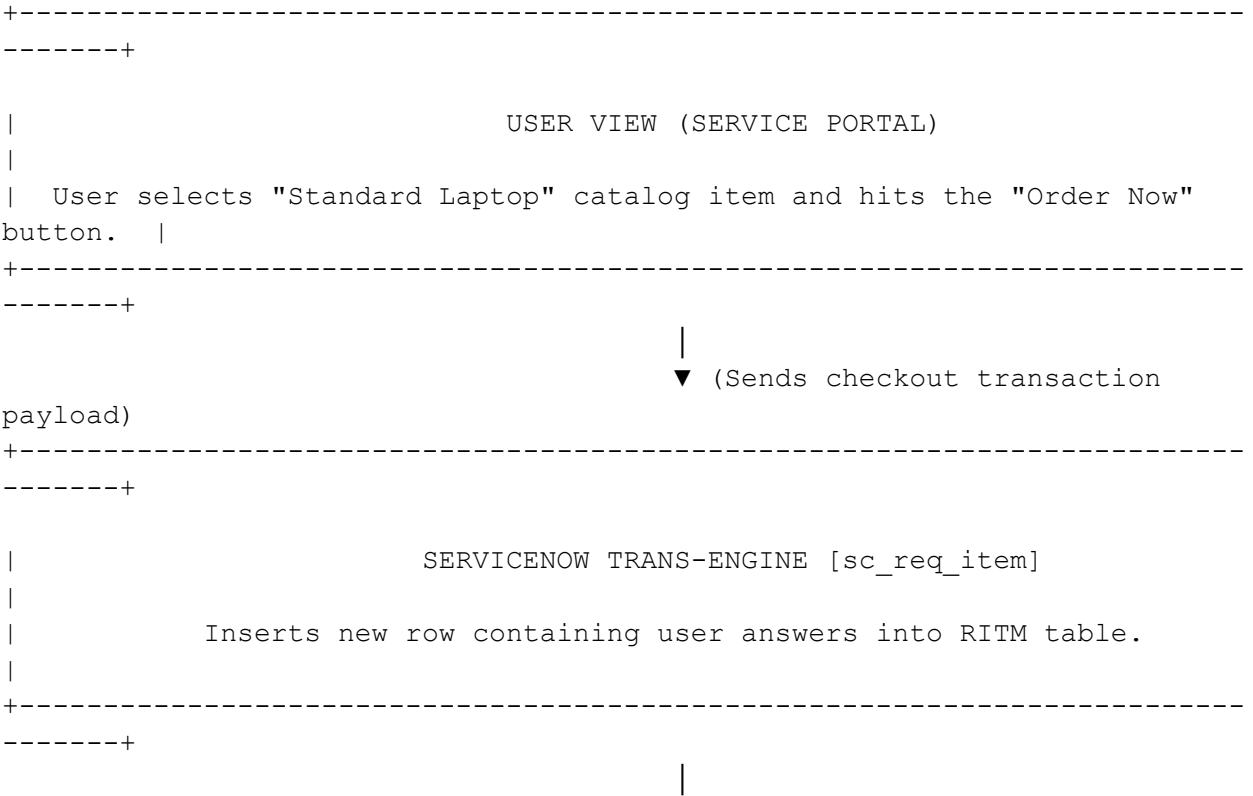

```

                                ▼ (Fires Service Catalog Event
Trigger)
+-----+
-----+

|                                FLOW DESIGNER ENGINE (System User)
|
|                                Launches Context Runner for Flow: "Standard laptop task"
|
+-----+
-----+


                                |
                                ▼ (Extracts dynamic Parent Sys_ID
via Data Pill)
+-----+
-----+

|                                ACTION WORKER: CREATE CATALOG TASK
|
|                                Instantiates sc_task row mapping values:
|
| - Parent ID                <-- Data Pill: Trigger RITM Record
|
| - Assignment Group <-- "Hardware" (Sys_ID Reference Pointer)
|
| - Text Descriptors <-- "Laptop need to Configured"
|
| - Approval State   <-- "Approved"
|
+-----+
-----+

                                |
                                ▼ (Commits Transaction)
+-----+
-----+

|                                FULFILLMENT DATABASE [sc_task]
|
|                                Task appears instantly in the Hardware group's work queue.
|
+-----+
-----+

```

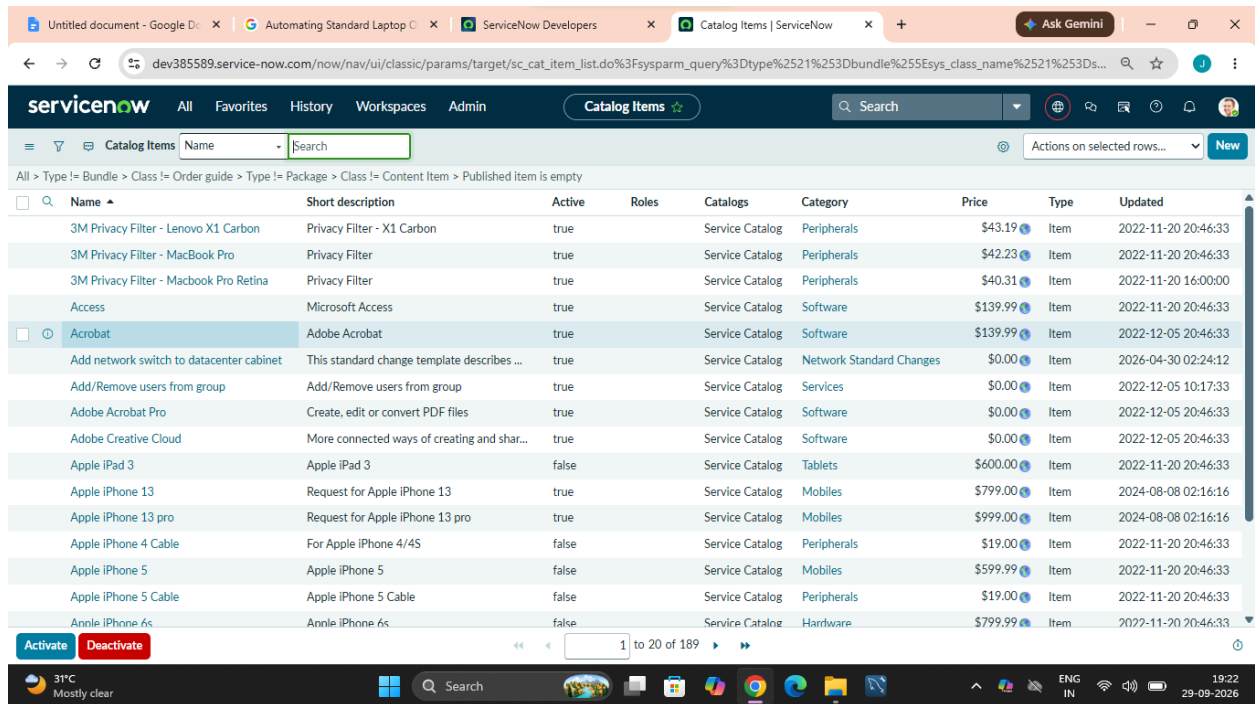

3.2 Dynamic Data-Pill & Field Mapping Design Schema

The field configuration mapping schema defines the precise target data types and values populated during the workflow execution:

Destination Target Field	Database Column Name	Source Type	Injected String / Dynamic Reference Target
Request Item Link	<code>request_item</code>	Reference Data Pill	<code>Trigger -> Service Catalog -> Requested Item Record</code>
Task Table Selector	<code>sys_class_name</code>	Internal Baseline	Automatically evaluated to <code>sc_task</code>
Short Description	<code>short_description</code>	String Literal	<code>"Laptop need to Configured"</code>
Detailed Description	<code>description</code>	String Literal	<code>"Laptop need to Configured"</code>

Assignment Group	<code>assignment_group</code>	Reference (Sys_ID)	Hardcoded value pointer to <code>"Hardware"</code> queue group
Approval State	<code>approval</code>	Choice List	Value mapped directly to state: <code>"Approved"</code>