

Project Title:Streamlining IT Procurement: Automating Standard Laptop Orders with Flow Designer

Phase:7 Project Documentation Phase


Administrator System Maintenance Manual

- **Modifying Assignment Targets:** If the internal enterprise fulfillment architecture scales and the target assignment queue name changes (e.g., changing from `Hardware` to `Global Provisioning Tier 1`), system administrators must execute the following updates:
 1. Open **Flow Designer** -> Select the active version of `Standard laptop task`.
 2. Click **Deactivate** on the top command option toolbar to check out the project code canvas.
 3. Expand the **Create Catalog Task** action item card layout.
 4. Clear the value in the **Assignment group** reference field and select the new fulfillment queue name.
 5. Click **Save** and then click **Activate** to instantly publish the updated workflow routing rules.

System Diagnostic Logging Steps: When diagnosing performance issues or troubleshooting why tasks are not appearing in fulfillment queues:

1. Navigate to **Flow Designer > Operations > Executions** within the application navigator.
2. Filter the runtime lists by searching for Flow name matching `Standard laptop task`.
3. Open the target transaction row block and audit the execution steps sequentially. If a step failed, check the runtime data pill values to isolate the root cause.
4. **Configuration Context Modifications:** If the internal hardware queue infrastructure alters its operational tracking designation name (e.g., from `Hardware` to `Hardware Deployment Tier 1`), system administrators must navigate to **Flow Designer > Standard laptop task**, modify the "Assignment group" target variable inside the Action card matrix, and re-publish via the

Activate switch.

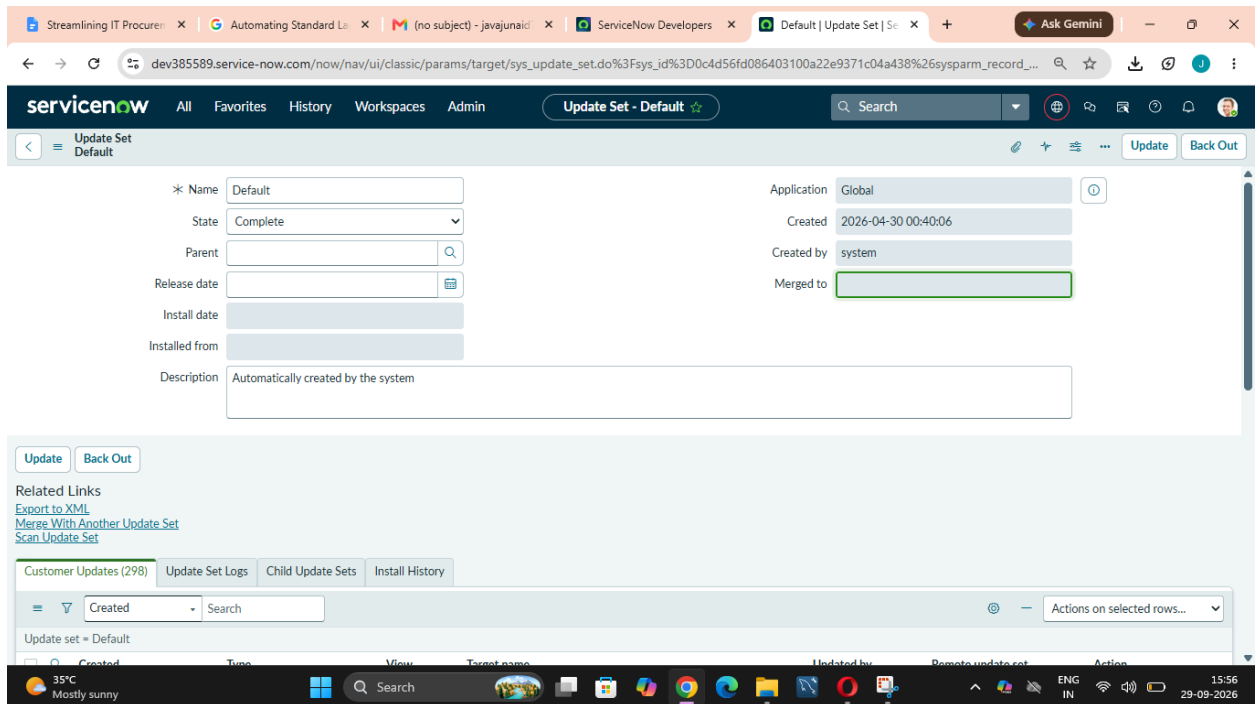

5. **Runtime Diagnostic Framework:** In the event an execution fails or a task does not generate:
 - a. Navigate directly to **Flow Designer > Operations > Executions**.
 - b. Filter by Flow Name containing `Standard laptop task`.
 - c. Open the specific runtime context string token and identify the node marked with an error state to trace the issue.

-
- **Configuration Context Modifications:** If the internal hardware queue infrastructure alters its operational tracking designation name (e.g., from `Hardware` to `Hardware Deployment Tier 1`), system administrators must navigate to **Flow Designer > Standard laptop task**, modify the "Assignment group" target variable inside the Action card matrix, and re-publish via the **Activate** switch.
 - **Runtime Diagnostic Framework:** In the event an execution fails or a task does not generate:
 1. Navigate directly to **Flow Designer > Operations > Executions**.
 2. Filter by Flow Name containing `Standard laptop task`.
 3. Open the specific runtime context string token and identify the node marked with an error state to trace the issue.

