

If we simply run as Java Application then it will use default profile (dev) which we setup in pom.xml as default active profile



Let's build and run for other profile

Make setup in "Run Configuration" Window ..


left

Or


right

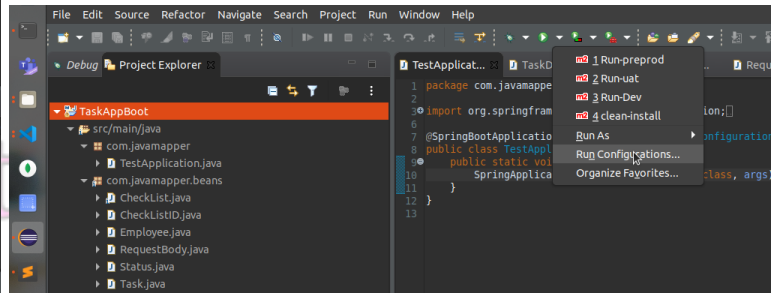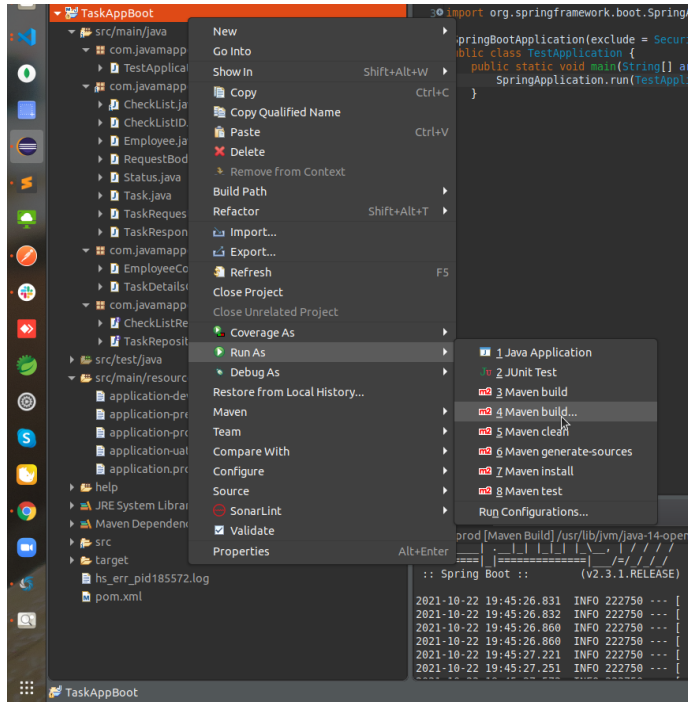


Setup for build(clean & install) with profile Uat but not run here

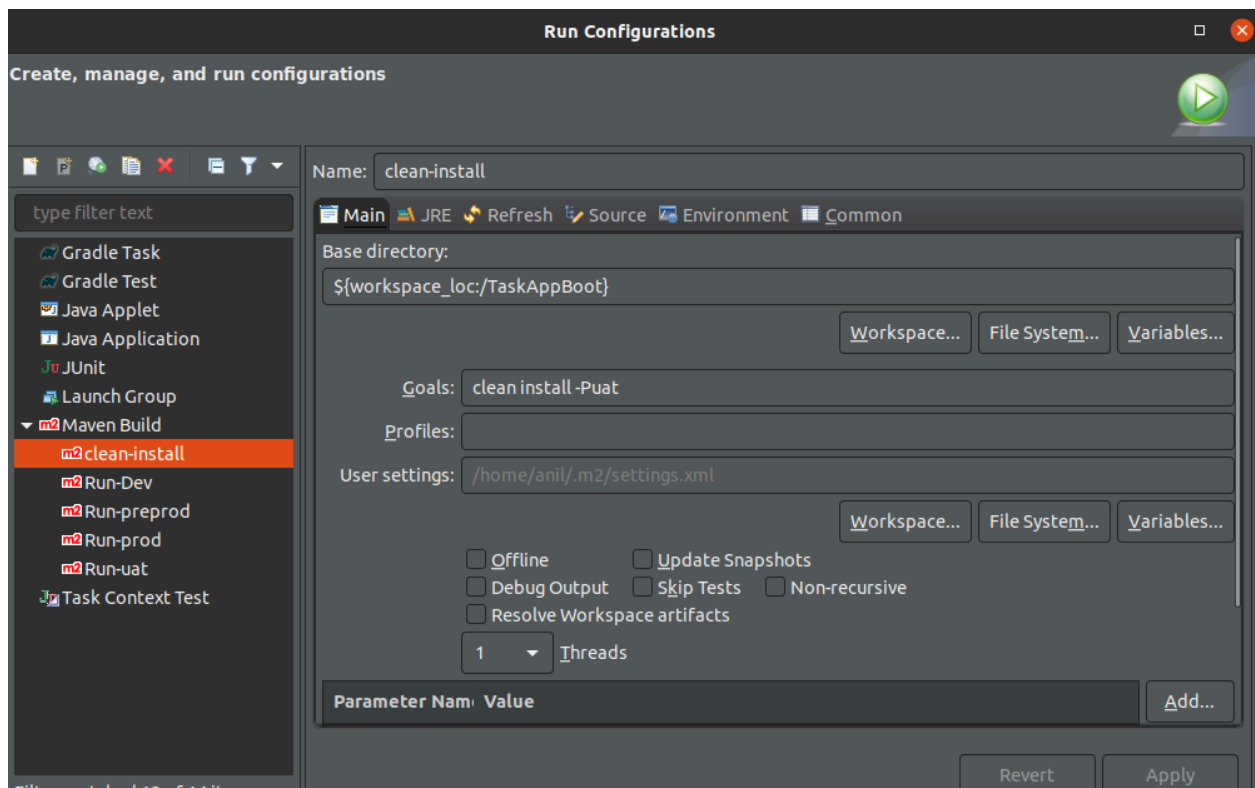


Setup for dev profile "RUN"

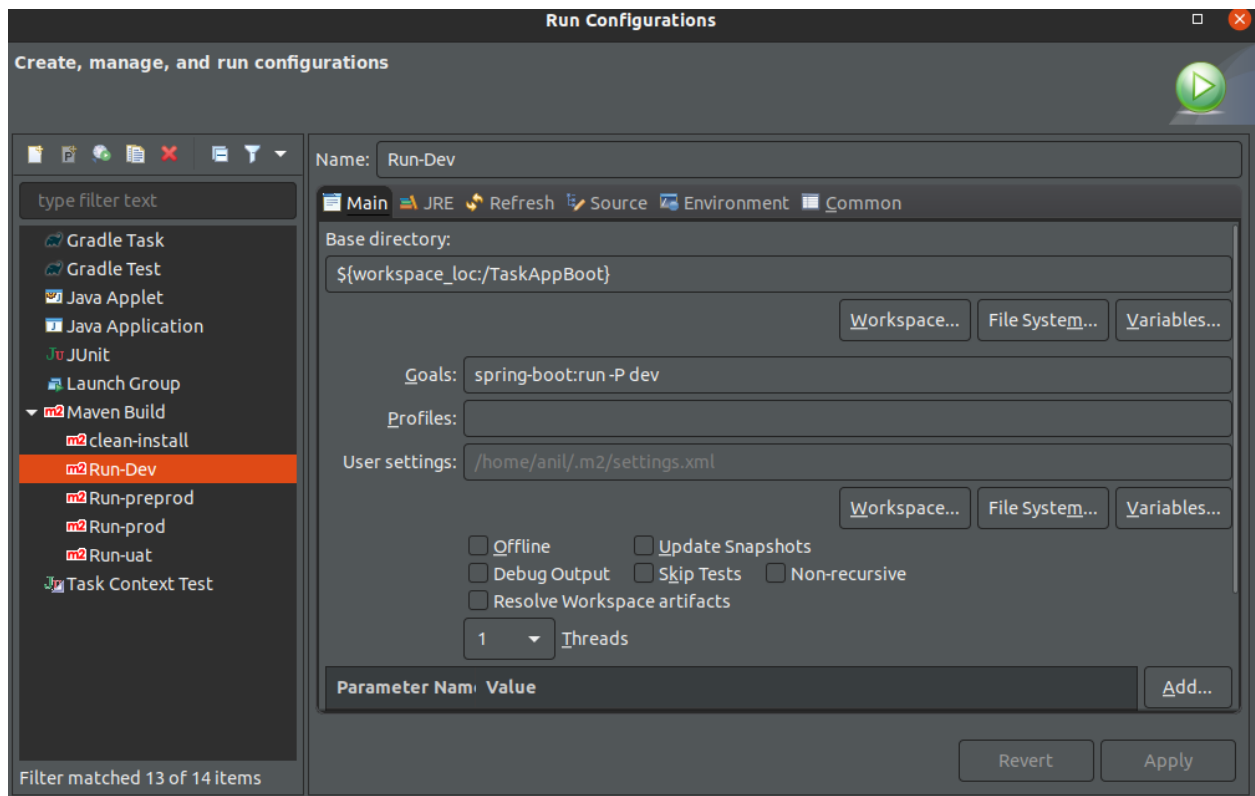

Steup for preprod profile Run (below log confirming which profile running)

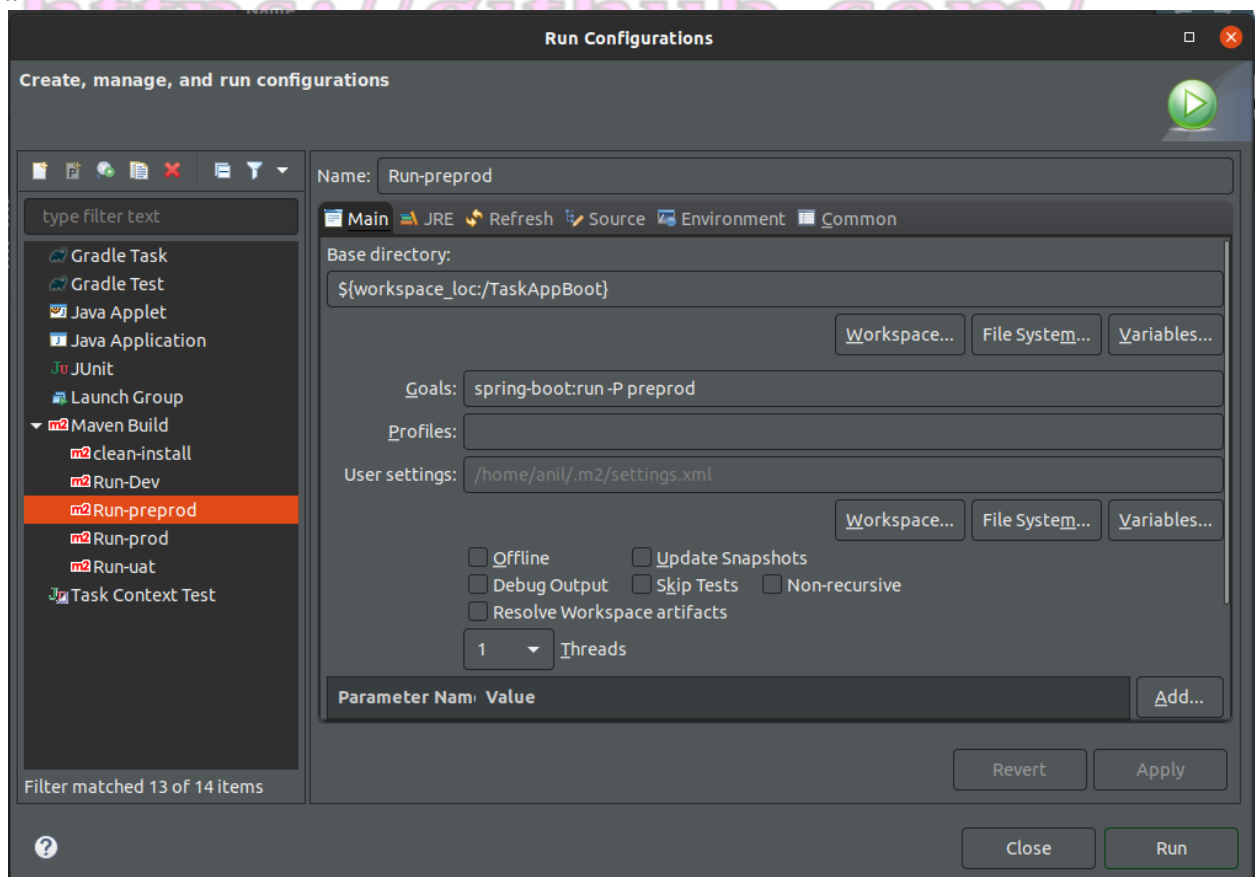

Steup for uat profile Run

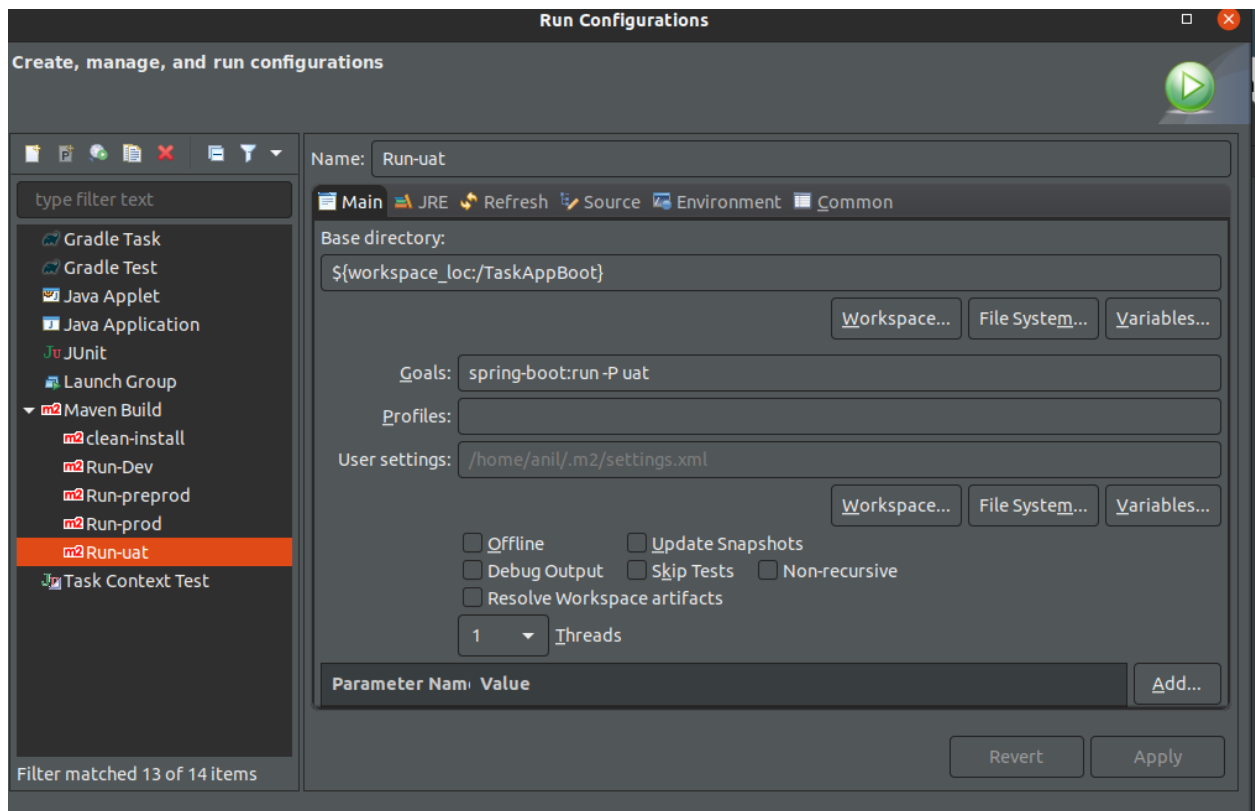

Steup for prod profile Run

