



Semantic Fashion Recommendation Microservice

FastAPI microservice with Swagger/OpenAPI, local Amazon Fashion vector search, OpenAI-enforced AWS mode, and product filters.

Offline index build path

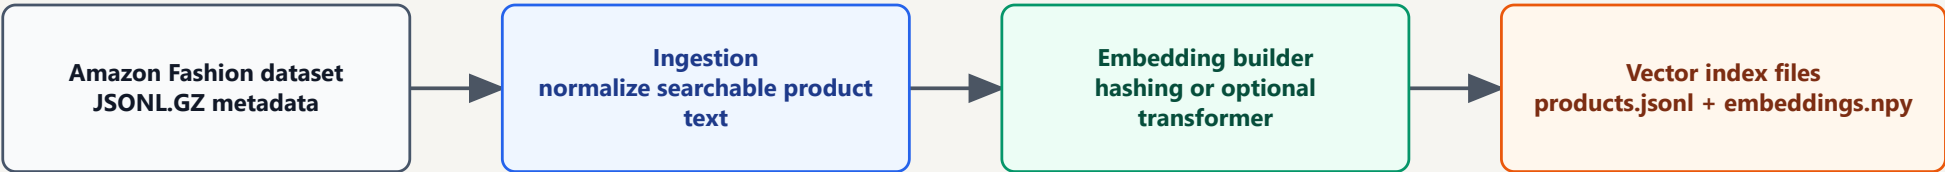

Runtime recommendation path

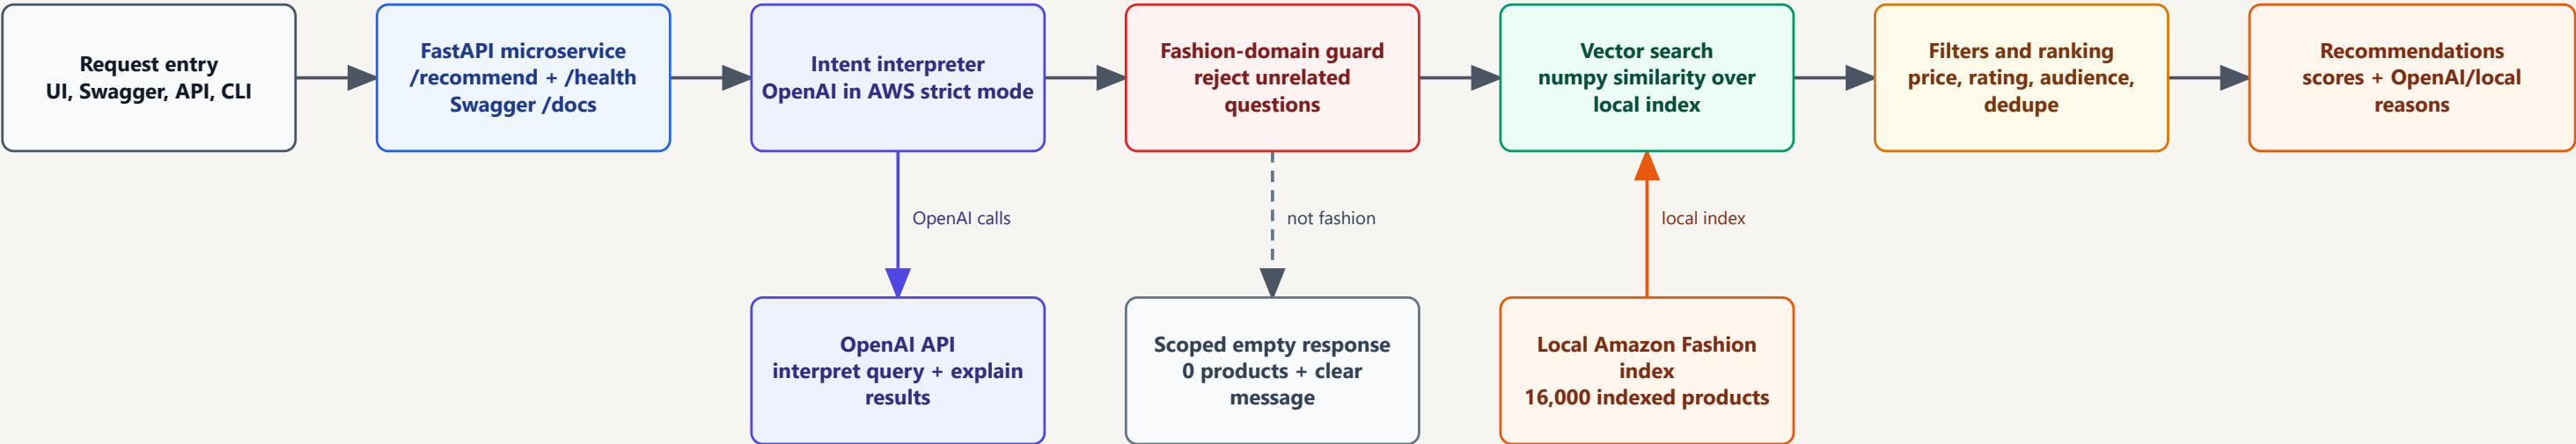

Design invariant: OpenAI improves query understanding and explanations, but product retrieval always stays on the local Amazon Fashion index. AWS demo uses REQUIRE_OPENAI=true; local runs can work without a key.



Fashion Recommender - High Level Design

FastAPI microservice on EC2 with Swagger/OpenAPI, OpenAI-required intent handling, and local Amazon Fashion retrieval.

Runtime access path




Runtime dependencies

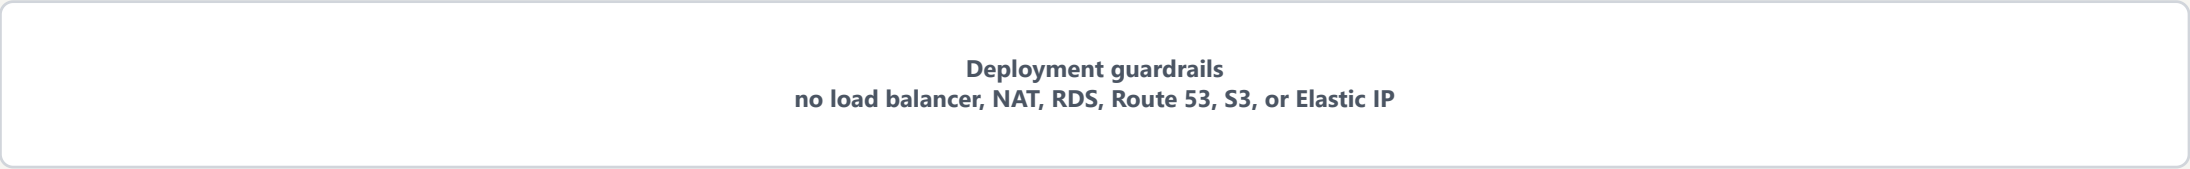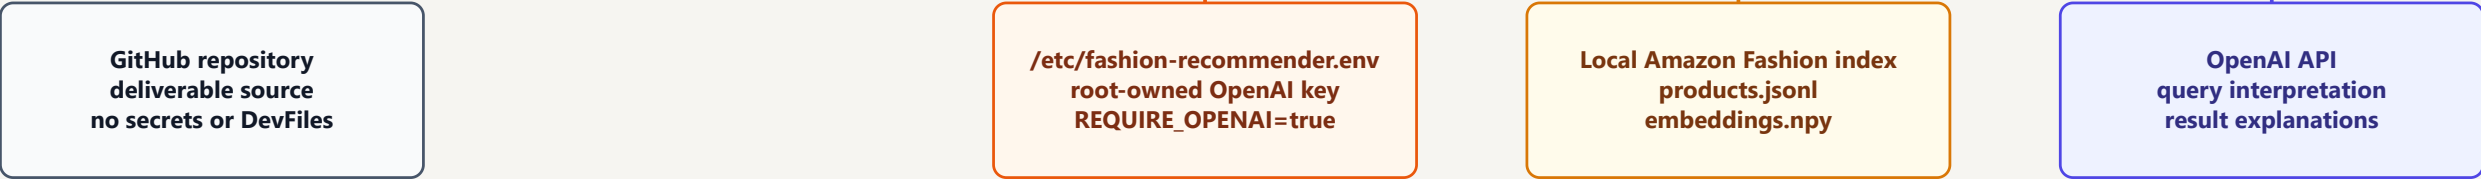

Fashion Recommender - Detailed Request Design

Top-down POST /recommend pipeline. Branches are placed to the side so no connector crosses the main path.

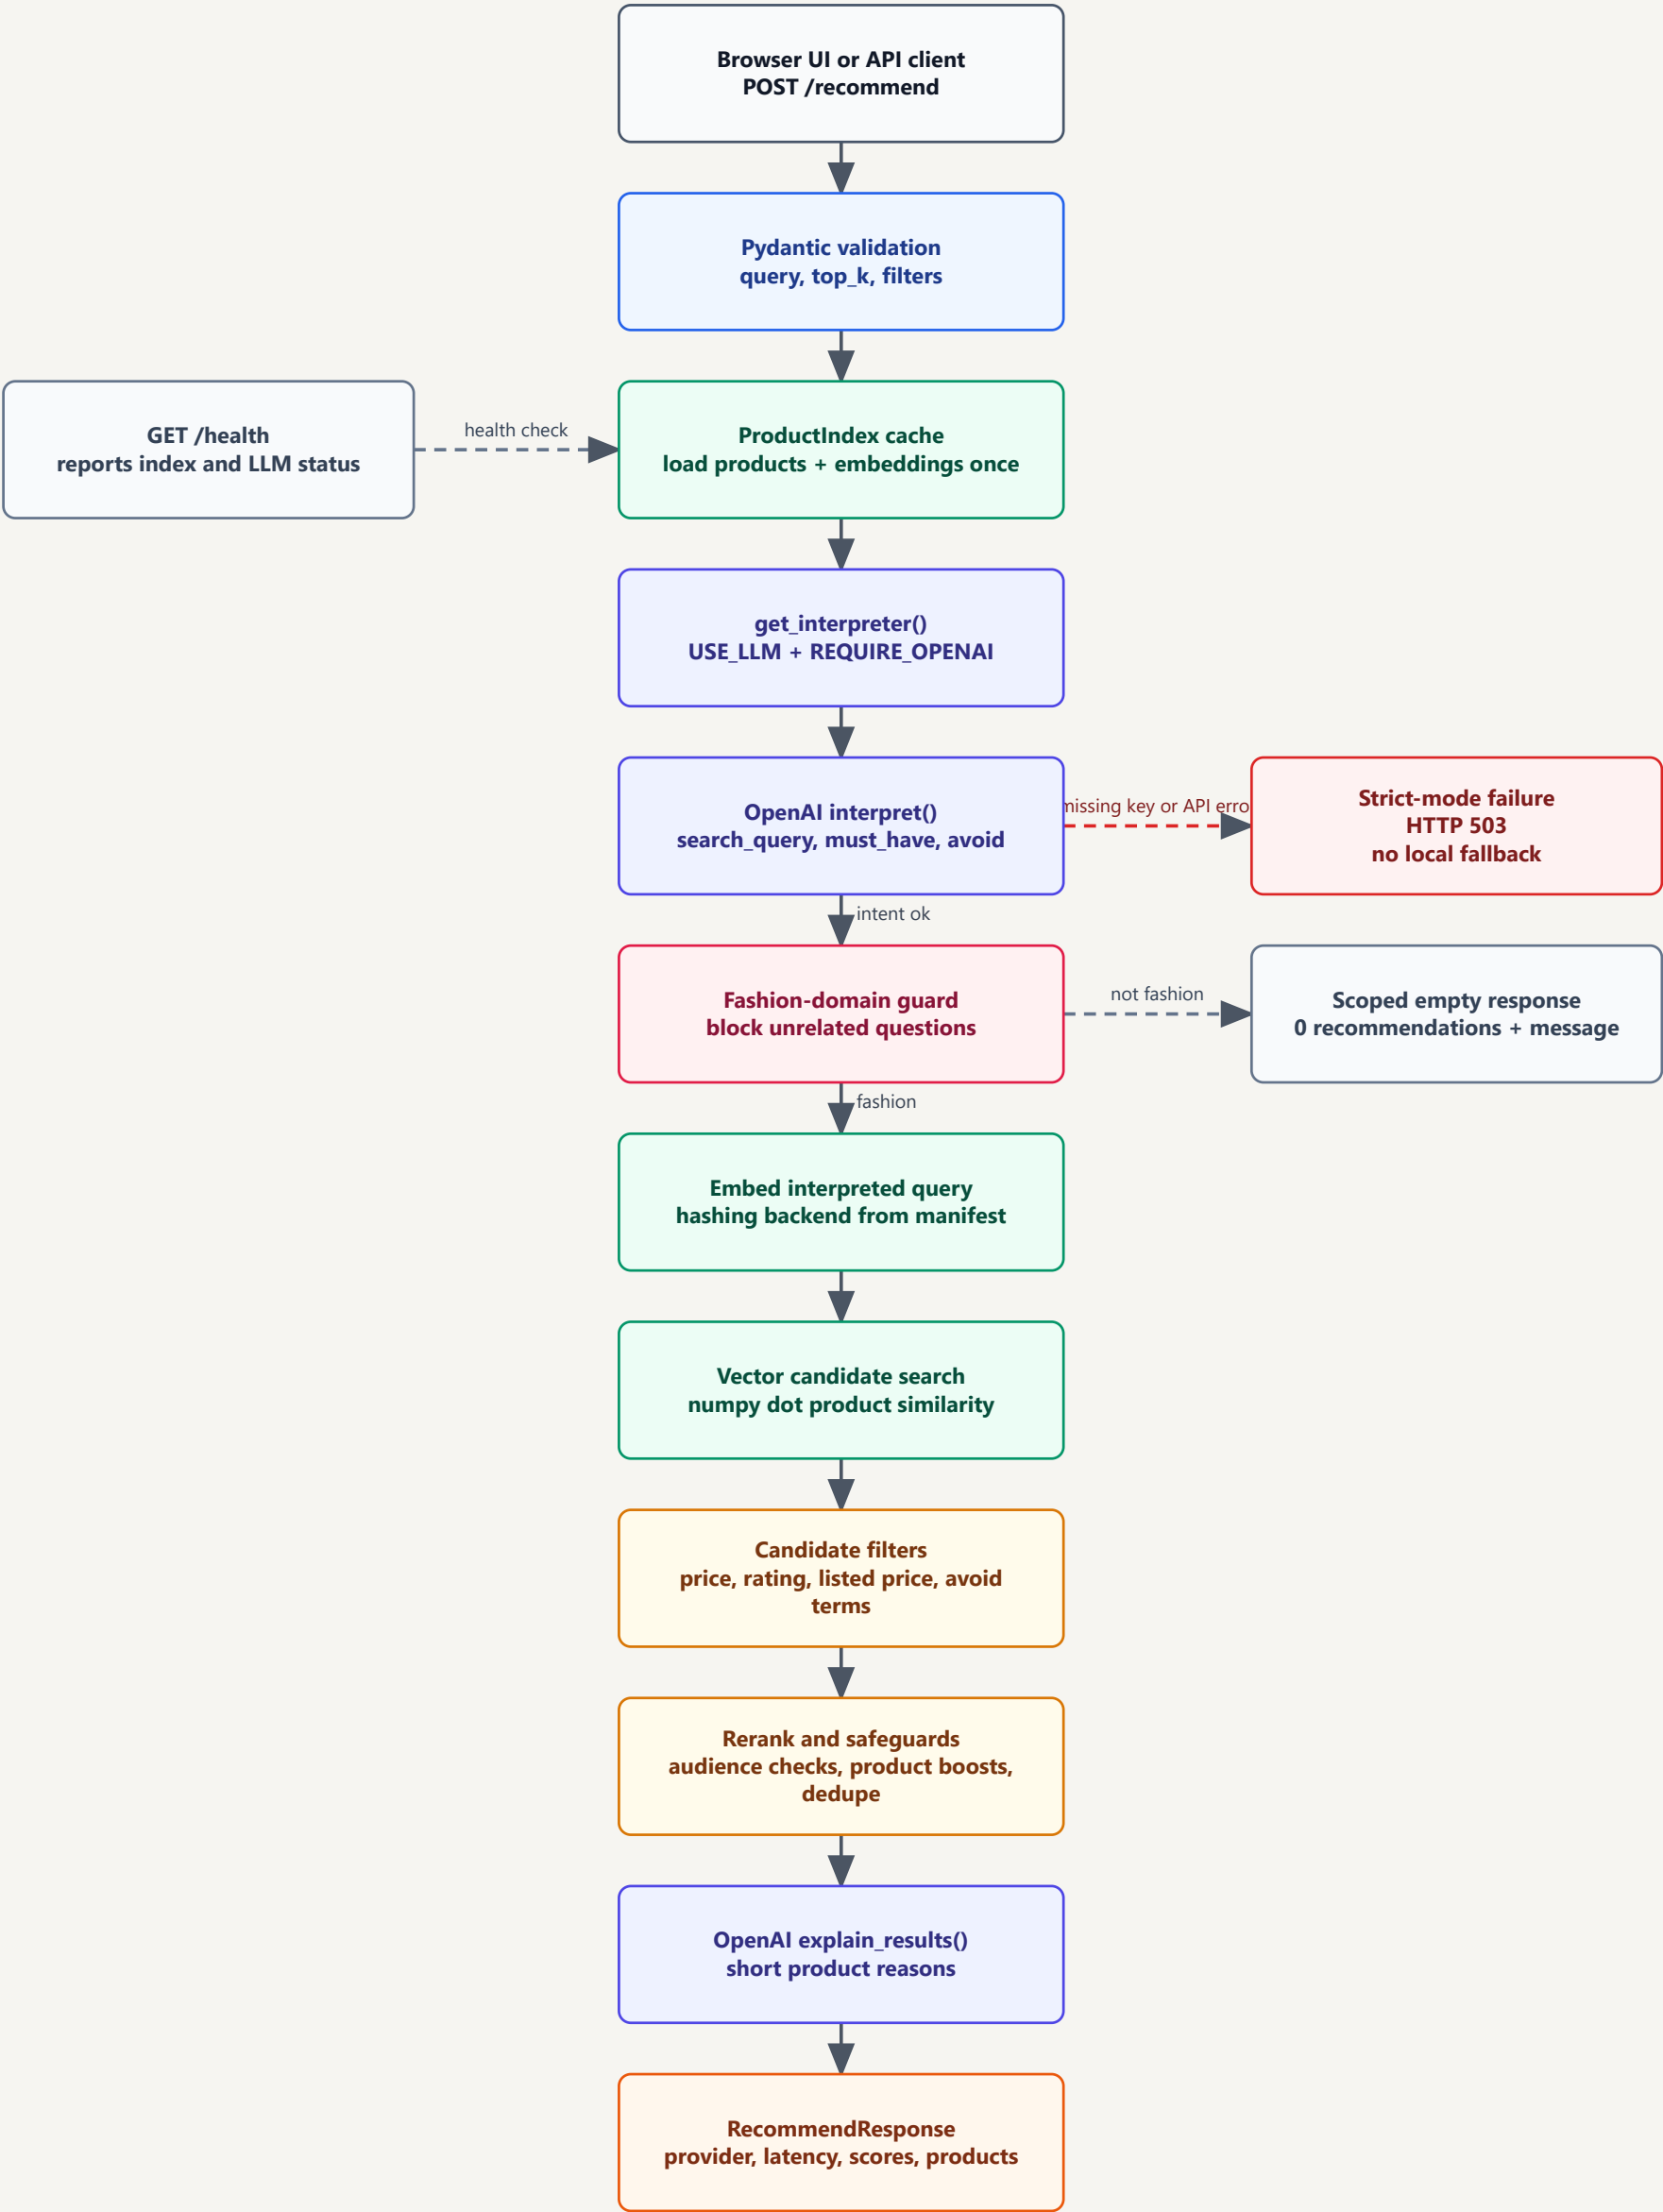

Design invariant: OpenAI interprets intent and writes explanations. Product retrieval always uses the local Amazon Fashion index.