A Gentle Introduction to R

Jonathan Whiteley

2023-08-09

Prerequisites

- Access to a copy of the R¹ software
 - i.e., a "binary executable"
 - Go to www.r-project.org to get a copy, or ask your system administrator.
- No previous experience with R or programming required.

¹The R logo (♠) is © 2016 The R Foundation and used as-is under the terms of the CC-BY-SA 4.0 license

Pop Quiz

We will review these at the end, so you can see how much you have learned.

- What does 'CRAN' stand for?
- Why is it named 'R'?
- How can you use R interactively?
- How do you find out what a function does & how to use it?
- How do you store values to re-use later?
- True or False: Warnings can be ignored, but an Error means I made a mistake.
- True or False: Error messages will tell me how to fix the problem.

Answer in the chat:

What emoji best describes your current mood or state of mind?

Introductions

- Name
- Pronouns
- Job Title, role
- Have you used R before?
- Have you used a programming language before?
- optional: a hobby or activity you enjoy?

Icebreaker activity

What is this?

1–3 word description, for example:

- "This is grey"
- "This looks uncomfortable"

On your turn:

- 1 Previous person's name
- 2 Their answer to the question
- Your name
- 4 Your answer
- 6 Name of the person to go next



Figure 1: What is this?

© John Speirs/Comedywildlifephoto.com

Learning Objectives

- Get familiar with the R interface
- Use technical terms for R concepts
- Enter commands
 - use R interactively: understand input & output
 - use some common functions
- Get familiar with 'R objects'
 - store & retrieve values
- Understand Errors, Warnings, and Messages
- How to get Help

Why is it named 'R'?

- R started as an open-source implementation of the S statistical computing language (S-PLUS)²
 - ▶ S was created at Bell Laboratories in 1976³
 - R was based on the S syntax (mostly v3), but works very differently "under the hood".
- R was created by Ross Ihaka and Robert Gentleman aka "R & R"⁴
 at the University of Aukland in the early 1990s.

Read more about the history of R on Wikipedia⁵

²https://www.r-project.org/about.html

 $^{^3} https://en.wikipedia.org/wiki/S_(programming_language)$

⁴https://www.r-project.org/contributors.html

⁵https://en.wikipedia.org/wiki/R_(programming_language)#History

The R Interface

- 'base R' has a slightly different interface for each Operating System (OS)
 - ► GUI = **G**raphical **U**ser **I**nterface
- R can also run inside of a terminal (no GUI) or other software (different GUI).

Integrated **D**evelopment **E**nvironment (IDE)

- An IDE is like an extra interface layer on top of 'base R'
- IDEs often add convenient tools to make writing code easier (e.g., syntax highlighting), and for developing larger projects with multiple files.
- **RStudio** is one of the most popular cross-platform IDEs for R.
 - RStudio is available in open source (free/libre) and commercial^a editions.

^afor organizations not able to use software licensed with AGPL

A quick tour of the 'base R GUI'

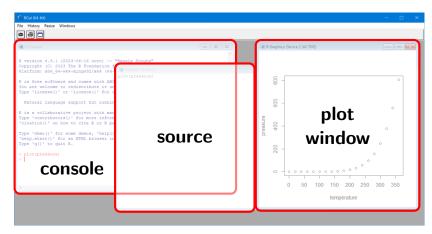


Figure 2: Screenshot of the R GUI in Windows.

A quick tour of RStudio

The RStudio GUI has 4 'panes' that contain 'tabs'.

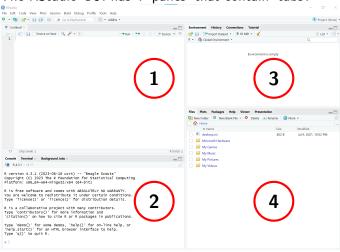


Figure 3: Screenshot of RStudio (default layout).

left:

- 1 top: Source^a
 - bottom:
 Console,
 Terminal,

right:

- 3 top: Environment, History, . . .
- bottom:
 Files, Plots,
 Help, ...

^aempty until you create or open a file



- Regardless of the GUI, you interact with R primarily using a command line
 - aka a command line interface (cli)
 - the command line is usually in the console
- "Question-and-Answer Model"
 - You ask R to do something (a command), and R tells you the answer (result).
- Instructions are given to R using the R language.



The *console* is a window or pane where you will find:

- The command line
 - where you will enter commands for R to run
- Results of commands and other output
- Messages, Warnings, and Errors

The R command-line

• The command prompt normally looks like this:

>

(the colour varies depending on the interface)

- ▶ This is R's way of saying "I am ready to accept new commands".
- ▶ Type a new command on the line after this prompt (i.e., input).
- Press return/enter to run the current command
- If you can still edit the command next to the prompt, then it has not been submitted to R to execute (it is still waiting for input).
- If the last prompt is not empty (i.e., there is text beside it)
 and you cannot edit what is beside the prompt,
 it means R is still running the last command and is not ready to accept
 a new command yet.
 - Wait for a new empty prompt to appear before entering the next command.

The R command-line (continued)

• If the prompt looks like this:

+

it means the last command was incomplete and R is waiting for more input.

R will not do anything until the command is completed or cancelled.

- ► This usually means you forgot a closing quote ", parenthesis (, bracket [, or brace {
- You can cancel the current command at any time by pressing escape (esc)

Input & Output

In this presentation,

• commands that can be entered in the command-line look like this:

```
Input (commands)
```

- ▶ You can try these yourself!
- Expected output (results) look like this:

```
## Output (results)
```



Read the opening message carefully.

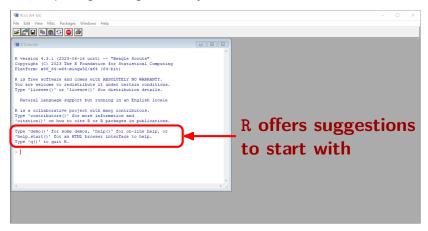


Figure 4: R offers suggestions of commands to Type in the console when it starts.



demo(graphics)

• some plots and graphs that can be made with R

demo(image)

 image-like graphics and maps that can be produced with R

demo(lm.glm)

ullet a demonstration of linear modelling & GLMs

demo()

• a list of available demos


help.start()

← A great place to start, especially if you are comfortable reading documentation for a programming language. More on this later.

Note

R will not only show the output, but also the code used to produce it.



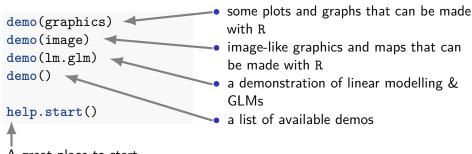

A great place to start, especially if you are comfortable reading documentation for a programming language. More on this later.

Note

R will not only show the output, but also the code used to produce it.

R is a calculator

- These are *expressions*
- Expressions are evaluated, and the value (result) is returned (sometimes invisibly)



- With the cursor next to the empty prompt (>), use the up & down arrow keys (↑↓) to re-produce previous commands.
- This lets you "scroll through your command history".
- Press up (↑) once, and you get the last command you entered without having to copy & paste.

Vectors

Some data types (of atomic vectors)

Symbolic variables

• You can store values (*objects*) in symbolic variables (*names*) using an assignment operator:

```
assign the value on the right to the name on the left
```

Names can include:

```
letters a-z A-Z numbers 0-9 periods . underscores _
```

```
A <- 10
B <- 10 * 10
A_log <- log(A)
B.seq <- 1:B
assign('x', 3)
```

 Names should begin with a letter.

Retrieve values

When a variable name is evaluated, it returns the stored value.

Α							В							
## [1] 10						##	[1]	100					
A_log														
## [1] 2.303							##	[1]	3					
B.seq														
##	[1]	1	2	3	4	5	6	7	8	9	10	11	12	
##	[13]	13	14	15	16	17	18	19	20	21	22	23	24	
##	[25]	25	26	27	28	29	30	31	32	33	34	35	36	
##	[37]	37	38	39	40	41	42	43	44	45	46	47	48	
##	[49]	49	50	51	52	53	54	55	56	57	58	59	60	
##	[61]	61	62	63	64	65	66	67	68	69	70	71	72	
##	[73]	73	74	75	76	77	78	79	80	81	82	83	84	
##	[85]	85	86	87	88	89	90	91	92	93	94	95	96	
##	[97]	97	98	99	100									

Built-in variables

Some words and letters already have values in R and should **never be used as variable names**.

```
version
рi
                                ## ... information about
## [1] 3.142
                                ## this version of R ...
letters
    [1] "a" "b" "c" "d" "e" "f" "g" "h" "i" "j" "k" "l" "m"
##
## [14] "n" "o" "p" "q" "r" "s" "t" "u" "v" "w" "x" "y" "z"
LETTERS
    [1] "A" "B" "C" "D" "E" "F" "G" "H" "I" "J" "K" "L" "M"
##
    [14] "N" "O" "P" "Q" "R" "S" "T" "U" "V" "W" "X" "Y" "Z"
```

Reserved words

Some words and letters already have special meaning in the R language (*keywords*) and should **never be used as variable names**.

Quiz Review

References & More Information

help.start()

Accessible from the screen above (offline):

- An Introduction to R
- The R Language Definition

Online:

- RStudio Education (education.rstudio.com)
 - tutorials, workshop materials, and other resources.
- R Manuals (https://cran.r-project.org/manuals.html)
- R Contributed Documentation
 - e.g., http://cran.r-project.org/doc/contrib/usingR.pdf
- Internet search
 - Stack Overflow (stackoverflow.com)
 - Cookbook for R (www.cookbook-r.com)