

RewardHarness: Self-Evolving Agentic Post-Training

Yuxuan Zhang^{1,2,3,6,*}, Penghui Du^{3,*}, Bo Li^{3,*}, Cong Wei^{5,*}, Junwen Miao⁴,
 Huaisong Zhang⁷, Songcheng Cai⁵, Yubo Wang^{2,5}, Dongfu Jiang^{2,5,†},
 Yuyu Zhang⁸, Ping Nie^{5,†}, Wenhui Chen^{2,5,†}, Changqian Yu^{3,§}, Kelsey R. Allen^{1,2,†}

¹University of British Columbia ²Vector Institute ³Kolors Team, Kuaishou Technology

⁴Carnegie Mellon University ⁵University of Waterloo ⁶Etude AI

⁷Tsinghua University ⁸Georgia Institute of Technology

Abstract

Evaluating instruction-guided image edits requires rewards that reflect subtle human preferences, yet current reward models typically depend on large-scale preference annotation and additional model training. This creates a data-efficiency gap: humans can often infer the target evaluation criteria from only a few examples, while models are usually trained on hundreds of thousands of comparisons. We present REWARDHARNESS, a self-evolving agentic reward framework that reframes reward modeling as context evolution rather than weight optimization. Instead of learning from large-scale annotations, REWARDHARNESS aligns with human preferences by iteratively evolving a library of tools and skills from as few as 100 preference demonstrations. Given a source image, candidate edited images, and an editing instruction, an Orchestrator selects the most relevant subset of tools and skills from the maintained library, and a frozen Sub-Agent uses them to construct a reasoning chain that produces a preference judgment. By comparing predicted judgments with ground-truth preferences and analyzing successes and failures in the reasoning process, the Orchestrator automatically refines its library of tools and skills without additional human annotation. Using only 0.05% of the EditReward preference data, REWARDHARNESS achieves 47.4% average accuracy on image-editing evaluation benchmarks, surpassing GPT-5 by 5.3 points. When used as a reward signal for GRPO fine-tuning, RL-tuned models achieve 3.52 on ImgEdit-Bench. Project page: <https://rewardharness.com>.

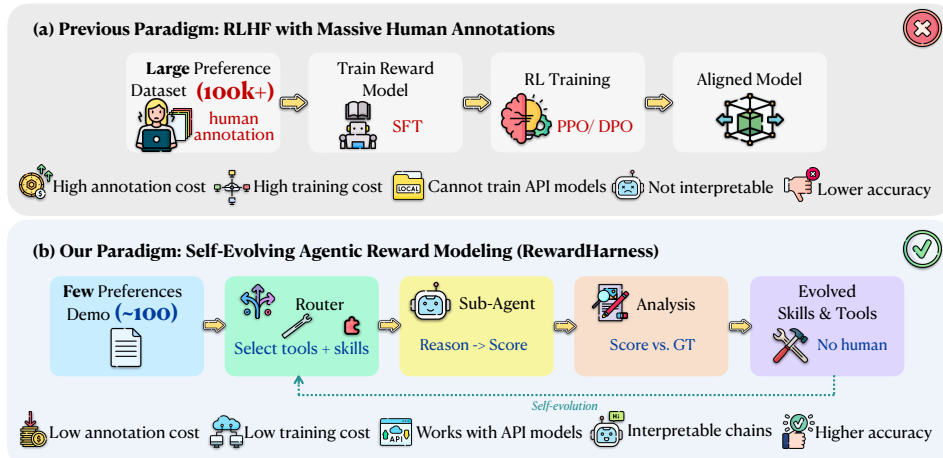


Figure 1: **Paradigm comparison.** The conventional paradigm collects large-scale human preference data, trains a reward model, and uses it as the reward signal for RL alignment. In contrast, REWARDHARNESS starts from a small set of preference demonstrations and self-evolves a Skills-and-Tools Library through iterative evaluation and analysis, yielding an interpretable reward system.

*Equal Contribution. § Project Lead. † Advisors.

1 Introduction

Image editing has advanced rapidly, but **reliable evaluation remains a central bottleneck**. This challenge is even more pronounced in reinforcement learning for visual generation and editing, where progress depends on reward signals that faithfully reflect human preferences [1, 12, 35, 43].

As illustrated in Figure 1(a), existing approaches [4, 7, 11, 13, 16, 17, 25, 27, 29, 33, 34] largely address this problem by collecting large-scale human preference annotations and training dedicated reward models on top of them. While effective, this paradigm is expensive and inflexible: it incurs substantial annotation cost, requires additional model training, often produces opaque scalar rewards, and is difficult to apply to closed or API-only foundation models. These limitations are particularly severe for image editing, where preference judgments are subtle, multi-dimensional, and depend on jointly understanding the editing instruction, the source image, and the edited result.

More importantly, it reveals a striking asymmetry. Human annotators can often internalize the target evaluation criteria from only a small calibration set and then apply them consistently at scale, whereas current models typically require hundreds of thousands of labeled comparisons to acquire similar preference behavior. This raises the central question of this paper: **if humans can acquire image-editing preferences from a handful of demonstrations, can models do the same—purely in context, and without any parameter updates?**

We answer this question with REWARDHARNESS, a self-evolving agentic reward framework that reframes reward modeling as context evolution—evolving external Skills and Tools while keeping model weights fixed—rather than weight optimization. As illustrated in Figure 1(b), the key idea is not to spend a small number of demonstrations on training a smaller reward model, but to use them to iteratively build an explicit and reusable library of evaluation knowledge. Specifically, REWARDHARNESS evolves a library of *Skills* and *Tools*: *Skills* provide structured evaluation guidelines that break image-editing quality into fine-grained criteria, while *Tools* provide structured specifications for targeted visual analysis, describing what should be checked, how it should be analyzed, and when the procedure should be invoked. Given a source image, candidate edits, and an editing instruction, an Orchestrator retrieves the most relevant subset of Skills and Tools, and a Sub-Agent composes them into an interpretable reasoning chain that produces a preference judgment.

This design leads to a different way of obtaining reward capability. Instead of fitting a monolithic reward network from massive annotations, REWARDHARNESS uses only about 100 preference demonstrations to iteratively evaluate predictions against human labels, analyze successes and failures, and refine the underlying library without additional human supervision. In this sense, **REWARDHARNESS is not merely a better reward model; it is a different way to obtain reward capability**. The resulting reward system is data-efficient, compatible with frozen and API-based models, and more interpretable because its evaluation behavior is externalized into editable Skills, Tools, and reasoning traces rather than hidden in model parameters.

Key results. Built on top of off-the-shelf foundation models, REWARDHARNESS achieves strong performance without gradient-based reward-model training. With a Claude-based Orchestrator and a frozen Qwen2.5-VL-7B Sub-Agent, REWARDHARNESS surpasses the Qwen-based EditReward variant trained with supervised fine-tuning on 200K preference pairs while using only 0.05% of the preference data. REWARDHARNESS (Gemini-2.0-Flash) achieves 47.4% average accuracy on EditReward-Bench and GenAI-Bench, surpassing GPT-5 by 5.3 points. When used as a reward signal for GRPO fine-tuning, RL-tuned models achieve 3.52 on ImgEdit-Bench.

2 Method

We present REWARDHARNESS, a self-evolving agentic reward system that acquires human evaluation preferences through context evolution alone, without updating any evaluator model parameters. REWARDHARNESS consists of two main components: an **Orchestrator** agent and a shared **Library** of interpretable evaluation artifacts. At inference time, the Orchestrator retrieves relevant artifacts from the Library and injects them into the context of a frozen Sub-Agent vision-language model (VLM), which performs the preference judgment. At evolution time, the Orchestrator drives iterative Library refinement using a small calibration set of human preference demonstrations. Figure 2 provides an overview of the full pipeline. We describe each component in turn: the problem

formulation (§2.1), the Skills and Tools Library (§2.2), the Orchestrator (§2.3), the Sub-Agent (§2.4), and the self-evolution loop (§2.5).

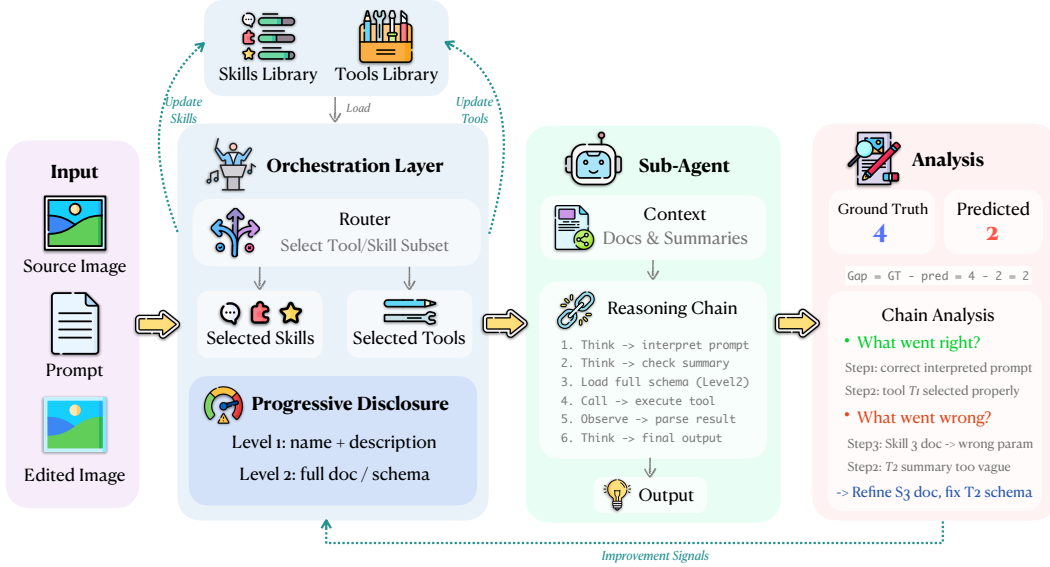


Figure 2: Overview of the REWARDHARNESS self-evolution pipeline. Multi-modal inputs (source image, editing prompt, and an edited-image candidate; ranking tasks repeat this scoring over candidates) are fed into the Orchestrator, which selects relevant entries from the Skills and Tools libraries. The Sub-Agent (a frozen VLM, e.g., Qwen2.5-VL-7B) builds a reasoning chain using selected skills and tools, producing scores and a preference judgment. Outputs are scored against ground truth; the Orchestrator analyzes reasoning chains to generate improvement signals that update the libraries.

2.1 Problem Formulation

Given a source image I_s , an editing instruction p , and K candidate edited images $\{I_1, \dots, I_K\}$, the task is to produce scalar preference scores $\mathbf{s} = (s_1, \dots, s_K)$ and the induced preference ranking π over $\{1, \dots, K\}$ such that $I_{\pi(1)} \succ I_{\pi(2)} \succ \dots \succ I_{\pi(K)}$. Scores are ordinal quality estimates on the same discrete rubric used by the human demonstrations (1–5 in our implementation); only their relative order is used for ranking accuracy, while equal scores are treated as ties. In REWARDHARNESS, scoring and ranking are realized by a frozen VLM $\mathcal{M}$ steered entirely by a context $\mathcal{C}$ assembled at inference time:

$$\mathbf{s}, \pi = \mathcal{M}(I_s, \{I_k\}_{k=1}^K, p, \mathcal{C}), \quad (1)$$

where $\mathcal{C}$ comprises the Skill documents and Tool specifications selected by the Orchestrator; the parameters of $\mathcal{M}$ are never updated. A preference judgment therefore consists of the scores $\mathbf{s}$ and the ranking π obtained by sorting them. For benchmark evaluation, predicted rankings are compared with human preference labels. For downstream GRPO, a generated edit is scored as the sole candidate against the source image and instruction; the resulting 1–5 score is batch-normalized by the GRPO trainer and used as the reward signal under the same normalization used by the compared reward model.

2.2 Skills and Tools Library

REWARDHARNESS maintains a **Library**, a versioned collection of Skills and Tools that encodes accumulated evaluation knowledge. The Library is initialized empty and grows through self-evolution (§2.5). Representative examples of both components are shown in Figure 3.

Skills. A *Skill* is a structured Markdown evaluation guideline containing: a **name**, a one-line **description**, a **scoring rubric** decomposing quality into assessable criteria, and **examples** illustrating correct application. For instance, the skill *realism-and-artifact-penalties* provides rubrics that

distinguish visual artifacts (always penalized) from conceptual unrealism (acceptable when explicitly requested by the editing instruction).

Tools. A *Tool* is a structured Markdown document that specifies a targeted visual analysis procedure: it defines the tool’s **name**, **purpose**, expected **inputs** and **outputs**, **invocation conditions**, and a step-by-step **execution protocol**. Unlike Skills (which provide declarative evaluation criteria), Tools provide *procedural* in-context specifications rather than standalone learned modules: by reading a Tool document, a general-purpose VLM can temporarily act as a specialized expert for a particular visual analysis task, either by performing the targeted analysis directly or by issuing a structured secondary VLM query defined by the Tool schema, without any parameter updates. For example, the *text-and-ocr-analyzer* tool instructs the Sub-Agent to extract, compare, and verify text content in source and edited images, catching typos and placement errors that holistic evaluation routinely misses.

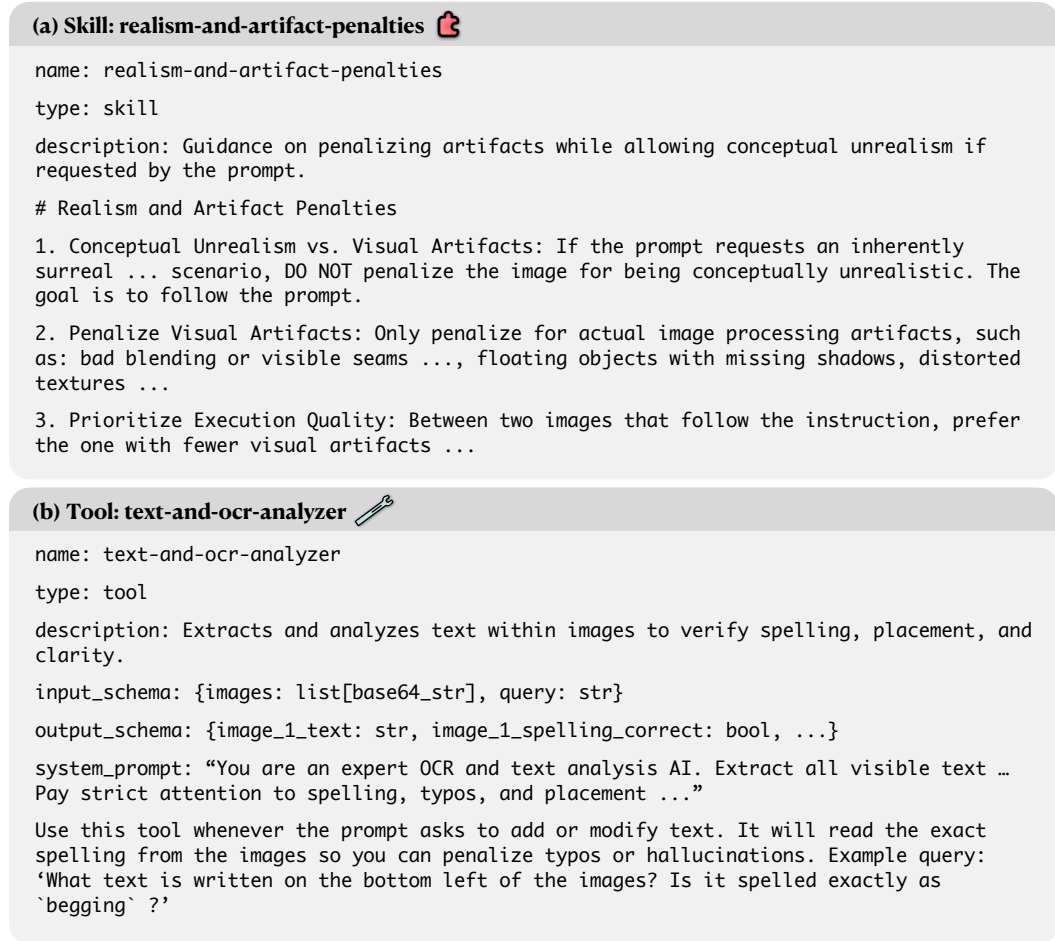


Figure 3: Examples of a **Skill** and a **Tool** sampled from the Library at evolution iteration 69. Skills are declarative rubrics guiding the Sub-Agent’s assessment criteria; Tools are procedural specifications instructing the Sub-Agent to perform targeted visual analysis.

2.3 Orchestrator Layer

The Orchestrator is a Claude-based LLM that serves two roles. During *inference*, it examines the editing instruction, source image, and candidate edited images, then uses a routing step (labeled “Router” in Figure 2) to select the appropriate Skills and Tools from the library and assemble the evaluation context $\mathcal{C}$ for the Sub-Agent. To keep the context compact, Tools are exposed through progressive disclosure: the Orchestrator first considers names and descriptions, then loads the full

Tool schema only when its invocation conditions are met. During *evolution*, it analyzes the Sub-Agent’s reasoning chains against ground-truth labels, performs root-cause analysis on errors, and proposes library updates (§2.5).

2.4 Sub-Agent

The Sub-Agent is a frozen, pluggable VLM that receives the multimodal inputs I_s , $\{I_k\}_{k=1}^K$, p , and the assembled context $\mathcal{C}$ from the Orchestrator. By reading the Skill and Tool documents in $\mathcal{C}$, the Sub-Agent temporarily adopts the role of a specialized evaluator and constructs a structured reasoning chain. Our default configuration uses Qwen2.5-VL-7B-Instruct, but the Sub-Agent is fully pluggable: we also evaluate Gemini as a drop-in replacement (Table 1). The reasoning chain proceeds in three steps:

1. **Rubric application.** For each Skill in $\mathcal{C}$, the Sub-Agent applies its scoring rubric to every candidate image, producing per-criterion assessments grounded in the skill’s guidelines and examples.
2. **Tool-guided analysis (optional).** For each Tool in $\mathcal{C}$ whose invocation conditions are met, the Sub-Agent follows the tool’s execution protocol to perform a targeted visual analysis (e.g., OCR extraction, spatial relationship verification, object counting) and appends the structured result to the reasoning chain.
3. **Aggregation and ranking.** The Sub-Agent synthesizes all per-criterion assessments and tool outputs into scalar scores $\mathbf{s}$ and the final preference ranking π over the K candidates.

2.5 Self-Evolution Loop

The self-evolution loop takes as input a small calibration set of $N = 100$ human preference demonstrations $\mathcal{D} = \{(I_s^{(i)}, p^{(i)}, \{I_k^{(i)}\}, \mathbf{s}^{*(i)}, \pi^{*(i)})\}_{i=1}^N$, where $\mathbf{s}^{*(i)}$ are human scores and $\pi^{*(i)}$ is their induced ranking. The Orchestrator partitions $\mathcal{D}$ into a training split $\mathcal{D}_{\text{train}}$ (60 examples) and a held-out validation split $\mathcal{D}_{\text{val}}$ (40 examples). Each iteration of the loop proceeds through five stages:

Step 1: Evaluation. For each example in $\mathcal{D}_{\text{train}}$, the Orchestrator retrieves the most relevant Skills and Tools from the current Library and assigns them to a Sub-Agent. The Sub-Agent constructs a reasoning chain and produces predicted scores $\hat{\mathbf{s}}^{(i)}$ and a predicted preference ranking $\hat{\pi}^{(i)}$ following the procedure in §2.4.

Step 2: Scoring. Predicted scores and rankings are compared against ground-truth human scores and preferences; samples are partitioned into correct predictions and errors by ranking agreement, with scalar score gaps used only for diagnostic analysis.

Step 3: Chain analysis. The Orchestrator examines reasoning chains from both correct and incorrect predictions. For errors, it performs root-cause analysis: identifying whether the failure stems from a missing evaluation criterion (suggesting a new Skill), an incorrect rubric application (suggesting a Skill modification), or a perceptual hallucination (suggesting a new or improved Tool). For correct predictions, it identifies which Skills and Tools were instrumental, reinforcing their retention. The analysis produces a structured improvement proposal specifying the type of change and the target artifact.

Step 4: Library update. Based on the analysis, the Orchestrator proposes one of three actions: (i) *creating* a new Skill or Tool, (ii) *modifying* an existing entry, or (iii) *deprecating* an entry that consistently leads to incorrect reasoning. In addition to incremental updates, the system can also perform aggressive pruning to remove accumulated artifacts from the exploration phase. In our experiments, the pruning phase begins around iteration 50 after the library peaks at 13 entries (8 Skills + 5 Tools), eventually producing a compact final library with 7 entries (3 Skills + 4 Tools).

Step 5: Validation and gating. The updated Library is evaluated on $\mathcal{D}_{\text{val}}$. If validation accuracy improves over the current best, the update is **accepted**; otherwise it is **rolled back** to the previous Library state. This conservative gating mechanism prevents regression. In our experiments, many proposed updates were rolled back, and Skill proposals were accepted less often than Tool

Table 1: Comparison of image editing evaluators on editing reward benchmarks. **Best** and **second-best** results are highlighted. Δ measures the average improvement over the GPT-4o baseline.

Method	EditReward-Bench			GenAI-Bench	Avg.	Δ
	$K=2$	$K=3$	$K=4$			
Proprietary Models						
GPT-4o	45.7	27.3	7.3	53.5	33.5	–
GPT-5	57.5	38.5	12.8	59.6	42.1	+8.6
Gemini-2.0-Flash	52.4	33.3	13.5	53.3	38.1	+4.6
Gemini-2.5-Flash	58.6	39.9	12.2	57.0	41.9	+8.4
Claude-Haiku-4.5	57.9	30.7	7.4	47.1	35.8	+2.3
Open-Source Models						
Qwen2.5-VL-7B	52.7	24.7	3.4	40.5	30.3	–3.2
Qwen2.5-VL-32B	50.5	25.3	4.1	39.3	29.8	–3.7
MiMo-VL-7B	49.5	30.4	9.5	57.9	36.8	+3.3
EditReward (Qwen)	57.0	36.0	10.8	64.0	42.0	+8.5
EditReward (MiMo)	56.5	42.7	11.5	65.7	44.1	+10.6
Models with Evolving Skills and Tools (Ours)						
REWARDHARNESS (Qwen)	57.9	46.7	10.8	67.5	45.7	+12.2
REWARDHARNESS (Gemini-2.0-Flash)	66.2	45.3	13.5	64.4	47.4	+13.9

proposals, reflecting the difficulty of modifying declarative rubrics without regression compared with the modularity of procedural capabilities. The loop terminates after a fixed budget of iterations. REWARDHARNESS then selects the Library state that achieved the highest validation accuracy as its final reward system; this Library is used for benchmark evaluation without any further updates. In our experiments, the final selected Library (3 Skills + 4 Tools) achieved 62.5% validation accuracy, a 47% relative improvement over the 42.5% empty-library baseline.

3 Experiments

We evaluate REWARDHARNESS on editing reward benchmarks and downstream RL applications. The default open-source Sub-Agent is a frozen Qwen2.5-VL-7B-Instruct backbone served via vLLM; no evaluator or Sub-Agent parameters are updated during reward-system evolution. We also run the same evolution procedure with Gemini-2.0-Flash as a closed-source Sub-Agent replacement (Table 1); unless otherwise stated, each reported REWARDHARNESS variant uses the Library evolved with that fixed Sub-Agent.

3.1 Main Results on Image-Editing Evaluation

We evaluate preference judgment accuracy on two established benchmarks for instruction-guided image editing evaluation: EditReward-Bench [29], which reports ranking accuracy at $K=2, 3$, and 4, and GenAI-Bench [9].

Main results. Table 1 compares REWARDHARNESS against proprietary models (GPT-4o, GPT-5, Gemini, Claude) and open-source baselines (Qwen2.5-VL, MiMo-VL, EditReward) on EditReward-Bench ($K=2/3/4$) and GenAI-Bench. With a frozen Qwen2.5-VL-7B Sub-Agent, REWARDHARNESS achieves 45.7 average accuracy, outperforming all listed baselines on average, including the strongest open-source reward model EditReward (MiMo) at 44.1 and the strongest proprietary baseline GPT-5 at 42.1. Importantly, this is not simply a backbone advantage: compared under the same Qwen2.5-VL-7B backbone, REWARDHARNESS (Qwen) still outperforms EditReward (Qwen) by 3.7 points on average (45.7 vs. 42.0). Crucially, this result is obtained without any parameter updates to the

underlying VLM and using only 100 preference examples sampled from the EditReward training set for evolution.

The frozen Qwen2.5-VL-7B model scores only 30.3 by itself, so the full system improves it by +15.4 points through the evolved Skills and Tools applied to each evaluation example. REWARDHARNESS also generalizes well beyond its evolution data: although each Library is evolved only from 100 examples sampled from the EditReward training split, the Qwen-based REWARDHARNESS achieves the best GenAI-Bench accuracy of 67.5, suggesting that the learned Skills and Tools capture general editing-quality criteria rather than benchmark-specific heuristics.

Pluggable Sub-Agent. The Sub-Agent is also pluggable. Running the same Library-evolution procedure with Gemini-2.0-Flash yields the best overall average accuracy of 47.4, as well as the best EditReward-Bench performance at $K=2$ and tied-best performance at $K=4$. This shows that REWARDHARNESS’s gains are not tied to a single VLM backbone; instead, the framework can be instantiated with stronger VLMs for further improvement.

3.2 Performance as Reward Modeling

A reward model is only valuable if it drives genuine improvement in the underlying generative model. We validate this by using REWARDHARNESS as the reward signal in GRPO fine-tuning of FLUX.2-klein-base-4B, and evaluating the resulting editor on ImgEdit-Bench [37] against the base model and an EditReward-trained counterpart under the same GRPO setup. During GRPO, each sampled edit is scored as a single generated candidate conditioned on the source image and instruction, and the resulting scalar preference score is passed to the GRPO trainer using the same reward normalization as the EditReward baseline.

Reward-driven editing improvement. As shown in Table 2, GRPO fine-tuning with REWARDHARNESS improves the base model overall on ImgEdit-Bench ($3.32 \rightarrow 3.52$), reaching the same overall score as Flux.1 Kontext [dev] despite using a significantly smaller 4B backbone.

Comparison under the same GRPO setup. Both EditReward and REWARDHARNESS are used as reward signals within the same GRPO training pipeline. Under this controlled comparison, REWARDHARNESS yields a larger overall improvement on ImgEdit-Bench, raising the base model from 3.32 to 3.52, whereas EditReward reaches 3.45. The two reward signals also lead to different trade-offs across categories: EditReward improves Add and Replace more, while REWARDHARNESS delivers stronger gains on Adjust, Extract, Background, and preserves the base-model performance on Compose. Overall, these results indicate that REWARDHARNESS provides a more effective training signal than EditReward under the same GRPO algorithm.

3.3 Analysis

Figure 6 shows the self-evolution dynamics over 77 iterations for the Gemini-2.0-Flash Sub-Agent, corresponding to the configuration with the best average accuracy in Table 1. Validation accuracy plateaus at 52.5% as the library grows to 13 entries (8 Skills + 5 Tools), then improves after the pruning phase begins around iteration 50. The final selected library at iteration 69 reaches 62.5% validation accuracy with 7 entries (3 Skills + 4 Tools). Figure 8 (Appendix B.4) breaks down library composition at three key stages, illustrating how the system converges to a leaner configuration. We further examine REWARDHARNESS’s behavior qualitatively. Figure 4 shows a representative preference-scoring example from EditReward-Bench: REWARDHARNESS assigns the higher score to the human-preferred candidate, while EditReward fails. Figure 5 compares RL-tuned editing outputs, showing that the REWARDHARNESS-trained variant faithfully executes editing instructions while the base model and EditReward-trained variant frequently fail (see Appendix B.2 for additional examples).

4 Related Work

Reward models for visual generation. Existing reward models—ImageReward, PickScore, VisionReward, EditReward, VideoScore2, ImagenWorld—rely on supervised fine-tuning from tens of thousands of human preference comparisons [8, 11, 17, 22, 29, 33, 34]. REWARDHARNESS learns from only ~ 100 demonstrations by shifting adaptation from parameter updates to explicit library evolution. **Self-evolving agents.** Context-based self-evolving methods (Reflexion, ExpEL,

Table 2: To validate the effectiveness of REWARDHARNESS as a reward model, we use it to RL-tune FLUX.2-klein-base-4B and evaluate on downstream image editing benchmarks (ImgEdit-Bench). Compared to EditReward, REWARDHARNESS yields more substantial improvements in editing performance.

Method	ImgEdit-Bench									
	Add	Adjust	Extract	Replace	Remove	Bg.	Style	Compose	Action	Overall
<i>Existing Image Editing Models</i>										
AnyEdit	3.18	2.95	1.88	2.47	2.23	2.23	2.85	1.56	2.65	2.45
UltraEdit	3.44	2.81	2.13	2.96	1.45	2.86	3.76	1.91	2.98	2.70
Step1X-Edit	3.88	3.14	1.76	3.40	2.41	3.16	4.63	2.64	2.52	3.06
BAGEL	3.56	3.31	1.70	3.30	2.62	3.24	4.49	2.38	4.17	3.20
OmniGen2	3.57	3.06	1.77	3.74	3.20	3.57	4.81	2.52	4.68	3.44
Ovis-U1	4.13	3.62	2.98	4.45	4.06	4.22	4.69	3.45	4.61	4.00
GPT-Image-1	4.61	4.33	2.90	4.35	3.66	4.57	4.93	3.96	4.89	4.20
Flux.1 Kontext [dev]	3.76	3.45	2.15	3.98	2.94	3.78	4.38	2.96	4.26	3.52
<i>Models Tuned with RL</i>										
FLUX.2-klein-base-4B	3.27	4.00	2.04	3.07	2.90	3.47	4.26	3.19	4.44	3.32
+RL (EditReward)	4.21	4.01	2.02	3.21	2.58	3.69	4.32	2.85	4.34	3.45
+RL (REWARDHARNESS)	4.03	4.27	2.24	3.12	2.19	4.22	4.44	3.19	4.22	3.52

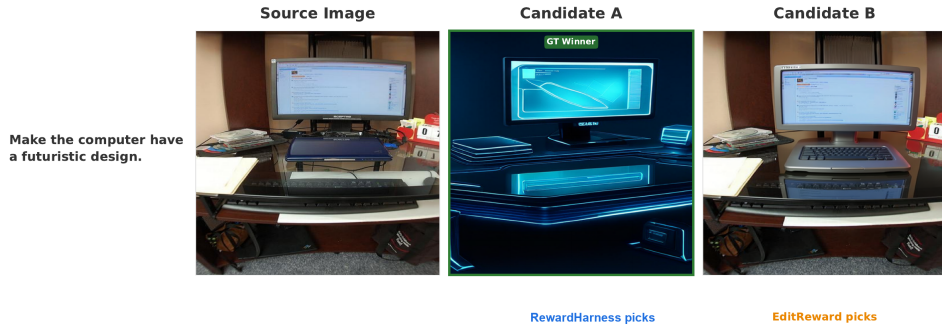


Figure 4: **Preference-scoring comparison on EditReward-Bench.** The figure shows a source image, an editing instruction, and two candidate edits (A and B). GT denotes the ground-truth human preference label, REWARDHARNESS denotes our predicted preference score, and ER denotes the EditReward score. REWARDHARNESS assigns the higher score to the human-preferred candidate (marked “GT Winner”), while EditReward fails.

Voyager, SkillRL, EvolveCoder) keep model weights fixed and evolve prompts, memories, or reusable skills [21, 23, 26, 32, 42]. REWARDHARNESS specializes this paradigm to multimodal reward modeling: rather than evolving reasoning for a single agent task, we evolve a composable Skills-and-Tools Library that serves as a reusable evaluator context. **Tool-augmented LLMs.** Prior work (ReAct, ToolLLM, Gorilla, VeriTool) focuses on learning when to invoke a *fixed* tool set [10, 18, 20, 36, 41]. REWARDHARNESS inverts this emphasis: the base VLM remains frozen while the Skills and Tools themselves are iteratively created and refined to fit the target evaluation domain. See Appendix A for additional discussion.

5 Limitation

The Orchestrator currently relies on a proprietary LLM (Claude) for routing, chain analysis, and library evolution. While the Sub-Agent is pluggable (we demonstrate Qwen2.5-VL-7B and Gemini as drop-in choices), the Orchestrator itself has not been validated with open-source alternatives. This coupling limits full reproducibility and introduces a dependency on API availability and cost. Exploring whether a capable open-source LLM can serve as Orchestrator without degrading evolution quality is an important direction for future work. Additionally, we have only applied REWARDHARNESS to

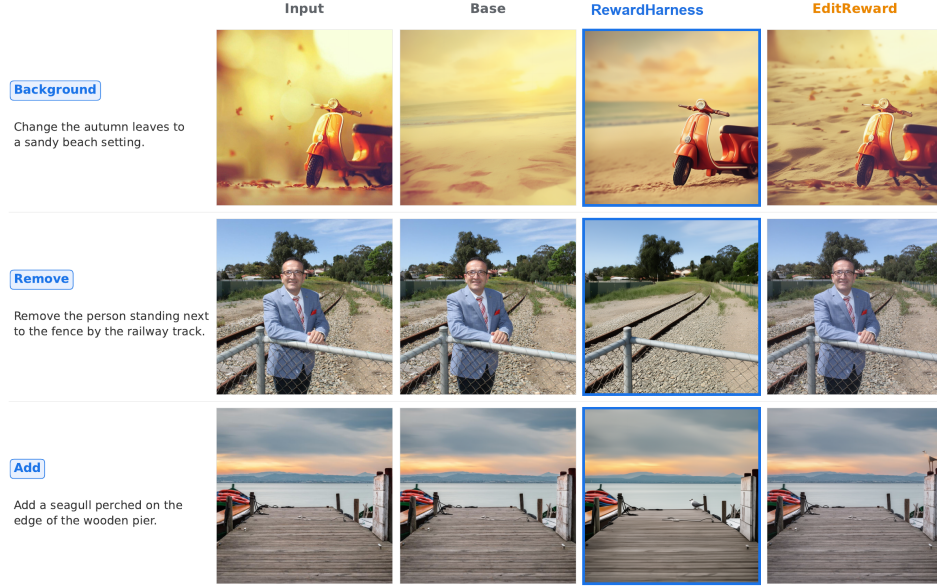


Figure 5: **Qualitative comparison on ImgEdit-Bench.** Each row presents a different editing task with the source image, the base model output (FLUX.2-klein-base-4B), and two RL-fine-tuned variants: REWARDHARNESS and EditReward. REWARDHARNESS consistently produces edits that faithfully follow the instruction while preserving visual quality and physical consistency, whereas both the base model and the EditReward-trained variant frequently fail to execute the intended edit or introduce artifacts.

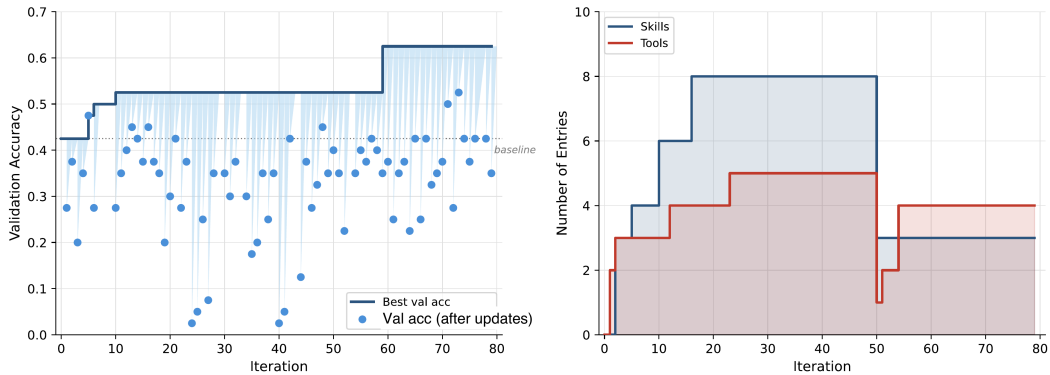


Figure 6: **Self-evolution dynamics over 77 iterations.** *Left:* Per-iteration (dots) and best (solid line) validation accuracy; the gating mechanism rejects proposals that fail to improve the current best, while the shaded region shows the gap between proposals and the running best. *Right:* Numbers of Skills and Tools over time. After peaking at 13 total entries (8 Skills + 5 Tools), the pruning phase begins around iter 50 and the final selected library reaches 62.5% accuracy with 7 entries (3 Skills + 4 Tools), a 47% relative improvement over the 42.5% baseline.

instruction-guided image editing evaluation. The self-evolving Skills and Tools framework is domain-agnostic in principle, but its effectiveness on other visual evaluation tasks, such as text-to-image generation quality, video editing, or 3D scene manipulation, remains unexplored. Finally, the current evolution loop optimizes validation accuracy on a small held-out set, which means that the learned Library can still over-specialize to recurring failure modes if the demonstration set is narrow or biased. The conservative rollback gate reduces regressions, but it does not guarantee discovery of globally optimal Skills or Tools; useful proposals may be rejected when they help rare cases but slightly hurt frequent ones. Future work could combine the current validation gate with diversity-aware sampling,

uncertainty estimates, or lightweight human audits, especially when deploying the reward system in domains where preferences are contested or safety-sensitive.

6 Conclusion

We presented REWARDHARNESS, a self-evolving agentic framework that reframes reward modeling as context evolution rather than weight optimization. By keeping the underlying VLM frozen and iteratively refining a compact library of Skills and Tools from only 100 labeled samples, REWARDHARNESS achieves 47.4% average accuracy on editing reward benchmarks, surpassing the listed proprietary and open-source baselines on average. When used as a reward signal in GRPO fine-tuning, REWARDHARNESS outperforms the supervised reward baseline in downstream RL. Our results suggest that structured evaluation knowledge, automatically discovered and refined through self-evolution, can be a viable and data-efficient alternative to large-scale preference annotation. More broadly, these results suggest a complementary scaling axis for reward modeling: explicit evaluation context.

References

- [1] Jiuai Chen, Le Xue, Zhiyang Xu, Xichen Pan, Shusheng Yang, Can Qin, An Yan, Honglu Zhou, Zeyuan Chen, Lifu Huang, et al. Blip3o-next: Next frontier of native image generation. *arXiv preprint arXiv:2510.15857*, 2025.
- [2] Zixiang Chen, Yihe Deng, Huizhuo Yuan, Kaixuan Ji, and Quanquan Gu. Self-play fine-tuning converts weak language models to strong language models. *arXiv preprint arXiv:2401.01335*, 2024.
- [3] Jiazhan Feng, Shijue Huang, Xingwei Qu, Ge Zhang, Yujia Qin, Baoquan Zhong, Chengquan Jiang, Jinxin Chi, and Wanjuan Zhong. Retool: Reinforcement learning for strategic tool use in llms. *arXiv preprint arXiv:2504.11536*, 2025.
- [4] Yuan Gong, Xionghui Wang, Jie Wu, Shiyin Wang, Yitong Wang, and Xinglong Wu. Onereward: Unified mask-guided image generation via multi-task human preference learning. *arXiv preprint arXiv:2508.21066*, 2025.
- [5] Shibo Hao, Tianyang Liu, Zhen Wang, and Zhiting Hu. Toolkengpt: Augmenting frozen language models with massive tools via tool embeddings. *Advances in neural information processing systems*, 36:45870–45894, 2023.
- [6] Bolei He, Xinran He, Mengke Chen, Xianwei Xue, Ying Zhu, and Zhen-Hua Ling. Rise: reasoning enhancement via iterative self-exploration in multi-hop question answering. In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 14925–14948, 2025.
- [7] Xuan He, Dongfu Jiang, Ge Zhang, Max Ku, Achint Soni, Sherman Siu, Haonan Chen, Abhramil Chandra, Ziyan Jiang, Aaran Arulraj, et al. Videoscore: Building automatic metrics to simulate fine-grained human feedback for video generation. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 2105–2123, 2024.
- [8] Xuan He, Dongfu Jiang, Ping Nie, Minghao Liu, Zhengxuan Jiang, Mingyi Su, Wentao Ma, Junru Lin, Chun Ye, Yi Lu, Kenning Wu, Benjamin Schneider, Quy Duc Do, Zhuofeng Li, Yiming Jia, Yuxuan Zhang, Guo Cheng, Haozhe Wang, Wangchunshu Zhou, Qunshu Lin, Yuanxing Zhang, Ge Zhang, Wenhao Huang, and Wenhui Chen. Videoscore2: Think before you score in generative video evaluation. *arXiv preprint arXiv:2509.22799*, 2025.
- [9] Dongfu Jiang, Max Ku, Tianle Li, Yuansheng Ni, Shizhuo Sun, Rongqi Fan, and Wenhui Chen. Genai arena: An open evaluation platform for generative models. *arXiv preprint arXiv:2406.04485*, 2024.
- [10] Dongfu Jiang, Yi Lu, Zhuofeng Li, Zhiheng Lyu, Ping Nie, Haozhe Wang, Alex Su, Hui Chen, Kai Zou, Chao Du, et al. Veritool: Towards holistic agentic reinforcement learning with tool use. *arXiv preprint arXiv:2509.01055*, 2025.
- [11] Yuval Kirstain, Adam Polyak, Uriel Singer, Shahbuland Matiana, Joe Penna, and Omer Levy. Pick-a-pic: An open dataset of user preferences for text-to-image generation. *Advances in Neural Information Processing Systems*, 36: 36652–36663, 2023.
- [12] Zongjian Li, Zheyuan Liu, Qihui Zhang, Bin Lin, Feize Wu, Shenghai Yuan, Zhiyuan Yan, Yang Ye, Wangbo Yu, Yuwei Niu, et al. Uniworld-v2: Reinforce image editing with diffusion negative-aware finetuning and mllm implicit feedback. *arXiv preprint arXiv:2510.16888*, 2025.
- [13] Youwei Liang, Junfeng He, Gang Li, Peizhao Li, Arseniy Klimovskiy, Nicholas Carolan, Jiao Sun, Jordi Pont-Tuset, Sarah Young, Feng Yang, Junjie Ke, Krishnamurthy Dj Dvijotham, Katie Collins, Yiwen Luo, Yang Li, Kai J Kohlhoff, Deepak Ramachandran, and Vidhya Navalpakkam. Rich human feedback for text-to-image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024.
- [14] Jiaqi Liu, Kaiwen Xiong, Peng Xia, Yiyang Zhou, Haonian Ji, Lu Feng, Siwei Han, Mingyu Ding, and Huaxiu Yao. Agent0-vl: Exploring self-evolving agent for tool-integrated vision-language reasoning. *arXiv preprint arXiv:2511.19900*, 2025.
- [15] Jiaqi Liu, Yaofeng Su, Peng Xia, Siwei Han, Zeyu Zheng, Cihang Xie, Mingyu Ding, and Huaxiu Yao. Simplemem: Efficient lifelong memory for llm agents. *arXiv preprint arXiv:2601.02553*, 2026.
- [16] Jie Liu, Gongye Liu, Jiajun Liang, Ziyang Yuan, Xiaokun Liu, Mingwu Zheng, Xiele Wu, Qiulin Wang, Menghan Xia, Xintao Wang, et al. Improving video generation with human feedback. *arXiv preprint arXiv:2501.13918*, 2025.
- [17] Xin Luo, Jiahao Wang, Chenyuan Wu, Shitao Xiao, Xiyan Jiang, Defu Lian, Jiajun Zhang, Dong Liu, et al. Editscore: Unlocking online rl for image editing via high-fidelity reward modeling. *arXiv preprint arXiv:2509.23909*, 2025.
- [18] Shishir G Patil, Tianjun Zhang, Xin Wang, and Joseph E Gonzalez. Gorilla: Large language model connected with massive apis, 2023. *arXiv preprint arXiv:2305.15334*, 2023.

- [19] Zehua Pei, Hui-Ling Zhen, Shixiong Kai, Sinno Jialin Pan, Yunhe Wang, Mingxuan Yuan, and Bei Yu. Scope: Prompt evolution for enhancing agent effectiveness. *arXiv preprint arXiv:2512.15374*, 2025.
- [20] Yujia Qin, Shihao Liang, Yining Ye, Kunlun Zhu, Lan Yan, Yaxi Lu, Yankai Lin, Xin Cong, Xiangru Tang, Bill Qian, et al. Toolllm: Facilitating large language models to master 16000+ real-world apis. *arXiv preprint arXiv:2307.16789*, 2023.
- [21] Chi Ruan, Dongfu Jiang, Huaye Zeng, Ping Nie, and Wenhu Chen. Evolvecoder: Evolving test cases via adversarial verification for code reinforcement learning. *arXiv preprint arXiv:2603.12698*, 2026.
- [22] Samin Mahdizadeh Sani, Max Ku, Nima Jamali, Matina Mahdizadeh Sani, Paria Khoshtab, Wei-Chieh Sun, Parnian Fazel, Zhi Rui Tam, Thomas Chong, Edisy Kin Wai Chan, et al. Imagenworld: Stress-testing image generation models with explainable human evaluation on open-ended real-world tasks. *arXiv preprint arXiv:2603.27862*, 2026.
- [23] Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. *Advances in neural information processing systems*, 36:8634–8652, 2023.
- [24] Theodore Sumers, Shunyu Yao, Karthik R Narasimhan, and Thomas L Griffiths. Cognitive architectures for language agents. *Transactions on Machine Learning Research*, 2023.
- [25] Binghai Wang, Runji Lin, Keming Lu, Le Yu, Zhenru Zhang, Fei Huang, Chujie Zheng, Kai Dang, Yang Fan, Xingzhang Ren, et al. Worldpm: Scaling human preference modeling. *arXiv preprint arXiv:2505.10527*, 2025.
- [26] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*, 2023.
- [27] Yibin Wang, Yuhang Zang, Hao Li, Cheng Jin, and Jiaqi Wang. Unified reward model for multimodal understanding and generation. *arXiv preprint arXiv:2503.05236*, 2025.
- [28] Yuxiang Wei, Olivier Duchenne, Jade Copet, Quentin Carbonneaux, Lingming Zhang, Daniel Fried, Gabriel Synnaeve, Rishabh Singh, and Sida I Wang. Swe-rl: Advancing llm reasoning via reinforcement learning on open software evolution. *arXiv preprint arXiv:2502.18449*, 2025.
- [29] Keming Wu, Sicong Jiang, Max Ku, Ping Nie, Minghao Liu, and Wenhu Chen. Editreward: A human-aligned reward model for instruction-guided image editing. *arXiv preprint arXiv:2509.26346*, 2025.
- [30] Rong Wu, Xiaoman Wang, Jianbiao Mei, Pinlong Cai, Daocheng Fu, Cheng Yang, Licheng Wen, Xuemeng Yang, Yufan Shen, Yuxin Wang, et al. Evolver: Self-evolving llm agents through an experience-driven lifecycle. *arXiv preprint arXiv:2510.16079*, 2025.
- [31] Peng Xia, Kaide Zeng, Jiaqi Liu, Can Qin, Fang Wu, Yiyang Zhou, Caiming Xiong, and Huaxiu Yao. Agent0: Unleashing self-evolving agents from zero data via tool-integrated reasoning. *arXiv preprint arXiv:2511.16043*, 2025.
- [32] Peng Xia, Jianwen Chen, Hanyang Wang, Jiaqi Liu, Kaide Zeng, Yu Wang, Siwei Han, Yiyang Zhou, Xujiang Zhao, Haifeng Chen, et al. Skillrl: Evolving agents via recursive skill-augmented reinforcement learning. *arXiv preprint arXiv:2602.08234*, 2026.
- [33] Jiazheng Xu, Xiao Liu, Yuchen Wu, Yuxuan Tong, Qinkai Li, Ming Ding, Jie Tang, and Yuxiao Dong. Imagereward: Learning and evaluating human preferences for text-to-image generation. *Advances in Neural Information Processing Systems*, 36:15903–15935, 2023.
- [34] Jiazheng Xu, Yu Huang, Jiale Cheng, Yuanming Yang, Jiajun Xu, Yuan Wang, Wenbo Duan, Shen Yang, Qunlin Jin, Shurun Li, et al. Visionreward: Fine-grained multi-dimensional human preference learning for image and video generation. *arXiv preprint arXiv:2412.21059*, 2024.
- [35] Zeyue Xue, Jie Wu, Yu Gao, Fangyuan Kong, Lingting Zhu, Mengzhao Chen, Zhiheng Liu, Wei Liu, Qiushan Guo, Weilin Huang, et al. Dancegrpo: Unleashing grpo on visual generation. *arXiv preprint arXiv:2505.07818*, 2025.
- [36] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik R Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. In *The eleventh international conference on learning representations*, 2022.
- [37] Yang Ye, Xianyi He, Zongjian Li, Bin Lin, Shenghai Yuan, Zhiyuan Yan, Bohan Hou, and Li Yuan. Imgedit: A unified image editing dataset and benchmark, 2025. URL <https://arxiv.org/abs/2505.20275>.
- [38] Weizhe Yuan, Richard Yuanzhe Pang, Kyunghyun Cho, Xian Li, Sainbayar Sukhbaatar, Jing Xu, and Jason E Weston. Self-rewarding language models. In *Forty-first International Conference on Machine Learning*, 2024.
- [39] Eric Zelikman, Yuhuai Wu, Jesse Mu, and Noah Goodman. Star: Bootstrapping reasoning with reasoning. *Advances in Neural Information Processing Systems*, 35:15476–15488, 2022.
- [40] Qizheng Zhang, Changran Hu, Shubhangi Upasani, Boyuan Ma, Fenglu Hong, Vamsidhar Kamanuru, Jay Rainton, Chen Wu, Mengmeng Ji, Hanchen Li, et al. Agentic context engineering: Evolving contexts for self-improving language models. *arXiv preprint arXiv:2510.04618*, 2025.
- [41] Yuxuan Zhang, EunJeong Hwang, Huaisong Zhang, Penghui Du, Yiming Jia, Dongfu Jiang, Xuan He, Shenhui Zhang, Ping Nie, Peter West, et al. Watch before you answer: Learning from visually grounded post-training. *arXiv preprint arXiv:2604.05117*, 2026.
- [42] Andrew Zhao, Daniel Huang, Quentin Xu, Matthieu Lin, Yong-Jin Liu, and Gao Huang. Expel: Llm agents are experiential learners. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 19632–19642, 2024.
- [43] Kaiwen Zheng, Huayu Chen, Haotian Ye, Haoxiang Wang, Qinsheng Zhang, Kai Jiang, Hang Su, Stefano Ermon, Jun Zhu, and Ming-Yu Liu. Diffusionnft: Online diffusion reinforcement with forward process. *arXiv preprint arXiv:2509.16117*, 2025.

A Related Work (Extended)

A.1 Reward Models for Visual Generation

Reward modeling has become a standard approach for aligning visual generators with human preferences. Representative methods include ImageReward, PickScore, VisionReward, UnifiedReward, and OneReward for image generation [4, 11, 27, 33, 34], VideoScore for video generation [7], and EditReward/EditScore for image editing [17, 29]. Despite architectural differences, these methods rely on supervised learning from large-scale human preference data, often ranging from tens of thousands to hundreds of thousands of comparisons [11, 13, 29]. In contrast, our method learns an image-edit evaluator from only 100 demonstrations by shifting adaptation from parameter updates to explicit library evolution.

A.2 Self-evolving Agents

Self-evolving agents improve through feedback from their own interactions, either by updating model parameters (*weight-based*) or by refining textual artifacts (*instruction-/context-based*). Weight-based methods iteratively improve behavior by fine-tuning on self-generated data, as in STaR [39], SPIN [2], self-rewarding language models [38], and related multi-round self-improvement frameworks [6, 28]. In contrast, instruction- and context-based approaches keep model weights fixed and instead evolve prompts, memories, rules, or reusable skills, as in Reflexion [23], ExpeL [42], SCOPE [19], ACE [40], EvolveR [30], Voyager [26], SkillRL [32], Agent0 [31], Agent0-VL [14], and SimpleMem [15]. Our method belongs to this latter family, but specializes it to multimodal reward modeling: we freeze the underlying VLM and iteratively evolve *Skills* and *Tools* for image-edit evaluation from only 100 labeled samples.

A.3 Tool-augmented Large Language Models

Tool-augmented LLMs extend model capabilities by learning when and how to invoke external tools. Representative examples include ReAct [36], Gorilla [18], ToolLLM [20], ReTool [3], ToolkenGPT [5], and broader agent frameworks such as CoALA [24]. In these settings, the tool set is typically assumed to be fixed and learning focuses on the invocation policy. Our method inverts this emphasis: the base models remain frozen, while the *Skills* and *Tools* themselves are iteratively created and refined for the target evaluation task.

B Additional Experiments and Analyses

B.1 Data Efficiency Comparison

Figure 1 contrasts the two paradigms side by side; this subsection provides additional discussion of the comparison. The conventional approach (top) requires a large-scale human preference dataset to train a reward model via supervised fine-tuning before any RL alignment can take place—a process that is expensive, slow, and infeasible for black-box API models. REWARDHARNESS (bottom) eliminates both the data collection and the fine-tuning stages. Given only ~ 100 preference demonstrations as calibration examples, an Orchestrator selects the most relevant skills and tools from a self-maintained library, and a Sub-Agent applies them to produce an interpretable, step-by-step preference judgment. Because no gradient updates are made to any VLM, the framework works equally well with closed-source API models and can be deployed immediately on a new domain by providing a small set of labeled examples.

B.2 Additional Qualitative Examples

Figure 7 provides additional qualitative examples across five editing categories.

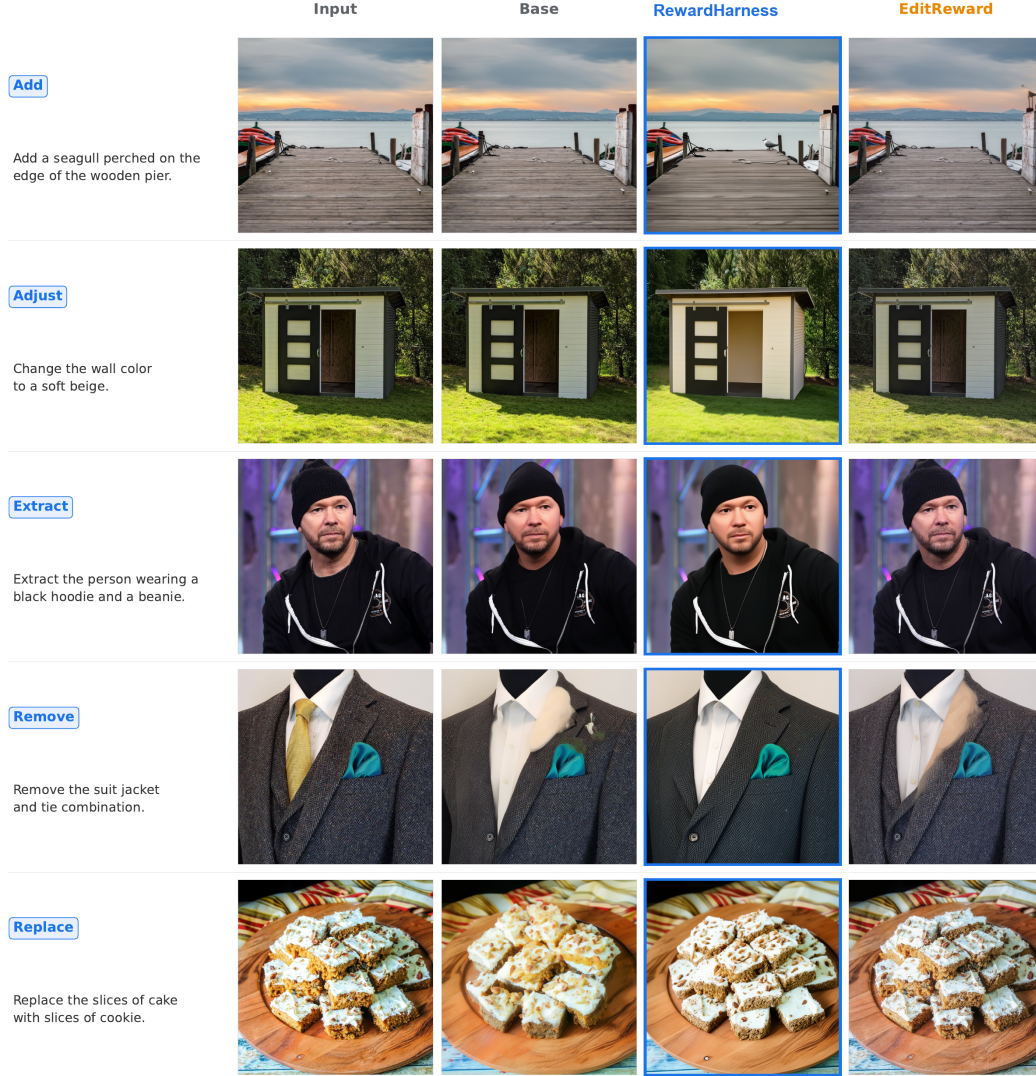


Figure 7: **Additional qualitative comparison on ImgEdit-Bench.** Each row shows a different editing category (Add, Adjust, Extract, Remove, Replace) with the input image, the base model output (FLUX.2-klein-base-4B), and two RL-fine-tuned variants: REWARDHARNESS and EditReward.

B.3 Evolution Trajectory

Figure 6 shows how validation accuracy and library size co-evolve over 77 iterations of the self-evolution loop on the Gemini-2.0-Flash Sub-Agent, the configuration that achieves the best average accuracy in Table 1. The left panel plots the best-so-far validation accuracy (step function) alongside the per-iteration accuracy *after a proposed library update is injected* (scatter dots); the triangular fills highlight the temporary performance dip that occurs whenever new updates introduce unseen reasoning patterns—the library is only committed if the updated state surpasses the current best. Three accepted improvement windows (iter 5–7, iter 10, and iter 58–60) correspond to moments when a newly evolved library state cleared this threshold. The right panel shows that the library undergoes two structural phases: an *expansion phase* (iters 0–20) where both skills and tools are rapidly added, and a *pruning phase* (iters 50–60) where the Orchestrator replaces the bloated library with a leaner, more reliable configuration that achieves the highest accuracy.

B.4 Library Case Study

Library composition at key stages. Figure 8 tracks the skills-to-tools ratio at three representative checkpoints. At iteration 10 the library is skill-heavy (6 skills, 3 tools), reflecting early efforts to encode reasoning heuristics. By iteration 49 the library peaks at 13 entries (8 skills, 5 tools) before a major pruning event. The final exported library at iteration 69 distills to 7 entries (3 skills, 4 tools)—more tools than skills—while retaining the best validation accuracy reached during pruning, indicating that the Orchestrator converged on grounding reasoning in explicit visual queries rather than heuristic guidance alone.

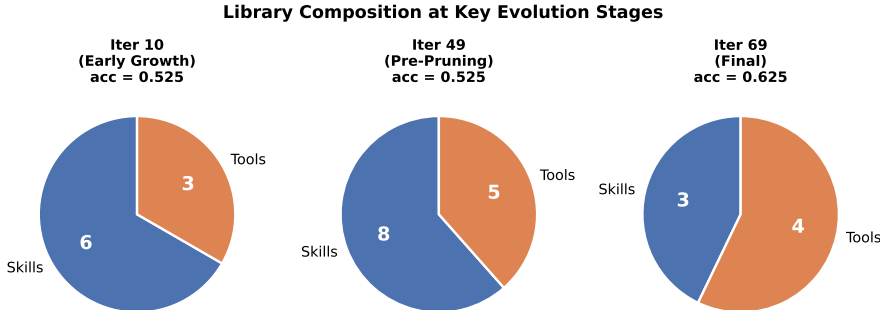


Figure 8: **Library composition at three evolution stages.** The library grows and then self-prunes: the final configuration (iter 69, val acc = 0.625) is leaner than the mid-point peak yet achieves the highest accuracy, with tools outnumbering skills (4 vs. 3) as the agent shifts from heuristic guidance to grounded visual verification.

Final library contents. Table 3 lists all skills and tools in the final exported Gemini-2.0-Flash library (iteration 69) with their descriptions. Skills encode *declarative* evaluation heuristics (e.g., describe before judging; allow surrealism if prompted), while Tools provide *procedural* grounding by routing specific sub-queries to a secondary VLM call.

Table 3: Final library contents at iteration 69 (3 skills, 4 tools).

Name	Type	Description
objective-visual-description-first	Skill	Mandates describing each image objectively before evaluating, preventing hallucination and position bias.
realism-and-artifact-penalties	Skill	Guides penalizing visual artifacts while explicitly allowing conceptual unrealism when the prompt requests it.
style-and-background-transformation-evaluation	Skill	Governs evaluation of background/style changes, enforcing strict foreground preservation and photorealism.
text-and-ocr-analyzer	Tool	Extracts and verifies text within images to check spelling, placement, and legibility via a secondary VLM call.
spatial-and-object-analyzer	Tool	Counts objects sequentially and analyzes spatial relationships and orientation via structured JSON output.
visual-qa-tool	Tool	Answers targeted visual questions about image content to prevent hallucination and left-right swapping.
cultural-and-style-knowledge-oracle	Tool	Identifies artistic styles, cultural references, and artist-inspired elements in images.

Evolution narrative. The analysis summaries logged by the Orchestrator reveal a consistent failure pattern across iterations: the Sub-Agent hallucinates visual content (claiming images are “completely black”, misreading text, or fabricating object presence), fails on cultural/style knowledge, and over-penalizes conceptually surreal edits that were explicitly requested. Each evolution step directly targets observed failures—iteration 1 adds OCR and VQA tools to address text misreading

and black-image hallucination; iteration 10 introduces anti-hallucination guidance that routes text, blank-image, and object-detail checks to Tools; iteration 60 strengthens tool invocation through a new “tool-usage-mandate” skill; and the final exported checkpoint includes tie-handling guidance for cases where both edited images fail the prompt. This failure-driven loop mirrors how human annotators iteratively refine rubrics, but operates from model reasoning traces compared against human labels, without additional human annotation.

B.5 Skill and Tool Case Studies

No zoom-in, crop, or close-up specific skills emerged during evolution. Spatial and detail-level queries were instead delegated entirely to the `spatial-and-object-analyzer` Tool, which routes precise counting and layout questions to a structured VLM call. Below we present three case studies illustrating how the Library evolves toward increasingly targeted guidance.

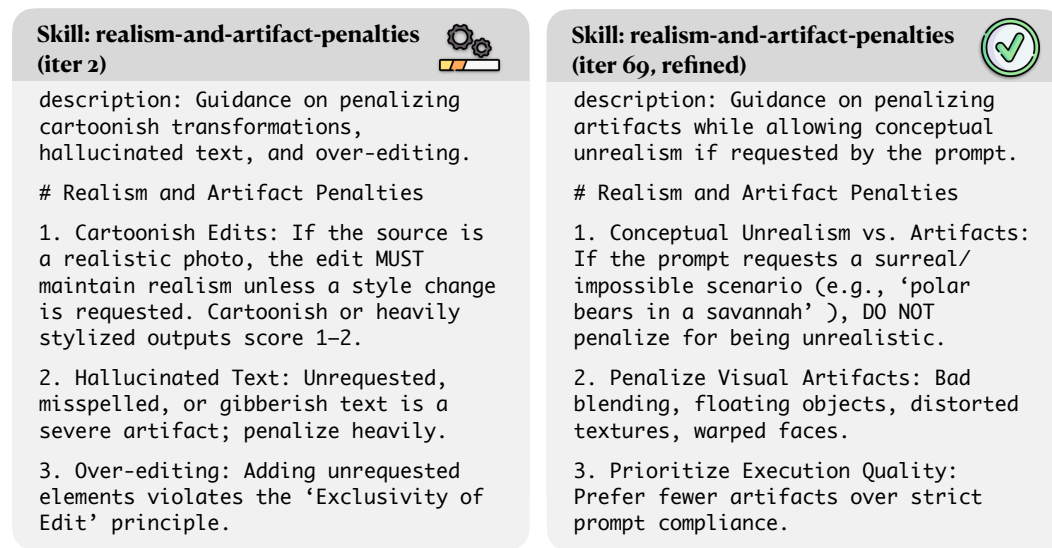


Figure 9: Evolution of realism-and-artifact-penalties skill. Comparison between iteration 2 (left) and iteration 69 (right). The initial version broadly penalizes cartoonish or unrealistic outputs regardless of intent. The refined version introduces an explicit carve-out that allows conceptually surreal content when it is requested by the prompt (e.g., “polar bears in a grassy savannah”), while still penalizing genuine visual artifacts. This refinement reduces false penalties on prompt-consistent surreal edits and improves alignment between evaluation and user intent.

Case 1: Skill Refinement.

Figure 9 shows `realism-and-artifact-penalties` at iteration 2 (left) versus iteration 69 (right). The early version broadly penalizes any cartoonish or unrealistic output; the evolved version adds an explicit carve-out allowing conceptually surreal content *when the prompt itself requests it*, preventing false penalties on prompts such as “polar bears in a grassy savannah”.

Case 2: Tool-Invocation Guidance.

Figure 10 shows `anti-hallucination-and-verification` (iteration 10), a skill that does not evaluate images itself but instead *instructs* the Sub-Agent to route specific queries—black-image detection, text reading, object attribute verification—to Tools before forming any judgment. This pattern represents a Skills→Tools handoff: the Skill specifies *when* to call a Tool; the Tool specification (see below) specifies *how*.

Skill: anti-hallucination-and-verification (iter 10)

description: Prevents hallucinating text, objects, or blank images by mandating tool use and objective verification.

Anti-Hallucination and Verification

1. Black-Image Hallucination: Never assume an image is completely black. If suspected, MUST call visual-qa-tool: {"query": "Is this image completely black or corrupted?"}.
2. Text Hallucination: Never guess exact text. Use text-and-ocr-analyzer to read the exact spelling before judging.
3. Subtle Object Details: For prompts specifying fine-grained attributes (e.g., "a clear plastic bottle with a nipple", "home plate"), call visual-qa-tool to confirm presence before scoring.

CRITICAL: Tool results override your internal perception. If a tool says the image is not black, accept that result even if you initially perceived it as black.

Figure 10: The anti-hallucination-and-verification skill (iteration 10) enforces mandatory Tool use for recurring failure modes such as black-image detection, text reading, and object-attribute verification.

Tool: spatial-and-object-analyzer (iter 69)

description: Detects objects, counts them sequentially, and analyzes spatial relationships, orientation, and layout.

input_schema: {images: list[base64_str], query: str}

output_schema: {objects_detected: list[dict], counts: int, spatial_relationships: str, conclusion: str}

system_prompt: "You are an expert in object detection and spatial analysis. Given a query about specific objects, counts, or spatial relationships (e.g., 'is the cat's foot under the bag?', 'is there a home plate in front of the catcher?'), carefully examine the images. Return a JSON object with: objects_detected (list of objects found), counts (integer counts), spatial_relationships (detailed positional description), conclusion (definitive answer)."

Use this tool when the prompt requires counting objects (e.g., 'the 4th surfboard'), evaluating spatial relationships (e.g., 'under the bag'), or checking orientation (e.g., 'rotated counterclockwise'). Example query: "Count the surfboards from left to right and tell me which one has CBS on it."

Figure 11: The spatial-and-object-analyzer Tool (iteration 69). The typed JSON schema and detailed system prompt provide structured grounding for spatial queries, object counting, and orientation checks.

Case 3: Structured Tool Schema.

Figure 11 shows spatial-and-object-analyzer, the tool that handles all spatial, counting, and orientation queries. Rather than encoding heuristics as text, this Tool issues a secondary VLM call with a typed JSON schema, enabling programmatic grounding for prompts like "the 4th surfboard from the left" or "is the cat's foot under the bag?"—tasks where the primary Sub-Agent consistently hallucinated without grounding.