


CSS EXERCISES

EX NO:1

EXTERNAL

INPUT:


MYSTYLE

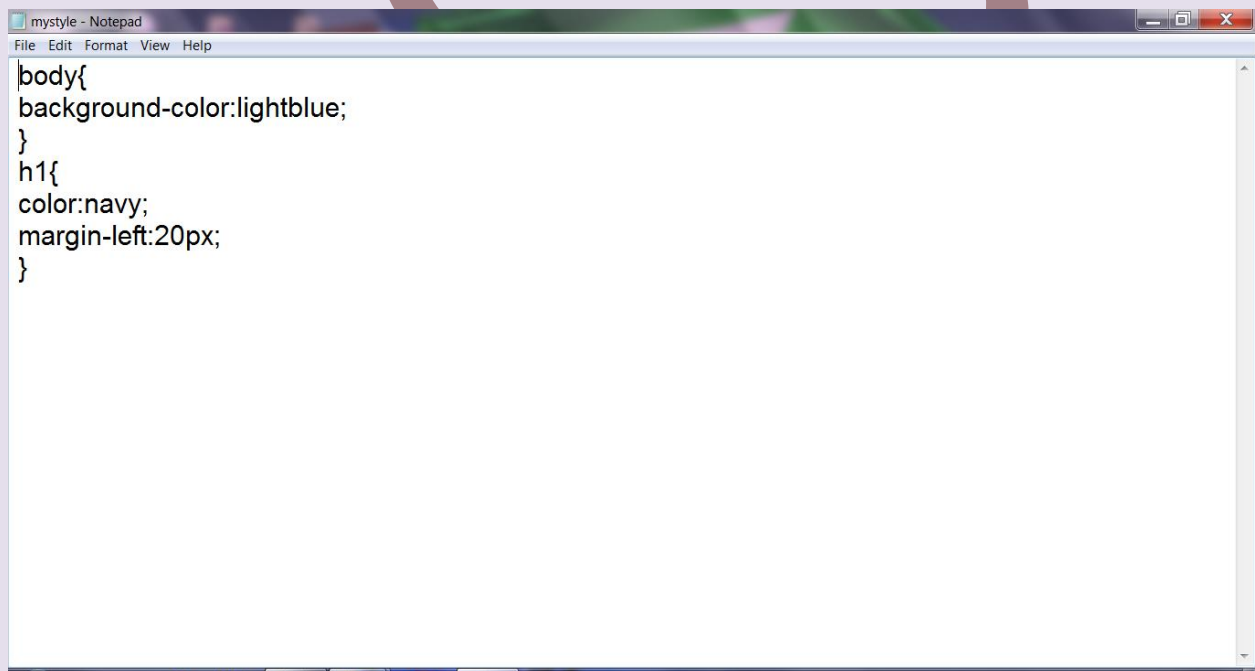A screenshot of a Notepad window titled "mystyle - Notepad". The window has a menu bar with "File", "Edit", "Format", "View", and "Help". The text area contains the following CSS code:

```
body{  
background-color:lightblue;  
}  
h1{  
color:navy;  
margin-left:20px;  
}
```

```
external - Notepad
File Edit Format View Help
<!DOCTYPE html>
<html>
<head>
<link rel="stylesheet"href="mystyle.css">
</head>
<body>
<h1>This is a heading</h1>
<p>This is a paragraph.</p>
</body>
</html>
```


OUTPUT:

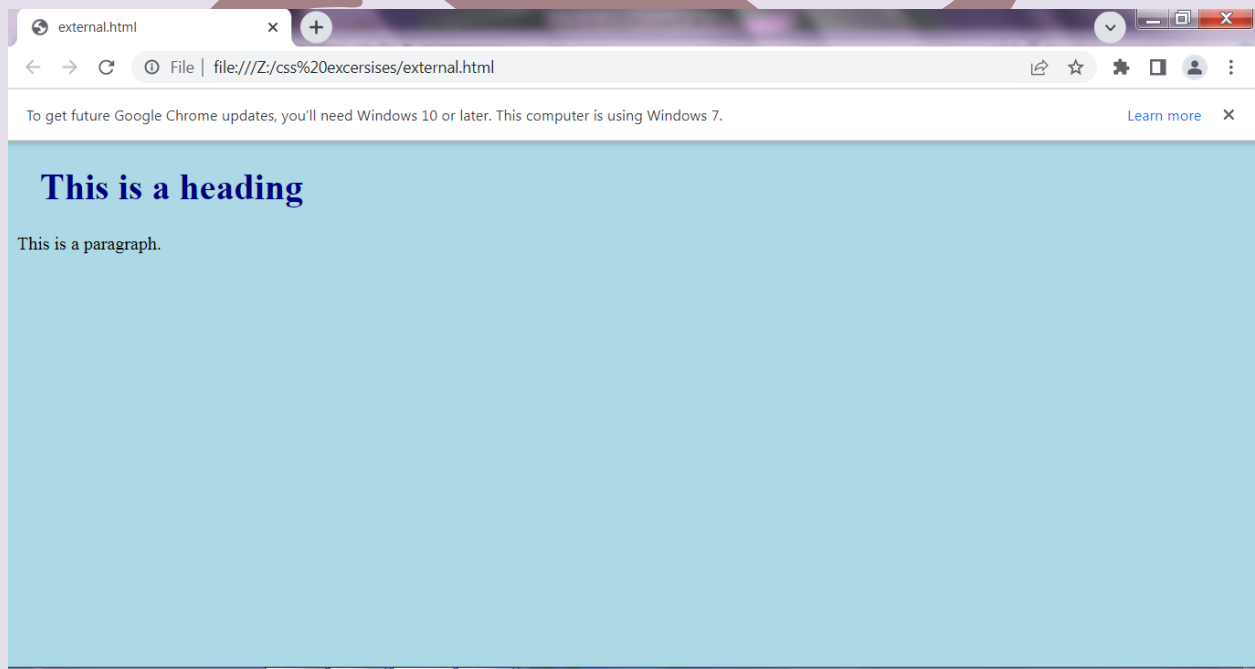

EX NO:2



INTERNAL

INPUT:

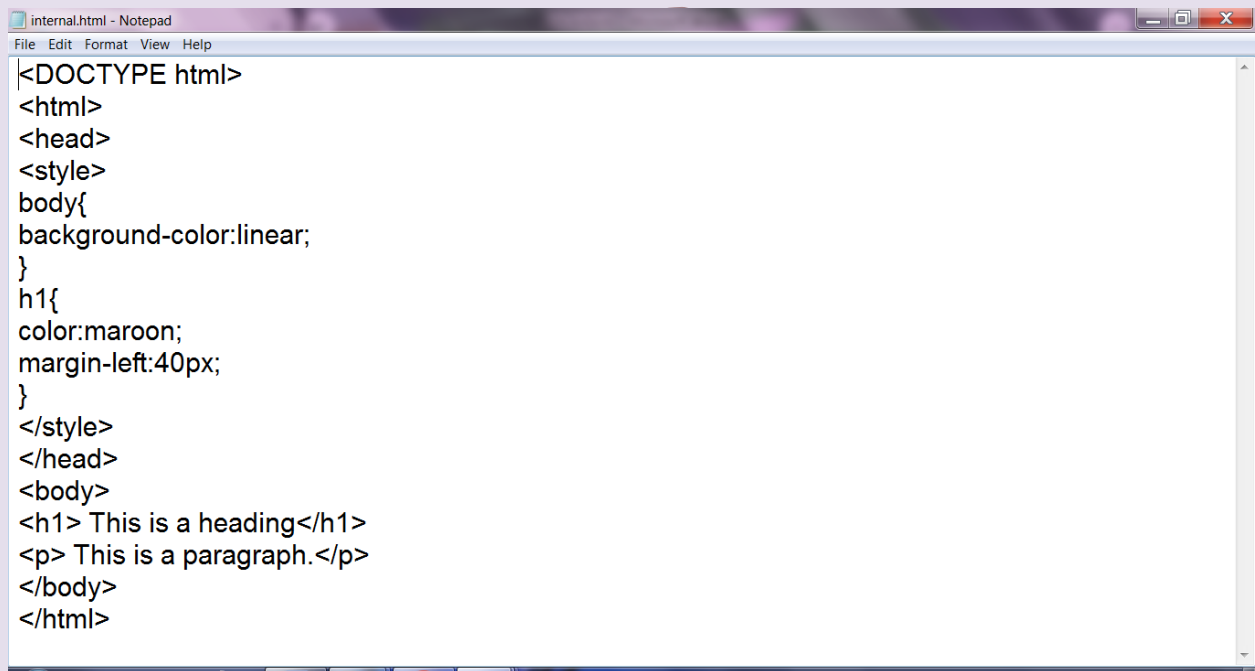A screenshot of a Notepad window titled 'internal.html - Notepad'. The window contains the following HTML code:

```
<DOCTYPE html>
<html>
<head>
<style>
body{
background-color:linear;
}
h1{
color:maroon;
margin-left:40px;
}
</style>
</head>
<body>
<h1> This is a heading</h1>
<p> This is a paragraph.</p>
</body>
</html>
```


OUTPUT:

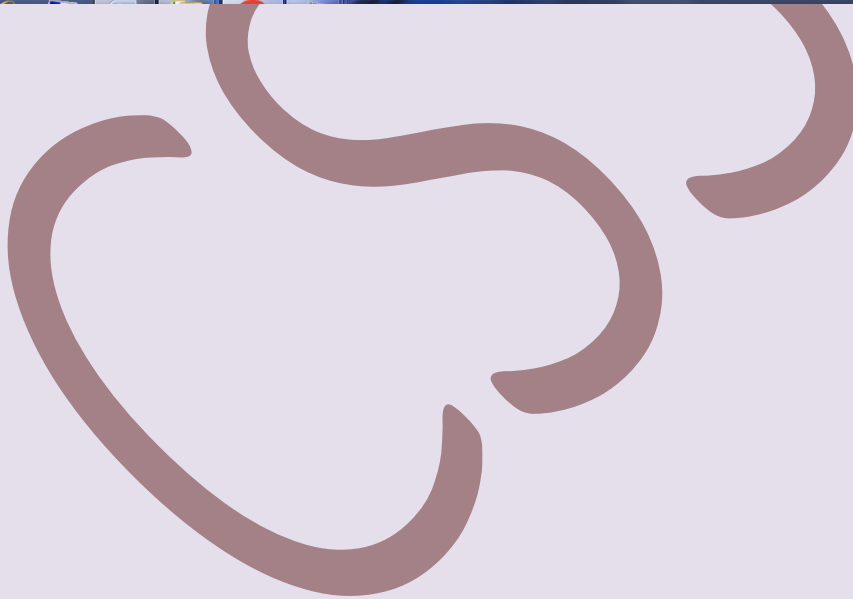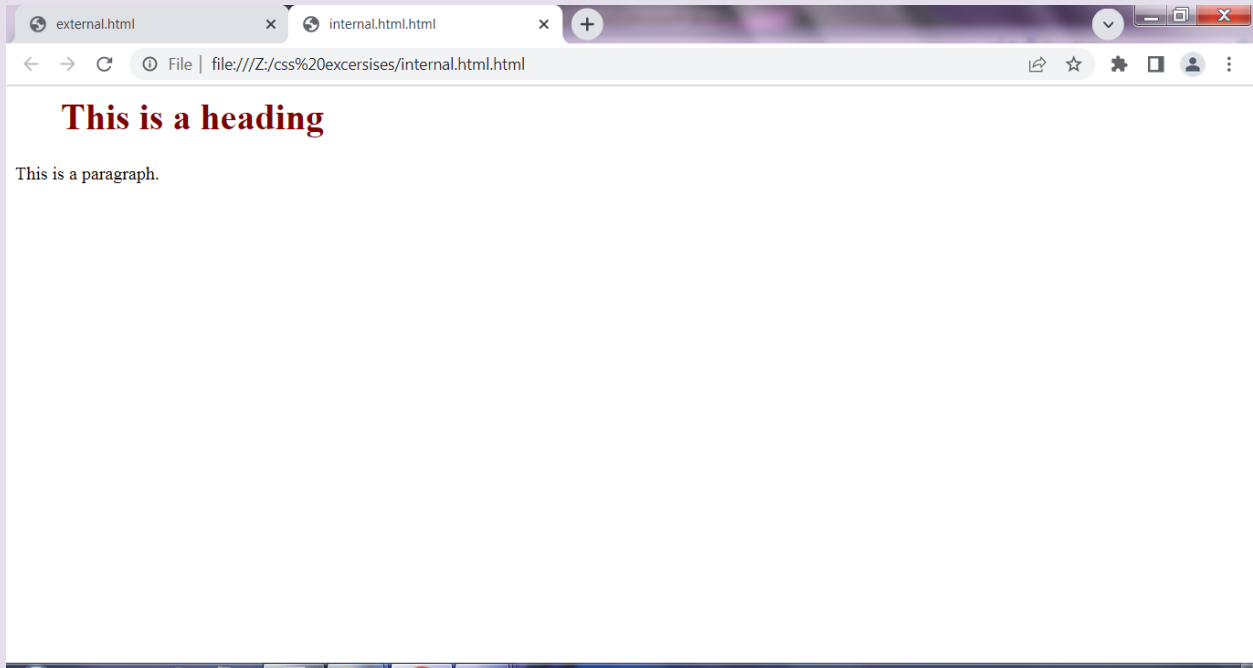

EX NO:3


INLINE

INPUT:

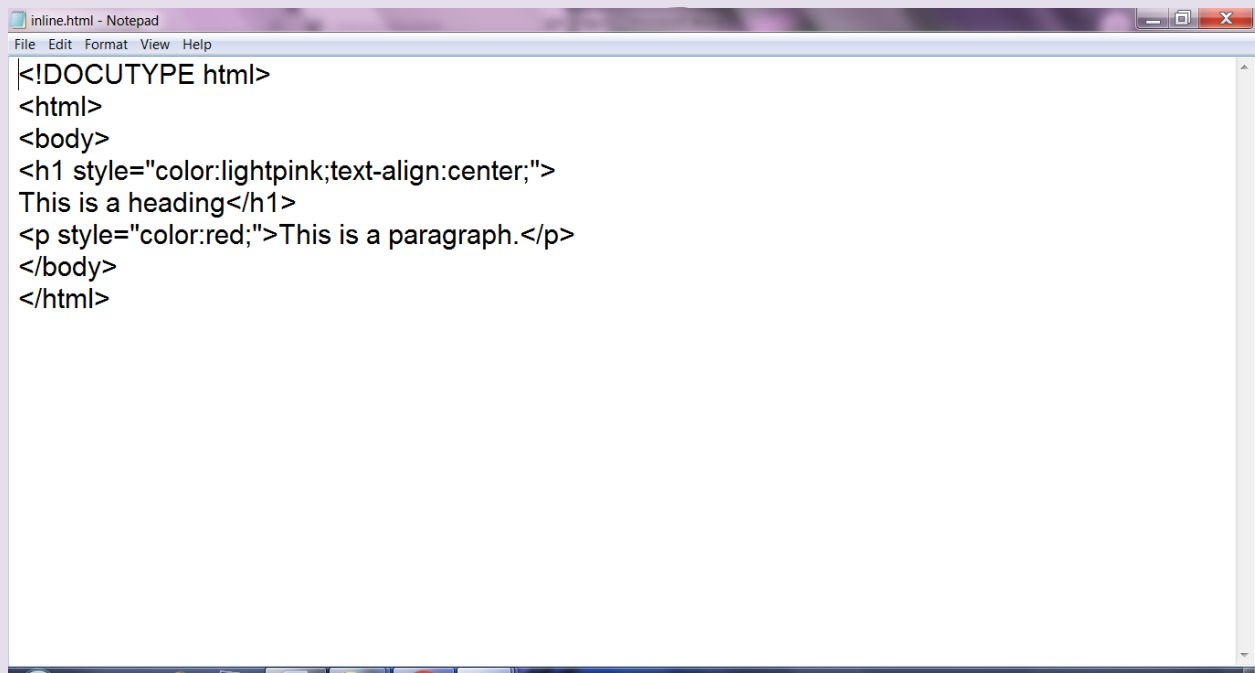A screenshot of a Notepad window titled 'inline.html - Notepad'. The window has a menu bar with 'File', 'Edit', 'Format', 'View', and 'Help'. The text area contains the following HTML code:

```
<!DOCTYPE html>
<html>
<body>
<h1 style="color:lightpink;text-align:center;">
This is a heading</h1>
<p style="color:red;">This is a paragraph.</p>
</body>
</html>
```


OUTPUT:

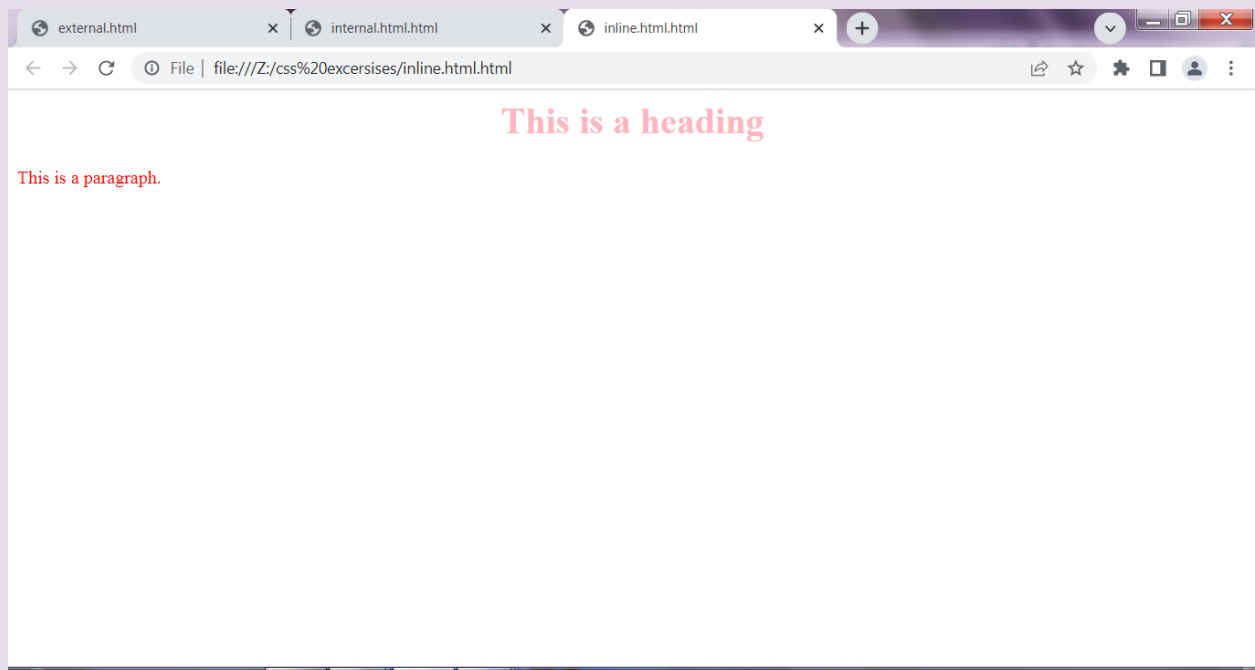

EX NO:4



BACKGROUND COLOR

INPUT:

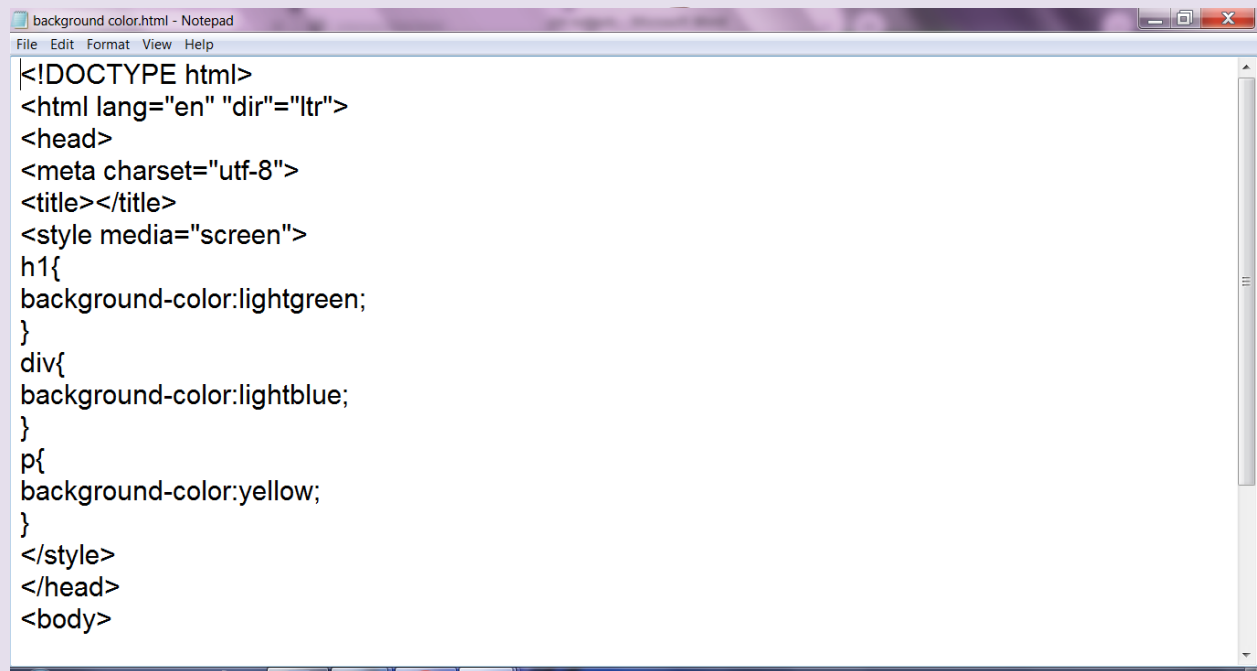A screenshot of a Notepad window titled "background color.html - Notepad". The window contains the following HTML code:

```
<!DOCTYPE html>
<html lang="en" "dir"="ltr">
<head>
<meta charset="utf-8">
<title></title>
<style media="screen">
h1{
background-color:lightgreen;
}
div{
background-color:lightblue;
}
p{
background-color:yellow;
}
</style>
</head>
<body>
```


OUTPUT:

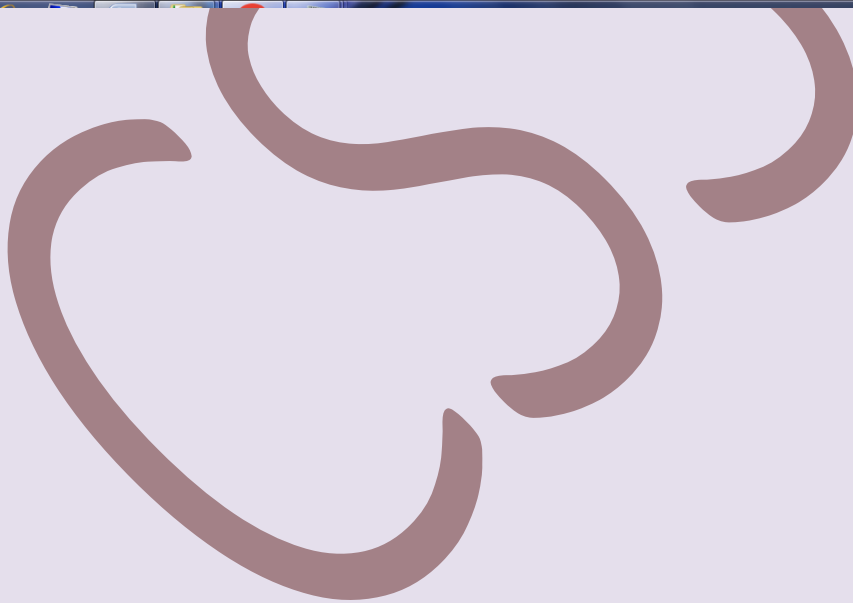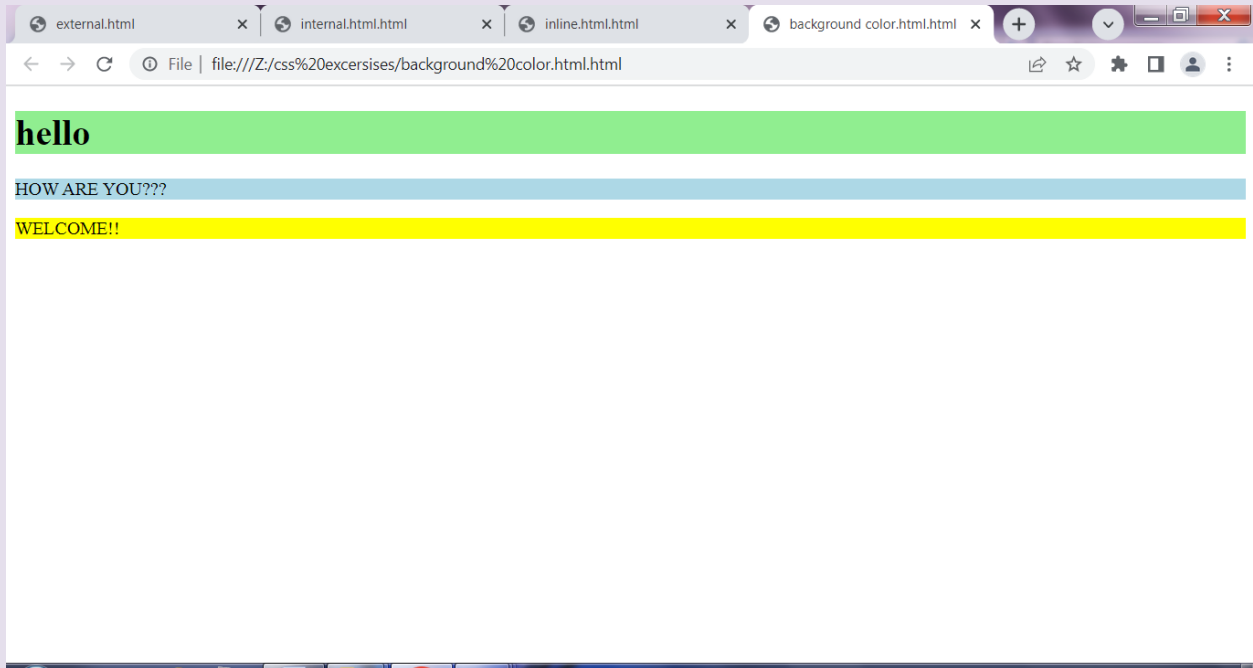

EX NO:5


BACKGROUND IMAGE

INPUT:

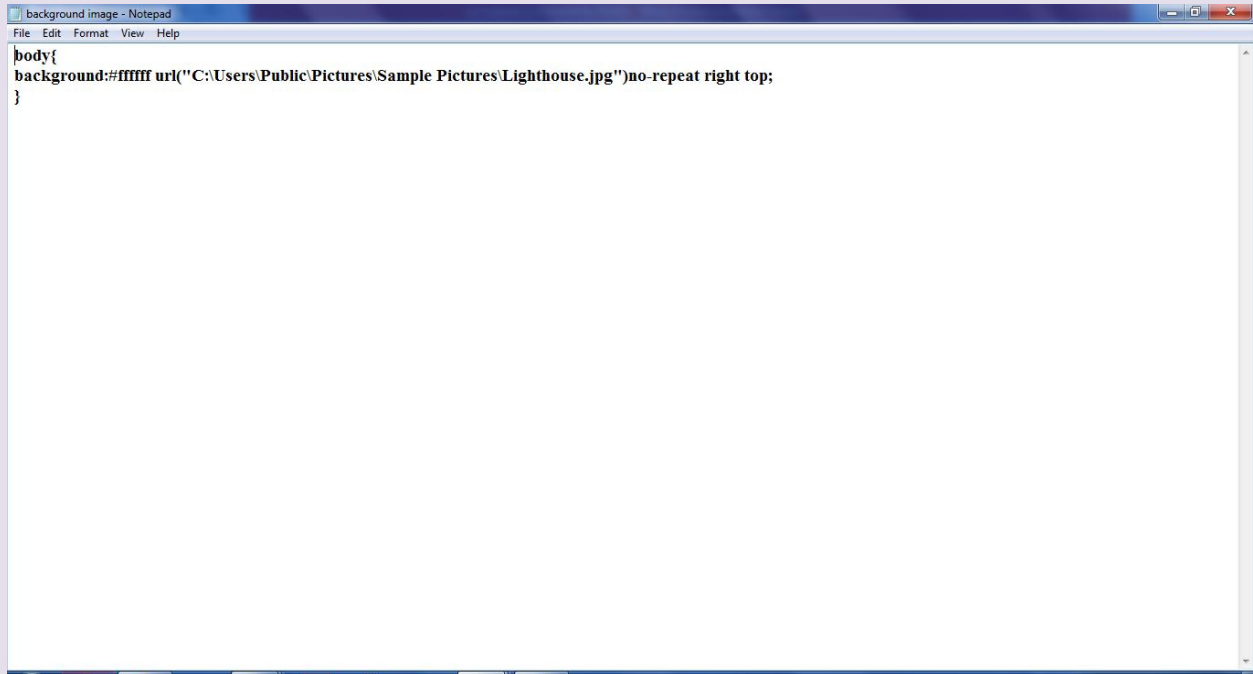A screenshot of a Notepad window titled "background image - Notepad". The window has a menu bar with "File", "Edit", "Format", "View", and "Help". The text area contains the following CSS code:

```
body{  
background:#ffffff url("C:\Users\Public\Pictures\Sample Pictures\Lighthouse.jpg")no-repeat right top;  
}
```


OUTPUT:

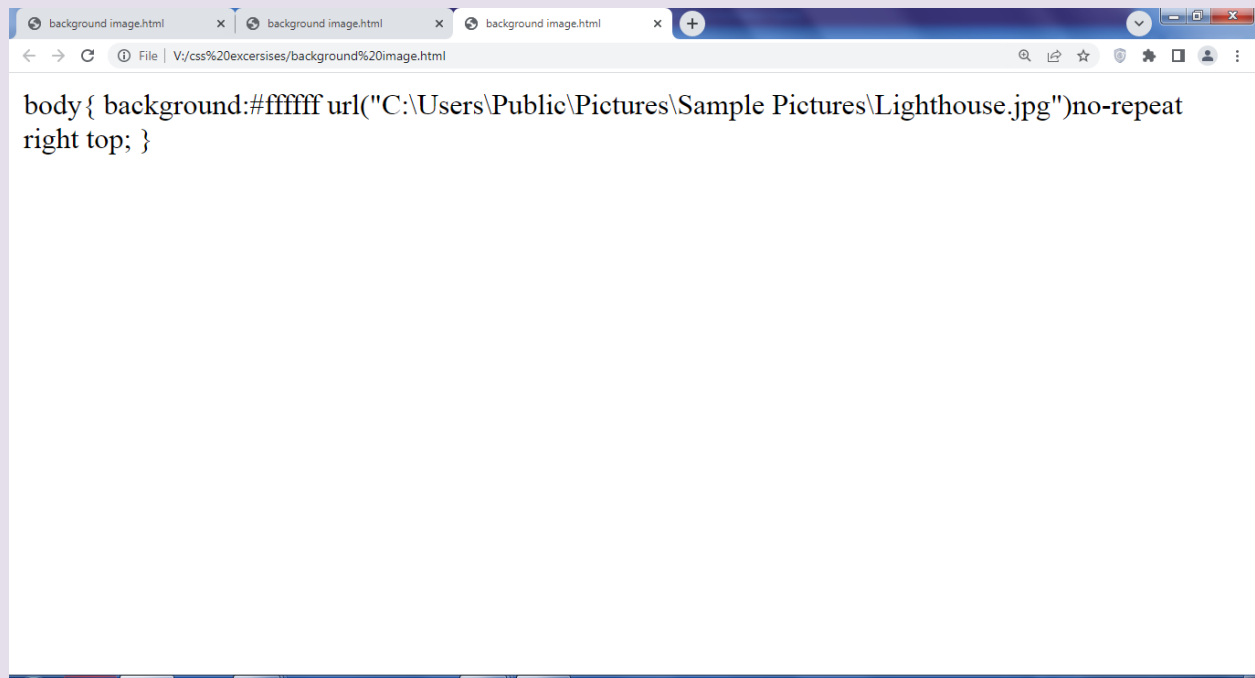

EX NO:6


BORDERS

INPUT:

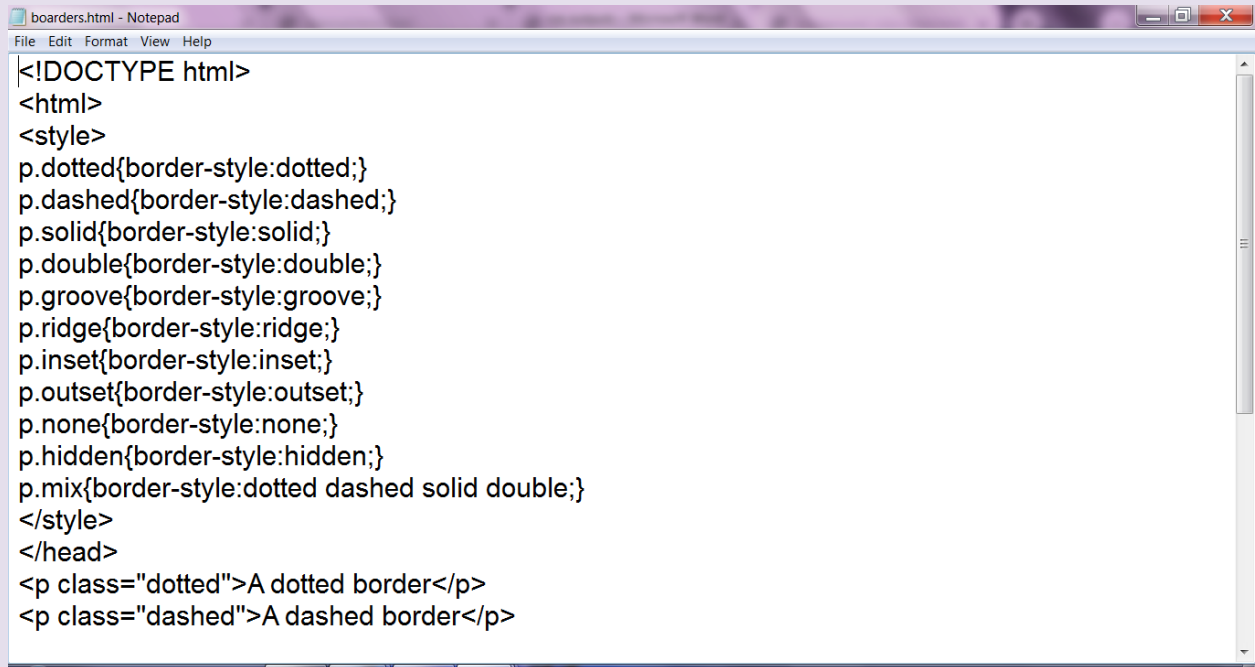A screenshot of a Notepad window titled 'boarders.html - Notepad'. The window contains the following HTML code:

```
<!DOCTYPE html>
<html>
<style>
p.dotted{border-style:dotted;}
p.dashed{border-style:dashed;}
p.solid{border-style:solid;}
p.double{border-style:double;}
p.groove{border-style:groove;}
p.ridge{border-style:ridge;}
p.inset{border-style:inset;}
p.outset{border-style:outset;}
p.none{border-style:none;}
p.hidden{border-style:hidden;}
p.mix{border-style:dotted dashed solid double;}
</style>
</head>
<p class="dotted">A dotted border</p>
<p class="dashed">A dashed border</p>
```


OUTPUT:

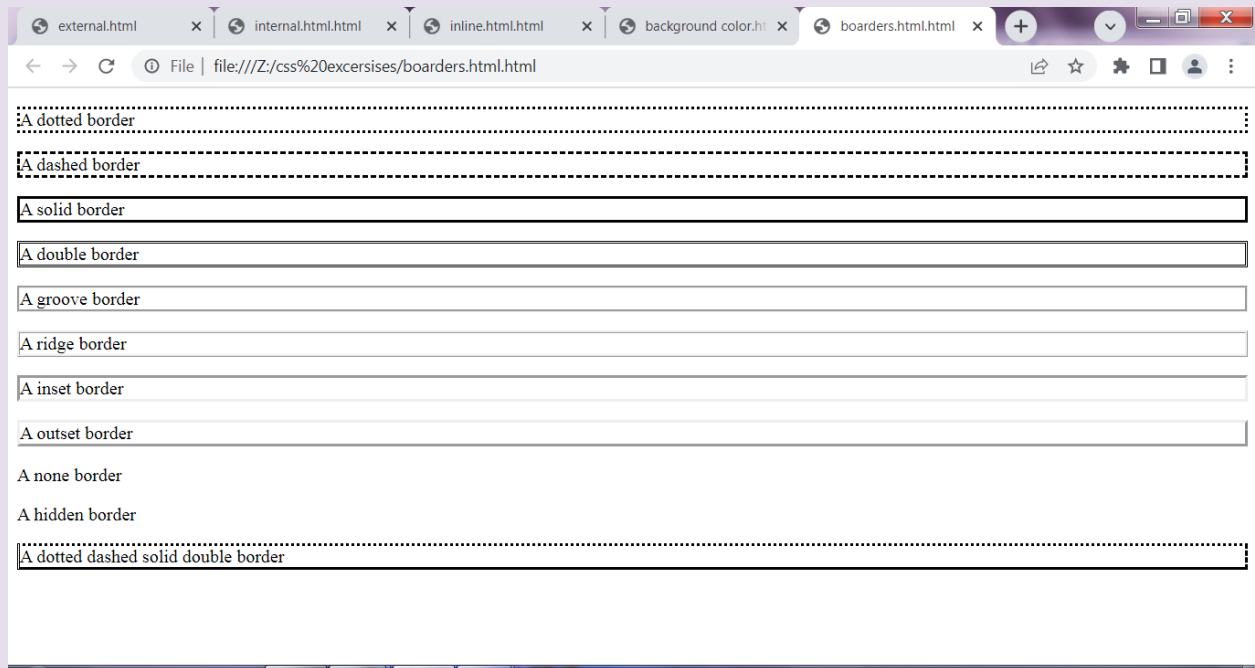

EX NO:7.1


LIST WITH STYLES

INPUT:

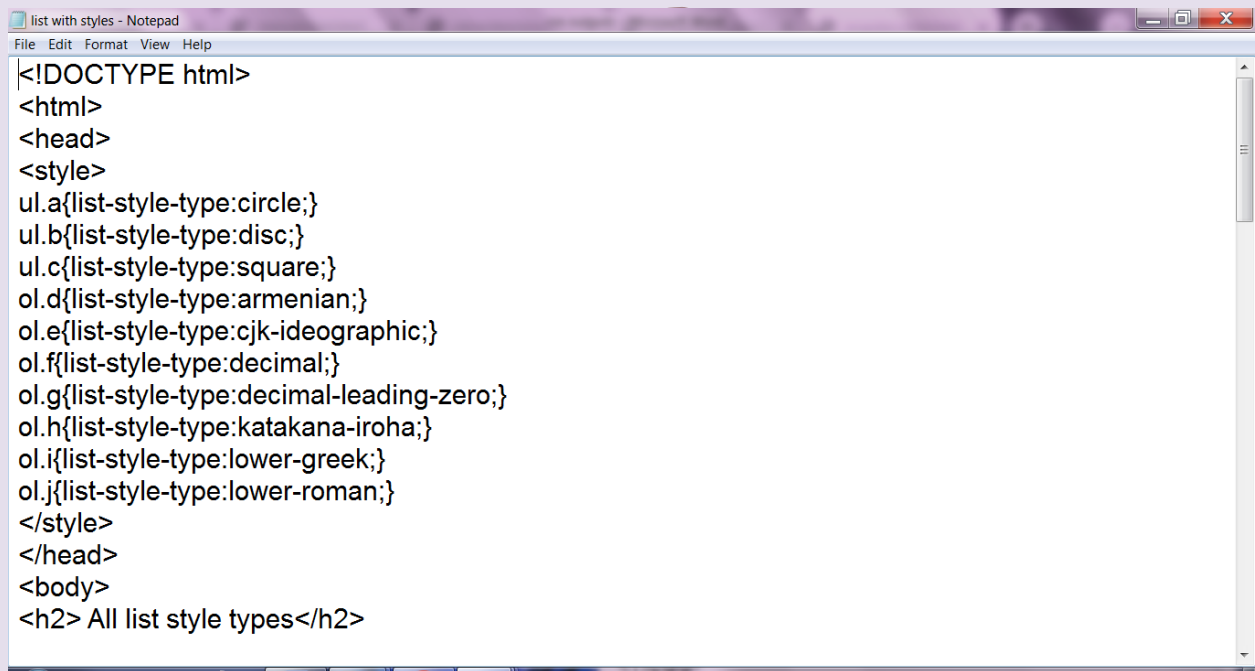

```
<!DOCTYPE html>
<html>
<head>
<style>
ul.a{list-style-type:circle;}
ul.b{list-style-type:disc;}
ul.c{list-style-type:square;}
ol.d{list-style-type:armenian;}
ol.e{list-style-type:cjk-ideographic;}
ol.f{list-style-type:decimal;}
ol.g{list-style-type:decimal-leading-zero;}
ol.h{list-style-type:katakana-iroha;}
ol.i{list-style-type:lower-greek;}
ol.j{list-style-type:lower-roman;}
</style>
</head>
<body>
<h2> All list style types</h2>
```


OUTPUT:

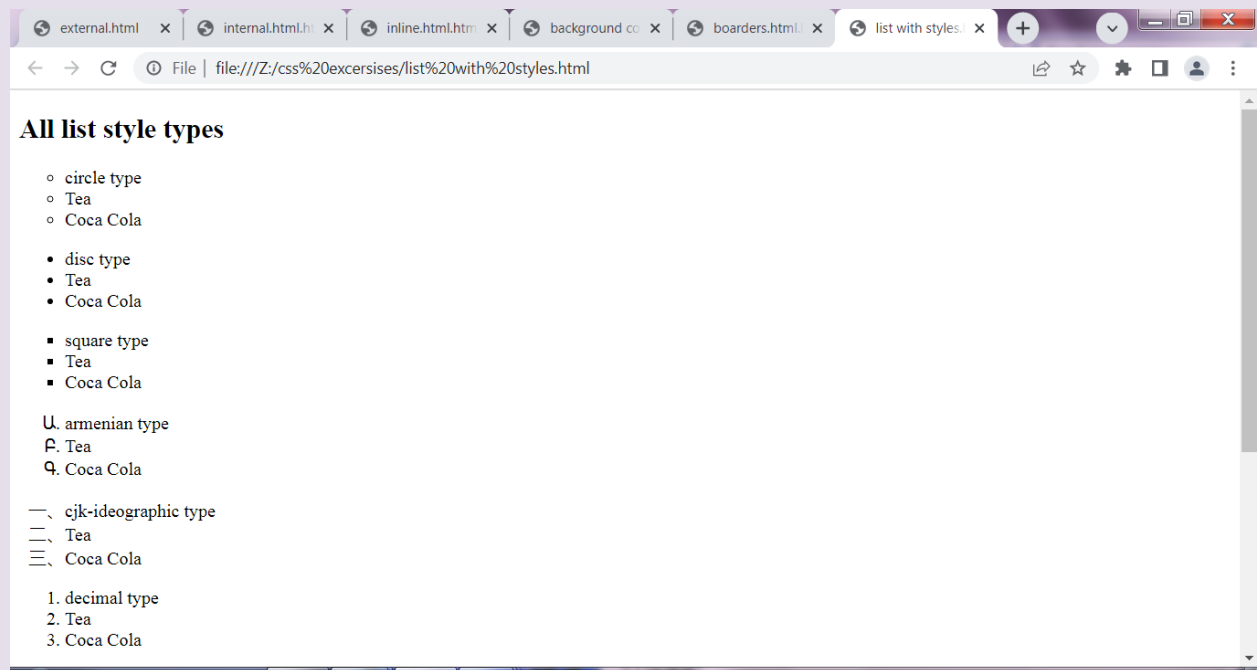

EX NO:7.2

LIST WITH COLORS

INPUT:

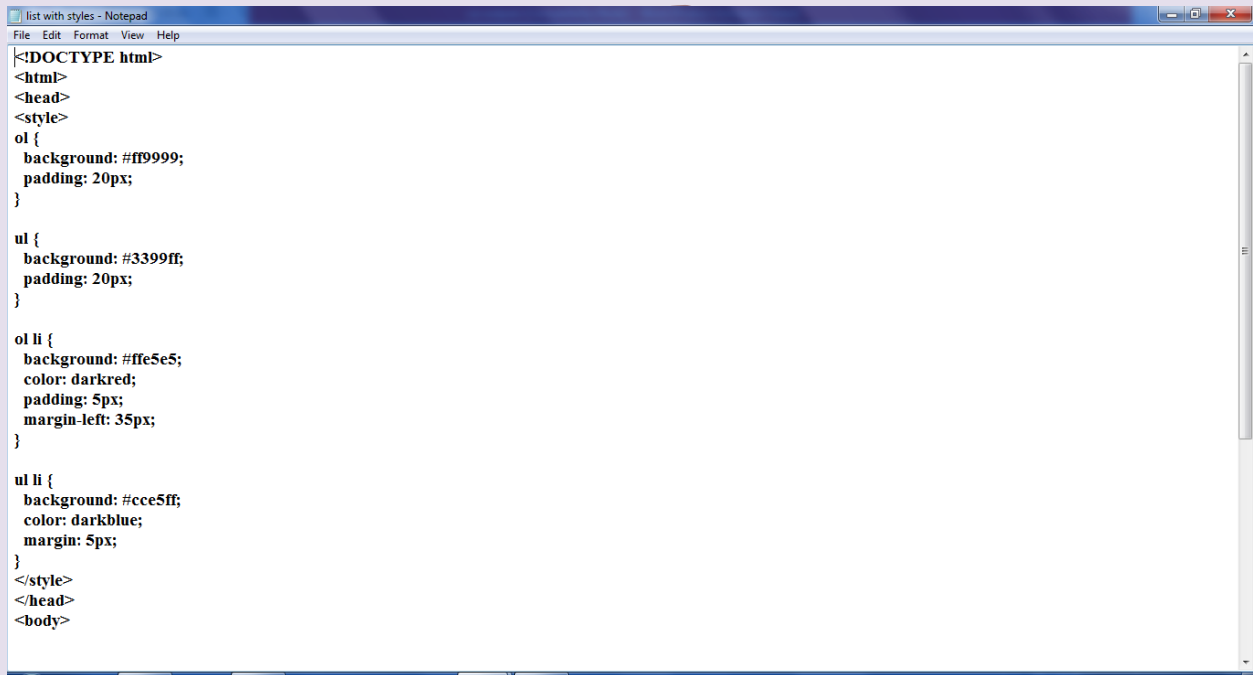


```
<!DOCTYPE html>
<html>
<head>
<style>
ol {
  background: #ff9999;
  padding: 20px;
}

ul {
  background: #3399ff;
  padding: 20px;
}

ol li {
  background: #ffe5e5;
  color: darkred;
  padding: 5px;
  margin-left: 35px;
}

ul li {
  background: #cce5ff;
  color: darkblue;
  margin: 5px;
}
</style>
</head>
<body>
```


OUTPUT:

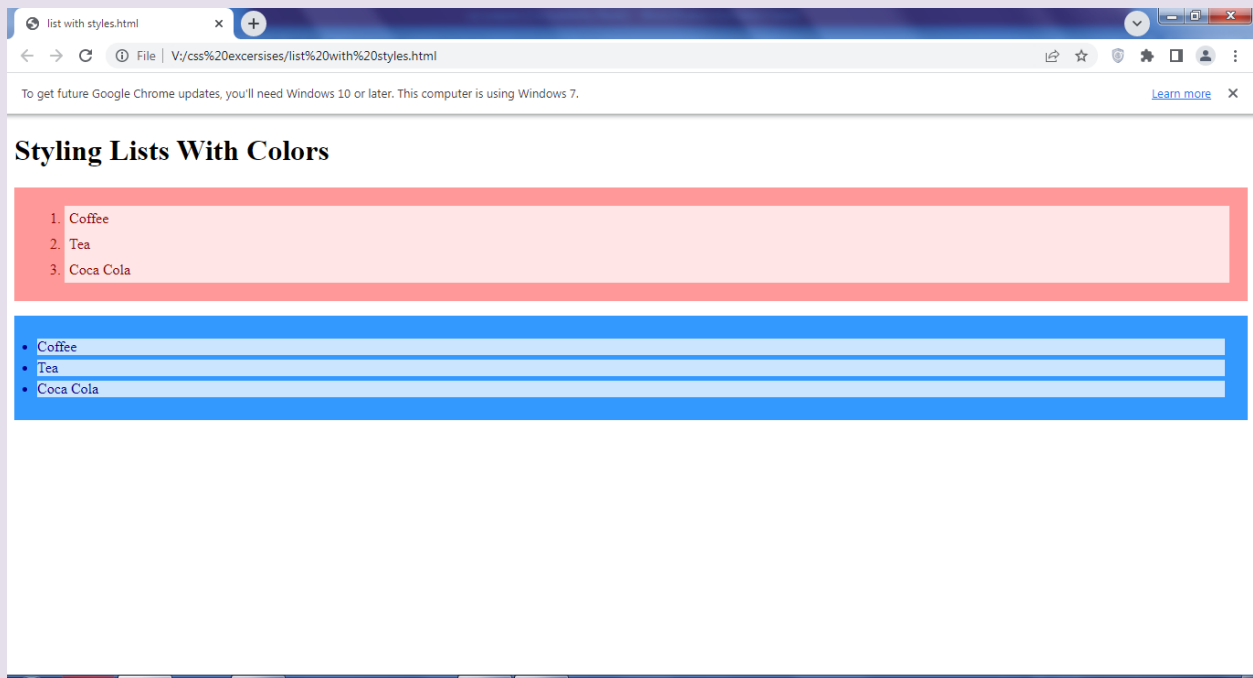

EX NO:8

TABLE WITH STYLES

INPUT:

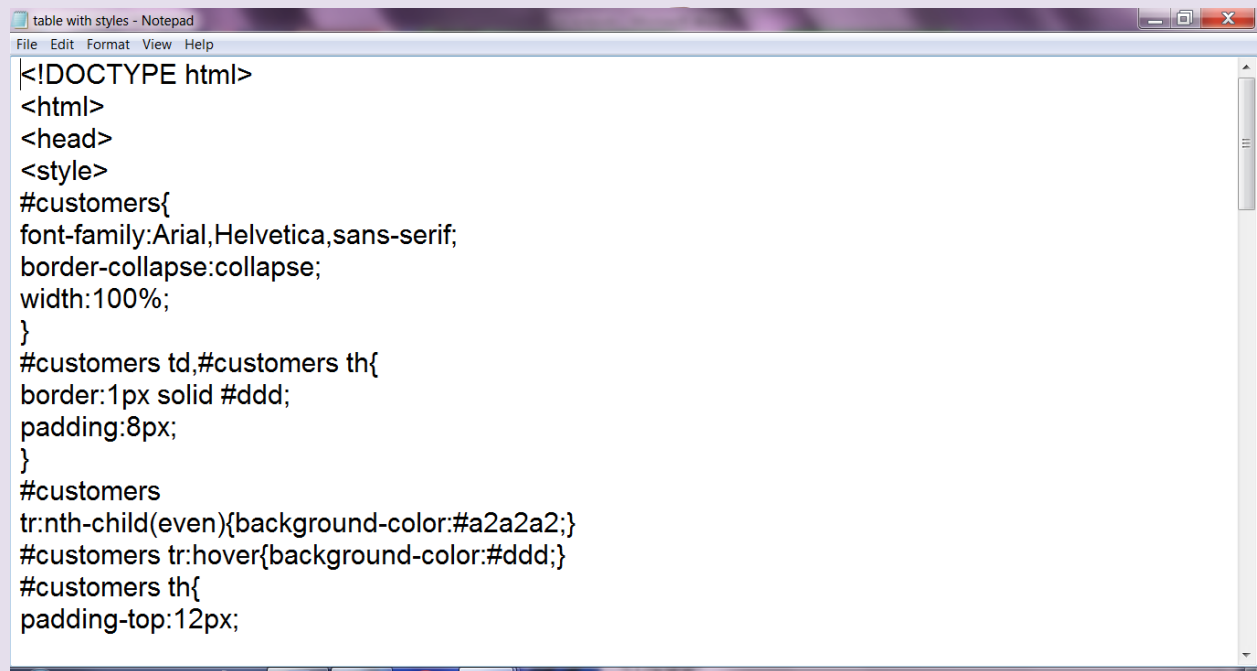

```
<!DOCTYPE html>
<html>
<head>
<style>
#customers{
font-family:Arial,Helvetica,sans-serif;
border-collapse:collapse;
width:100%;
}
#customers td,#customers th{
border:1px solid #ddd;
padding:8px;
}
#customers
tr:nth-child(even){background-color:#a2a2a2;}
#customers tr:hover{background-color:#ddd;}
#customers th{
padding-top:12px;
```

OUTPUT:


table with styles.html

File | file:///Z:/css%20exercisises/table%20with%20styles.html

To get future Google Chrome updates, you'll need Windows 10 or later. This computer is using Windows 7. [Learn more](#)

A Fancy Table

company	contact	country	company	contact	country	company	contact	country	company	contact	country	company	contact	country
Alfreds Futterkiste	Maria Anders	Germany												
Berglunds snabbkop	Christina Berglund	Sweden												
Centro Comercial Moctezuma	Francisco Chang	Mexico												
Ernst Handel	Roland Mendel	Austria												
Island trading	Helen Bennett	UK												

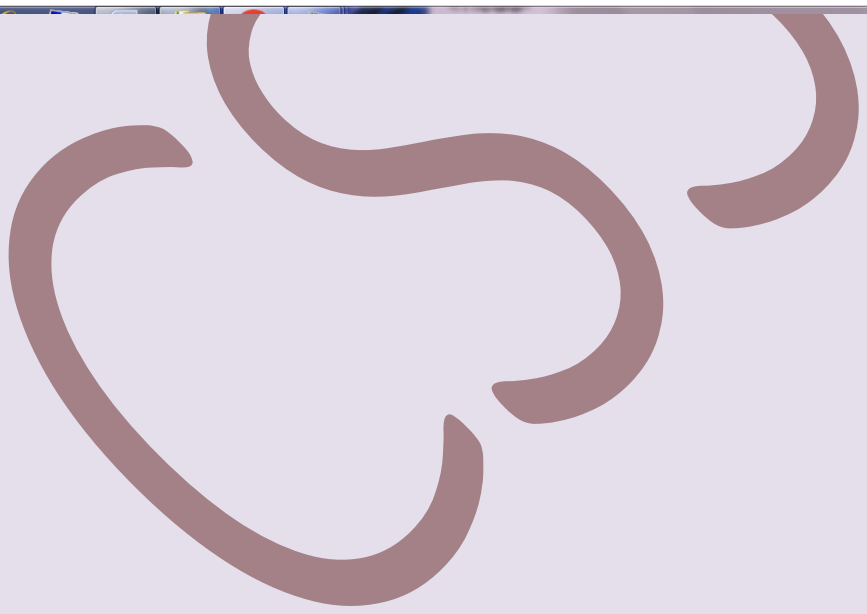

EX NO:9

FORM WITH STYLES

INPUT:

```
form with styles - Notepad
File Edit Format View Help
<!DOCTYPE html>
<html>
<head>
<style>
*{
box-sizing:border-box;
}
input[type=text],select,text area{
width:100%;
padding:12px;
border:1px solid #ccc;
border-radius:4px;
resize:vertical;
}
label{
padding:12px 12px 12px 0;
display:inline-block;
}
input[type=submit]{
background-color:#04AA6D;
color:white;
padding:12px 20px;
border:none;
border-radius:4px;
cursor:pointer;
float:right;
}
input[type=submit]:hover{
background-color:#45a049;
}
```

OUTPUT:

form with styles.html

File | Y:\css%20excersises\form%20with%20styles.html

To get future Google Chrome updates, you'll need Windows 10 or later. This computer is using Windows 8.1.[Learn more](#)

responsive form

resize the browser wiindow to see the effect. when the screen is less than 600px wide, make the two columns stackson top of eachother instead of next to each other.

first name	<input type="text" value="your name..."/>
last name	<input type="text"/>
country	<div>Australia</div>
subject	<div>write something...</div>


submit



EX NO:10


VERTICAL NAVIGATION BAR

INPUT:

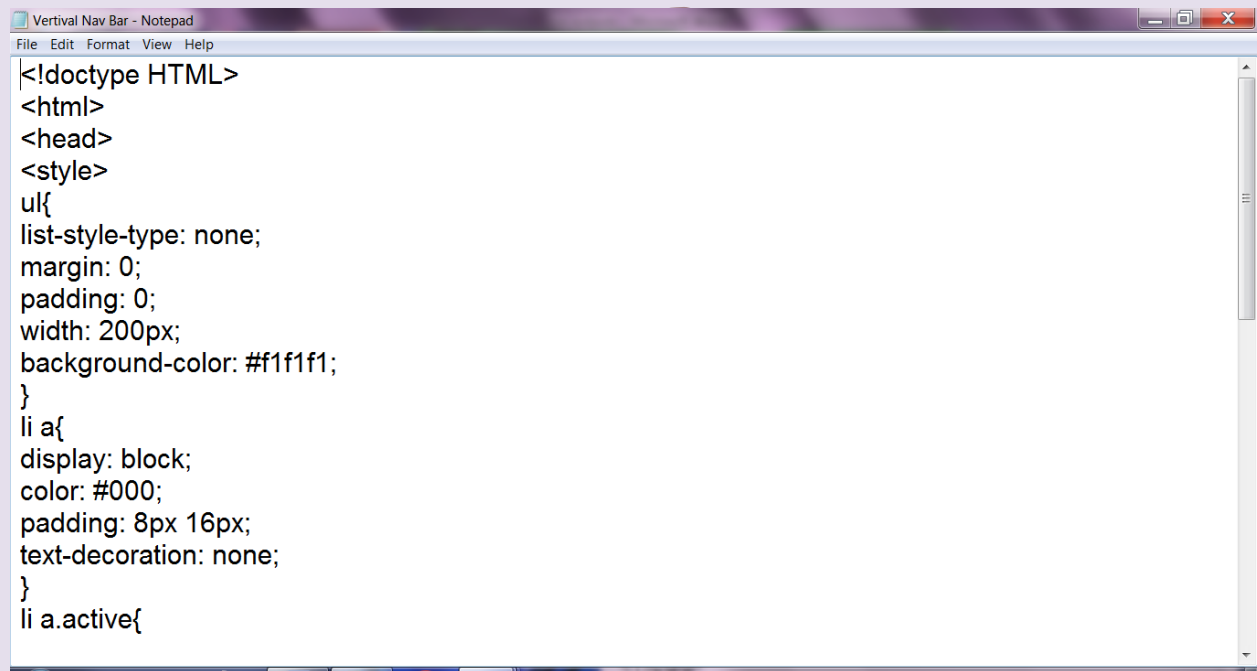

```
<!doctype HTML>
<html>
<head>
<style>
ul{
list-style-type: none;
margin: 0;
padding: 0;
width: 200px;
background-color: #f1f1f1;
}
li a{
display: block;
color: #000;
padding: 8px 16px;
text-decoration: none;
}
li a.active{
```


OUTPUT:

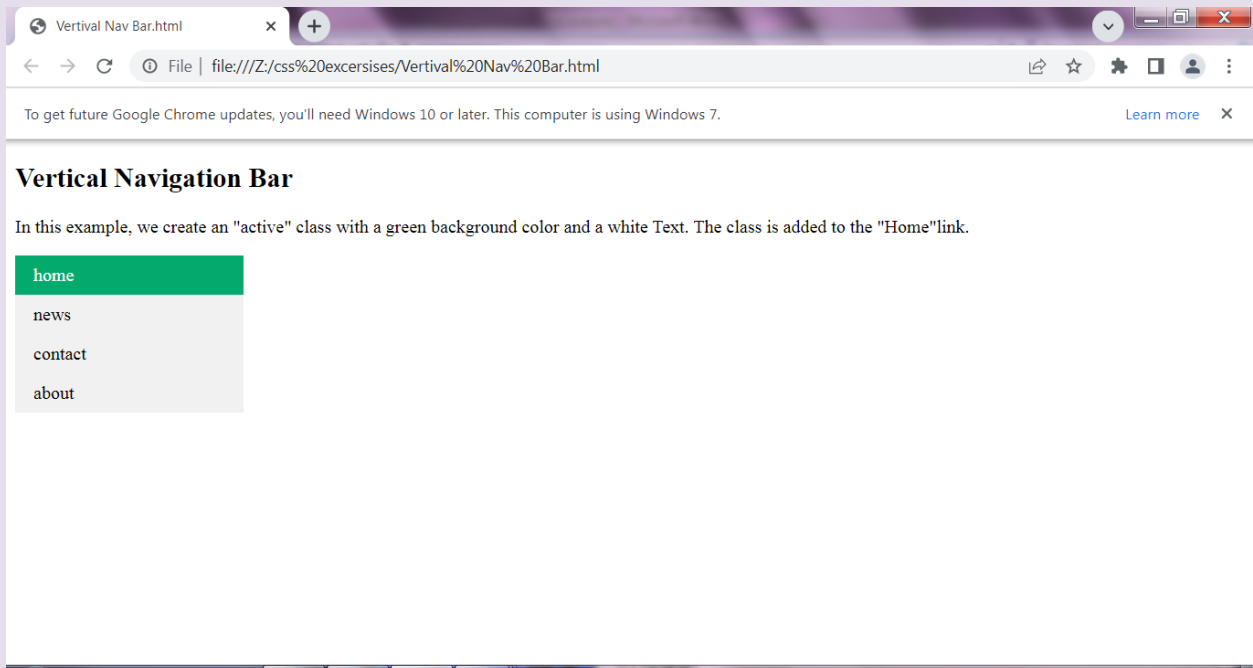

EX NO:11


STICKY HORIZONTAL NAVIGATION BAR

INPUT:

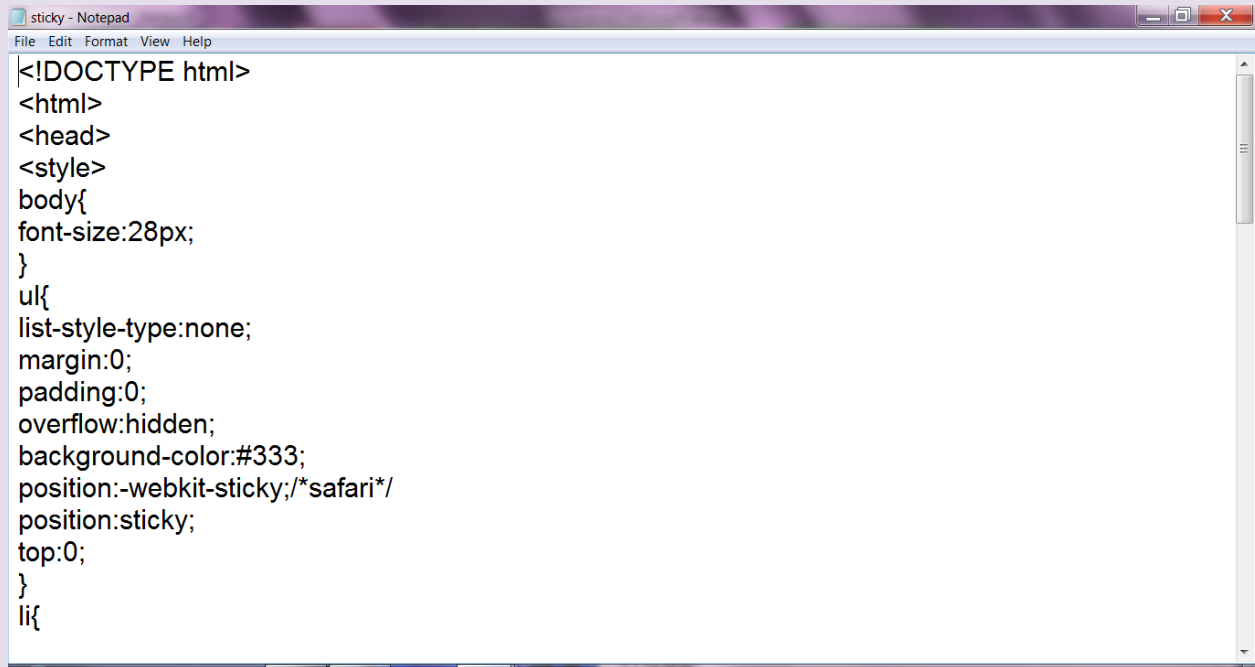

```
<!DOCTYPE html>
<html>
<head>
<style>
body{
font-size:28px;
}
ul{
list-style-type:none;
margin:0;
padding:0;
overflow:hidden;
background-color:#333;
position:-webkit-sticky;/*safari*/
position:sticky;
top:0;
}
li{
```

OUTPUT:

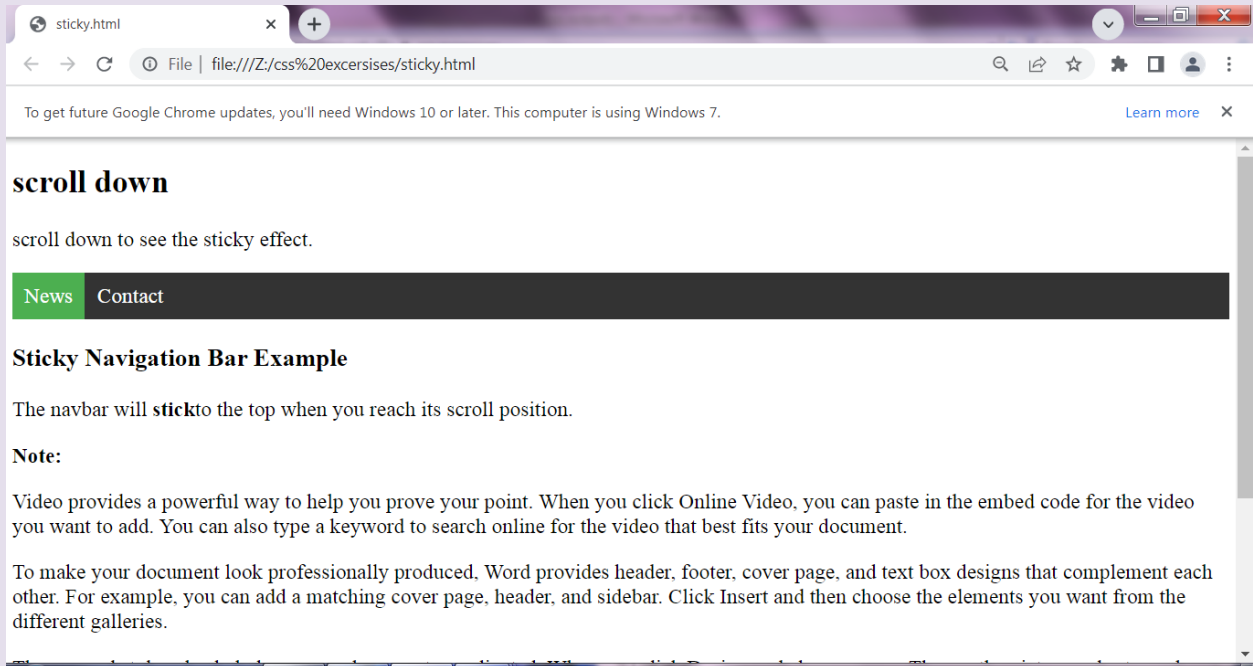

EX NO:12.1

DROPDOWN NAVIGATION BAR

INPUT:


```
dropdown in navigation bar - Notepad
File Edit Format View Help
<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-color:white;
}
ul {
  list-style-type: none;
  margin: 0;
  padding: 0;
  overflow: hidden;
  background-color: #38444d;
}

li {
  float: left;
}

li a, .dropbtn {
  display: inline-block;
  color: white;
  text-align: center;
  padding: 14px 16px;
  text-decoration: none;
}

li a:hover, .dropdown:hover .dropbtn {
  background-color: red;
}
```


OUTPUT:

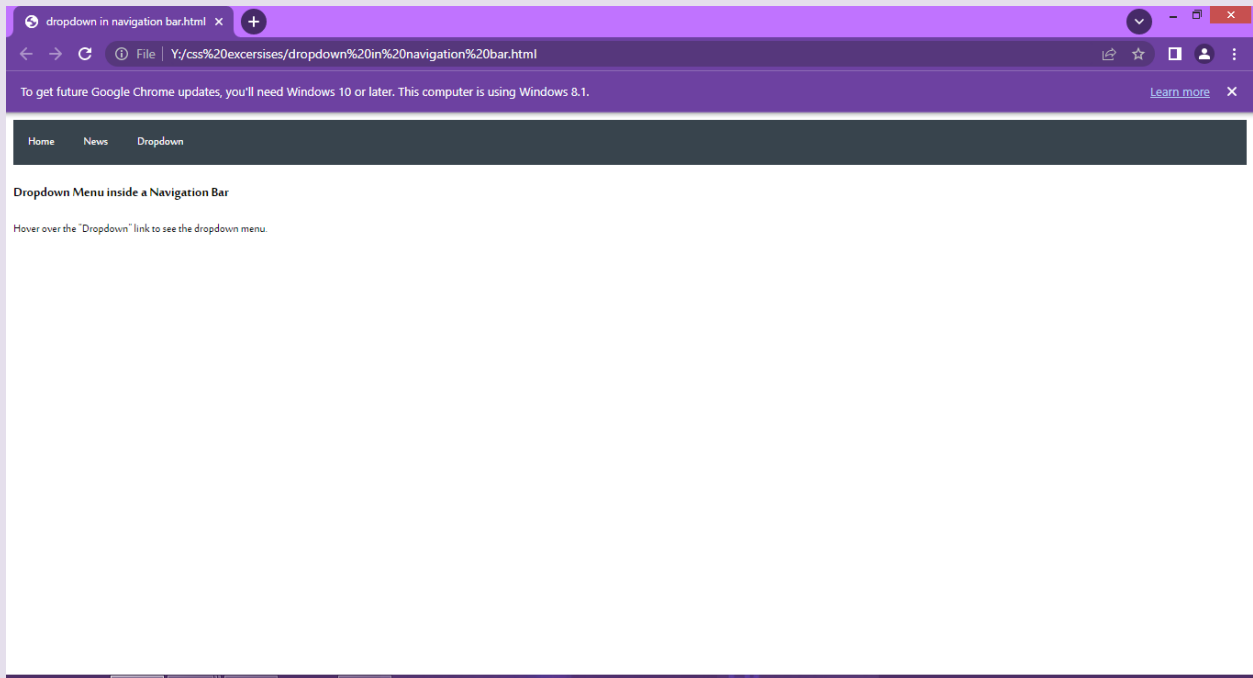

EX NO:12.2

DROPDOWN IMAGE

INPUT:

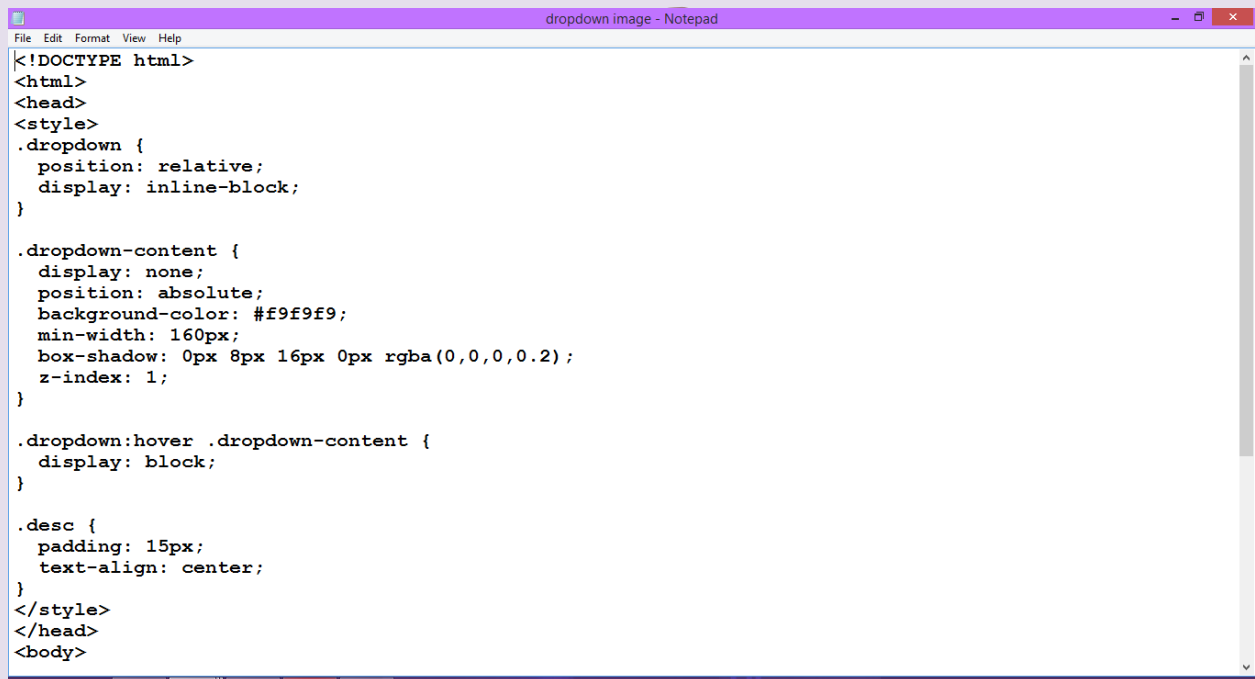


```
<!DOCTYPE html>
<html>
<head>
<style>
.dropdown {
  position: relative;
  display: inline-block;
}

.dropdown-content {
  display: none;
  position: absolute;
  background-color: #f9f9f9;
  min-width: 160px;
  box-shadow: 0px 8px 16px 0px rgba(0,0,0,0.2);
  z-index: 1;
}

.dropdown:hover .dropdown-content {
  display: block;
}

.desc {
  padding: 15px;
  text-align: center;
}
</style>
</head>
<body>
```

OUTPUT:

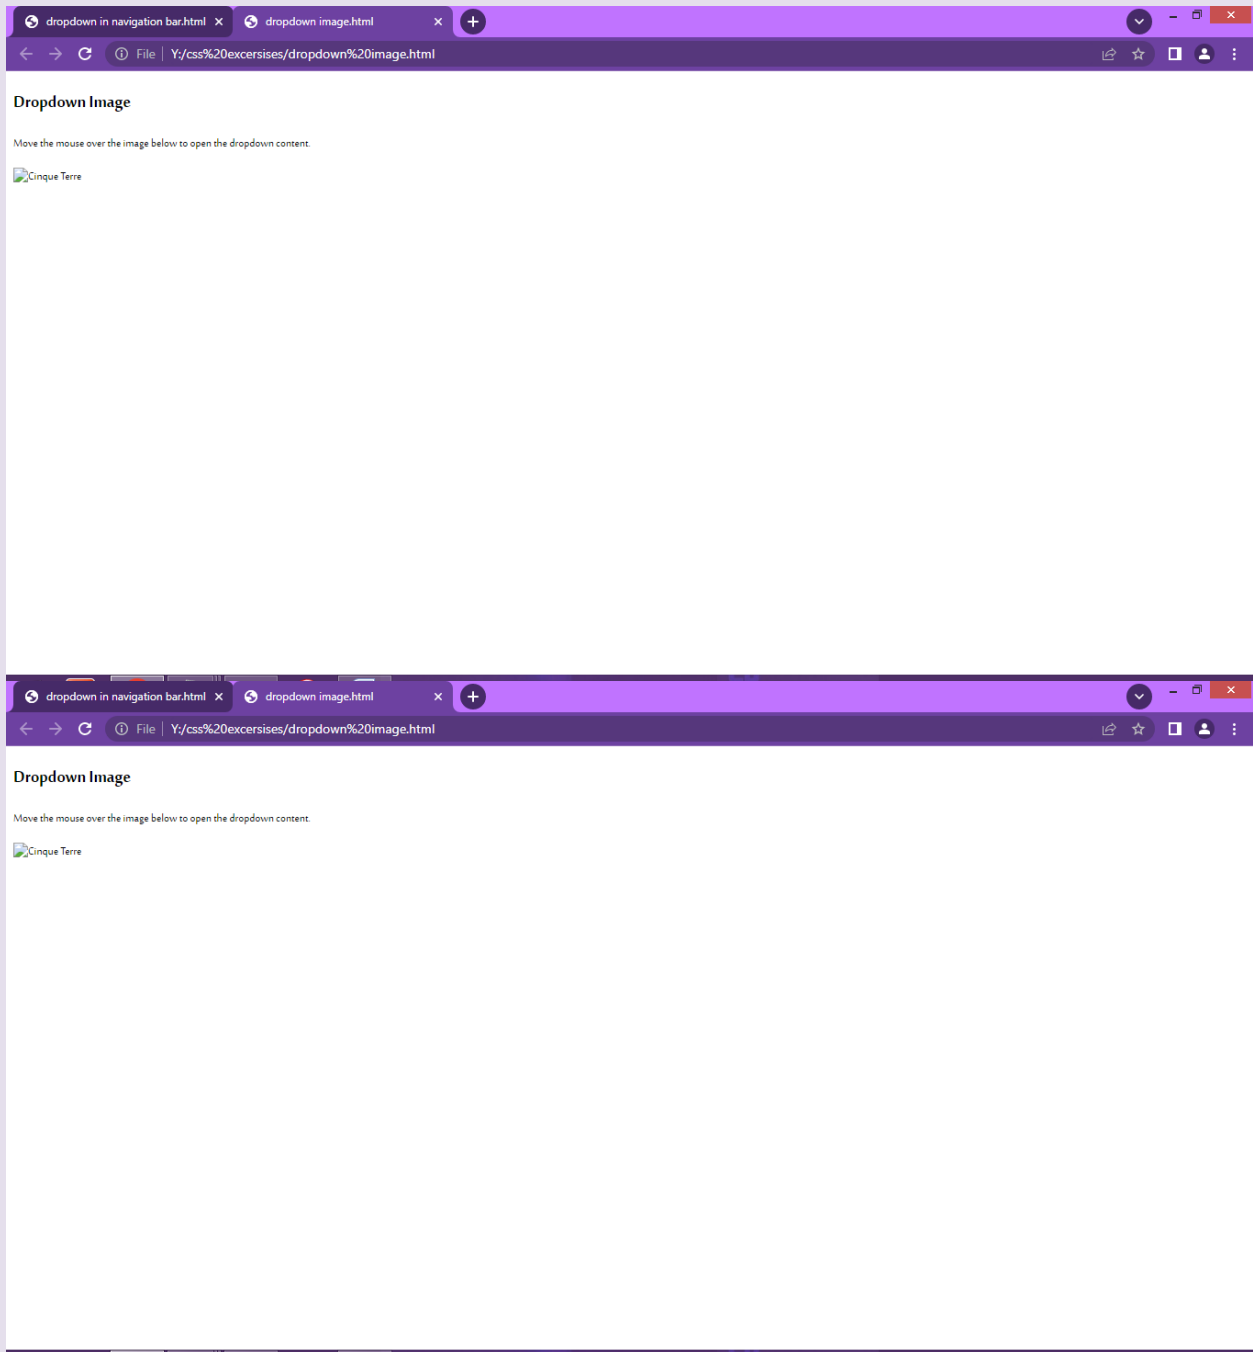




EX NO:13


TRANSITION

INPUT:

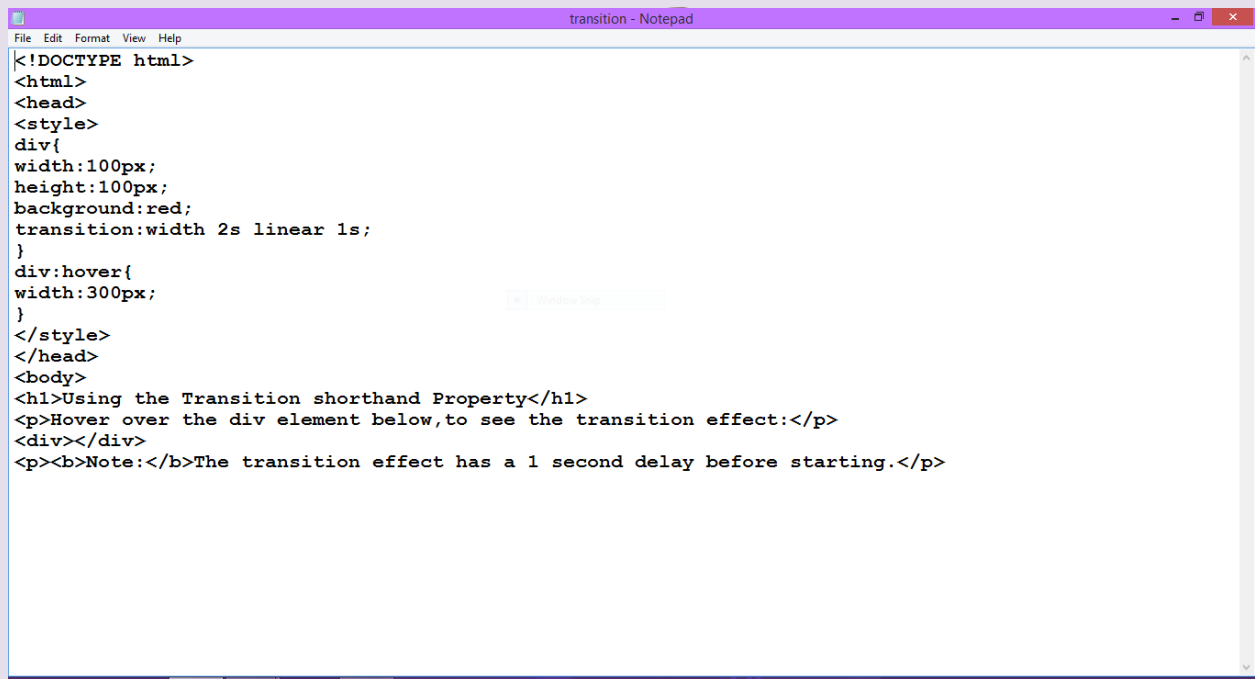

```
<!DOCTYPE html>
<html>
<head>
<style>
div{
width:100px;
height:100px;
background:red;
transition:width 2s linear 1s;
}
div:hover{
width:300px;
}
</style>
</head>
<body>
<h1>Using the Transition shorthand Property</h1>
<p>Hover over the div element below,to see the transition effect:</p>
<div></div>
<p><b>Note:</b>The transition effect has a 1 second delay before starting.</p>
```


OUTPUT:

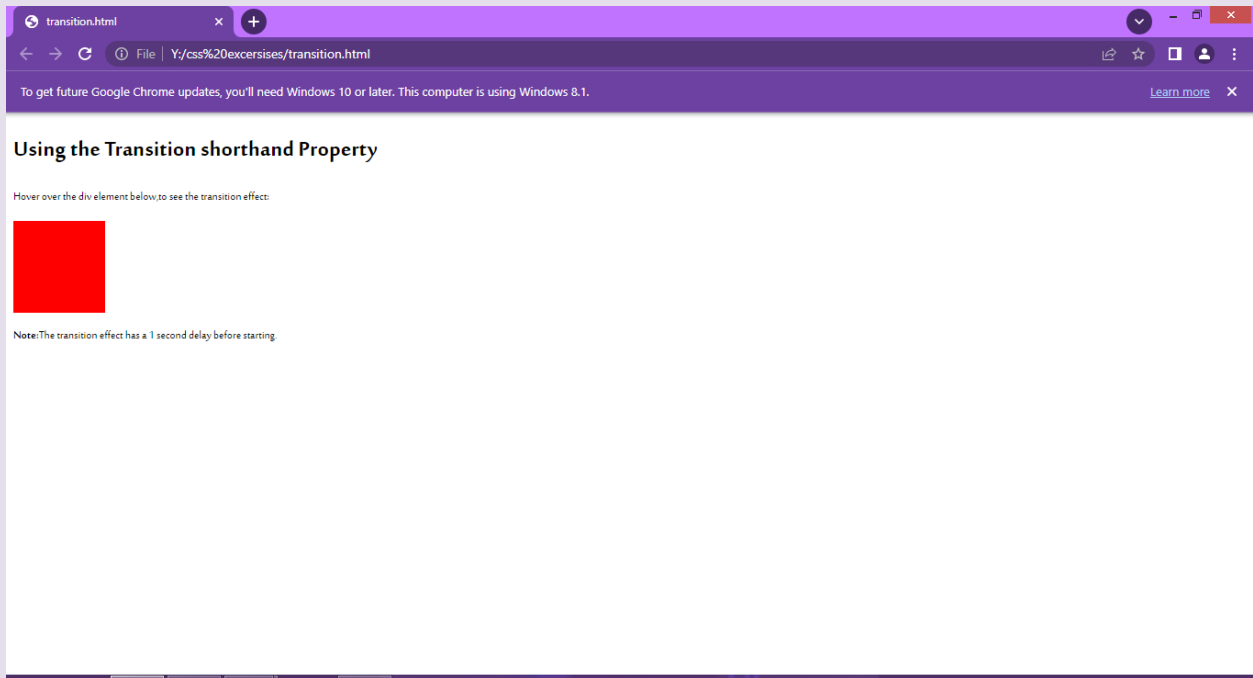

EX NO:14

ANIMATION

INPUT:

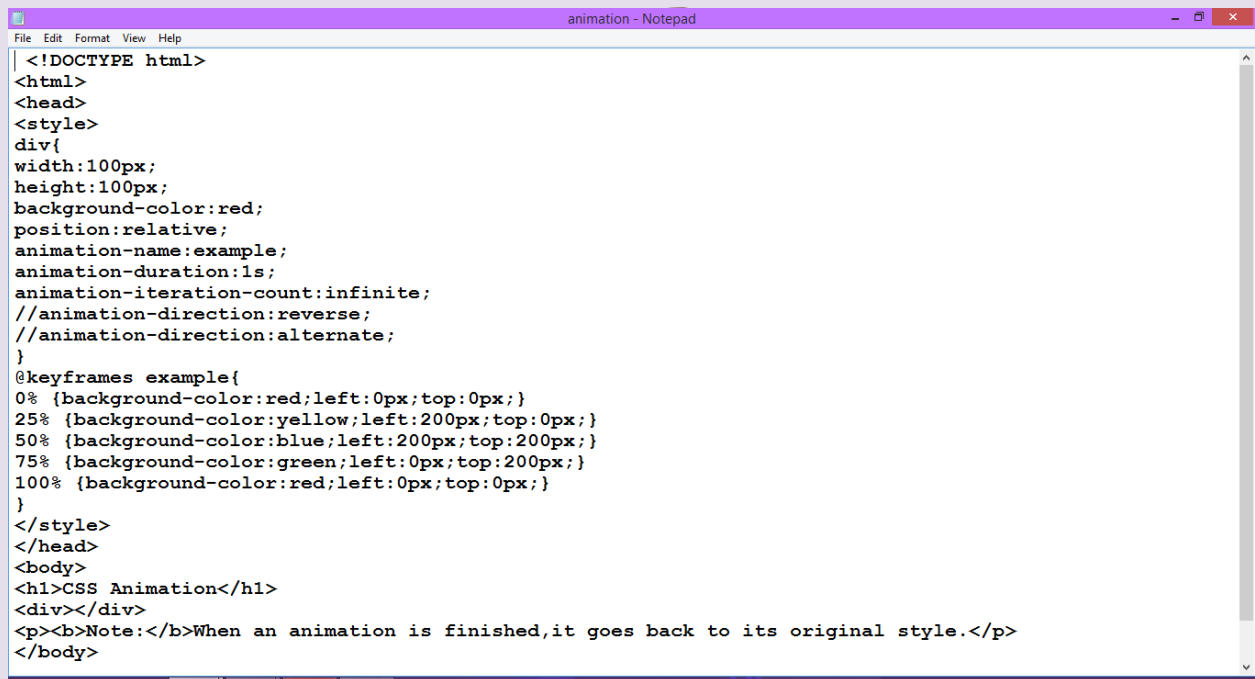

```
<!DOCTYPE html>
<html>
<head>
<style>
div{
width:100px;
height:100px;
background-color:red;
position:relative;
animation-name:example;
animation-duration:1s;
animation-iteration-count:infinite;
//animation-direction:reverse;
//animation-direction:alternate;
}
@keyframes example{
0% {background-color:red;left:0px;top:0px;}
25% {background-color:yellow;left:200px;top:0px;}
50% {background-color:blue;left:200px;top:200px;}
75% {background-color:green;left:0px;top:200px;}
100% {background-color:red;left:0px;top:0px;}
}
</style>
</head>
<body>
<h1>CSS Animation</h1>
<div></div>
<p><b>Note:</b>When an animation is finished,it goes back to its original style.</p>
</body>
```

OUTPUT:

